




切削工具

CUTTING TOOLS
2023-2024

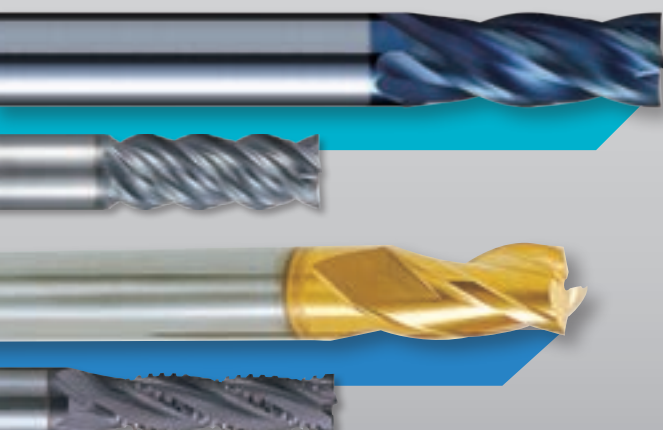

目录 CONTENTS

产品目录的使用方法

How to use CUTTING TOOLS 2023-2024

2

新商品介绍

New Products

7

硬质合金钻头

Carbide Drills

A-1

高速钢钻头

HSS Drills

B-1

丝锥

Taps

C-1

硬质合金立铣刀

Carbide End Mills

D-1

高速钢立铣刀

HSS End Mills

E-1

切割工具

Metal Cutting Saw Series

F-1

套装商品／其它

DIY Products/Other Products

G-1

精密工具

Precision Tools

H-1

技术资料 Technical Documents

索引

Index

I-1

I-56

安全事项

Attentions on Safety

I-64

再研磨和再涂层服务的介绍

I-68

产品目录的使用方法

How to use CUTTING TOOLS 2023-2024

在使用本目录时请注意

- 本产品目录中的信息为截至 2023 年 2 月的信息。
- 为了商品的研究和改良，可能会在未提前通知的情况下变更刊载商品的规格。敬请谅解。
- 伴随新商品的开发，标识为库存品的刊载商品有可能被改良或废弃。敬请谅解。
- 严禁擅自转载或复制产品目录的刊载内容。
- 本目录中的产品图片及内容仅做示意，实物产品效果（包括不限于外观、颜色、尺寸）可能略有差异，请以实物为准。
- 本目录中的数据为理论值，均来源于不二越内部实验，于特定测试环境下所得（请见各项说明），实际使用中可能因产品个体差异、使用条件 and 环境因素不同略有不同，请以实际使用的情况为准。

查找商品

根据产品阵容查找

■ 商品系列

可以根据商品一览查找。

商品一览		硬质合金钻头	
品名	规格	品名	规格
...	...	...	...

■ 被削材、用途

可以根据各类被削材选型基准表查找。

各类被削材选型基准表		硬质合金钻头	
被削材	用途	被削材	用途
...	...	...	...

根据索引查找

索引 (I-56) 中按照商品编码、商品名称 (英语)、List No. 的顺序排列商品刊载页码。

■ 商品编码

索引	商品编码	商品名称 英语	LIST No.
...	...	...	...

■ 商品名称 (英语)

索引	商品编码	商品名称 英语	LIST No.
...	...	...	...

■ List No.

索引	商品编码	商品名称 英语	LIST No.
...	...	...	...

尺寸表的说明

商品编码

商品名称

AQDEXOH3D

AQUA EX 油孔钻 3D

- 本钻头可以实现稳定的湿式加工、MQL 加工。
- 可以进行钻头直径 3 倍为止的高效率孔加工。

This drill provides reliable wet and MQL drilling.

High performance up to 3x drill diameter.



LIST 编号

LIST 9604

商品编码

商品编码	直径 DC	有效长 LU	槽长 LCF	槽长 LS	全长 OAL	柄径 D1	柄长 PL	总长 S201
AQDEXOH3D0100	1.00		6.2		54.2			
AQDEXOH3D0101	1.01	3.0						
AQDEXOH3D0102	1.02			43.3				

订货方式

订购商品时，请按照此处记载的
法向代理经销商进行订购。

库存标记

- ：标准库存品
- ：特定代理店库存品
- △：定制品
- ：只限库存品

商品的技术资料和故障排除等，
请参照“技术资料” (I-1)。

基准切削条件刊载页面

标记

表示产品特长的标记。
标记的种类和含义
请参照第 4 页。


钻尖形状

钻尖抛光、横刃修磨的详情请参
照 I-5。

购买 NACHI 商品

- 请向 NACHI 商品的代理经销商、特约经销商购买。
- 其他需求以及咨询、订购请联系最近的各营业网点 (I-72)。

智能手机、平板电脑终端用应用程序介绍



可随时随地轻松确认 NACHI 工具的商品信息

NACHI
工具解决方案

详情
请点击此处下载

<http://www.nachi-china.com.cn/tool/app/index.html>

商品详情、视频、
个别产品目录请点击此处

主页

<http://www.nachi-china.com.cn/index.html>

产品目录的使用方法

How to use CUTTING TOOLS 2023-2024

标记的说明

Guide to mark (Tool specification)

	标记 Mark	说 明 Descriptions		标记 Mark	说 明 Descriptions
涂层 Coating		系 AG (AlCrN 系) 涂层品, 与传统的涂层膜比较, 耐热性能更为优良。 AG Coat	涂层 Coating		ZT (AlTiN 系) 涂层品, 耐磨性、平滑化优良、适合滚轧加工。 ZT Coat
		REVO-D涂层品, 耐热性、耐磨性、平滑性能优良, 适合用于钻头的高效加工。 REVO-D coat			将 CBN 烧结体用于刃部材料。 Sintered CBN
		REVO铣刀涂层品, 耐热冲击性、耐摩擦性优良, 适用于铣刀的高效加工。 REVO-M Coat			使用了硬质合金。 Tungsten Carbide
		系 AQUA EX (AlCrTi 系膜 + 润滑膜) 涂层品, 耐热性、耐磨性优良。 AQEX Coat			使用了高级粉末高速钢。 High Grade Powder HSS
		系 AQUA (TiAlN 系) 涂层品, 耐热性优良且摩擦系数小, 故可进行干式加工。 AQ(TiAlN multi-layer) Coat			使用了高合金高速钢。 High Alloy HSS
		氮化铬涂层品, 对铝合金具有优良的耐溶着性。 CrN Coat			使用了高效能含钴高速钢。 High Grade Cobalt HSS
		系金刚石涂层品, 耐磨性优良, 适合用于 CFRP 的加工。 Crystal Diamond Coat			使用了含钴高速钢。 Cobalt HSS
		系金刚石涂层品, 耐磨性优良, 可进行铝合金的长寿命加工。 Diamond Coat			使用了 HSS (高速钢)。 High Speed Steels
		系 DLC 涂层品, 对铝合金有优良的耐溶着性能, 可进行干式加工。 DLC Coat			使用了含钒高速钢。 Vanadium HSS
		GSX II (AlCrN 系 + AlCrXN 系) 涂层品, 耐热性和耐磨性优良。 GSX II Coat			使用了合金工具钢。 Alloy Tool Steels
		GSX (AlCrN 系) 涂层品, 耐热性和耐磨性优良。 GSX Coat	工具材料 Tool Materials		槽的螺旋角 (15°时) Helix Angle
		系 GS (TiAlN 系) 涂层品, 平滑性能优良, 适合高效率加工。 GS(TiAlN multi-layer) Coat			表示钻头的尖端角。 Point Angle of Drills
		系 G (TiN) 涂层品, 耐溶着性和耐磨性优良。 G(TiN) Coat			表示钻头的直径公差。 Tolerance of drill dia.
		系白金 (TiCN 系) 涂层品, 耐溶着性和耐磨性优良。 Platinum Coat			表示柄直径公差。 Tolerance of shank dia.
		系 SG (TiCN 系) 涂层品, 耐溶着性和耐磨性优良。 SG(TiCN multi-layer) Coat			表示立铣刀使用耐崩型。 Gashland type end mill
		TiCN 系复合多层涂层品, 耐溶着性、耐磨性和耐热性能优良。 TiCN multi-layer Coat			表示立铣刀使用锋利型刀尖。 Sharp corner type end mill
		系 XS (TiAlN 系) 涂层品, 耐热性优良, 适合高速加工。 XS(TiAlN multi-layer) Coat			刃部和锯身焊接了不同材料的双金属结构。 Bi-Metal construction

尺寸公差

Tolerance

直径公差 (摘自 JIS B 0401-1 : 1998)

Tolerance of Diameter

单位 (Unit) : μm

直径 Diameter(mm)	3 以下 $D \leq 3$	超过 3 6 以下 $3 < D \leq 6$	超过 6 10 以下 $6 < D \leq 10$	超过 10 18 以下 $10 < D \leq 18$	超过 18 30 以下 $18 < D \leq 30$	超过 30 50 以下 $30 < D \leq 50$	超过 50 80 以下 $50 < D \leq 80$	超过 80 120 以下 $80 < D \leq 120$
公差 Tolerance	h5	0 - 4	0 - 5	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13
	h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13	0 - 16	0 - 19
	h7	0 - 10	0 - 12	0 - 15	0 - 18	0 - 21	0 - 25	0 - 30
	h8	0 - 14	0 - 18	0 - 22	0 - 27	0 - 33	0 - 39	0 - 46
	js6	± 3	± 4	± 4.5	± 5.5	± 6.5	± 8	± 8.5
	m5	+ 6 + 2	+ 9 + 4	+12 + 6	+15 + 7	+17 + 8	+20 + 9	+24 +11

孔径公差 (摘自 JIS B 0401-1 : 1998)

Tolerance of Hole Diameter

单位 (Unit) : μm

直径 Diameter(mm)	3 以下 $D \leq 3$	超过 3 6 以下 $3 < D \leq 6$	超过 6 10 以下 $6 < D \leq 10$	超过 10 18 以下 $10 < D \leq 18$	超过 18 30 以下 $18 < D \leq 30$	超过 30 50 以下 $30 < D \leq 50$	超过 50 80 以下 $50 < D \leq 80$	超过 80 120 以下 $80 < D \leq 120$
公差 Tolerance	H7	+ 10 0	+ 12 0	+ 15 0	+ 18 0	+ 21 0	+ 25 0	+ 30 0
	H8	+ 14 0	+ 18 0	+ 22 0	+ 27 0	+ 33 0	+ 39 0	+ 46 0
	H9	+ 25 0	+ 30 0	+ 36 0	+ 43 0	+ 52 0	+ 62 0	+ 74 0


关于符合 ISO13399 的尺寸标记

The designations that comply with ISO13399

- ISO13399 作为工具电子数据国际通用化的标准。
- 如下所示，符合 ISO13399 的尺寸标记开始使用。
- 目录中可能包含一些未包含在 ISO13399 内的标记。
- ISO13399 is an international standard aimed at universalizing the electronic data of tools.
- As shown below, we have started to use the designations that comply with ISO13399.
- This catalog may contain some designations which are not included in ISO13399.


钻头 Drills

标记	内容
DC	直径
SIG	先端角
PL	先端与肩部的尺寸
LU	有效长
LCF	槽长
ℓ	以肩部为基准的槽长
OAL	全长
LF	以肩部为基准的全长
LS	柄长
DCONMS	柄径
LB	颈长

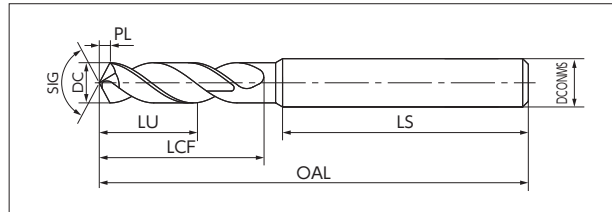


丝锥 Taps

标记	内容
TCL	切削锥部
L1	全长
THL	螺纹长度
DCONMS	柄径
L2	颈长
DN	颈径
DRVS	钻柄四棱部 宽度
DRVL	钻柄四棱部 长度

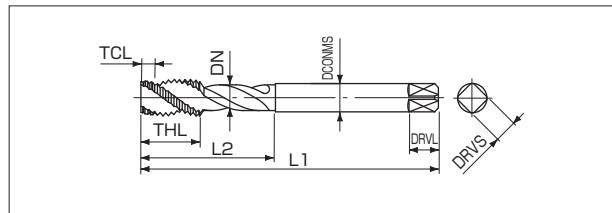

铣刀 End Mills

标记	内容
DC	外径
APMX	刃长
OAL	全长
DCONMS	柄径
DN	颈径
LB	颈长

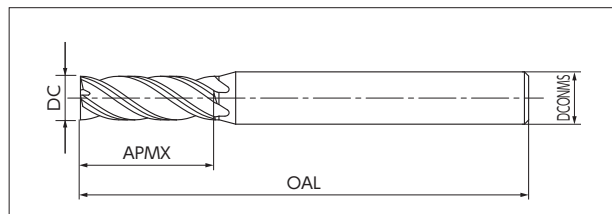

硬质合金钻头 Carbide Drills

页 Page	商品编码 Code	品名 Product Name	冷却方式 Coolant	钻孔深度 L/D	尺寸 Size	表面处理 Coating
10	AQRVDM5D	AquaREVO 微型钻头 5D NEW! AquaREVO Drills Micro 5D	外冷 External	5DC	φ0.50~φ1.99	REVO-D
12	AQRVDM10D	AquaREVO 微型钻头 10D NEW! AquaREVO Drills Micro 10D	外冷 External	10DC	φ0.50~φ1.99	REVO-D
14	切削条件表 (AQRVDM5D/AQRVDM10D)					

15	AQRVDS	AquaREVO 短刃钻 AquaREVO Drills Stub	外冷 External	3DC	φ2.0~φ16.0	REVO-D
20	AQRVDR	AquaREVO 标准刃钻 AquaREVO Drills Regular	外冷 External	5DC	φ2.0~φ16.0	REVO-D
22	AQRVDSL	AquaREVO 中长刃钻 AquaREVO Drills Semi-long	外冷 External	7DC	φ2.0~φ16.0	REVO-D
23	切削条件表 (AQRVDS/AQRVDR/AQRVDSL)					

24	AQRVDOH3D	AquaREVO 油孔钻 3D AquaREVO Drills Oil-Hole 3D	内冷 Internal	3DC	φ3.0~φ16.0	REVO-D
25	AQRVDOH5D	AquaREVO 油孔钻 5D AquaREVO Drills Oil-Hole 5D	内冷 Internal	5DC	φ3.0~φ16.0	REVO-D
26	AQRVDOH8D	AquaREVO 油孔钻 8D AquaREVO Drills Oil-Hole 8D	内冷 Internal	8DC	φ3.0~φ16.0	REVO-D
28	切削条件表 (AQRVDOH3D/5D)					
29	切削条件表 (AQRVDOH8D)					

硬质合金铣刀 Carbide End Mills

页 Page	商品编码 Code	品名 Product Name	刃数 Number of teeth	刃尖形状 Cutting edge shape	刃长 Length of cut	尺寸 Size	表面处理 Coating
30	RVM2G-1.5D	AquaREVO 铣刀 2 刃 G 型 1.5D AquaREVO Mills Two Flutes 1.5D G type	2 刃	耐崩型 Gashland	1.5D 短刃 Short	φ1.0~φ20.0	REVO-M
30	RVM4G-1.5D	AquaREVO 铣刀 4 刃 G 型 1.5D AquaREVO Mills Four Flutes 1.5D G type	4 刃	耐崩型 Gashland	1.5D 短刃 Short	φ1.0~φ20.0	REVO-M
31	RVM2G-2.5D	AquaREVO 铣刀 2 刃 G 型 2.5D AquaREVO Mills Two Flutes 2.5D G type	2 刃	耐崩型 Gashland	2.5D 标准刃 Regular	φ1.0~φ20.0	REVO-M
31	RVM4G-2.5D	AquaREVO 铣刀 4 刃 G 型 2.5D AquaREVO Mills Four Flutes 2.5D G type	4 刃	耐崩型 Gashland	2.5D 标准刃 Regular	φ1.0~φ20.0	REVO-M
32	RVM2S-2.5D	AquaREVO 铣刀 2 刃 S 型 2.5D AquaREVO Mills Two Flutes 2.5D S type	2 刃	锋利型 Sharp corner	2.5D 标准刃 Regular	φ1.0~φ20.0	REVO-M
32	RVM4S-2.5D	AquaREVO 铣刀 4 刃 S 型 2.5D AquaREVO Mills Four Flutes 2.5D S type	4 刃	锋利型 Sharp corner	2.5D 标准刃 Regular	φ1.0~φ20.0	REVO-M
33	RVM4G-4D	AquaREVO 铣刀 4 刃 4D G 型 NEW! AquaREVO Mills Four Flutes 4D G type	4 刃	耐崩型 Gashland	4D 长刃 Long	φ1.0~φ20.0	REVO-M
33	RVMSUS4G-2.5D	AquaREVO 铣刀 不锈钢 4 刃 2.5D G 型 NEW! AquaREVO Mills for Stainless Steel Four Flutes 2.5D G type	4 刃	耐崩型 Gashland	2.5D 标准刃 Regular	φ3.0~φ20.0	REVO-M
34	被削材推荐表						
40	刃数・刃尖形状类型 推荐加工方法						
41	切削条件表						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQRVDM5D/10D

AquaREVO微型钻头 AquaREVO Drills Micro

实现小径钻头需求的“不易折损长寿命”和“波动少”的稳定加工


Achieves “long tool life that is hard to break” and “stable cutting with little dispersion” required for small-diameter drills.

微型钻头用耐折损超硬材料、
兼顾硬度和韧性

Newly developed carbide material has improved both hardness and toughness by original component design for micro drill.

重视刚性和铁屑排出性的槽形状、
实现钻头不易折损

Achieves a drill that is hard to break with a fl flute shape that emphasizes rigidity and chip evacuation.



AQRVDS/AQRVDR/AQRVDSL

AquaREVO钻头 短刃型/标准型/中长刃型

AquaREVO Drills Stub/Regular/Semi-long

新的硬度和韧性并存的超硬母材提高耐磨损性和耐崩损性

Development of carbide base material compatible with hardness and toughness. Improving wear resistance and chipping resistance.

采用直线切刃、分散应力提高刃尖崩强度

Adoption of straight cutting edge. Break up cutting stress. Improve strength against corner chipping.

新的耐氧化和耐磨损性优良的REVO-D涂层
实现平滑化处理使铁屑更顺畅的排出

Newly developed REVO-D coat suitable for drilling. High oxidation resistance and wear resistance ensured. Realizes low friction and smooth chip evacuation by super smooth surface treatment.



AQRVDOH3D/5D/8D

AquaREVO油孔钻 AquaREVO Drills Oil-Hole

新的油孔形状[REVO Power Cooler]

NACHI developed a new concept oil hole geometry “REVO Power Cooler” .

实现流量·流速提高

有效提升[冷却性][润滑性][铁屑排出性]

A carbide drill with an oil hole that achieves an overwhelming flow rate and flow velocity and has significantly improved “cooling”, “lubrication”, and “chip evacuation” .

冷却液直击流向磨损速度较早的刃尖至
易发生月牙洼磨损的前刀面和横刃修磨

Shoot directly to the corners where wear progresses quickly and thinning rake surfaces where crater wear occurs.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

RVM2G-1.5D/RVM4G-1.5D RVM2G-2.5D/RVM4G-2.5D RVM4G-4D RVM2S-2.5D/RVM4S-2.5D

AquaREVO铣刀

AquaREVO Mills

延长工具寿命、适用多种加工机械和多种材料
发挥稳定加工性能的通用超硬铣刀

A high-performance general-purpose carbide end mill that realize stable machining performance for longer tool life, various applications and wide range of products.

切削阻力降低、抑制影响加工面产生的振动
实现高效率加工

Reduces cutting resistance and suppresses chatter vibration that affects the machined surface.
Achieves stable and highly efficient machining.

具有高耐磨损性和耐热性、
和耐热冲击性优良的REVO-D涂层
提高铁屑脱离、防止铁屑咬入损伤

REVO-M Coat film has not only high wear resistance and heat resistance, but also has excellent heat and shock resistance.
Improves chip separation and prevents chipping due to chip biting.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

RVMSUS4G-2.5D

AquaREVO铣刀 不锈钢用

AquaREVO Mills for Stainless Steel

新的槽形状“Air Flutes”
有效的铁屑排出性和冷却效果

Newly developed flute design “Air Flutes”, that improved overwhelming chip evacuation and cooling performance.

减少铁屑的接触、提高铁屑的排出性、
降低切削阻力

Improved chip evacuation and cutting force reduction by reducing contact of chips on flute.

在难削材不锈钢的侧面加工和槽加工中、
即使提高切削速度和进给量、工具的崩刃和磨损量也减少、
实现高质量加工面和稳定加工

Achieves high-quality machined surface and stable machining with less chipping and wear even in high speed or feed range in side milling and grooving of difficult-to-cut stainless steel.



切断工具

套装商品
其它

精密工具

技术资料
索引

AQRVDM5D **NEW!**

AquaREVO 微型钻头 5D

AquaREVO Drills Micro 5D

Carbide
工具材料

REVO
D
涂层

下记
直径公差

120°
DC ≤ 1.09

135°
DC > 1.09


30°
螺旋角

h6
柄直径公差

5DC
加工孔深

0.50-1.99
直径范围

切削条件 Cutting Condition ▶▶▶ 14

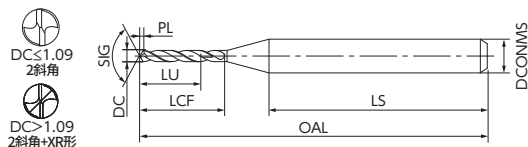

LIST 9878

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDM5D0050	0.50	2.5	3.5	29.3			0.1	
AQRVDM5D0051	0.51							
AQRVDM5D0052	0.52	2.6						
AQRVDM5D0053	0.53		3.8	29.1				
AQRVDM5D0054	0.54	2.7						
AQRVDM5D0055	0.55							
AQRVDM5D0056	0.56	2.8						
AQRVDM5D0057	0.57							
AQRVDM5D0058	0.58	2.9	4.2	28.8				
AQRVDM5D0059	0.59							
AQRVDM5D0060	0.60	3.0						
AQRVDM5D0061	0.61							
AQRVDM5D0062	0.62	3.1						
AQRVDM5D0063	0.63		4.5	28.6				
AQRVDM5D0064	0.64	3.2						
AQRVDM5D0065	0.65							
AQRVDM5D0066	0.66	3.3						
AQRVDM5D0067	0.67							
AQRVDM5D0068	0.68	3.4	4.9	28.3			0.2	
AQRVDM5D0069	0.69							
AQRVDM5D0070	0.70	3.5						
AQRVDM5D0071	0.71							
AQRVDM5D0072	0.72	3.6						
AQRVDM5D0073	0.73		5.2	28.1				
AQRVDM5D0074	0.74	3.7						
AQRVDM5D0075	0.75							
AQRVDM5D0076	0.76	3.8						
AQRVDM5D0077	0.77							
AQRVDM5D0078	0.78	3.9	5.6	27.8				
AQRVDM5D0079	0.79							
AQRVDM5D0080	0.80	4.0			38	3		
AQRVDM5D0081	0.81							
AQRVDM5D0082	0.82	4.1						
AQRVDM5D0083	0.83		5.9	27.6				
AQRVDM5D0084	0.84	4.2						
AQRVDM5D0085	0.85							
AQRVDM5D0086	0.86	4.3						
AQRVDM5D0087	0.87							
AQRVDM5D0088	0.88	4.4	6.3	27.3				
AQRVDM5D0089	0.89							
AQRVDM5D0090	0.90	4.5						
AQRVDM5D0091	0.91							
AQRVDM5D0092	0.92	4.6						
AQRVDM5D0093	0.93		6.6	27.1				
AQRVDM5D0094	0.94	4.7						
AQRVDM5D0095	0.95							
AQRVDM5D0096	0.96	4.8						
AQRVDM5D0097	0.97							
AQRVDM5D0098	0.98	4.9	7.0	26.7			0.3	
AQRVDM5D0099	0.99							
AQRVDM5D0100	1.00	5.0		26.3				
AQRVDM5D0101	1.01							
AQRVDM5D0102	1.02	5.1						
AQRVDM5D0103	1.03		7.4	26.0				
AQRVDM5D0104	1.04	5.2						
AQRVDM5D0105	1.05							
AQRVDM5D0106	1.06	5.3						
AQRVDM5D0107	1.07							
AQRVDM5D0108	1.08	5.4	7.7	25.7				
AQRVDM5D0109	1.09	5.5						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDM5D0110	1.10	5.5	7.7	25.8				
AQRVDM5D0111	1.11							
AQRVDM5D0112	1.12	5.6						
AQRVDM5D0113	1.13		8.1	25.4				
AQRVDM5D0114	1.14	5.7						
AQRVDM5D0115	1.15						0.2	
AQRVDM5D0116	1.16	5.8						
AQRVDM5D0117	1.17							
AQRVDM5D0118	1.18	5.9	8.4	25.2				
AQRVDM5D0119	1.19							
AQRVDM5D0120	1.20	6.0						
AQRVDM5D0121	1.21							
AQRVDM5D0122	1.22	6.1						
AQRVDM5D0123	1.23		8.8	24.9				
AQRVDM5D0124	1.24	6.2						
AQRVDM5D0125	1.25							
AQRVDM5D0126	1.26	6.3						
AQRVDM5D0127	1.27							
AQRVDM5D0128	1.28	6.4	9.1	24.7				
AQRVDM5D0129	1.29							
AQRVDM5D0130	1.30	6.5						
AQRVDM5D0131	1.31							
AQRVDM5D0132	1.32	6.6						
AQRVDM5D0133	1.33		9.5	24.4				
AQRVDM5D0134	1.34	6.7						
AQRVDM5D0135	1.35				38			
AQRVDM5D0136	1.36	6.8						
AQRVDM5D0137	1.37							
AQRVDM5D0138	1.38	6.9	9.8	24.2				
AQRVDM5D0139	1.39					3		
AQRVDM5D0140	1.40	7.0						
AQRVDM5D0141	1.41							
AQRVDM5D0142	1.42	7.1						
AQRVDM5D0143	1.43		10.2	23.9				
AQRVDM5D0144	1.44	7.2					0.3	
AQRVDM5D0145	1.45							
AQRVDM5D0146	1.46	7.3						
AQRVDM5D0147	1.47							
AQRVDM5D0148	1.48	7.4	10.5	23.7				
AQRVDM5D0149	1.49							
AQRVDM5D0150	1.50	7.5						
AQRVDM5D0151	1.51							
AQRVDM5D0152	1.52	7.6						
AQRVDM5D0153	1.53		10.9	23.4				
AQRVDM5D0154	1.54	7.7						
AQRVDM5D0155	1.55							
AQRVDM5D0156	1.56	7.8						
AQRVDM5D0157	1.57							
AQRVDM5D0158	1.58	7.9	11.3	23.1				
AQRVDM5D0159	1.59							
AQRVDM5D0160	1.60	8.0						
AQRVDM5D0161	1.61							
AQRVDM5D0162	1.62	8.1						
AQRVDM5D0163	1.63		11.6	29.9				
AQRVDM5D0164	1.64	8.2						
AQRVDM5D0165	1.65					45		
AQRVDM5D0166	1.66	8.3						
AQRVDM5D0167	1.67							
AQRVDM5D0168	1.68	8.4	12.0	29.6				
AQRVDM5D0169	1.69	8.5					0.4	

直径公差 0~-0.009mm

先端角在直径 0.50~1.09mm 以下为 120°，直径 1.09~1.99mm 为 135°。

Tolerance of diameter is 0 to -0.009mm.

The point angle is 120° for diameters 0.50 to 1.09mm or less, and 135° for diameters over 1.09 to 1.99mm.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DO/DMS	先端 PL	库存 Stock
AQRVDM5D0170	1.70	8.5	12.0	29.6	45	3	0.4	●
AQRVDM5D0171	1.71	8.6	12.3	29.4				
AQRVDM5D0172	1.72							
AQRVDM5D0173	1.73	8.7	12.3	29.4				
AQRVDM5D0174	1.74							
AQRVDM5D0175	1.75	8.8	12.7	29.1				
AQRVDM5D0176	1.76							
AQRVDM5D0177	1.77	8.9	12.7	29.1				
AQRVDM5D0178	1.78							
AQRVDM5D0179	1.79	9.0	13.0	28.9				
AQRVDM5D0180	1.80							
AQRVDM5D0181	1.81	9.1	13.0	28.9				
AQRVDM5D0182	1.82							
AQRVDM5D0183	1.83	9.2	13.3	28.6				
AQRVDM5D0184	1.84							
AQRVDM5D0185	1.85	9.3	13.3	28.6				
AQRVDM5D0186	1.86							
AQRVDM5D0187	1.87	9.4	13.7	28.3				
AQRVDM5D0188	1.88							
AQRVDM5D0189	1.89	9.5	14.0	28.1				
AQRVDM5D0190	1.90							
AQRVDM5D0191	1.91	9.6	13.7	28.3				
AQRVDM5D0192	1.92							
AQRVDM5D0193	1.93	9.7	14.0	28.1				
AQRVDM5D0194	1.94							
AQRVDM5D0195	1.95	9.8	14.0	28.1				
AQRVDM5D0196	1.96							
AQRVDM5D0197	1.97	9.9	14.0	28.1				
AQRVDM5D0198	1.98							
AQRVDM5D0199	1.99	10.0						

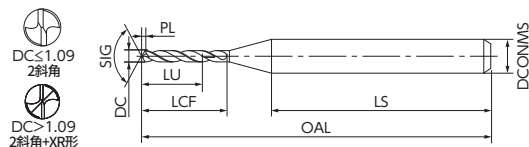

LIST 9880

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDM10D0050	0.50	5.0	6.0	26.8	38	0.1	0.1	
AQRVDM10D0051	0.51	5.1						
AQRVDM10D0052	0.52	5.2						
AQRVDM10D0053	0.53	5.3	6.6	26.3				
AQRVDM10D0054	0.54	5.4						
AQRVDM10D0055	0.55	5.5						
AQRVDM10D0056	0.56	5.6						
AQRVDM10D0057	0.57	5.7						
AQRVDM10D0058	0.58	5.8	7.2	25.8				
AQRVDM10D0059	0.59	5.9						
AQRVDM10D0060	0.60	6.0			24.8	0.2	0.2	
AQRVDM10D0061	0.61	6.1						
AQRVDM10D0062	0.62	6.2						
AQRVDM10D0063	0.63	6.3	7.8	25.3				
AQRVDM10D0064	0.64	6.4						
AQRVDM10D0065	0.65	6.5						
AQRVDM10D0066	0.66	6.6						
AQRVDM10D0067	0.67	6.7						
AQRVDM10D0068	0.68	6.8	8.4	24.8				
AQRVDM10D0069	0.69	6.9			23.8	0.3	0.3	
AQRVDM10D0070	0.70	7.0						
AQRVDM10D0071	0.71	7.1						
AQRVDM10D0072	0.72	7.2						
AQRVDM10D0073	0.73	7.3	9.0	24.3				
AQRVDM10D0074	0.74	7.4						
AQRVDM10D0075	0.75	7.5						
AQRVDM10D0076	0.76	7.6						
AQRVDM10D0077	0.77	7.7	9.6	23.8				
AQRVDM10D0078	0.78	7.8			30.3	0.4	0.4	
AQRVDM10D0079	0.79	7.9						
AQRVDM10D0080	0.80	8.0						
AQRVDM10D0081	0.81	8.1						
AQRVDM10D0082	0.82	8.2						
AQRVDM10D0083	0.83	8.3	10.2	23.8				
AQRVDM10D0084	0.84	8.4						
AQRVDM10D0085	0.85	8.5						
AQRVDM10D0086	0.86	8.6						
AQRVDM10D0087	0.87	8.7			29.8	0.5	0.5	
AQRVDM10D0088	0.88	8.8	10.8	29.8				
AQRVDM10D0089	0.89	8.9						
AQRVDM10D0090	0.90	9.0						
AQRVDM10D0091	0.91	9.1						
AQRVDM10D0092	0.92	9.2						
AQRVDM10D0093	0.93	9.3	11.4	29.3				
AQRVDM10D0094	0.94	9.4						
AQRVDM10D0095	0.95	9.5						
AQRVDM10D0096	0.96	9.6			28.7	0.6	0.6	
AQRVDM10D0097	0.97	9.7						
AQRVDM10D0098	0.98	9.8	12.0	28.7				
AQRVDM10D0099	0.99	9.9						
AQRVDM10D0100	1.00	10.0		28.3				
AQRVDM10D0101	1.01	10.1						
AQRVDM10D0102	1.02	10.2						
AQRVDM10D0103	1.03	10.3	12.6	27.8				
AQRVDM10D0104	1.04	10.4						
AQRVDM10D0105	1.05	10.5			27.2	0.7	0.7	
AQRVDM10D0106	1.06	10.6						
AQRVDM10D0107	1.07	10.7	13.2	27.2				
AQRVDM10D0108	1.08	10.8						
AQRVDM10D0109	1.09	10.9						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDM10D0110	1.10	11.0	13.2	27.3	45	0.2	0.2	
AQRVDM10D0111	1.11	11.1						
AQRVDM10D0112	1.12	11.2						
AQRVDM10D0113	1.13	11.3	13.8	26.7				
AQRVDM10D0114	1.14	11.4						
AQRVDM10D0115	1.15	11.5						
AQRVDM10D0116	1.16	11.6						
AQRVDM10D0117	1.17	11.7						
AQRVDM10D0118	1.18	11.8	14.4	26.2				
AQRVDM10D0119	1.19	11.9						
AQRVDM10D0120	1.20	12.0			25.2	0.3	0.3	
AQRVDM10D0121	1.21	12.1						
AQRVDM10D0122	1.22	12.2						
AQRVDM10D0123	1.23	12.3	15.0	25.7				
AQRVDM10D0124	1.24	12.4						
AQRVDM10D0125	1.25	12.5						
AQRVDM10D0126	1.26	12.6						
AQRVDM10D0127	1.27	12.7						
AQRVDM10D0128	1.28	12.8	15.6	25.2				
AQRVDM10D0129	1.29	12.9			3	0.4	0.4	
AQRVDM10D0130	1.30	13.0						
AQRVDM10D0131	1.31	13.1						
AQRVDM10D0132	1.32	13.2						
AQRVDM10D0133	1.33	13.3	16.2	24.7				
AQRVDM10D0134	1.34	13.4						
AQRVDM10D0135	1.35	13.5						
AQRVDM10D0136	1.36	13.6						
AQRVDM10D0137	1.37	13.7						
AQRVDM10D0138	1.38	13.8	16.8	24.2				
AQRVDM10D0139	1.39	13.9			50	0.5	0.5	
AQRVDM10D0140	1.40	14.0						
AQRVDM10D0141	1.41	14.1						
AQRVDM10D0142	1.42	14.2						
AQRVDM10D0143	1.43	14.3	17.4	23.7				
AQRVDM10D0144	1.44	14.4						
AQRVDM10D0145	1.45	14.5						
AQRVDM10D0146	1.46	14.6						
AQRVDM10D0147	1.47	14.7						
AQRVDM10D0148	1.48	14.8	18.0	23.2				
AQRVDM10D0149	1.49	14.9			27.7	0.6	0.6	
AQRVDM10D0150	1.50	15.0						
AQRVDM10D0151	1.51	15.1						
AQRVDM10D0152	1.52	15.2						
AQRVDM10D0153	1.53	15.3	18.6	27.7				
AQRVDM10D0154	1.54	15.4						
AQRVDM10D0155	1.55	15.5						
AQRVDM10D0156	1.56	15.6						
AQRVDM10D0157	1.57	15.7						
AQRVDM10D0158	1.58	15.8	19.2	27.2				
AQRVDM10D0159	1.59	15.9			26.2	0.7	0.7	
AQRVDM10D0160	1.60	16.0						
AQRVDM10D0161	1.61	16.1						
AQRVDM10D0162	1.62	16.2						
AQRVDM10D0163	1.63	16.3	19.8	26.7				
AQRVDM10D0164	1.64	16.4						
AQRVDM10D0165	1.65	16.5						
AQRVDM10D0166	1.66	16.6						
AQRVDM10D0167	1.67	16.7	20.4	26.2				
AQRVDM10D0168	1.68	16.8						
AQRVDM10D0169	1.69	16.9						

直径公差 0~ -0.009mm

先端角在直径 0.50~1.09mm 以下为 120°, 直径 1.09~1.99mm 为 135°。

Tolerance of diameter is 0 to -0.009mm.

The point angle is 120° for diameters 0.50 to 1.09mm or less, and 135° for diameters over 1.09 to 1.99mm.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DO/DMS	先端 PL	库存 Stock
AQRVDM10D0170	1.70	17.0	20.4	26.2	50	3	0.4	●
AQRVDM10D0171	1.71	17.1	21.0	25.7				
AQRVDM10D0172	1.72	17.2						
AQRVDM10D0173	1.73	17.3						
AQRVDM10D0174	1.74	17.4						
AQRVDM10D0175	1.75	17.5						
AQRVDM10D0176	1.76	17.6	21.6	25.2				
AQRVDM10D0177	1.77	17.7						
AQRVDM10D0178	1.78	17.8						
AQRVDM10D0179	1.79	17.9						
AQRVDM10D0180	1.80	18.0	22.2	24.7				
AQRVDM10D0181	1.81	18.1						
AQRVDM10D0182	1.82	18.2						
AQRVDM10D0183	1.83	18.3						
AQRVDM10D0184	1.84	18.4	22.8	24.1				
AQRVDM10D0185	1.85	18.5						
AQRVDM10D0186	1.86	18.6						
AQRVDM10D0187	1.87	18.7						
AQRVDM10D0188	1.88	18.8	23.4	23.6				
AQRVDM10D0189	1.89	18.9						
AQRVDM10D0190	1.90	19.0						
AQRVDM10D0191	1.91	19.1						
AQRVDM10D0192	1.92	19.2						
AQRVDM10D0193	1.93	19.3	23.9	23.2				
AQRVDM10D0194	1.94	19.4						
AQRVDM10D0195	1.95	19.5						
AQRVDM10D0196	1.96	19.6						
AQRVDM10D0197	1.97	19.7						
AQRVDM10D0198	1.98	19.8						
AQRVDM10D0199	1.99	19.9						

AquaREVO 微型钻头的基准切削条件

Standard Cutting Condition for New Products

AQRVDM5D | AquaREVO微型钻头5D AquaREVO Drills Micro 5D

被削材 Work Material	一般结构用钢 碳素钢 灰口铸铁 SS400 SS50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 SCr Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 铁素体系 马氏体系 奥氏体系 SUS430 SUS403 SUS304 Stainless Steel		不锈钢 析出硬化系 SUS630 Stainless Steel		铝合金 AC ADC Aluminum Alloy	
	~200HB		20~30HRC		30~40HRC		40~55HRC									
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
0.5	25500	770	19100	380	15900	320	12750	250	12600	250	5600	100	5600	95	30000	900
1.0	15000	900	9900	400	8500	340	7500	300	9900	400	4200	120	4200	100	25000	1500
1.1	15000	990	9900	440	8500	370	7500	330	9900	440	4100	120	4100	100	25000	1650
1.6	11940	1150	7900	510	7000	450	6000	380	7900	510	4000	130	3200	100	20000	1910
1.9	10050	1150	6700	510	5900	450	5030	380	6700	510	3350	130	2700	100	16760	1910

AQRVDM10D | AquaREVO微型钻头10D AquaREVO Drills Micro 10D


被削材 Work Material	一般结构用钢 碳素钢 灰口铸铁 SS400 SS50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 SCr Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 铁素体系 马氏体系 奥氏体系 SUS430 SUS403 SUS304 Stainless Steel		不锈钢 析出硬化系 SUS630 Stainless Steel		铝合金 AC ADC Aluminum Alloy	
	~200HB		20~30HRC		30~40HRC		40~55HRC									
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
0.5	25500	770	19100	380	15900	320	12750	250	12600	250	5600	100	5600	95	30000	900
1.0	15000	900	9900	400	8500	340	7500	300	9900	400	4200	120	4200	100	25000	1500
1.1	15000	990	9900	440	8500	370	7500	330	9900	440	4100	120	4100	100	25000	1650
1.6	11940	1150	7900	510	7000	450	6000	380	7900	510	4000	130	3200	100	20000	1910
1.9	10050	1150	6700	510	5900	450	5030	380	6700	510	3350	130	2700	100	16760	1910

AQRVDM5D/10D

- 1) 机床刚性和工件装夹，根据加工部形状的情况，请调整切削条件。
- 2) 如果使用的设备有转数的限制，请以相同比率降低转数和进给速度。
- 3) 湿式加工是指使用水溶性切削液时的加工。
- 4) 使用非水溶性切削液时，请将转速和进给降低 20%。
- 5) 无论孔深度如何，请使用分级加工。
- 6) 分级加工时请返回孔的上方。
- 7) 分级量一般设定为 0.2~0.5DC。
- 8) 请将钻头的跳动控制在 0.005mm 以下。
- 9) 请不要将切削油剂直接喷注在工具上，而应沿着被削材料喷注。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) If the machine you are using has restrictions on the number of rotation, reduce the rotation and feed rate by the same ratio.
- 3) Wet Condition are for drilling with water soluble cutting fluid.
- 4) In non-water soluble cutting fluid, reduce the rotation and feed rate by 20%.
- 5) Please step feed regardless of the hole depth.
- 6) Retraction of the step feed is to be returned to the top of the hole.
- 7) Step feed is recommended to 0.2 ~ 0.5 x DC.
- 8) Please use the fixture to control the amplitude of the drill bit below 0.005mm.
- 9) Do not pour the cutting fluid directly to the drill, but pour it along the work material.

10、12 ◀ 尺寸表 Stocked Sized

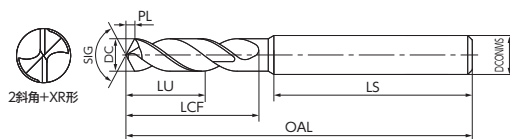

LIST 9860

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDS0200	2.00	6.0	9	34.1				●
AQRVDS0201	2.01			32.1				
AQRVDS0202	2.02							□
AQRVDS0203	2.03	6.1						
AQRVDS0204	2.04							●
AQRVDS0205	2.05							
AQRVDS0206	2.06	6.2		32.2			0.4	□
AQRVDS0207	2.07							
AQRVDS0208	2.08							●
AQRVDS0209	2.09							
AQRVDS0210	2.10	6.3						●
AQRVDS0211	2.11							□
AQRVDS0212	2.12							
AQRVDS0213	2.13	6.4						●
AQRVDS0214	2.14							□
AQRVDS0215	2.15							●
AQRVDS0216	2.16	6.5		32.3				□
AQRVDS0217	2.17							●
AQRVDS0218	2.18							□
AQRVDS0219	2.19	6.6						●
AQRVDS0220	2.20							□
AQRVDS0221	2.21							●
AQRVDS0222	2.22	6.7						□
AQRVDS0223	2.23							●
AQRVDS0224	2.24							□
AQRVDS0225	2.25	6.8	11					●
AQRVDS0226	2.26							□
AQRVDS0227	2.27							●
AQRVDS0228	2.28							□
AQRVDS0229	2.29	6.9		32.4	45	3		●
AQRVDS0230	2.30							□
AQRVDS0231	2.31							●
AQRVDS0232	2.32	7.0						□
AQRVDS0233	2.33							●
AQRVDS0234	2.34							□
AQRVDS0235	2.35	7.1					0.5	●
AQRVDS0236	2.36							□
AQRVDS0237	2.37							●
AQRVDS0238	2.38	7.2						□
AQRVDS0239	2.39							●
AQRVDS0240	2.40							□
AQRVDS0241	2.41	7.3		32.5				●
AQRVDS0242	2.42							□
AQRVDS0243	2.43							●
AQRVDS0244	2.44	7.4						□
AQRVDS0245	2.45							●
AQRVDS0246	2.46							□
AQRVDS0247	2.47	7.5		32.6				●
AQRVDS0248	2.48							□
AQRVDS0249	2.49	7.6						●
AQRVDS0250	2.50							□
AQRVDS0251	2.51							●
AQRVDS0252	2.52	7.7	14	29.6				□
AQRVDS0253	2.53							●
AQRVDS0254	2.54							□
AQRVDS0255	2.55							●
AQRVDS0256	2.56	7.8						□
AQRVDS0257	2.57							●
AQRVDS0258	2.58							□
AQRVDS0259	2.59							●

单位 (Unit): mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDS0260	2.60	7.8						●
AQRVDS0261	2.61							
AQRVDS0262	2.62						0.5	□
AQRVDS0263	2.63	7.9						●
AQRVDS0264	2.64			29.7				□
AQRVDS0265	2.65							●
AQRVDS0266	2.66	8.0						□
AQRVDS0267	2.67							●
AQRVDS0268	2.68							□
AQRVDS0269	2.69	8.1						●
AQRVDS0270	2.70							□
AQRVDS0271	2.71	8.2						●
AQRVDS0272	2.72							□
AQRVDS0273	2.73	8.3						●
AQRVDS0274	2.74			29.8				□
AQRVDS0275	2.75							●
AQRVDS0276	2.76	8.4						□
AQRVDS0277	2.77							●
AQRVDS0278	2.78							□
AQRVDS0279	2.79	8.5						●
AQRVDS0280	2.80		14		45	3		□
AQRVDS0281	2.81							●
AQRVDS0282	2.82	8.6						□
AQRVDS0283	2.83							●
AQRVDS0284	2.84							□
AQRVDS0285	2.85	8.7						●
AQRVDS0286	2.86			29.9				□
AQRVDS0287	2.87							●
AQRVDS0288	2.88	8.8						□
AQRVDS0289	2.89							●
AQRVDS0290	2.90						0.6	□
AQRVDS0291	2.91	8.9						●
AQRVDS0292	2.92							□
AQRVDS0293	2.93							●
AQRVDS0294	2.94	9.0						□
AQRVDS0295	2.95							●
AQRVDS0296	2.96							□
AQRVDS0297	2.97	9.1						●
AQRVDS0298	2.98							□
AQRVDS0299	2.99							●
AQRVDS0300	3.00							□
AQRVDS0301	3.01	9.2		33.1				●
AQRVDS0302	3.02							□
AQRVDS0303	3.03							●
AQRVDS0304	3.04	9.3						□
AQRVDS0305	3.05							●
AQRVDS0306	3.06							□
AQRVDS0307	3.07	9.4		33.2				●
AQRVDS0308	3.08							□
AQRVDS0309	3.09							●
AQRVDS0310	3.10	9.5			55	4		□
AQRVDS0311	3.11							●
AQRVDS0312	3.12							□
AQRVDS0313	3.13							●
AQRVDS0314	3.14	9.6						□
AQRVDS0315	3.15							●
AQRVDS0316	3.16							□
AQRVDS0317	3.17			33.3			0.7	●
AQRVDS0318	3.18							□
AQRVDS0319	3.19							●

Next Page 下一页 ➡

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



工具材料



涂层



直径公差



先端角




螺旋角



柄直径公差



加工孔深



直径范围

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock								
AQRVDS0320	3.20	9.6	33.3	33.3	55	4	0.7	●								
AQRVDS0321	3.21							□								
AQRVDS0322	3.22	9.7						●								
AQRVDS0323	3.23							□								
AQRVDS0324	3.24	9.8	33.4	33.4				●								
AQRVDS0325	3.25							□								
AQRVDS0326	3.26	9.9						●								
AQRVDS0327	3.27							□								
AQRVDS0328	3.28	10.0						●								
AQRVDS0329	3.29							□								
AQRVDS0330	3.30	10.1	33.5	33.5				●								
AQRVDS0331	3.31							□								
AQRVDS0332	3.32	10.2						●								
AQRVDS0333	3.33							□								
AQRVDS0334	3.34	10.3						●								
AQRVDS0335	3.35							□								
AQRVDS0336	3.36	10.4	33.6	33.6				●								
AQRVDS0337	3.37							□								
AQRVDS0338	3.38	10.5						●								
AQRVDS0339	3.39							□								
AQRVDS0340	3.40	10.6	31.6	31.6				●								
AQRVDS0341	3.41							□								
AQRVDS0342	3.42	10.7						●								
AQRVDS0343	3.43							□								
AQRVDS0344	3.44	10.8	31.7	31.7				●								
AQRVDS0345	3.45							□								
AQRVDS0346	3.46	10.9						●								
AQRVDS0347	3.47							□								
AQRVDS0348	3.48	11.0	31.8	31.8				●								
AQRVDS0349	3.49							□								
AQRVDS0350	3.50	11.1						●								
AQRVDS0351	3.51							□								
AQRVDS0352	3.52	11.2	31.9	31.9				●								
AQRVDS0353	3.53							□								
AQRVDS0354	3.54	11.3						●								
AQRVDS0355	3.55							□								
AQRVDS0356	3.56	11.4						●								
AQRVDS0357	3.57							□								
AQRVDS0358	3.58	11.5	32.0	32.0				●								
AQRVDS0359	3.59							□								
AQRVDS0360	3.60	11.6						●								
AQRVDS0361	3.61							□								
AQRVDS0362	3.62	11.7	32.1	32.1				●								
AQRVDS0363	3.63							□								
AQRVDS0364	3.64	11.8						●								
AQRVDS0365	3.65							□								
AQRVDS0366	3.66	11.9	32.2	32.2				●								
AQRVDS0367	3.67							□								
AQRVDS0368	3.68	12.0						●								
AQRVDS0369	3.69							□								
AQRVDS0370	3.70	12.1	32.3	32.3				●								
AQRVDS0371	3.71							□								
AQRVDS0372	3.72	12.2						●								
AQRVDS0373	3.73							□								
AQRVDS0374	3.74	12.3						●								
AQRVDS0375	3.75							□								
AQRVDS0376	3.76	12.4	32.4	32.4				●								
AQRVDS0377	3.77							□								
AQRVDS0378	3.78	12.5						●								
AQRVDS0379	3.79							□								

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock										
AQRVDS0380	3.80	11.4	22	31.8	55	4	0.8	●										
AQRVDS0381	3.81							□										
AQRVDS0382	3.82	11.5		31.9				●										
AQRVDS0383	3.83								□									
AQRVDS0384	3.84	11.6							31.9	□								
AQRVDS0385	3.85										11.7	55	4	●				
AQRVDS0386	3.86	11.8		32.0				0.8							●			
AQRVDS0387	3.87										11.9					32.0	□	
AQRVDS0388	3.88	12.0							36.1	62								5
AQRVDS0389	3.89										12.1	36.2	□					
AQRVDS0390	3.90	12.2		36.3				62						5	0.9			
AQRVDS0391	3.91										12.3					36.4	36.5	
AQRVDS0392	3.92	12.4	36.5		□													
AQRVDS0393	3.93					12.5	36.6		□									
AQRVDS0394	3.94	12.6		36.7				□										
AQRVDS0395	3.95					12.7				36.8	□							
AQRVDS0396	3.96	12.8	36.9		□													
AQRVDS0397	3.97					12.9	37.0		□									
AQRVDS0398	3.98	13.0		37.1				□										
AQRVDS0399	3.99					13.1				37.2	□							
AQRVDS0400	4.00	13.2	37.3		□													
AQRVDS0401	4.01					13.3	37.4		□									
AQRVDS0402	4.02	13.4		37.5				□										
AQRVDS0403	4.03					13.5				37.6	□							
AQRVDS0404	4.04	13.6	37.7		□													
AQRVDS0405	4.05					13.7	37.8		□									
AQRVDS0406	4.06	13.8		37.9				□										
AQRVDS0407	4.07					13.9				38.0	□							
AQRVDS0408	4.08	14.0	38.1		□													
AQRVDS0409	4.09					14.1	38.2		□									
AQRVDS0410	4.10	14.2		38.3				□										
AQRVDS0411	4.11					14.3				38.4	□							
AQRVDS0412	4.12	14.4	38.5		□													
AQRVDS0413	4.13					14.5	38.6		□									
AQRVDS0414	4.14	14.6		38.7				□										
AQRVDS0415	4.15					14.7				38.8	□							
AQRVDS0416	4.16	14.8	38.9		□													
AQRVDS0417	4.17					14.9	39.0		□									
AQRVDS0418	4.18	15.0		39.1				□										
AQRVDS0419	4.19					15.1				39.2	□							
AQRVDS0420	4.20	15.2	39.3		□													
AQRVDS0421	4.21					15.3	39.4		□									
AQRVDS0422	4.22	15.4		39.5				□										
AQRVDS0423	4.23					15.5				39.6	□							
AQRVDS0424	4.24	15.6	39.7		□													
AQRVDS0425	4.25					15.7	39.8		□									
AQRVDS0426	4.26	15.8		39.9				□										
AQRVDS0427	4.27					15.9				40.0	□							
AQRVDS0428	4.28	16.0	40.1		□													
AQRVDS0429	4.29					16.1	40.2		□									
AQRVDS0430	4.30	16.2		40.3				□										
AQRVDS0431	4.31					16.3				40.4	□							
AQRVDS0432	4.32	16.4	40.5		□													
AQRVDS0433	4.33					16.5	40.6		□									
AQRVDS0434	4.34	16.6		40.7				□										
AQRVDS0435	4.35					16.7				40.8	□							
AQRVDS0436	4.36	16.8	40.9		□													
AQRVDS0437	4.37					16.9	41.0		□									
AQRVDS0438	4.38	17.0		41.1				□										
AQRVDS0439	4.39					17.1				41.2	□							
AQRVDS0440	4.40	17.2	41.3		□													
AQRVDS0441	4.41					17.3	41.4		□									
AQRVDS0442	4.42	17.4		41.5				□										
AQRVDS0443	4.43					17.5				41.6	□							
AQRVDS0444	4.44	17.6	41.7		□													
AQRVDS0445	4.45					17.7	41.8		□									
AQRVDS0446	4.46	17.8		41.9				□										
AQRVDS0447	4.47					17.9				42.0	□							
AQRVDS0448	4.48	18.0	42.1		□													
AQRVDS0449	4.49					18.1	42.2		□									
AQRVDS0450	4.50	18.2		42.3				□										
AQRVDS0451	4.51					18.3				42.4	□							
AQRVDS0452	4.52	18.4	42.5		□													
AQRVDS0453	4.53					18.5	42.6		□									
AQRVDS0454	4.54	18.6		42.7				□										
AQRVDS0455	4.55					18.7				42.8	□							
AQRVDS0456	4.56	18.8	42.9		□													
AQRVDS0457	4.57					18.9	43.0		□									
AQRVDS0458	4.58	19.0		43.1				□										
AQRVDS0459	4.59					19.1				43.2	□							
AQRVDS0460	4.60	19.2	43.3		□													
AQRVDS0461	4.61					19.3	43.4		□									
AQRVDS0462	4.62	19.4		43.5				□										
AQRVDS0463	4.63					19.5				43.6	□							
AQRVDS0464	4.64	19.6	43.7		□													
AQRVDS0465	4.65					19.7	43.8		□									
AQRVDS0466	4.66	19.8		43.9				□										
AQRVDS0467	4.67					19.9				44.0	□							
AQRVDS0468	4.68	20.0	44.1		□													
AQRVDS0469	4.69					20.1	44.2		□									
AQRVDS0470	4.70	20.2		44.3				□										
AQRVDS0471	4.71					20.3				44.4	□							
AQRVDS0472	4.72	20.4	44.5		□													
AQRVDS0473	4.73					20.5	44.6		□									
AQRVDS0474	4.74	20.6		44.7				□										
AQRVDS0475	4.75					20.7				44.8	□							
AQRVDS0476	4.76	20.8	44.9		□													
AQRVDS0477	4.77					20.9	45.0		□									
AQRVDS0478	4.78	21.0		45.1				□										
AQRVDS0479	4.79					21.1				45.2	□							
AQRVDS0480	4.80	21.2	45.3		□													
AQRVDS0481	4.81					21.3	45.4		□									
AQRVDS0482	4.82	21.4		45.5				□										
AQRVDS0483	4.83					21.5				45.6	□							
AQRVDS0484	4.84	21.6	45.7		□													
AQRVDS0485	4.85					21.7	45.8		□									
AQRVDS0486	4.86	21.8		45.9				□										
AQRVDS0487	4.87					21.9				46.0	□							
AQRVDS0488	4.88	22.0	46.1		□													
AQRVDS0489	4.89					22.1	46.2		□									
AQRVDS0490	4.90	22.2		46.3				□										
AQRVDS0491	4.91					22.3				46.4	□							
AQRVDS0492	4.92	22.4	46.5		□													
AQRVDS0493	4.93					22.5	46.6		□									
AQRVDS0494	4.94	22.6		46.7				□										
AQRVDS0495	4.95					22.7				46.8	□							
AQRVDS0496	4.96	22.8	46.9		□													
AQRVDS0497	4.97					22.9	47.0		□									
AQRVDS0498	4.98	23.0		47.1				□										
AQRVDS0499	4.99					23.1				47.2	□							
AQRVDS0500	5.00	23.2	47.3		□													
AQRVDS0501	5.01					23.3	47.4		□									
AQRVDS0502	5.02	23.4		47.5				□										
AQRVDS0503	5.03					23.5				47.6	□							
AQRVDS0504	5.04	23.6	47.7		□													
AQRVDS0505	5.05					23.7	47.8		□									
AQRVDS0506	5.06	23.8		47.9				□										
AQRVDS0507	5.07					23.9				48.0	□							
AQRVDS0508	5.08	24.0	48.1		□													
AQRVDS0509	5.09					24.1	48.2		□									
AQRVDS0510	5.10	24.2		48.3				□										
AQRVDS0511	5.11					24.3				48.4	□							
AQRVDS0512	5.12	24.4	48.5		□													
AQRVDS0513	5.13					24.5	48.6		□									
AQRVDS0514	5.14	24.6		48.7				□										
AQRVDS0515	5.15					24.7				48.8	□							
AQRVDS0516	5.16	24.8	48.9		□													
AQRVDS0517	5.17					24.9	49.0		□									
AQRVDS0518	5.18	25.0		49.1				□										
AQRVDS0519	5.19					25.1				49.2	□							
AQRVDS0520	5.20	25.2	49.3		□													
AQRVDS0521	5.21					25.3	49.4		□									
AQRVDS0522	5.22	25.4		49.5				□										
AQRVDS0523	5.23					25.5				49.6	□							
AQRVDS0524	5.24	25.6	49.7		□													
AQRVDS0525	5.25					25.7	49.8		□									
AQRVDS0526	5.26	25.8		49.9				□										
AQRVDS0527	5.27					25.9				50.0	□							
AQRVDS0528	5.28	26.0	50.1		□													
AQRVDS0529	5.29					26.1	50.2		□									
AQRVDS0530	5.30	26.2		50.3				□										
AQRVDS0531	5.31					26.3				50.4	□							
AQRVDS0532	5.32	26.4	50.5		□													
AQRVDS0533	5.33					26.5	50.6		□									
AQRVDS0534	5.34	26.6		50.7				□										
AQRVDS0535	5.35					26.7				50.8	□							
AQRVDS0536	5.36	26.8	50.9		□													
AQRVDS0537	5.37					26.9	51.0		□									
AQRVDS0538	5.38	27.0		51.1				□										
AQRVDS0539	5.39					27.1				51.2	□							
AQRVDS0540	5.40	27.2	51.3		□													
AQRVDS0541	5.41					27.3	51.4		□									
AQRVDS0542	5.42	27.4		51.5				□										
AQRVDS0543	5.43					27.5				51.6	□							
AQRVDS0544	5.44	27.6	51.7		□													
AQRVDS0545	5.45					27.7	51.8		□									
AQRVDS0546	5.46	27.8		51.9				□										
AQRVDS0547	5.47					27.9				52.0	□							
AQRVDS0548	5.48	28.0	52.1		□													
AQRVDS0549	5.49					28.1	52.2		□									
AQRVDS0550	5.50	28.2		52.3				□										
AQRVDS0551	5.51					28.3				52.4	□							
AQRVDS0552	5.52	28.4	52.5		□													
AQRVDS0553	5.53					28.5	52.6		□									
AQRVDS0554	5.54	28.6		52.7				□										
AQRVDS0555	5.55					28.7				52.8	□							
AQRVDS0556	5.56	28.8	52.9		□													
AQRVDS0557	5.57					28.9	53.0		□									
AQRVDS0558	5.58	29.0		53.1				□										
AQRVDS0559	5.59					29.1				53.2	□							
AQRVDS0560	5.60	29.2	53.3		□													
AQRVDS0561	5.61					29.3	53.4		□									
AQRVDS0562	5.62	29.4		53.5				□										
AQRVDS0563	5.63					29.5				53.6	□							
AQRVDS0564	5.64	29.6	53.7		□													
AQRVDS0565	5.65					29.7	53.8		□									
AQRVDS0566	5.66	29.8		53.9				□										
AQRVDS0567	5.67					29.9				54.0	□							
AQRVDS0568	5.68	30.0	54.1		□													
AQRVDS0569	5.69					30.1	54.2		□									
AQRVDS0570	5.70	30.2		54.3				□										
AQRVDS0571	5.71					30.3				54.4	□							
AQRVDS0572	5.72	30.4	54.5		□													
AQRVDS0573	5.73					30.5	54.6		□									
AQRVDS0574	5.74	30.6		54.7				□										
AQRVDS0575	5.75					30.7				54.8	□							
AQRVDS0576	5.76	30.8	54.9		□													
AQRVDS0577	5.77					30.9	55.0		□									
AQRVDS0578	5.78	31.0		55.1				□										
AQRVDS0579	5.79					31.1				55.2	□							
AQRVDS0580	5.80	31.2	55.3		□													
AQRVDS0581	5.81					31.3	55.4		□									
AQRVDS0582	5.82	31.4		55.5				□										
AQRVDS0583	5.83					31.5				55.6	□							
AQRVDS0584	5.84	31.6	55.7		□													
AQRVDS0585	5.85					31.7	55.8		□									
AQRVDS0586	5.86	31.8		55.9				□										
AQRVDS0587	5.87					31.9				56.0	□							
AQRVDS0588	5.88	32.0	56.1		□													
AQRVDS0589	5.89					32.1	56.2		□									
AQRVDS0590	5.90	32.																

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
AQRVDS0440	4.40	13.2	24	36.5	62	5	0.9	●
AQRVDS0441	4.41							
AQRVDS0442	4.42							
AQRVDS0443	4.43	13.3						
AQRVDS0444	4.44							
AQRVDS0445	4.45							
AQRVDS0446	4.46	13.4						
AQRVDS0447	4.47							
AQRVDS0448	4.48							
AQRVDS0449	4.49	13.5		36.6				
AQRVDS0450	4.50							
AQRVDS0451	4.51							
AQRVDS0452	4.52	13.6	34.6					
AQRVDS0453	4.53							
AQRVDS0454	4.54							
AQRVDS0455	4.55	13.7						
AQRVDS0456	4.56							
AQRVDS0457	4.57							
AQRVDS0458	4.58	13.8						
AQRVDS0459	4.59							
AQRVDS0460	4.60							
AQRVDS0461	4.61	13.9		34.7				
AQRVDS0462	4.62							
AQRVDS0463	4.63							
AQRVDS0464	4.64	14.0						
AQRVDS0465	4.65							
AQRVDS0466	4.66							
AQRVDS0467	4.67	14.1						
AQRVDS0468	4.68							
AQRVDS0469	4.69							
AQRVDS0470	4.70	14.2	34.8					
AQRVDS0471	4.71							
AQRVDS0472	4.72							
AQRVDS0473	4.73	14.3						
AQRVDS0474	4.74							
AQRVDS0475	4.75							
AQRVDS0476	4.76	14.4						
AQRVDS0477	4.77							
AQRVDS0478	4.78							
AQRVDS0479	4.79	14.5						
AQRVDS0480	4.80							
AQRVDS0481	4.81							
AQRVDS0482	4.82	14.6	34.9					
AQRVDS0483	4.83							
AQRVDS0484	4.84							
AQRVDS0485	4.85	14.7						
AQRVDS0486	4.86							
AQRVDS0487	4.87							
AQRVDS0488	4.88	14.8						
AQRVDS0489	4.89							
AQRVDS0490	4.90							
AQRVDS0491	4.91	14.9		35.0				
AQRVDS0492	4.92							
AQRVDS0493	4.93							
AQRVDS0494	4.94							
AQRVDS0495	4.95							
AQRVDS0496	4.96	15.0						
AQRVDS0497	4.97							
AQRVDS0498	4.98							
AQRVDS0499	4.99							

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock	
AQRVDS0500	5.00	15.0	26	35.0	62	5	1.0	●	
AQRVDS0501	5.01	15.1		38.1	66	6		□	
AQRVDS0502	5.02			15.2				38.2	●
AQRVDS0503	5.03								15.3
AQRVDS0504	5.04	15.4							
AQRVDS0505	5.05			15.5					
AQRVDS0506	5.06								15.6
AQRVDS0507	5.07	15.7							
AQRVDS0508	5.08			15.8					
AQRVDS0509	5.09								15.9
AQRVDS0510	5.10	16.0	38.3				●		
AQRVDS0511	5.11			16.1	□				
AQRVDS0512	5.12				16.2	●			
AQRVDS0513	5.13	16.3				□			
AQRVDS0514	5.14			16.4		●			
AQRVDS0515	5.15				16.5	□			
AQRVDS0516	5.16	16.6				●			
AQRVDS0517	5.17			16.7		□			
AQRVDS0518	5.18				16.8	●			
AQRVDS0519	5.19	16.9				□			
AQRVDS0520	5.20		17.0	●					
AQRVDS0521	5.21			17.1	□				
AQRVDS0522	5.22	17.2			●				
AQRVDS0523	5.23		17.3		□				
AQRVDS0524	5.24			17.4	●				
AQRVDS0525	5.25	17.5			□				
AQRVDS0526	5.26		17.6		●				
AQRVDS0527	5.27			17.7	□				
AQRVDS0528	5.28	17.8			●				
AQRVDS0529	5.29		17.9		□				
AQRVDS0530	5.30			18.0	●				
AQRVDS0531	5.31	18.1			□				
AQRVDS0532	5.32		18.2		●				
AQRVDS0533	5.33			18.3	□				
AQRVDS0534	5.34	18.4			●				
AQRVDS0535	5.35		18.5		□				
AQRVDS0536	5.36			18.6	●				
AQRVDS0537	5.37	18.7			□				
AQRVDS0538	5.38		18.8		●				
AQRVDS0539	5.39			18.9	□				
AQRVDS0540	5.40	19.0			●				
AQRVDS0541	5.41		19.1		□				
AQRVDS0542	5.42			19.2	●				
AQRVDS0543	5.43	19.3			□				
AQRVDS0544	5.44		19.4		●				
AQRVDS0545	5.45			19.5	□				
AQRVDS0546	5.46	19.6			●				
AQRVDS0547	5.47		19.7		□				
AQRVDS0548	5.48			19.8	●				
AQRVDS0549	5.49	19.9			□				
AQRVDS0550	5.50		20.0		●				
AQRVDS0551	5.51			20.1	□				
AQRVDS0552	5.52	20.2			●				
AQRVDS0553	5.53		20.3		□				
AQRVDS0554	5.54			20.4	●				
AQRVDS0555	5.55	20.5			□				
AQRVDS0556	5.56		20.6		●				
AQRVDS0557	5.57			20.7	□				
AQRVDS0558	5.58	20.8			●				
AQRVDS0559	5.59		20.9		□				
AQRVDS0560	5.60			21.0	●				
AQRVDS0561	5.61	21.1			□				
AQRVDS0562	5.62		21.2		●				
AQRVDS0563	5.63			21.3	□				
AQRVDS0564	5.64	21.4			●				
AQRVDS0565	5.65		21.5		□				
AQRVDS0566	5.66			21.6	●				
AQRVDS0567	5.67	21.7			□				
AQRVDS0568	5.68		21.8		●				
AQRVDS0569	5.69			21.9	□				
AQRVDS0570	5.70	22.0			●				
AQRVDS0571	5.71		22.1		□				
AQRVDS0572	5.72			22.2	●				
AQRVDS0573	5.73	22.3			□				
AQRVDS0574	5.74		22.4		●				
AQRVDS0575	5.75			22.5	□				
AQRVDS0576	5.76	22.6			●				
AQRVDS0577	5.77		22.7		□				
AQRVDS0578	5.78			22.8	●				
AQRVDS0579	5.79	22.9			□				
AQRVDS0580	5.80		23.0		●				
AQRVDS0581	5.81			23.1	□				
AQRVDS0582	5.82	23.2			●				
AQRVDS0583	5.83		23.3		□				
AQRVDS0584	5.84			23.4	●				
AQRVDS0585	5.85	23.5			□				
AQRVDS0586	5.86		23.6		●				
AQRVDS0587	5.87			23.7	□				
AQRVDS0588	5.88	23.8			●				
AQRVDS0589	5.89		23.9		□				
AQRVDS0590	5.90			24.0	●				
AQRVDS0591	5.91	24.1			□				
AQRVDS0592	5.92		24.2		●				
AQRVDS0593	5.93			24.3	□				
AQRVDS0594	5.94	24.4			●				
AQRVDS0595	5.95		24.5		□				
AQRVDS0596	5.96			24.6	●				
AQRVDS0597	5.97	24.7			□				
AQRVDS0598	5.98		24.8		●				
AQRVDS0599	5.99			24.9	□				
AQRVDS0600	6.00	25.0			●				
AQRVDS0601	6.01		25.1		□				
AQRVDS0602	6.02			25.2	●				
AQRVDS0603	6.03	25.3			□				
AQRVDS0604	6.04		25.4		●				
AQRVDS0605	6.05			25.5	□				
AQRVDS0606	6.06	25.6			●				
AQRVDS0607	6.07		25.7		□				
AQRVDS0608	6.08			25.8	●				
AQRVDS0609	6.09	25.9			□				
AQRVDS0610	6.10		26.0		●				
AQRVDS0611	6.11			26.1	□				
AQRVDS0612	6.12	26.2			●				
AQRVDS0613	6.13		26.3		□				
AQRVDS0614	6.14			26.4	●				
AQRVDS0615	6.15	26.5			□				
AQRVDS0616	6.16		26.6		●				
AQRVDS0617	6.17			26.7	□				
AQRVDS0618	6.18	26.8			●				
AQRVDS0619	6.19		26.9		□				
AQRVDS0620	6.20			27.0	●				
AQRVDS0621	6.21	27.1			□				
AQRVDS0622	6.22		27.2		●				
AQRVDS0623	6.23			27.3	□				
AQRVDS0624	6.24	27.4			●				
AQRVDS0625	6.25		27.5		□				
AQRVDS0626	6.26			27.6	●				
AQRVDS0627	6.27	27.7			□				
AQRVDS0628	6.28		27.8		●				
AQRVDS0629	6.29			27.9	□				
AQRVDS0630	6.30	28.0			●				
AQRVDS0631	6.31		28.1		□				
AQRVDS0632	6.32			28.2	●				
AQRVDS0633	6.33	28.3			□				
AQRVDS0634	6.34		28.4		●				
AQRVDS0635	6.35			28.5	□				
AQRVDS0636	6.36	28.6			●				
AQRVDS0637	6.37		28.7		□				
AQRVDS0638	6.38			28.8	●				
AQRVDS0639	6.39	28.9			□				
AQRVDS0640	6.40		29.0		●				
AQRVDS0641	6.41			29.1	□				
AQRVDS0642	6.42	29.2			●				
AQRVDS0643	6.43		29.3		□				
AQRVDS0644	6.44			29.4	●				
AQRVDS0645	6.45	29.5			□				
AQRVDS0646	6.46		29.6		●				
AQRVDS0647	6.47			29.7	□				
AQRVDS0648	6.48	29.8			●				
AQRVDS0649	6.49		29.9		□				
AQRVDS0650	6.50			30.0	●				
AQRVDS0651	6.51	30.1			□				
AQRVDS0652	6.52		30.2		●				
AQRVDS0653	6.53			30.3	□				
AQRVDS0654	6.54	30.4			●				
AQRVDS0655	6.55		30.5		□				
AQRVDS0656	6.56			30.6	●				
AQRVDS0657	6.57	30.7			□				
AQRVDS0658	6.58		30.8		●				
AQRVDS0659	6.59			30.9	□				
AQRVDS0660	6.60	31.0			●				
AQRVDS0661	6.61		31.1		□				
AQRVDS0662	6.62			31.2	●				
AQRVDS0663	6.63	31.3			□				
AQRVDS0664	6.64		31.4		●				
AQRVDS0665	6.65			31.5	□				
AQRVDS0666	6.66	31.6			●				
AQRVDS0667	6.67		31.7		□				
AQRVDS0668	6.68			31.8	●				
AQRVDS0669	6.69	31.9			□				
AQRVDS0670	6.70		32.0		●				
AQRVDS0671	6.71			32.1	□				
AQRVDS0672	6.72	32.2			●				
AQRVDS0673	6.73		32.3		□				
AQRVDS0674	6.74			32.4	●				
AQRVDS0675	6.75	32.5			□				
AQRVDS0676	6.76		32.6		●				
AQRVDS0677	6.77			32.7	□				
AQRVDS0678	6.78	32.8			●				
AQRVDS0679	6.79		32.9		□				
AQRVDS0680	6.80			33.0	●				
AQRVDS0681	6.81	33.1			□				
AQRVDS0682	6.82		33.2		●				
AQRVDS0683	6.83			33.3	□				
AQRVDS0684	6.84	33.4			●				
AQRVDS0685	6.85		33.5		□				
AQRVDS0686	6.86			33.6	●				
AQRVDS0687	6.87	33.7			□				
AQRVDS0688	6.88		33.8		●				
AQRVDS0689	6.89			33.9	□				
AQRVDS0690	6.90	34.0			●				
AQRVDS0691	6.91		34.1		□				
AQRVDS0692	6.92			34.2	●				
AQRVDS0693	6.93	34.3			□				
AQRVDS0694	6.94		34.4		●				
AQRVDS0695	6.95			34.5	□				
AQRVDS0696	6.96	34.6			●				
AQRVDS0697	6.97		34.7		□				
AQRVDS0698	6.98			34.8	●				
AQRVDS0699	6.99	34.9			□				
AQRVDS0700	7.00		35.0		●				
AQRVDS0701	7.01			35.1	□				
AQRVDS0702	7.02	35.2			●				
AQRVDS0703	7.03		35.3		□				
AQRVDS0704	7.04			35.4	●				
AQRVDS0705	7.05	35.5			□				
AQRVDS0706	7.06		35.6		●				
AQRVDS0707	7.07			35.7	□				
AQRVDS0708	7.08	35.8			●				
AQRVDS0709	7.09		35.9		□				
AQRVDS0710	7.10			36.0	●				
AQRVDS0711	7.11	36.1			□				
AQRVDS0712	7.12		36.2		●				
AQRVDS0713	7.13			36.3	□				
AQRVDS0714	7.14	36.4			●				
AQRVDS0715	7.15		36.5		□				
AQRVDS0716	7.16			36.6	●				
AQRVDS0717	7.17	36.7			□				
AQRVDS0718	7.18		36.8		●				
AQRVDS0719	7.19			36.9	□				
AQRVDS0720	7.20	37.0			●				
AQRVDS0721	7.21		37.1		□				
AQRVDS0722	7.22			37.2	●				
AQRVDS0723	7.23	37.3			□				
AQRVDS0724	7.24		37.4		●				
AQRVDS0725	7.25			37.5	□				
AQRVDS0726	7.26	37.6			●				
AQRVDS0727	7.27		37.7		□				
AQRVDS0728	7.28			37.8	●				
AQRVDS0729	7.29	37.9			□				
AQRVDS0730	7.30		38.0		●				
AQRVDS0731	7.31			38.1	□				
AQRVDS0732	7.32	38.2			●				
AQRVDS0733	7.33		38.3		□				
AQRVDS0734	7.34			38.4	●				
AQRVDS0735	7.35	38.5			□				
AQRVDS0736	7.36		38.6		●				
AQRVDS0737	7.37			38.7	□				
AQRVDS0738	7.38	38.8			●				
AQRVDS0739	7.39		38.9		□				
AQRVDS0740	7.40			39.0	●				
AQRVDS0741	7.41	39.1			□				
AQRVDS0742	7.42		39.2		●				
AQRVDS0743	7.43			39.3	□				
AQRVDS0744	7.44	39.4			●				
AQRVDS0745	7.45		39.5		□				
AQRVDS0746	7.46			39.6	●				
AQRVDS0747	7.47	39.7			□				
AQRVDS0748	7.48		39.8		●				
AQRVDS0749	7.49			39.9	□				
AQRVDS0750	7.50	40.0			●				
AQRVDS0751	7.51		40.1		□				
AQRVDS0752	7.52			40.2	●				
AQRVDS0753	7.53	40.3			□				
AQRVDS0754	7.54		40.4		●				
AQRVDS0755	7.55			40.5	□				
AQRVDS0756	7.56	40.6			●				
AQRVDS0757	7.57		40.7		□				
AQRVDS0758	7.58			40.8	●				
AQRVDS0759	7.59	40.9			□				
AQRVDS0760	7.60		41.0		●				
AQRVDS0761	7.61			41.1	□				
AQRVDS0762	7.62	41.2			●				
AQRVDS0763	7.63		41.3		□				
AQRVDS0764	7.64			41.4	●				
AQRVDS0765	7.65	41.5			□				
AQRVDS0766	7.66		41.6		●				
AQRVDS0767	7.67			41.7	□				
AQRVDS0768	7.68	41.8			●				
AQRVDS0769	7.69		41.9		□				
AQRVDS0770	7.70			42.0	●				
AQRVDS0771	7.71	42.1			□				
AQRVDS0772	7.72		42.2		●				
AQRVDS0773	7.73			42.3	□				
AQRVDS0774	7.74	42.4			●				
AQRVDS0775	7.75		42.5		□				
AQRVDS0776	7.76			42.6	●				
AQRVDS0777	7.77	42.7			□				
AQRVDS0778	7.78		42.8		●				
AQRVDS0779	7.79			42.9	□				
AQRVDS0780	7.80	43.0			●				
AQRVDS0781	7.81		43.1		□				
AQRVDS0782	7.82			43.2	●				
AQRVDS0783	7.83</								

Next
Page 下一页 ➡



工具材料



涂层



直径公差



先端角




螺旋角



柄径公差



加工孔深



直径范围

新品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock				
AQRVDS0560	5.60	16.8	28	36.7	66	6	1.2	●				
AQRVDS0561	5.61							□				
AQRVDS0562	5.62	16.9						36.8	67	7	1.3	□
AQRVDS0563	5.63											●
AQRVDS0564	5.64	17.0						36.9	68	8	1.4	□
AQRVDS0565	5.65											●
AQRVDS0566	5.66	17.1						37.0	69	9	1.5	□
AQRVDS0567	5.67											●
AQRVDS0568	5.68	17.2						37.1	70	10	1.6	□
AQRVDS0569	5.69											●
AQRVDS0570	5.70	17.3	37.2	71	11	1.7	□					
AQRVDS0571	5.71						●					
AQRVDS0572	5.72	17.4	37.3	72	12	1.8	□					
AQRVDS0573	5.73						●					
AQRVDS0574	5.74	17.5	37.4	73	13	1.9	□					
AQRVDS0575	5.75						●					
AQRVDS0576	5.76	17.6	37.5	74	14	2.0	□					
AQRVDS0577	5.77						●					
AQRVDS0578	5.78	17.7	37.6	75	15	2.1	□					
AQRVDS0579	5.79						●					
AQRVDS0580	5.80	17.8	37.7	76	16	2.2	□					
AQRVDS0581	5.81						●					
AQRVDS0582	5.82	17.9	37.8	77	17	2.3	□					
AQRVDS0583	5.83						●					
AQRVDS0584	5.84	18.0	37.9	78	18	2.4	□					
AQRVDS0585	5.85						●					
AQRVDS0586	5.86	18.1	38.0	79	19	2.5	□					
AQRVDS0587	5.87						●					
AQRVDS0588	5.88	18.2	38.1	80	20	2.6	□					
AQRVDS0589	5.89						●					
AQRVDS0590	5.90	18.3	38.2	81	21	2.7	□					
AQRVDS0591	5.91						●					
AQRVDS0592	5.92	18.4	38.3	82	22	2.8	□					
AQRVDS0593	5.93						●					
AQRVDS0594	5.94	18.5	38.4	83	23	2.9	□					
AQRVDS0595	5.95						●					
AQRVDS0596	5.96	18.6	38.5	84	24	3.0	□					
AQRVDS0597	5.97						●					
AQRVDS0598	5.98	18.7	38.6	85	25	3.1	□					
AQRVDS0599	5.99						●					
AQRVDS0600	6.00	18.8	32	40.2	74	7	1.3	●				
AQRVDS0610	6.10	18.3							40.3			
AQRVDS0620	6.20	18.6	40.4	75	8	1.4						
AQRVDS0630	6.30	18.9					40.5					
AQRVDS0640	6.40	19.2	40.6	76	9	1.5						
AQRVDS0650	6.50	19.5					37.7					
AQRVDS0660	6.60	19.8	37.8	77	10	1.6						
AQRVDS0670	6.70	20.1					37.9					
AQRVDS0680	6.80	20.4	38.0	78	11	1.7						
AQRVDS0690	6.90	20.7					42.2					
AQRVDS0700	7.00	21.0	42.3	79	12	1.8						
AQRVDS0710	7.10	21.3					42.4					
AQRVDS0720	7.20	21.6	42.5	80	13	1.9						
AQRVDS0730	7.30	21.9					42.6					
AQRVDS0740	7.40	22.2	39.7	81	14	2.0						
AQRVDS0750	7.50	22.5					39.8					
AQRVDS0760	7.60	22.8	39.9	82	15	2.1						
AQRVDS0770	7.70	23.1					39.8					
AQRVDS0780	7.80	23.4	39.9	83	16	2.2						
AQRVDS0790	7.90	23.7					39.9					

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDS0800	8.00	24.0	38	40.0	79	8	1.7	●
AQRVDS0810	8.10	24.3		43.2	83	9		
AQRVDS0820	8.20	24.6		43.3				
AQRVDS0830	8.30	24.9		43.4				
AQRVDS0840	8.40	25.2		43.5				
AQRVDS0850	8.50	25.5	43.6					
AQRVDS0860	8.60	25.8	40	41.7			1.8	
AQRVDS0870	8.70	26.1		41.8				
AQRVDS0880	8.80	26.4		41.9				
AQRVDS0890	8.90	26.7		42.0				
AQRVDS0900	9.00	27.0		42.1	89	10		
AQRVDS0910	9.10	27.3	42.2					
AQRVDS0920	9.20	27.6	42.3					
AQRVDS0930	9.30	27.9	42.4					
AQRVDS0940	9.40	28.2	42.5					
AQRVDS0950	9.50	28.5	43	42.6	95	11	2.0	
AQRVDS0960	9.60	28.8		44.7				
AQRVDS0970	9.70	29.1		44.8				
AQRVDS0980	9.80	29.4		44.9				
AQRVDS0990	9.90	29.7		45.0				
AQRVDS1000	10.00	30.0	47	45.1	102	12	2.1	
AQRVDS1010	10.10	30.3		50.2				
AQRVDS1020	10.20	30.6		50.3				
AQRVDS1030	10.30	30.9		50.4				
AQRVDS1040	10.40	31.2		50.5				
AQRVDS1050	10.50	31.5	50	50.6	107	13	2.2	
AQRVDS1060	10.60	31.8		46.7				
AQRVDS1070	10.70	32.1		46.8				
AQRVDS1080	10.80	32.4		46.9				
AQRVDS1090	10.90	32.7		47.0				
AQRVDS1100	11.00	33.0	53	47.1	112	14	2.3	
AQRVDS1110	11.10	33.3		53.2				
AQRVDS1120	11.20	33.6		53.3				
AQRVDS1130	11.30	33.9		53.4				
AQRVDS1140	11.40	34.2		53.5				
AQRVDS1150	11.50	34.5	55	53.6	117	15	2.4	
AQRVDS1160	11.60	34.8		50.7				
AQRVDS1170	11.70	35.1		50.8				
AQRVDS1180	11.80	35.4		50.9				
AQRVDS1190	11.90	35.7		51.0				
AQRVDS1200	12.00	36.0	58	51.1	122	16	2.5	
AQRVDS1210	12.10	36.3		51.2				
AQRVDS1220	12.20	36.6		51.3				
AQRVDS1230	12.30	36.9		51.4				
AQRVDS1240	12.40	37.2		51.5				
AQRVDS1250	12.50	37.5	61	51.6	127	17	2.6	
AQRVDS1260	12.60	37.8		48.7				
AQRVDS1270	12.70	38.1		48.8				
AQRVDS1280	12.80	38.4		48.9				
AQRVDS1290	12.90	38.7		49.0				
AQRVDS1300	13.00	39.0	64	49.1	132	18	2.7	
AQRVDS1310	13.10	39.3		52.2				
AQRVDS1320	13.20	39.6		52.3				
AQRVDS1330	13.30	39.9		52.4				
AQRVDS1340	13.40	40.2		52.5				
AQRVDS1350	13.50	40.5	67	52.6	137	19	2.8	
AQRVDS1360	13.60	40.8		50.7				
AQRVDS1370	13.70	41.1		50.8				
AQRVDS1380	13.80	41.4		50.9				
AQRVDS1390	13.90	41.7		51.0				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DOONMS	先端 PL	库存 Stock	
AQRVDS1400	14.00	42.0	55	51.0	107	14	2.9	●	
AQRVDS1410	14.10	42.3		53.2	110	15			3.0
AQRVDS1420	14.20	42.6		53.3					
AQRVDS1430	14.30	42.9		53.4					
AQRVDS1440	14.40	43.2		53.5					
AQRVDS1450	14.50	43.5	53.6	56	114	16	3.1		
AQRVDS1460	14.60	43.8	58						52.7
AQRVDS1470	14.70	44.1					52.8		3.2
AQRVDS1480	14.80	44.4					52.9		
AQRVDS1490	14.90	44.7					53.0		
AQRVDS1500	15.00	45.0	56	56.2	114	16	3.2		
AQRVDS1510	15.10	45.3		56.3					
AQRVDS1520	15.20	45.6		56.4			3.3		
AQRVDS1530	15.30	45.9		56.5					
AQRVDS1540	15.40	46.2		56.6					
AQRVDS1550	15.50	46.5	58	54.7	114	16		3.3	
AQRVDS1560	15.60	46.8		54.8					
AQRVDS1570	15.70	47.1		54.9					
AQRVDS1580	15.80	47.4		55.0					
AQRVDS1590	15.90	47.7							
AQRVDS1600	16.00	48.0							

AQRVDR

AquaREVO标准刃钻

AquaREVO Drills Regular

切削条件 Cutting Condition ▶ P23



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

加工孔深

直径范围

新品

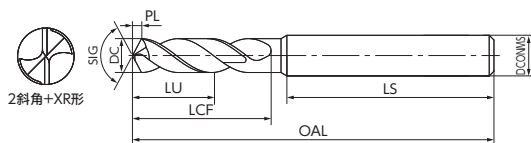

LIST 9862

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDR0200	2.00	10.0	15	32.1	49	3	0.4	
AQRVDR0205	2.05	10.3	18	29.2				
AQRVDR0210	2.10	10.5		29.3				
AQRVDR0215	2.15	10.8						
AQRVDR0220	2.20	11.0		29.4			0.5	
AQRVDR0225	2.25	11.3						
AQRVDR0228	2.28	11.4	29.5					
AQRVDR0230	2.30	11.5						
AQRVDR0233	2.33	11.7	29.6					
AQRVDR0235	2.35	11.8						
AQRVDR0240	2.40	12.0	27.6					
AQRVDR0245	2.45	12.3						
AQRVDR0250	2.50	12.5	20	27.7			0.6	
AQRVDR0255	2.55	12.8		27.8				
AQRVDR0260	2.60	13.0						
AQRVDR0265	2.65	13.3		27.9				
AQRVDR0270	2.70	13.5						
AQRVDR0275	2.75	13.8	28.0					
AQRVDR0276	2.76	13.9						
AQRVDR0278	2.78	13.9	25	28.1	0.7			
AQRVDR0280	2.80	14.0						
AQRVDR0285	2.85	14.3	33.2					
AQRVDR0290	2.90	14.5						
AQRVDR0295	2.95	14.8	33.3					
AQRVDR0300	3.00	15.0						
AQRVDR0305	3.05	15.3	33.4					
AQRVDR0310	3.10	15.5						
AQRVDR0315	3.15	15.8	33.5					
AQRVDR0320	3.20	16.0						
AQRVDR0325	3.25	16.3	33.6					
AQRVDR0330	3.30	16.5						
AQRVDR0335	3.35	16.8	30.6					
AQRVDR0340	3.40	17.0						
AQRVDR0345	3.45	17.3	30.7					
AQRVDR0350	3.50	17.5						
AQRVDR0355	3.55	17.8	28					
AQRVDR0360	3.60	18.0						
AQRVDR0365	3.65	18.3	30.8					
AQRVDR0366	3.66	18.3						
AQRVDR0368	3.68	18.4	30.9					
AQRVDR0370	3.70	18.5						
AQRVDR0375	3.75	18.8	31.0					
AQRVDR0380	3.80	19.0						
AQRVDR0385	3.85	19.3	43.2					
AQRVDR0390	3.90	19.5						
AQRVDR0395	3.95	19.8	43.3					
AQRVDR0400	4.00	20.0						
AQRVDR0405	4.05	20.3	43.4					
AQRVDR0410	4.10	20.5						
AQRVDR0415	4.15	20.8	43.5					
AQRVDR0420	4.20	21.0						
AQRVDR0425	4.25	21.3	43.6					
AQRVDR0430	4.30	21.5						
AQRVDR0435	4.35	21.8	39					
AQRVDR0440	4.40	22.0						
AQRVDR0445	4.45	22.3	36.7					
AQRVDR0450	4.50	22.5						
AQRVDR0455	4.55	22.8	1.0					
AQRVDR0460	4.60	23.0						
AQRVDR0462	4.62	23.1						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDR0464	4.64	23.2	39	36.7	77	5	1.0	
AQRVDR0465	4.65	23.3						
AQRVDR0470	4.70	23.5						
AQRVDR0475	4.75	23.8		36.8				
AQRVDR0480	4.80	24.0						
AQRVDR0485	4.85	24.3		36.9				
AQRVDR0490	4.90	24.5						
AQRVDR0495	4.95	24.8	37.0					
AQRVDR0500	5.00	25.0						
AQRVDR0505	5.05	25.3		40	40.2	82	6	1.1
AQRVDR0510	5.10	25.5						
AQRVDR0515	5.15	25.8						
AQRVDR0520	5.20	26.0	40.3					
AQRVDR0525	5.25	26.3						
AQRVDR0530	5.30	26.5	40.4					
AQRVDR0535	5.35	26.8						
AQRVDR0540	5.40	27.0	40.5					
AQRVDR0545	5.45	27.3						
AQRVDR0550	5.50	27.5	40.6					
AQRVDR0552	5.52	27.6						
AQRVDR0554	5.54	27.7	42	38.6	84	6	1.2	
AQRVDR0555	5.55	27.8						
AQRVDR0557	5.57	27.9						
AQRVDR0560	5.60	28.0		38.7				
AQRVDR0565	5.65	28.3						
AQRVDR0570	5.70	28.5		38.8				
AQRVDR0575	5.75	28.8						
AQRVDR0580	5.80	29.0	38.9					
AQRVDR0585	5.85	29.3						
AQRVDR0590	5.90	29.5	39.0					
AQRVDR0595	5.95	29.8						
AQRVDR0600	6.00	30.0	43	39.2	84	7	1.3	
AQRVDR0610	6.10	30.5						
AQRVDR0620	6.20	31.0						
AQRVDR0630	6.30	31.5		39.3				
AQRVDR0640	6.40	32.0						
AQRVDR0650	6.50	32.5		39.4				
AQRVDR0660	6.60	33.0						
AQRVDR0670	6.70	33.5	39.5					
AQRVDR0680	6.80	34.0						
AQRVDR0690	6.90	34.5	39.6					
AQRVDR0700	7.00	35.0						
AQRVDR0710	7.10	35.5	44	38.7	91	8	1.4	
AQRVDR0720	7.20	36.0						
AQRVDR0730	7.30	36.5						
AQRVDR0740	7.40	37.0		38.8				
AQRVDR0750	7.50	37.5						
AQRVDR0760	7.60	38.0		38.9				
AQRVDR0770	7.70	38.5						
AQRVDR0780	7.80	39.0	39.0					
AQRVDR0790	7.90	39.5						
AQRVDR0800	8.00	40.0	46	42.7	99	9	1.5	
AQRVDR0810	8.10	40.5						
AQRVDR0820	8.20	41.0						
AQRVDR0830	8.30	41.5		42.8				
AQRVDR0840	8.40	42.0						
AQRVDR0850	8.50	42.5		42.9				
AQRVDR0860	8.60	43.0						
AQRVDR0870	8.70	43.5	47	43.2				
AQRVDR0880	8.80	44.0						
AQRVDR0890	8.90	44.5		43.3				
AQRVDR0900	9.00	45.0						
AQRVDR0910	9.10	45.5	48	43.4	100	10	1.6	
AQRVDR0920	9.20	46.0						
AQRVDR0930	9.30	46.5						
AQRVDR0940	9.40	47.0		43.5				
AQRVDR0950	9.50	47.5						
AQRVDR0960	9.60	48.0		43.6				
AQRVDR0970	9.70	48.5						
AQRVDR0980	9.80	49.0	43.7					
AQRVDR0990	9.90	49.5						
AQRVDR1000	10.00	50.0	49	43.8	101	11	1.7	
AQRVDR1010	10.10	50.5						
AQRVDR1020	10.20	51.0						
AQRVDR1030	10.30	51.5		43.9				
AQRVDR1040	10.40	52.0						
AQRVDR1050	10.50	52.5		44.0				
AQRVDR1060	10.60	53.0						
AQRVDR1070	10.70	53.5	44.1					
AQRVDR1080	10.80	54.0						
AQRVDR1090	10.90	54.5	50	44.2	102	12	1.8	
AQRVDR1100	11.00	55.0						
AQRVDR1110	11.10	55.5						
AQRVDR1120	11.20	56.0		44.3				
AQRVDR1130	11.30	56.5						
AQRVDR1140	11.40	57.0		44.4				
AQRVDR1150	11.50	57.5						
AQRVDR1160	11.60	58.0	44.5					
AQRVDR1170	11.70	58.5						
AQRVDR1180	11.80	59.0	51	44.6	103	13	1.9	
AQRVDR1190	11.90	59.5						
AQRVDR1200	12.00	60.0						
AQRVDR1210	12.10	60.5		44.7				
AQRVDR1220	12.20	61.0						
AQRVDR1230	12.30	61.5		44.8				
AQRVDR1240	12.40	62.0						
AQRVDR1250	12.50	62.5	44.9					
AQRVDR1260	12.60	63.0						
AQRVDR1270	12.70	63.5	52	45.0	104	14	2.0	
AQRVDR1280	12.80	64.0						
AQRVDR1290	12.90	64.5						
AQRVDR1300	13.00	65.0		45.1				
AQRVDR1310	13.10	65.5						
AQRVDR1320	13.20	66.0		45.2				
AQRVDR1330	13.30	66.5						
AQRVDR1340	13.40	67.0	45.3					
AQRVDR1350	13.50	67.5						
AQRVDR1360	13.60	68.0	53	45.4	105	15	2.1	
AQRVDR1370	13.70	68.5						
AQRVDR1380	13.80	69.0						
AQRVDR1390	13.90	69.5		45.5				
AQRVDR1400	14.00	70.0						
AQRVDR1410	14.10	70.5		45.6				
AQRVDR1420	14.20	71.0						
AQRVDR1430	14.30	71.5	45.7					
AQRVDR1440	14.40	72.0						
AQRVDR1450	14.50	72.5	54	45.8	106	16	2.2	
AQRVDR1460	14.60	73.0						
AQRVDR1470	14.70	73.5						
AQRVDR1480	14.80	74.0		45.9				
AQRVDR1490	14.90	74.5						
AQRVDR1500	15.00	75.0		46.0				
AQRVDR1510	15.10	75.5						
AQRVDR1520	15.20	76.0	46.1					
AQRVDR1530	15.30	76.5						
AQRVDR1540	15.40	77.0	55	46.2	107	17	2.3	
AQRVDR1550	15.50	77.5						
AQRVDR1560	15.60	78.0						
AQRVDR1570	15.70	78.5		46.3				
AQRVDR1580	15.80	79.0						
AQRVDR1590	15.90	79.5		46.4				
AQRVDR1600	16.00	80.0						
AQRVDR1610	16.10	80.5	46.5					
AQRVDR1620	16.20	81.0						
AQRVDR1630	16.30	81.5	56	46.6	108	18	2.4	
AQRVDR1640	16.40	82.0						
AQRVDR1650	16.50	82.5						
AQRVDR1660	16.60	83.0		46.7				
AQRVDR1670	16.70	83.5						
AQRVDR1680	16.80	84.0		46.8				
AQRVDR1690	16.90	84.5						
AQRVDR1700	17.00	85.0	46.9					
AQRVDR1710	17.10	85.5						
AQRVDR1720	17.20	86.0	57	47.0	109	19	2.5	
AQRVDR1730	17.30	86.5						
AQRVDR1740	17.40	87.0						
AQRVDR1750	17.50	87.5		47.1				
AQRVDR1760	17.60	88.0						
AQRVDR1770	17.70	88.5		47.2				
AQRVDR1780	17.80	89.0						
AQRVDR1790	17.90	89.5	47.3					
AQRVDR1800	18.00	90.0						
AQRVDR1810	18.10	90.5	58	47.4	110	20	2.6	
AQRVDR1820	18.20	91.0						
AQRVDR1830	18.30	91.5						
AQRVDR1840	18.40	92.0		47.5				
AQRVDR1850	18.50	92.5						
AQRVDR1860	18.60	93.0		47.6				
AQRVDR1870	18.70	93.5						
AQRVDR1880	18.80	94.0	47.7					
AQRVDR1890	18.90	94.5						
AQRVDR1900	19.00	95.0	59	47.8	111	21	2.7	
AQRVDR1910	19.10	95.5						
AQRVDR1920	19.20	96.0						
AQRVDR1930	19.30	96.5		47.9				
AQRVDR1940	19.40	97.0						
AQRVDR1950	19.50	97.5		48.0				
AQRVDR1960	19.60	98.0						
AQRVDR1970	19.70	98.5	48.1					
AQRVDR1980	19.80	99.0						
AQRVDR1990	19.90	99.5	60	48.2	112	22	2.8	
AQRVDR2000	20.00	100.0						
AQRVDR2010	20.10	100.5						
AQRVDR2020	20.20	101.0		48.3				
AQRVDR2030	20.30	101.5						
AQRVDR2040	20.40	102.0		48.4				
AQRVDR2050	20.50	102.5						
AQRVDR2060	20.60	103.0	48.5					
AQRVDR2070	20.70	103.5						
AQRVDR2080	20.80	104.0	61	48.6	113	23	2.9	
AQRVDR2090	20.90	104.5						
AQRVDR2100	21.00	105.0						
AQRVDR2110	21.10	105.5		48.7				
AQRVDR2120	21.20	106.0						
AQRVDR2130	21.30	106.5		48.8				
AQRVDR2140	21.40	107.0						
AQRVDR2150	21.50	107.5	48.9					
AQRVDR2160	21.60	108.0						
AQRVDR2170	21.70	108.5	62	49.0	114	24	3.0	
AQRVDR2180	21.80	109.0						
AQRVDR2190	21.90	109.5						
AQRVDR2200	22.00	110.0		49.1				
AQRVDR2210	22.10	110.5						
AQRVDR2220	22.20	111.0		49.2				
AQRVDR2230	22.30	111.5						
AQRVDR2240	22.40	112.0	49.3					
AQRVDR2250	22.50	112.5						
AQRVDR2260	22.60	113.0	63	49.4	115	25	3.1	
AQRVDR2270	22.70	113.5						
AQRVDR2280	22.80	114.0						
AQRVDR2290	22.90	114.5		49.5				
AQRVDR2300	23.00	115.0						
AQRVDR2310	23.10	115.5		49.6				
AQRVDR2320	23.20	116.0						
AQRVDR2330	23.30	116.5	49.7					
AQRVDR2340	23.40	117.0						
AQRVDR2350	23.50	117.5	64	49.8	116	26	3.2	
AQRVDR2360	23.60	118.0						
AQRVDR2370	23.70	118.5						
AQRVDR2380	23.80	119.0		49.9				
AQRVDR2390	23.90	119.5						
AQRVDR2400	24.00	120.0		50.0				
AQRVDR2410	24.10	120.5						
AQRVDR2420	24.20	121.0	50.1					
AQRVDR2430	24.30	121.5						
AQRVDR2440	24.40	122.0	65	50.2	117	27	3.3	
AQRVDR2450	24.50	122.5						
AQRVDR2460	24.60	123.0						
AQRVDR2470	24.70	123.5		50.3				
AQRVDR2480	24.80	124.0						
AQRVDR2490	24.90	124.5		50.4				
AQRVDR2500	25.00	125.0						
AQRVDR2510	25.10	125.5	50.5					
AQRVDR2520	25.20	126.0						
AQRVDR2530	25.30	126.5	66	50.6	118	28	3.4	
AQRVDR2540	25.40	127.0						
AQRVDR2550	25.50	127.5						
AQRVDR2560	25.60	128.0		50.7				
AQRVDR2570	25.70	128.5						
AQRVDR2580	25.80	129.0		50.8				
AQRVDR2590	25.90	129.5						
AQRVDR2600	26.00	130.0	50.9					
AQRVDR2610	26.10	130.5						
AQRVDR2620	26.20	131.0	67	51.0	119	29	3.5	
AQRVDR2630	26.30	131.5						
AQRVDR2640	26.40	132.0						
AQRVDR2650	26.50	132.5		51.1				
AQRVDR2660	26.60	133.0						
AQRVDR2670	26.70	133.5		51.2				
AQRVDR2680	26.80	134.0						
AQRVDR2690	26.90	134.5	51.3					
AQRVDR2700	27.00	135.0						
AQRVDR2710	27.10	135.5	68	51.4	120	30	3.6	
AQRVDR2720	27.20	136.0						
AQRVDR2730	27.30	136.5						
AQRVDR2740	27.40	137.0		51.5				
AQRVDR2750	27.50	137.5						
AQRVDR2760	27.60	138.0		51.6				
AQRVDR2770	27.70	138.5						
AQRVDR2780	27.80	139.0	51.7					
AQRVDR2790	27.90	139.5						
AQRVDR2800	28.00	140.0	69	51.8	121	31	3.7	
AQRVDR2810	28.10	140.5						
AQRVDR2820	28.20	141.0						
AQRVDR2830	28.30	141.5		51.9				
AQRVDR2840	28.40	142.0						
AQRVDR2850	28.50	142.5		52.0				
AQRVDR2860	28.60	143.0						
AQRVDR2870	28.70	143.5	52.1					
AQRVDR2880	28.80	144.0						
AQRVDR2890	28.90	144.5	70	52.2	122	32	3.8	
AQRVDR2900	29.00	145.0						
AQRVDR2910	29.10	145.5						
AQRVDR2920	29.20	146.0		52.3				
AQRVDR2930	29.30	146.5						
AQRVDR2940	29.40	147.0		52.4				
AQRVDR2950	29.50	147.5						
AQRVDR2960	29.60	148.0	52.5					
AQRVDR2970	29.70	148.5						
AQRVDR2980	29.80	149.0	71	52.6	123	33	3.9	
AQRVDR2990	29.90	149.5						
AQRVDR3000	30.00	150.0						
AQRVDR3010	30.10							

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
AQRVDR0890	8.90	44.5	57	40.9	99	9	1.8	
AQRVDR0900	9.00	45.0		41.0				
AQRVDR0910	9.10	45.5		45.2			1.9	
AQRVDR0920	9.20	46.0	60	45.3				
AQRVDR0930	9.30	46.5		45.4				
AQRVDR0940	9.40	47.0		45.5				
AQRVDR0950	9.50	47.5		45.6	107	10		
AQRVDR0960	9.60	48.0		43.7			2.0	
AQRVDR0970	9.70	48.5		43.8				
AQRVDR0980	9.80	49.0	62	43.9				
AQRVDR0990	9.90	49.5		44.0				
AQRVDR1000	10.00	50.0		46.2			2.1	
AQRVDR1010	10.10	50.5		46.3				
AQRVDR1020	10.20	51.0	68	46.4				
AQRVDR1030	10.30	51.5		46.5				
AQRVDR1040	10.40	52.0		46.6	116	11		
AQRVDR1050	10.50	52.5		44.7			2.2	
AQRVDR1060	10.60	53.0		44.8				
AQRVDR1070	10.70	53.5	70	44.9				
AQRVDR1080	10.80	54.0		45.0				
AQRVDR1090	10.90	54.5		48.2			2.3	
AQRVDR1100	11.00	55.0		48.3				
AQRVDR1110	11.10	55.5		48.4				
AQRVDR1120	11.20	56.0	73	48.5				
AQRVDR1130	11.30	56.5		48.6				
AQRVDR1140	11.40	57.0		45.7	123	12		
AQRVDR1150	11.50	57.5		45.8			2.4	
AQRVDR1160	11.60	58.0		45.9				
AQRVDR1170	11.70	58.5	76	46.0				
AQRVDR1180	11.80	59.0		57.2			2.5	
AQRVDR1190	11.90	59.5		57.3				
AQRVDR1200	12.00	60.0		57.4				
AQRVDR1210	12.10	60.5	79	57.5				
AQRVDR1220	12.20	61.0		57.6				
AQRVDR1230	12.30	61.5		55.7	138	13		
AQRVDR1240	12.40	62.0		55.8			2.6	
AQRVDR1250	12.50	62.5		55.9				
AQRVDR1260	12.60	63.0		56.0				
AQRVDR1270	12.70	63.5	81	59.2			2.7	
AQRVDR1280	12.80	64.0		59.3				
AQRVDR1290	12.90	64.5		59.4				
AQRVDR1300	13.00	65.0		59.5				
AQRVDR1310	13.10	65.5		59.6				
AQRVDR1320	13.20	66.0	87	56.7			2.8	
AQRVDR1330	13.30	66.5		56.8				
AQRVDR1340	13.40	67.0		56.9				
AQRVDR1350	13.50	67.5		57.0	148	14		
AQRVDR1360	13.60	68.0		60.2				
AQRVDR1370	13.70	68.5	90	60.3				
AQRVDR1380	13.80	69.0		60.4			2.9	
AQRVDR1390	13.90	69.5		60.5				
AQRVDR1400	14.00	70.0		60.6				
AQRVDR1410	14.10	70.5		58.7				
AQRVDR1420	14.20	71.0	92	58.8			3.0	
AQRVDR1430	14.30	71.5						
AQRVDR1440	14.40	72.0			154	15		
AQRVDR1450	14.50	72.5						
AQRVDR1460	14.60	73.0						
AQRVDR1470	14.70	73.5	94					
AQRVDR1480	14.80	74.0					3.1	

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
AQRVDR1490	14.90	74.5	94	58.9	154	15		
AQRVDR1500	15.00	75.0		59.0			3.1	
AQRVDR1510	15.10	75.5		63.2				
AQRVDR1520	15.20	76.0	97	63.3				
AQRVDR1530	15.30	76.5		63.4				
AQRVDR1540	15.40	77.0		63.5			3.2	●
AQRVDR1550	15.50	77.5		63.6	162	16		
AQRVDR1560	15.60	78.0		61.7				
AQRVDR1570	15.70	78.5		61.8			3.3	
AQRVDR1580	15.80	79.0	99	61.9				
AQRVDR1590	15.90	79.5		62.0				
AQRVDR1600	16.00	80.0						

新品



LIST 9870

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDSL0200	2.0	14.0	25	30.1	57		0.4	
AQRVDSL0210	2.1	14.7		30.2				
AQRVDSL0220	2.2	15.4	27	28.3	62	3	0.5	
AQRVDSL0230	2.3	16.1		28.4				
AQRVDSL0240	2.4	16.8		28.5	65		0.6	
AQRVDSL0250	2.5	17.5	32	28.6				
AQRVDSL0260	2.6	18.2		28.7	69	4	0.7	
AQRVDSL0270	2.7	18.9		28.8				
AQRVDSL0280	2.8	19.6	35	28.9	72	5	0.8	
AQRVDSL0290	2.9	20.3		29.0				
AQRVDSL0300	3.0	21.0		29.2	76	6	0.9	
AQRVDSL0310	3.1	21.7	38	29.3				
AQRVDSL0320	3.2	22.4		29.4	87	7	1.0	
AQRVDSL0330	3.3	23.1		29.5				
AQRVDSL0340	3.4	23.8	41	29.6	91	8	1.1	
AQRVDSL0350	3.5	24.5		29.7				
AQRVDSL0360	3.6	25.2		29.8	97	9	1.2	
AQRVDSL0370	3.7	25.9	45	29.9				
AQRVDSL0380	3.8	26.6		30.0	102	10	1.3	
AQRVDSL0390	3.9	27.3	49	40.2				
AQRVDSL0400	4.0	28.0		40.3	110	11	1.4	
AQRVDSL0410	4.1	28.7		40.4				
AQRVDSL0420	4.2	29.4	55	40.5	116	12	1.5	
AQRVDSL0430	4.3	30.1		40.6				
AQRVDSL0440	4.4	30.8		40.7	122	13	1.6	
AQRVDSL0450	4.5	31.5	59	40.8				
AQRVDSL0460	4.6	32.2		40.9	127	14	1.7	
AQRVDSL0470	4.7	32.9		40.9				
AQRVDSL0480	4.8	33.6	60	41.0	134	15	1.8	
AQRVDSL0490	4.9	34.3		41.0				
AQRVDSL0500	5.0	35.0		41.0	142	16	1.9	
AQRVDSL0510	5.1	35.7	66	41.0				
AQRVDSL0520	5.2	36.4		41.0	156	17	2.0	
AQRVDSL0530	5.3	37.1		41.0				
AQRVDSL0540	5.4	37.8		41.0	163	18	2.1	
AQRVDSL0550	5.5	38.5	72	41.0				
AQRVDSL0560	5.6	39.2		41.0	172	19	2.2	
AQRVDSL0570	5.7	39.9		41.0				
AQRVDSL0580	5.8	40.6		41.0	185	20	2.3	
AQRVDSL0590	5.9	41.3		41.0				
AQRVDSL0600	6.0	42.0		41.0	191	21	2.4	
AQRVDSL0610	6.1	42.7		41.0				
AQRVDSL0620	6.2	43.4		41.0	200	22	2.5	
AQRVDSL0630	6.3	44.1	78	41.0				
AQRVDSL0640	6.4	44.8		41.0	212	23	2.6	
AQRVDSL0650	6.5	45.5		41.0				
AQRVDSL0660	6.6	46.2		41.0	227	24	2.7	
AQRVDSL0670	6.7	46.9		41.0				
AQRVDSL0680	6.8	47.6		41.0	242	25	2.8	
AQRVDSL0690	6.9	48.3		41.0				
AQRVDSL0700	7.0	49.0		41.0	257	26	2.9	
AQRVDSL0710	7.1	49.7		41.0				
AQRVDSL0720	7.2	50.4		41.0	272	27	3.0	
AQRVDSL0730	7.3	51.1		41.0				
AQRVDSL0740	7.4	51.8		41.0	287	28	3.1	
AQRVDSL0750	7.5	52.5		41.0				
AQRVDSL0760	7.6	53.2		41.0	302	29	3.2	
AQRVDSL0770	7.7	53.9		41.0				
AQRVDSL0780	7.8	54.6		41.0	317	30	3.3	
AQRVDSL0790	7.9	55.3		41.0				

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDSL0800	8.0	56.0	78	43.0	122	8		
AQRVDSL0810	8.1	56.7		47.2	128	9	1.7	
AQRVDSL0820	8.2	57.4		47.3				
AQRVDSL0830	8.3	58.1	79	47.4	134	10	1.8	
AQRVDSL0840	8.4	58.8		47.5				
AQRVDSL0850	8.5	59.5		47.6	142	11	1.9	
AQRVDSL0860	8.6	60.2		47.7				
AQRVDSL0870	8.7	60.9		47.9	149	12	2.0	
AQRVDSL0880	8.8	61.6		47.8				
AQRVDSL0890	8.9	62.3		47.9	156	13	2.1	
AQRVDSL0900	9.0	63.0		48.0				
AQRVDSL0910	9.1	63.7	85	47.2	163	14	2.2	
AQRVDSL0920	9.2	64.4		47.3				
AQRVDSL0930	9.3	65.1		47.4	172	15	2.3	
AQRVDSL0940	9.4	65.8		47.5				
AQRVDSL0950	9.5	66.5		47.6	185	16	2.4	
AQRVDSL0960	9.6	67.2		48.7				
AQRVDSL0970	9.7	67.9		48.8	191	17	2.5	
AQRVDSL0980	9.8	68.6		48.9				
AQRVDSL0990	9.9	69.3		49.0	200	18	2.6	
AQRVDSL1000	10.0	70.0	92	55.2				
AQRVDSL1010	10.1	70.7		55.3	212	19	2.7	
AQRVDSL1020	10.2	71.4		55.4				
AQRVDSL1030	10.3	72.1		55.5	227	20	2.8	
AQRVDSL1040	10.4	72.8		55.6				
AQRVDSL1050	10.5	73.5		55.7	242	21	2.9	
AQRVDSL1060	10.6	74.2		55.8				
AQRVDSL1070	10.7	74.9		55.9	257	22	3.0	
AQRVDSL1080	10.8	75.6		55.8				
AQRVDSL1090	10.9	76.3		55.9	272	23	3.1	
AQRVDSL1100	11.0	77.0		56.0				
AQRVDSL1110	11.1	77.7		56.1	287	24	3.2	
AQRVDSL1120	11.2	78.4		56.2				
AQRVDSL1130	11.3	79.1		56.3	302	25	3.3	
AQRVDSL1140	11.4	79.8		56.4				
AQRVDSL1150	11.5	80.5		56.5	317	26	3.4	
AQRVDSL1160	11.6	81.2		56.6				
AQRVDSL1170	11.7	81.9		56.7	332	27	3.5	
AQRVDSL1180	11.8	82.6		56.8				
AQRVDSL1190	11.9	83.3		56.9	347	28	3.6	
AQRVDSL1200	12.0	84.0		57.0				
AQRVDSL1250	12.5	87.5	107	54.6	163	13		
AQRVDSL1300	13.0	91.0		55.0	172	14	2.6	
AQRVDSL1350	13.5	94.5		56.6				
AQRVDSL1400	14.0	98.0	114	57.0	185	15	2.7	
AQRVDSL1450	14.5	101.5		57.4				
AQRVDSL1500	15.0	105.0	120	58.0	191	16	2.8	
AQRVDSL1550	15.5	108.5		58.4				
AQRVDSL1600	16.0	112.0	127	58.8				

AquaREVO 钻头的基准切削条件

Standard Cutting Condition for AquaREVO Drills

AQRVDS
AQRVDR
AQRVDSL

AquaREVO 短刃钻 AquaREVO Drills Stub
AquaREVO 标准刃钻 AquaREVO Drills Regular
AquaREVO 中长刃钻 AquaREVO Drills Semi-long

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
AQRVDS AquaREVO 短刃钻 AquaREVO Drills Stub												
2.0	16000	1000	12700	800	7200	350	4800	190	12000	750	3200	140
3.0	10600	1100	8500	890	4800	390	3200	210	8000	830	2120	150
5.0	6400	1100	5100	890	2900	390	1900	210	4800	830	1280	150
8.0	4000	1100	3200	890	1800	390	1200	210	3000	830	800	150
10.0	3200	1050	2500	840	1400	380	1000	200	2400	800	640	150
12.0	2650	1000	2100	800	1200	350	800	190	2000	750	530	140
16.0	2000	890	1600	700	900	320	600	170	1500	660	400	120
AQRVDR AquaREVO 标准刃钻 AquaREVO Drills Regular												
2.0	16000	900	12700	720	7200	320	4800	170	12000	680	3200	130
3.0	10600	1000	8500	810	4800	360	3200	190	8000	760	2120	140
5.0	6400	1000	5100	810	2900	360	1900	190	4800	760	1280	140
8.0	4000	1000	3200	810	1800	350	1200	190	3000	760	800	140
10.0	3200	960	2500	760	1400	340	1000	180	2400	720	640	130
12.0	2650	900	2100	720	1200	310	800	170	2000	680	530	130
16.0	2000	810	1600	650	900	290	600	150	1500	600	400	110
AQRVDSL AquaREVO 中长刃钻 AquaREVO Drills Semi-long												
2.0	12000	670	9550	540	5400	240	3660	130	8920	510	2400	95
3.0	8000	740	6370	610	3600	270	2440	145	5940	570	1600	105
5.0	4780	740	3820	610	2160	270	1460	145	3570	570	960	105
8.0	2980	740	2400	610	1350	260	920	145	2230	550	600	105
10.0	2400	720	1900	570	1080	260	730	135	1780	530	480	95
12.0	1990	675	1600	550	900	240	610	130	1480	500	400	95
16.0	1500	600	1200	480	680	220	460	110	1120	450	300	80

AQRVDS/AQRVDR/AQRVDSL

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 在机械或加工物安装过程中，无刚性或者发生颤动时，请按照相同比例，降低上表中的转速和进给速度。
- 3) 湿式加工是指使用水溶性切削油剂时的加工。
- 4) 使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 5) 不适用于铝合金、轻金属及不锈钢的加工。
- 6) 加工不锈钢时，如孔深超过 2DC，请采用分级加工方式。
- 7) 采用干式加工时，为进行冷却及去除切屑，请采取气冷措施。
- 8) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险，因此请采取防火对策。
- 9) 依被削材及加工条件，切削的排出性有时会变差，请使用分级进给。钻孔深度超过 3D 时推荐分级进给。
- 10) 分级进给时请返回到孔的上面。
- 11) 请将分级量的大致标准设定为 0.5 ~ 1.0DC。
- 12) 夹紧时，请将钻头的振动控制在 0.02mm 以下，小直径、高速切削时控制在 0.01mm 以下。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) In machine or installation of machining step, when there is no rigidity of machine or chattering occurs, reduce the rotation and feed rate.
- 3) Wet condition are for drilling with water soluble cutting fluid.
- 4) In non-water soluble cutting fluid, reduce the rotation and feed rate by 20%.
- 5) Drilling Aluminum Alloy, Light Metal, Stainless Steel are not recommended.
- 6) Drilling the step feed in Stainless Steel when hole depth more than 2xDC deep.
- 7) Use air blow for cooling and the chip exclusion in dry process.
- 8) By sparks during cutting, or heat by breakage, or hot chip, there is danger of fire. Take fire prevention measures.
- 9) A work material and cutting condition to chip removal may be worse. In that case, please step feed. It is recommended to step feeding for drilling depth of more than 3xDC.
- 10) Retraction of the step feed is to be returned to the top of the hole.
- 11) Step feed is recommended to 0.5 ~ 1.0xDC.
- 12) Please use the fixture to control the amplitude of the drill bit below 0.02mm, for small diameter, high-speed cutting control amplitude of the drill bit 0.01mm or less.

15、20、22 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQRVDOH3D

AquaREVO油孔钻 3D

AquaREVO Drills Oil-Hole 3D

切削条件 Cutting Condition ▶▶28

Carbide
工具材料

REVO
D
涂层


h7
直径公差

140°
先端角

26°
~30°
螺旋角

h6
柄直径公差

3.0-16.0
直径范围

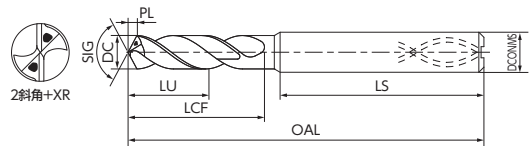

LIST 9864

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDOH3D0300	3.0	9.0	19	48.0	68	3	0.5	
AQRVDOH3D0310	3.1	9.3		49.2				
AQRVDOH3D0320	3.2	9.6		49.3				
AQRVDOH3D0330	3.3	9.9	21	49.4			0.6	
AQRVDOH3D0340	3.4	10.2		49.5				
AQRVDOH3D0350	3.5	10.5		49.6	72	4		
AQRVDOH3D0360	3.6	10.8		47.7				
AQRVDOH3D0370	3.7	11.1						
AQRVDOH3D0380	3.8	11.4	23	47.8			0.7	
AQRVDOH3D0390	3.9	11.7		47.9				
AQRVDOH3D0400	4.0	12.0		48.0				
AQRVDOH3D0410	4.1	12.3		52.2				
AQRVDOH3D0420	4.2	12.6		52.3				
AQRVDOH3D0430	4.3	12.9	26	52.4			0.8	
AQRVDOH3D0440	4.4	13.2		52.5				
AQRVDOH3D0450	4.5	13.5		52.6	80	5		
AQRVDOH3D0460	4.6	13.8		49.7				
AQRVDOH3D0470	4.7	14.1						
AQRVDOH3D0480	4.8	14.4		49.8				
AQRVDOH3D0490	4.9	14.7		49.9			0.9	
AQRVDOH3D0500	5.0	15.0		50.0				
AQRVDOH3D0510	5.1	15.3	29	51.2				
AQRVDOH3D0520	5.2	15.6		51.3				
AQRVDOH3D0530	5.3	15.9		51.4				
AQRVDOH3D0540	5.4	16.2		51.5				
AQRVDOH3D0550	5.5	16.5		51.6	82	6	1.0	
AQRVDOH3D0560	5.6	16.8		48.7				
AQRVDOH3D0570	5.7	17.1						
AQRVDOH3D0580	5.8	17.4	32	48.8				
AQRVDOH3D0590	5.9	17.7		48.9				
AQRVDOH3D0600	6.0	18.0		49.0			1.1	
AQRVDOH3D0610	6.1	18.3		52.2				
AQRVDOH3D0620	6.2	18.6		52.3				
AQRVDOH3D0630	6.3	18.9	34	52.4				
AQRVDOH3D0640	6.4	19.2		52.5				
AQRVDOH3D0650	6.5	19.5		52.6	88	7	1.2	
AQRVDOH3D0660	6.6	19.8		49.7				
AQRVDOH3D0670	6.7	20.1						
AQRVDOH3D0680	6.8	20.4	37	49.8				
AQRVDOH3D0690	6.9	20.7		49.9				
AQRVDOH3D0700	7.0	21.0		50.0				
AQRVDOH3D0710	7.1	21.3		53.2			1.3	
AQRVDOH3D0720	7.2	21.6		53.3				
AQRVDOH3D0730	7.3	21.9	39	53.4				
AQRVDOH3D0740	7.4	22.2		53.5				
AQRVDOH3D0750	7.5	22.5		53.6				
AQRVDOH3D0760	7.6	22.8		50.7	94	8	1.4	
AQRVDOH3D0770	7.7	23.1						
AQRVDOH3D0780	7.8	23.4	42	50.8				
AQRVDOH3D0790	7.9	23.7		50.9				
AQRVDOH3D0800	8.0	24.0		51.0				
AQRVDOH3D0810	8.1	24.3		54.2				
AQRVDOH3D0820	8.2	24.6		54.3			1.5	
AQRVDOH3D0830	8.3	24.9	44	54.4				
AQRVDOH3D0840	8.4	25.2		54.5				
AQRVDOH3D0850	8.5	25.5		54.6	100	9		
AQRVDOH3D0860	8.6	25.8		51.7				
AQRVDOH3D0870	8.7	26.1						
AQRVDOH3D0880	8.8	26.4	47	51.8			1.6	
AQRVDOH3D0890	8.9	26.7		51.9				
AQRVDOH3D0900	9.0	27.0		52.0				
AQRVDOH3D0910	9.1	27.3		55.2				
AQRVDOH3D0920	9.2	27.6		55.3				
AQRVDOH3D0930	9.3	27.9	49	55.4	106	10	1.7	
AQRVDOH3D0940	9.4	28.2		55.5				
AQRVDOH3D0950	9.5	28.5		55.6				

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDOH3D0960	9.6	28.8		52.7			1.7	
AQRVDOH3D0970	9.7	29.1						
AQRVDOH3D0980	9.8	29.4	52	52.8	106	10	1.8	
AQRVDOH3D0990	9.9	29.7		52.9				
AQRVDOH3D1000	10.0	30.0		53.0				
AQRVDOH3D1010	10.1	30.3		60.2				
AQRVDOH3D1020	10.2	30.6		60.3				
AQRVDOH3D1030	10.3	30.9	54	60.4			1.9	
AQRVDOH3D1040	10.4	31.2		60.5				
AQRVDOH3D1050	10.5	31.5		60.6				
AQRVDOH3D1060	10.6	31.8						
AQRVDOH3D1070	10.7	32.1		57.7				
AQRVDOH3D1080	10.8	32.4	57	57.8			2.0	
AQRVDOH3D1090	10.9	32.7		57.9				
AQRVDOH3D1100	11.0	33.0		58.0				
AQRVDOH3D1110	11.1	33.3		60.2				
AQRVDOH3D1120	11.2	33.6		60.3				
AQRVDOH3D1130	11.3	33.9	60	60.4				
AQRVDOH3D1140	11.4	34.2		60.5				
AQRVDOH3D1150	11.5	34.5		60.6				
AQRVDOH3D1160	11.6	34.8			122	12	2.1	
AQRVDOH3D1170	11.7	35.1		57.7				
AQRVDOH3D1180	11.8	35.4	63	57.8				
AQRVDOH3D1190	11.9	35.7		57.9				
AQRVDOH3D1200	12.0	36.0		58.0				
AQRVDOH3D1210	12.1	36.3		61.2			2.2	
AQRVDOH3D1220	12.2	36.6		61.3				
AQRVDOH3D1230	12.3	36.9	65	61.4				
AQRVDOH3D1240	12.4	37.2		61.5				
AQRVDOH3D1250	12.5	37.5		61.6				
AQRVDOH3D1260	12.6	37.8			128	13	2.3	
AQRVDOH3D1270	12.7	38.1		58.7				
AQRVDOH3D1280	12.8	38.4	68	58.8				
AQRVDOH3D1290	12.9	38.7		58.9				
AQRVDOH3D1300	13.0	39.0		59.0				
AQRVDOH3D1310	13.1	39.3		62.2				
AQRVDOH3D1320	13.2	39.6		62.3			2.4	
AQRVDOH3D1330	13.3	39.9	70	62.4				
AQRVDOH3D1340	13.4	40.2		62.5				
AQRVDOH3D1350	13.5	40.5		62.6				
AQRVDOH3D1360	13.6	40.8			134	14	2.5	
AQRVDOH3D1370	13.7	41.1		59.7				
AQRVDOH3D1380	13.8	41.4	73	59.8				
AQRVDOH3D1390	13.9	41.7		59.9				
AQRVDOH3D1400	14.0	42.0		60.0				
AQRVDOH3D1410	14.1	42.3		63.2				
AQRVDOH3D1420	14.2	42.6		63.3				
AQRVDOH3D1430	14.3	42.9	75	63.4			2.6	
AQRVDOH3D1440	14.4	43.2		63.5				
AQRVDOH3D1450	14.5	43.5		63.6				
AQRVDOH3D1460	14.6	43.8			140	15	2.7	
AQRVDOH3D1470	14.7	44.1		60.7				
AQRVDOH3D1480	14.8	44.4	78	60.8				
AQRVDOH3D1490	14.9	44.7		60.9				
AQRVDOH3D1500	15.0	45.0		61.0				
AQRVDOH3D1510	15.1	45.3		64.2				
AQRVDOH3D1520	15.2	45.6		64.3				
AQRVDOH3D1530	15.3	45.9	80	64.4			2.8	
AQRVDOH3D1540	15.4	46.2		64.5				
AQRVDOH3D1550	15.5	46.5		64.6				
AQRVDOH3D1560	15.6	46.8			146	16	2.9	
AQRVDOH3D1570	15.7	47.1		61.7				
AQRVDOH3D1580	15.8	47.4	83	61.8				
AQRVDOH3D1590	15.9	47.7		61.9				
AQRVDOH3D1600	16.0	48.0		62.0				

AQRVDOH5D

AquaREVO油孔钻 5D

AquaREVO Drills Oil-Hole 5D

切削条件 Cutting Condition ▶▶28



工具材料

涂层


直径公差

先端角

螺旋角

柄直径公差

直径范围

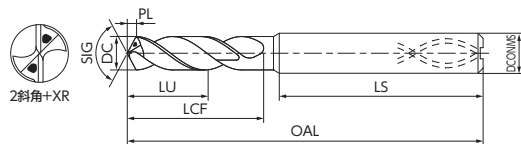

LIST 9866

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDOH5D0300	3.0	15.0	29	48.0	78	3	0.5	
AQRVDOH5D0310	3.1	15.5		51.2				
AQRVDOH5D0320	3.2	16.0		51.3				
AQRVDOH5D0330	3.3	16.5	33	51.4			0.6	
AQRVDOH5D0340	3.4	17.0		51.5				
AQRVDOH5D0350	3.5	17.5		51.6	86	4		
AQRVDOH5D0360	3.6	18.0		47.7				
AQRVDOH5D0370	3.7	18.5		47.8			0.7	
AQRVDOH5D0380	3.8	19.0	37	47.9				
AQRVDOH5D0390	3.9	19.5		48.0				
AQRVDOH5D0400	4.0	20.0		55.2				
AQRVDOH5D0410	4.1	20.5		55.3				
AQRVDOH5D0420	4.2	21.0		55.4				
AQRVDOH5D0430	4.3	21.5	41	55.5			0.8	
AQRVDOH5D0440	4.4	22.0		55.6				
AQRVDOH5D0450	4.5	22.5		51.7	98	5		
AQRVDOH5D0460	4.6	23.0		51.8				
AQRVDOH5D0470	4.7	23.5		51.9			0.9	
AQRVDOH5D0480	4.8	24.0	45	52.0				
AQRVDOH5D0490	4.9	24.5		52.2				
AQRVDOH5D0500	5.0	25.0		52.3				
AQRVDOH5D0510	5.1	25.5		52.4				
AQRVDOH5D0520	5.2	26.0		52.5				
AQRVDOH5D0530	5.3	26.5	46	52.6			1.0	
AQRVDOH5D0540	5.4	27.0		48.7	100	6		
AQRVDOH5D0550	5.5	27.5		48.8				
AQRVDOH5D0560	5.6	28.0		48.9				
AQRVDOH5D0570	5.7	28.5		49.0				
AQRVDOH5D0580	5.8	29.0	50	53.2			1.1	
AQRVDOH5D0590	5.9	29.5		53.3				
AQRVDOH5D0600	6.0	30.0		53.4				
AQRVDOH5D0610	6.1	30.5		53.5				
AQRVDOH5D0620	6.2	31.0	54	53.6			1.2	
AQRVDOH5D0630	6.3	31.5		49.7	109	7		
AQRVDOH5D0640	6.4	32.0		49.8				
AQRVDOH5D0650	6.5	32.5		49.9				
AQRVDOH5D0660	6.6	33.0		50.0				
AQRVDOH5D0670	6.7	33.5	58	54.2			1.3	
AQRVDOH5D0680	6.8	34.0		54.3				
AQRVDOH5D0690	6.9	34.5		54.4				
AQRVDOH5D0700	7.0	35.0	62	54.5				
AQRVDOH5D0710	7.1	35.5		54.6				
AQRVDOH5D0720	7.2	36.0		50.7	118	8		
AQRVDOH5D0730	7.3	36.5		50.8			1.4	
AQRVDOH5D0740	7.4	37.0		50.9				
AQRVDOH5D0750	7.5	37.5	66	51.0				
AQRVDOH5D0760	7.6	38.0		55.2				
AQRVDOH5D0770	7.7	38.5		55.3				
AQRVDOH5D0780	7.8	39.0	70	55.4			1.5	
AQRVDOH5D0790	7.9	39.5		55.5				
AQRVDOH5D0800	8.0	40.0		55.6				
AQRVDOH5D0810	8.1	40.5		51.7	127	9		
AQRVDOH5D0820	8.2	41.0		51.8				
AQRVDOH5D0830	8.3	41.5		51.9				
AQRVDOH5D0840	8.4	42.0	74	52.0			1.6	
AQRVDOH5D0850	8.5	42.5		56.2				
AQRVDOH5D0860	8.6	43.0		56.3				
AQRVDOH5D0870	8.7	43.5		56.4				
AQRVDOH5D0880	8.8	44.0		56.5				
AQRVDOH5D0890	8.9	44.5		56.6				
AQRVDOH5D0900	9.0	45.0		56.4	136	10		
AQRVDOH5D0910	9.1	45.5		56.5				
AQRVDOH5D0920	9.2	46.0		56.6				
AQRVDOH5D0930	9.3	46.5	78	56.4			1.7	
AQRVDOH5D0940	9.4	47.0		56.5				
AQRVDOH5D0950	9.5	47.5		56.6				

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDOH5D0960	9.6	48.0		52.7			1.7	
AQRVDOH5D0970	9.7	48.5						
AQRVDOH5D0980	9.8	49.0	82	52.8	136	10		
AQRVDOH5D0990	9.9	49.5		52.9			1.8	
AQRVDOH5D1000	10.0	50.0		53.0				
AQRVDOH5D1010	10.1	50.5		60.2				
AQRVDOH5D1020	10.2	51.0		60.3				
AQRVDOH5D1030	10.3	51.5	87	60.4			1.9	
AQRVDOH5D1040	10.4	52.0		60.5				
AQRVDOH5D1050	10.5	52.5		60.6				
AQRVDOH5D1060	10.6	53.0		56.7	149	11		
AQRVDOH5D1070	10.7	53.5		56.8				
AQRVDOH5D1080	10.8	54.0	91	56.9			2.0	
AQRVDOH5D1090	10.9	54.5		57.0				
AQRVDOH5D1100	11.0	55.0		61.2				
AQRVDOH5D1110	11.1	55.5		61.3				
AQRVDOH5D1120	11.2	56.0		61.4				
AQRVDOH5D1130	11.3	56.5	95	61.5			2.1	
AQRVDOH5D1140	11.4	57.0		61.6				
AQRVDOH5D1150	11.5	57.5		57.7	158	12		
AQRVDOH5D1160	11.6	58.0		57.8				
AQRVDOH5D1170	11.7	58.5		57.9				
AQRVDOH5D1180	11.8	59.0	99	58.0			2.2	
AQRVDOH5D1190	11.9	59.5		62.2				
AQRVDOH5D1200	12.0	60.0		62.3				
AQRVDOH5D1210	12.1	60.5		62.4				
AQRVDOH5D1220	12.2	61.0	103	62.5			2.3	
AQRVDOH5D1230	12.3	61.5		62.6				
AQRVDOH5D1240	12.4	62.0		62.7				
AQRVDOH5D1250	12.5	62.5		58.7	167	13		
AQRVDOH5D1260	12.6	63.0		58.8				
AQRVDOH5D1270	12.7	63.5	107	58.9			2.4	
AQRVDOH5D1280	12.8	64.0		59.0				
AQRVDOH5D1290	12.9	64.5		63.2				
AQRVDOH5D1300	13.0	65.0		63.3				
AQRVDOH5D1310	13.1	65.5		63.4				
AQRVDOH5D1320	13.2	66.0	111	63.5			2.5	
AQRVDOH5D1330	13.3	66.5		63.6				
AQRVDOH5D1340	13.4	67.0		63.7				
AQRVDOH5D1350	13.5	67.5		63.8				
AQRVDOH5D1360	13.6	68.0		59.7	176	14		
AQRVDOH5D1370	13.7	68.5		59.8				
AQRVDOH5D1380	13.8	69.0	115	59.9			2.6	
AQRVDOH5D1390	13.9	69.5		60.0				
AQRVDOH5D1400	14.0	70.0		64.2				
AQRVDOH5D1410	14.1	70.5		64.3				
AQRVDOH5D1420	14.2	71.0		64.4				
AQRVDOH5D1430	14.3	71.5	119	64.5			2.7	
AQRVDOH5D1440	14.4	72.0		64.6				
AQRVDOH5D1450	14.5	72.5		59.7	185	15		
AQRVDOH5D1460	14.6	73.0		59.8				
AQRVDOH5D1470	14.7	73.5		59.9				
AQRVDOH5D1480	14.8	74.0	124	60.0			2.8	
AQRVDOH5D1490	14.9	74.5		60.1				
AQRVDOH5D1500	15.0	75.0		60.2				
AQRVDOH5D1510	15.1	75.5		60.3				
AQRVDOH5D1520	15.2	76.0		60.4				
AQRVDOH5D1530	15.3	76.5	128	60.5			2.9	
AQRVDOH5D1540	15.4	77.0		60.6				
AQRVDOH5D1550	15.5	77.5		60.7				
AQRVDOH5D1560	15.6	78.0		60.8				
AQRVDOH5D1570	15.7	78.5		60.9				
AQRVDOH5D1580	15.8	79.0	132	61.0				
AQRVDOH5D1590	15.9	79.5						
AQRVDOH5D1600	16.0	80.0						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQRVDOH8D

AquaREVO油孔钻 8D

AquaREVO Drills Oil-Hole 8D

切削条件 Cutting Condition ▶▶29

Carbide
工具材料

REVO
D
涂层


h7
直径公差

140°
先端角

26°
~30°
螺旋角

h6
柄直径公差

3.0-16.0
直径范围

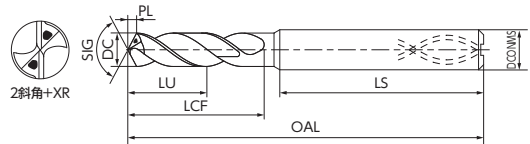

LIST 9868

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDOH8D0300	3.0	24.0	34	46.0	81	3	0.5	
AQRVDOH8D0310	3.1	24.8		51.2				
AQRVDOH8D0320	3.2	25.6		51.3				
AQRVDOH8D0330	3.3	26.4	39	51.4			0.6	
AQRVDOH8D0340	3.4	27.2		51.5				
AQRVDOH8D0350	3.5	28.0		51.6	92	4		
AQRVDOH8D0360	3.6	28.8		45.7				
AQRVDOH8D0370	3.7	29.6		45.7			0.7	
AQRVDOH8D0380	3.8	30.4	45	45.8				
AQRVDOH8D0390	3.9	31.2		45.9				
AQRVDOH8D0400	4.0	32.0		46.0				
AQRVDOH8D0410	4.1	32.8		53.2			0.8	
AQRVDOH8D0420	4.2	33.6		53.3				
AQRVDOH8D0430	4.3	34.4	50	53.4				
AQRVDOH8D0440	4.4	35.2		53.5				
AQRVDOH8D0450	4.5	36.0		53.6	105	5		
AQRVDOH8D0460	4.6	36.8		47.7				
AQRVDOH8D0470	4.7	37.6		47.8				
AQRVDOH8D0480	4.8	38.4	56	47.9			0.9	
AQRVDOH8D0490	4.9	39.2		48.0				
AQRVDOH8D0500	5.0	40.0		54.2				
AQRVDOH8D0510	5.1	40.8		54.3				
AQRVDOH8D0520	5.2	41.6		54.4				
AQRVDOH8D0530	5.3	42.4	62	54.5			1.0	
AQRVDOH8D0540	5.4	43.2		54.6				
AQRVDOH8D0550	5.5	44.0		48.7	118	6		
AQRVDOH8D0560	5.6	44.8		48.8				
AQRVDOH8D0570	5.7	45.6		48.9				
AQRVDOH8D0580	5.8	46.4	68	49.0			1.1	
AQRVDOH8D0590	5.9	47.2		55.3				
AQRVDOH8D0600	6.0	48.0		55.4				
AQRVDOH8D0610	6.1	48.8		55.5				
AQRVDOH8D0620	6.2	49.6	73	55.6				
AQRVDOH8D0630	6.3	50.4		55.5				
AQRVDOH8D0640	6.4	51.2		55.6				
AQRVDOH8D0650	6.5	52.0		49.7	130	7	1.2	
AQRVDOH8D0660	6.6	52.8		49.8				
AQRVDOH8D0670	6.7	53.6		49.9				
AQRVDOH8D0680	6.8	54.4	79	50.0				
AQRVDOH8D0690	6.9	55.2		56.2			1.3	
AQRVDOH8D0700	7.0	56.0		56.3				
AQRVDOH8D0710	7.1	56.8		56.4				
AQRVDOH8D0720	7.2	57.6		56.5				
AQRVDOH8D0730	7.3	58.4	84	56.6				
AQRVDOH8D0740	7.4	59.2		50.7			1.4	
AQRVDOH8D0750	7.5	60.0		50.8	142	8		
AQRVDOH8D0760	7.6	60.8		50.9				
AQRVDOH8D0770	7.7	61.6		51.0				
AQRVDOH8D0780	7.8	62.4	90	57.2				
AQRVDOH8D0790	7.9	63.2		57.3			1.5	
AQRVDOH8D0800	8.0	64.0		57.4				
AQRVDOH8D0810	8.1	64.8		57.5				
AQRVDOH8D0820	8.2	65.6	95	57.6				
AQRVDOH8D0830	8.3	66.4		57.7				
AQRVDOH8D0840	8.4	67.2		51.7				
AQRVDOH8D0850	8.5	68.0		51.8	154	9		
AQRVDOH8D0860	8.6	68.8		51.9			1.6	
AQRVDOH8D0870	8.7	69.6	101					
AQRVDOH8D0880	8.8	70.4						
AQRVDOH8D0890	8.9	71.2						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AQRVDOH8D0900	9.0	72.0	101	52.0	154	9	1.6	
AQRVDOH8D0910	9.1	72.8		58.2				
AQRVDOH8D0920	9.2	73.6		58.3				
AQRVDOH8D0930	9.3	74.4	106	58.4			1.7	
AQRVDOH8D0940	9.4	75.2		58.5				
AQRVDOH8D0950	9.5	76.0		58.6	166	10		
AQRVDOH8D0960	9.6	76.8		52.7				
AQRVDOH8D0970	9.7	77.6		52.8			1.8	
AQRVDOH8D0980	9.8	78.4	112	52.9				
AQRVDOH8D0990	9.9	79.2		53.0				
AQRVDOH8D1000	10.0	80.0		62.2				
AQRVDOH8D1010	10.1	80.8		62.3			1.9	
AQRVDOH8D1020	10.2	81.6		62.4				
AQRVDOH8D1030	10.3	82.4	118	62.5				
AQRVDOH8D1040	10.4	83.2		62.6	182	11		
AQRVDOH8D1050	10.5	84.0		56.7				
AQRVDOH8D1060	10.6	84.8		56.8			2.0	
AQRVDOH8D1070	10.7	85.6	124	56.9				
AQRVDOH8D1080	10.8	86.4		57.0				
AQRVDOH8D1090	10.9	87.2		63.2				
AQRVDOH8D1100	11.0	88.0		63.3				
AQRVDOH8D1110	11.1	88.8		63.4			2.1	
AQRVDOH8D1120	11.2	89.6		63.5				
AQRVDOH8D1130	11.3	90.4	129	63.6				
AQRVDOH8D1140	11.4	91.2		57.7	194	12		
AQRVDOH8D1150	11.5	92.0		57.8				
AQRVDOH8D1160	11.6	92.8		57.9				
AQRVDOH8D1170	11.7	93.6	135	58.0			2.2	
AQRVDOH8D1180	11.8	94.4		64.2				
AQRVDOH8D1190	11.9	95.2		64.3				
AQRVDOH8D1200	12.0	96.0		64.4				
AQRVDOH8D1210	12.1	96.8	140	64.5				
AQRVDOH8D1220	12.2	97.6		64.6			2.3	
AQRVDOH8D1230	12.3	98.4		58.7	206	13		
AQRVDOH8D1240	12.4	99.2		58.8				
AQRVDOH8D1250	12.5	100.0		58.9				
AQRVDOH8D1260	12.6	100.8		59.0				
AQRVDOH8D1270	12.7	101.6	146	65.2			2.4	
AQRVDOH8D1280	12.8	102.4		65.3				
AQRVDOH8D1290	12.9	103.2		65.4				
AQRVDOH8D1300	13.0	104.0		65.5				
AQRVDOH8D1310	13.1	104.8		65.6				
AQRVDOH8D1320	13.2	105.6	151	59.7			2.5	
AQRVDOH8D1330	13.3	106.4		59.8				
AQRVDOH8D1340	13.4	107.2		59.9				
AQRVDOH8D1350	13.5	108.0		60.0				
AQRVDOH8D1360	13.6	108.8	157	65.2			2.6	
AQRVDOH8D1370	13.7	109.6		65.3				
AQRVDOH8D1380	13.8	110.4		65.4				
AQRVDOH8D1390	13.9	111.2		65.5				
AQRVDOH8D1400	14.0	112.0		65.6				
AQRVDOH8D1410	14.1	112.8	163	59.7			2.7	
AQRVDOH8D1420	14.2	113.6		59.8				
AQRVDOH8D1430	14.3	114.4		59.9				
AQRVDOH8D1440	14.4	115.2		60.0				
AQRVDOH8D1450	14.5	116.0		65.2	230	15		
AQRVDOH8D1460	14.6	116.8		65.3				
AQRVDOH8D1470	14.7	117.6	169	65.4				
AQRVDOH8D1480	14.8	118.4		65.5				
AQRVDOH8D1490	14.9	119.2		65.6				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 CONNMS	先端 PL	库存 Stock
AQRVDOH8D1500	15.0	120.0	169	60.0	230	15	2.7	●
AQRVDOH8D1510	15.1	120.8		66.2				
AQRVDOH8D1520	15.2	121.6		66.3				
AQRVDOH8D1530	15.3	122.4	174	66.4			2.8	
AQRVDOH8D1540	15.4	123.2		66.5				
AQRVDOH8D1550	15.5	124.0		66.6	242	16		
AQRVDOH8D1560	15.6	124.8		60.7				
AQRVDOH8D1570	15.7	125.6						
AQRVDOH8D1580	15.8	126.4	180	60.8			2.9	
AQRVDOH8D1590	15.9	127.2		60.9				
AQRVDOH8D1600	16.0	128.0		61.0				

被削材推荐表

Applicable Work Materials

商品编码 Code	钻孔深度 L/D	被削材 Work Materials													
		一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢・调质钢 Alloy Steel, Heat Treated Steel	模具钢・预硬钢 Mold Steel, Pre-Hardened Steel	高硬度钢 Hardened Steel			不锈钢 Stainless Steel			钛合金 Titanium Alloy	镍基合金 Nickel based Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy
						40~50 HRC	50~57 HRC	58~65 HRC	SUS304 SUS316	SUS420	SUS630				
AQRVDOH3D	3	◎	◎	◎	◎	◎	○	—	◎	◎	◎	○	○	◎	○
AQRVDOH5D	5	◎	◎	◎	◎	◎	○	—	◎	◎	◎	○	○	◎	○
AQRVDOH8D	8	◎	◎	◎	◎	◎	○	—	◎	◎	◎	○	○	◎	○

◎：优选 Excellent ○：适用 Good —：不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AquaREVO 油孔钻的基准切削条件

Standard Cutting Condition for AquaREVO Drills Oil-Hole

AQRVDOH3D/5D | AquaREVO油孔钻3D/5D AquaREVO Drills Oil-Hole 3D/5D

湿式加工 Wet condition

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 SCr Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 铁素体系 马氏体系 奥氏体系 SUS430 SUS403 SUS304 Stainless Steel		不锈钢 析出硬化系 SUS630 Stainless Steel		钛合金 Ti-6Al-4V Titanium Alloy		镍基合金 Inconel 718 Nickel based Alloy Inconel	
	~200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC											
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	12700	1220	10600	1020	8500	760	4250	260	10600	950	8500	680	5300	400	4200	320	4200	190
4.0	9600	1220	8000	1020	6400	760	3200	260	8000	950	6400	680	4000	400	3200	320	3200	190
6.0	6400	1220	5300	1020	4200	710	2100	240	5300	950	4200	660	2600	400	2100	320	2100	190
8.0	4800	1220	4000	1020	3200	710	1600	240	4000	880	3200	640	2000	400	1600	320	1600	190
10.0	3800	1140	3200	960	2500	640	1300	230	3200	790	2500	590	1600	370	1300	300	1300	180
12.0	3200	1070	2700	920	2100	540	1050	220	2700	670	2100	560	1300	350	1050	280	1050	180
16.0	2400	960	2000	890	1600	480	800	210	2000	620	1600	510	1000	320	800	260	800	150

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 SCr Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	8500	770	7400	570	6400	540	2550	140	7400	620
4.0	6400	770	5600	570	4800	540	1900	140	5600	620
6.0	4200	770	3700	570	3200	540	1300	130	3700	620
8.0	3200	770	2800	570	2400	500	1000	130	2800	580
10.0	2500	720	2200	540	1900	440	800	120	2200	500
12.0	2100	670	1900	500	1600	380	650	120	1900	460
16.0	1600	600	1400	500	1200	340	480	100	1400	400

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQRVDOH8D | AquaREVO油孔钻8D AquaREVO Drills Oil-Hole 8D

湿式加工 Wet condition

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 SCr Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 铁素体系 马氏体系 奥氏体系 SUS430 SUS403 SUS304 Stainless Steel		不锈钢 析出硬化系 SUS630 Stainless Steel		钛合金 Ti-6Al-4V Titanium Alloy		镍基合金 Inconel 718 Nickel based Alloy Inconel	
	~200HB		20~30HRC		30~40HRC		40~50HRC											
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	12700	1020	10600	920	8500	630	4250	230	10600	800	8500	500	5300	320	4200	290	4200	170
4.0	9600	1080	8000	920	6400	630	3200	230	8000	800	6400	500	4000	350	3200	290	3200	170
6.0	6400	1150	5300	920	4200	600	2100	220	5300	740	4200	600	2600	360	2100	290	2100	170
8.0	4800	1220	4000	920	3200	590	1600	220	4000	740	3200	640	2000	360	1600	290	1600	170
10.0	3800	1140	3200	860	2500	530	1300	210	3200	680	2500	590	1600	330	1300	260	1300	160
12.0	3200	1070	2700	820	2100	480	1050	200	2700	630	2100	560	1300	320	1050	250	1050	150
16.0	2400	960	2000	800	1600	440	800	190	2000	550	1600	510	1000	290	800	230	800	140

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 SCr Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~200HB		20~30HRC		30~40HRC		40~50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	8500	640	7400	510	6400	400	2550	120	7400	500
4.0	6400	680	5600	510	4800	400	1900	120	5600	500
6.0	4200	700	3700	510	3200	370	1300	120	3700	470
8.0	3200	770	2800	510	2400	370	1000	120	2800	470
10.0	2500	720	2200	480	1900	340	800	100	2200	440
12.0	2100	670	1900	450	1600	340	650	100	1900	430
16.0	1600	600	1400	450	1200	330	480	90	1400	360

AQRVDOH3D/5D/8D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 湿式加工是指使用水溶性切削油剂时的加工。
- 3) 使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 4) 请采用内部冷却方式。
- 5) 可进行不分段加工。
但是，依被削材及加工条件，切削的排出性有时会变差。
此时，即使孔深小于规定的孔深，也请使用分级进给。
分级进给时请返回到孔的上面。
请将分级量的大致标准设定为 0.2 ~ 1DC。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) Wet condition are for drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Use on internal coolant.
- 5) Non-step drilling is possible.
However, a work material and cutting condition to chip removal may be worse.
In that case, even if under predetermined hole depth, please step feed.
In step feed, return to the entrance hole.
Step feed interval is about 0.2 ~ 1 × DC.

24、25、26 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

RVM2G-1.5D



AquaREVO 铣刀 2 刃 G 型 1.5D

AquaREVO Mills Two Flutes 1.5D G type

RVM4G-1.5D

AquaREVO 铣刀 4 刃 G 型 1.5D

AquaREVO Mills Four Flutes 1.5D G type

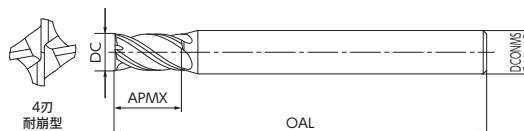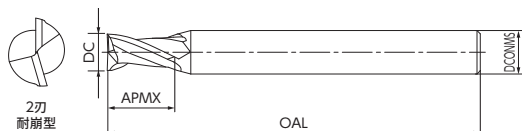

LIST 9714

切削条件 Cutting Condition $\bullet \blacktriangleright 34$

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RVM2010G-1.5D	1.0	1.5	40.0	4.0	●
RVM2015G-1.5D	1.5	2.3			
RVM2020G-1.5D	2.0	3.0			
RVM2025G-1.5D	2.5	3.8	45.0	6.0	
RVM2030G-1.5D	3.0	4.5			
RVM2035G-1.5D	3.5	5.3			
RVM2040G-1.5D	4.0	6.0	50.0	8.0	
RVM2045G-1.5D	4.5	6.8			
RVM2050G-1.5D	5.0	7.5			
RVM2055G-1.5D	5.5	8.3	60.0	10.0	
RVM2060G-1.5D	6.0	9.0			
RVM2070G-1.5D	7.0	11.0			
RVM2080G-1.5D	8.0	12.0	70.0	12.0	
RVM2090G-1.5D	9.0	14.0			
RVM2100G-1.5D	10.0	15.0			
RVM2120G-1.5D	12.0	18.0	75.0	16.0	
RVM2140G-1.5D	14.0	21.0			
RVM2150G-1.5D	15.0	23.0			
RVM2160G-1.5D	16.0	24.0	90.0	20.0	
RVM2200G-1.5D	20.0	30.0			

LIST 9716

切削条件 Cutting Condition $\bullet \blacktriangleright 36$

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RVM4010G-1.5D	1.0	1.5	40.0	4.0	●
RVM4015G-1.5D	1.5	2.3			
RVM4020G-1.5D	2.0	3.0			
RVM4025G-1.5D	2.5	3.8	45.0	6.0	
RVM4030G-1.5D	3.0	4.5			
RVM4035G-1.5D	3.5	5.3			
RVM4040G-1.5D	4.0	6.0	50.0	8.0	
RVM4045G-1.5D	4.5	6.8			
RVM4050G-1.5D	5.0	7.5			
RVM4055G-1.5D	5.5	8.3	60.0	10.0	
RVM4060G-1.5D	6.0	9.0			
RVM4070G-1.5D	7.0	11.0			
RVM4080G-1.5D	8.0	12.0	70.0	12.0	
RVM4090G-1.5D	9.0	14.0			
RVM4100G-1.5D	10.0	15.0			
RVM4120G-1.5D	12.0	18.0	75.0	16.0	
RVM4140G-1.5D	14.0	21.0			
RVM4150G-1.5D	15.0	23.0			
RVM4160G-1.5D	16.0	24.0	90.0	20.0	
RVM4200G-1.5D	20.0	30.0			

RVM2G-2.5D



AquaREVO 铣刀 2 刃 G 型 2.5D

AquaREVO Mills Two Flutes 2.5D G type

RVM4G-2.5D

AquaREVO 铣刀 4 刃 G 型 2.5D

AquaREVO Mills Four Flutes 2.5D G type

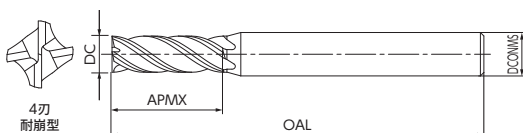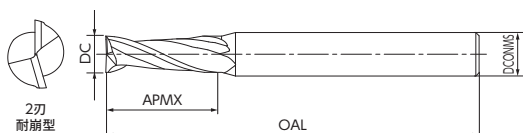

LIST 9706

切削条件 Cutting Condition $\star \star \star 35$

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RVM2010G-2.5D	1.0	2.5			
RVM2015G-2.5D	1.5	3.8			
RVM2020G-2.5D	2.0	5.0	40.0	4.0	
RVM2025G-2.5D	2.5	6.3			
RVM2030G-2.5D	3.0	7.5			
RVM2035G-2.5D	3.5	8.8	45.0		
RVM2040G-2.5D	4.0	10.0			
RVM2045G-2.5D	4.5	11.3		6.0	
RVM2050G-2.5D	5.0	12.5			
RVM2055G-2.5D	5.5	13.8	50.0		
RVM2060G-2.5D	6.0	15.0			
RVM2070G-2.5D	7.0	17.5	60.0	8.0	
RVM2080G-2.5D	8.0	20.0			
RVM2090G-2.5D	9.0	22.5	70.0	10.0	
RVM2100G-2.5D	10.0	25.0			
RVM2120G-2.5D	12.0	30.0	75.0	12.0	
RVM2140G-2.5D	14.0	35.0			
RVM2150G-2.5D	15.0	37.5	90.0	16.0	
RVM2160G-2.5D	16.0	40.0			
RVM2200G-2.5D	20.0	50.0	100.0	20.0	

LIST 9708

切削条件 Cutting Condition $\star \star \star 37$

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RVM4010G-2.5D	1.0	2.5			
RVM4015G-2.5D	1.5	3.8			
RVM4020G-2.5D	2.0	5.0	40.0	4.0	
RVM4025G-2.5D	2.5	6.3			
RVM4030G-2.5D	3.0	7.5			
RVM4035G-2.5D	3.5	8.8	45.0		
RVM4040G-2.5D	4.0	10.0			
RVM4045G-2.5D	4.5	11.3		6.0	
RVM4050G-2.5D	5.0	12.5			
RVM4055G-2.5D	5.5	13.8	50.0		
RVM4060G-2.5D	6.0	15.0			
RVM4070G-2.5D	7.0	17.5	60.0	8.0	
RVM4080G-2.5D	8.0	20.0			
RVM4090G-2.5D	9.0	22.5	70.0	10.0	
RVM4100G-2.5D	10.0	25.0			
RVM4120G-2.5D	12.0	30.0	75.0	12.0	
RVM4140G-2.5D	14.0	35.0			
RVM4150G-2.5D	15.0	37.5	90.0	16.0	
RVM4160G-2.5D	16.0	40.0			
RVM4200G-2.5D	20.0	50.0	100.0	20.0	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

RVM2S-2.5D



AquaREVO 铣刀 2 刃 S 型 2.5D

AquaREVO Mills Two Flutes 2.5D S type

RVM4S-2.5D

AquaREVO 铣刀 4 刃 S 型 2.5D

AquaREVO Mills Four Flutes 2.5D S type

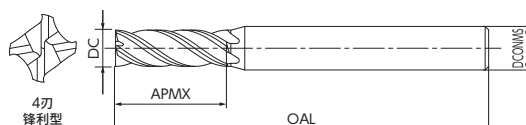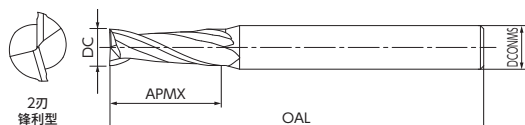

LIST 9702

切削条件 Cutting Condition $\blacktriangleright$ 35

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RVM2010S-2.5D	1.0	2.5	40.0	4.0	●
RVM2015S-2.5D	1.5	3.8			
RVM2020S-2.5D	2.0	5.0			
RVM2025S-2.5D	2.5	6.3	45.0	6.0	
RVM2030S-2.5D	3.0	7.5			
RVM2035S-2.5D	3.5	8.8			
RVM2040S-2.5D	4.0	10.0	50.0	8.0	
RVM2045S-2.5D	4.5	11.3			
RVM2050S-2.5D	5.0	12.5			
RVM2055S-2.5D	5.5	13.8	60.0	10.0	
RVM2060S-2.5D	6.0	15.0			
RVM2070S-2.5D	7.0	17.5			
RVM2080S-2.5D	8.0	20.0	70.0	12.0	
RVM2090S-2.5D	9.0	22.5			
RVM2100S-2.5D	10.0	25.0			
RVM2120S-2.5D	12.0	30.0	75.0	12.0	
RVM2140S-2.5D	14.0	35.0			
RVM2150S-2.5D	15.0	37.5			
RVM2160S-2.5D	16.0	40.0	90.0	16.0	
RVM2200S-2.5D	20.0	50.0			
					100.0

LIST 9704

切削条件 Cutting Condition $\blacktriangleright$ 37

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RVM4010S-2.5D	1.0	2.5	40.0	4.0	●
RVM4015S-2.5D	1.5	3.8			
RVM4020S-2.5D	2.0	5.0			
RVM4025S-2.5D	2.5	6.3	45.0	6.0	
RVM4030S-2.5D	3.0	7.5			
RVM4035S-2.5D	3.5	8.8			
RVM4040S-2.5D	4.0	10.0	50.0	8.0	
RVM4045S-2.5D	4.5	11.3			
RVM4050S-2.5D	5.0	12.5			
RVM4055S-2.5D	5.5	13.8	60.0	10.0	
RVM4060S-2.5D	6.0	15.0			
RVM4070S-2.5D	7.0	17.5			
RVM4080S-2.5D	8.0	20.0	70.0	12.0	
RVM4090S-2.5D	9.0	22.5			
RVM4100S-2.5D	10.0	25.0			
RVM4120S-2.5D	12.0	30.0	90.0	16.0	
RVM4140S-2.5D	14.0	35.0			
RVM4150S-2.5D	15.0	37.5			
RVM4160S-2.5D	16.0	40.0	100.0	20.0	
RVM4200S-2.5D	20.0	50.0			

RVM4G-4D NEW!



AquaREVO 铣刀 4 刃 4D G 型

AquaREVO Mills Four Flutes 4D G type

RVMSUS4G-2.5D NEW!

AquaREVO 铣刀 不锈钢用 4 刃 2.5D G 型

AquaREVO Mills for Stainless Steel Four Flutes 2.5D G type

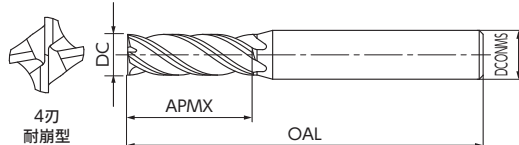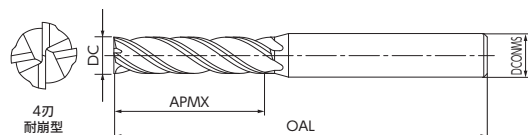

LIST 9720

切削条件 Cutting Condition ▶▶38

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RVM4010G-4D	1.0	4.0	40.0	4.0	●
RVM4015G-4D	1.5	6.0			
RVM4020G-4D	2.0	8.0			
RVM4025G-4D	2.5	10.0	50.0	6.0	
RVM4030G-4D	3.0	12.0			
RVM4035G-4D	3.5	14.0			
RVM4040G-4D	4.0	16.0	60.0	8.0	
RVM4045G-4D	4.5	18.0			
RVM4050G-4D	5.0	20.0			
RVM4055G-4D	5.5	22.0	80.0	10.0	
RVM4060G-4D	6.0	24.0			
RVM4070G-4D	7.0	28.0			
RVM4080G-4D	8.0	32.0	100.0	12.0	
RVM4090G-4D	9.0	36.0			
RVM4100G-4D	10.0	40.0			
RVM4120G-4D	12.0	48.0	120.0	16.0	
RVM4140G-4D	14.0	56.0			
RVM4150G-4D	15.0	60.0			
RVM4160G-4D	16.0	64.0	140.0	20.0	
RVM4200G-4D	20.0	80.0			

LIST 9724

切削条件 Cutting Condition ▶▶39

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RVMSUS4030G-2.5D	3.0	7.5	45	6	●
RVMSUS4040G-2.5D	4.0	10.0			
RVMSUS4050G-2.5D	5.0	12.5	50		
RVMSUS4060G-2.5D	6.0	15.0			
RVMSUS4080G-2.5D	8.0	20.0	60	8	
RVMSUS4100G-2.5D	10.0	25.0	70	10	
RVMSUS4120G-2.5D	12.0	30.0	75	12	
RVMSUS4160G-2.5D	16.0	40.0	90	16	
RVMSUS4200G-2.5D	20.0	50.0	100	20	


AquaREVO 铣刀 不锈钢用

G 型（耐崩型）的残留余量

Guideline of remaining corner

单位 (Unit) : mm

外径 DC	k	m
3	0.15	0.03
6	0.2	0.04
10	0.3	0.05
20	0.3	0.05



外径公差

DC tolerance

单位 (Unit) : mm

外径 DC		公差 Tolerance
以上 Above	以下 Up to	
	3	0 ~ -0.015
3	12	0 ~ -0.020
12		0 ~ -0.030

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AquaREVO 铣刀的基准切削条件

Standard Cutting Condition for AquaREVO Mills

RVM2G-1.5D | AquaREVO铣刀2刃 G型1.5D AquaREVO Mills Two Flutes 1.5D G type

	被削材 Work Material	一般结构钢 碳钢 / 铸铁 SS/S-C/FC- Structural Steel Carbon Steel Cast Iron	合金钢 调质钢 SCM/NAK/HPM Alloy Steel Heat Treated Steel	调质钢 淬硬钢 Heat Treated Steel Hardened Steel	淬硬钢 淬硬钢 Hardened Steel	淬硬钢 SKD11 Hardened Steel	不锈钢 SUS304/ SUS316 Stainless Steel	耐热合金 钛合金 Ti-6Al-4V Nickel Alloy Titanium Alloy	铝合金 Aluminum Alloy									
		150 ~ 250HB	25 ~ 35HRC	35 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC												
		外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)						
侧面加工 Side Milling	1	38200	1100	31850	850	25500	480	19000	200	17500	160	12740	60	31700	650	粗加工 Roughing 		
	2	19100	1100	15900	850	12730	480	10400	230	11150	280	7960	90	15900	650			
	4	9550	1100	7960	850	6370	480	5500	230	6370	400	4780	110	7950	650	精加工 Finishing 		
	6	6370	1100	5300	850	4240	480	4200	230	4240	400	3180	130	5300	650			
	8	5000	1100	4200	850	3600	480	3200	230	3180	400	2390	130	3980	650			
	10	4100	1000	3500	720	2900	480	2500	200	2550	400	1910	130	3180	650			
	12	3180	770	2800	600	2120	420	1800	150	2120	350	1320	100	2650	650			
	16	2000	600	1900	450	1400	300	1300	125	1590	270	800	85	1980	650			
	20	1500	450	1430	350	1050	240	900	90	1110	200	630	75	1590	650			
		切削量 Depth of cut	ap	1.5DC				0.02DC				0.2DC (MAX 1.0mm)					0.02DC	
槽加工 Grooving	1	31850	530	25500	330	20700	250	7500	55	RVM4G-1.5D (推荐使用 4 刃 G 型耐崩型 1.5D) Please use RVM4G-1.5D (Four Flutes 1.5D G type Gashland)	12740	60	6370	18	19000	150	粗加工 Roughing 	
	2	15900	530	12730	330	10350	250	4500	70	7960	85	3980	27	9500	150			
	4	7960	530	6370	330	5170	250	3980	130	4780	150	2390	39	4800	150	精加工 Finishing 		
	6	5300	530	4240	330	3450	250	2650	130	3180	150	1590	44	3200	150			
	8	3980	530	3180	330	2590	250	1990	130	2390	150	1200	44	2400	150			
	10	3180	490	2550	290	2070	230	1590	130	1910	150	950	46	1900	150			
	12	2530	430	2120	250	1670	200	1320	130	1460	130	660	34	1600	150			
	16	1890	330	1350	170	1100	140	900	90	1000	100	400	21	1200	150			
	20	1430	250	950	130	780	100	550	55	800	80	310	17	950	150			
		切削量 Depth of cut	ap	1DC(MAX 10mm)				0.2DC				0.5DC				0.2DC		
			1DC(MAX 10mm)				0.2DC				1DC (MAX 10mm)							

RVM2G-1.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工场合，请使用气冷。
- 3) 淬硬钢 (45~55HRC) 加工场合请使用干式气冷加工。
- 4) 淬硬钢 (55~60HRC) 不推荐加工。推荐使用 RVM4G-1.5D(4 刃 G 型耐崩型 1.5D)。
- 5) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 6) 发生颤动时，请按相同比例降低上表中的转数和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When processing Hardened Steel (45 to 55HRC), use an air blow for dry process.
- 4) It is not recommended for processing Hardened Steel (55 to 60 HRC). Please use RVM4G-1.5D (Four Flutes G type Gashland).
- 5) Use in wet condition in case of Stainless Steel, Nickel Alloy and Titanium Alloy.
- 6) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

30 ◀ • 尺寸表 Stocked Sized

切削工具

套装商品
其它

精密工具

技术资料
索引

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

RVM2G-2.5D RVM2S-2.5D

AquaREVO铣刀 2刃 G型 2.5D AquaREVO Mills Two Flutes 2.5D G type AquaREVO铣刀 2刃 S型 2.5D AquaREVO Mills Two Flutes 2.5D S type

	被削材 Work Material	一般结构钢 碳钢 / 铸铁 SS/S-C/FC- Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM/NAK/HPM Alloy Steel Heat Treated Steel		调质钢 淬硬钢 Heat Treated Steel Hardened Steel		淬硬钢 Hardened Steel		淬硬钢 SKD11 Hardened Steel		不锈钢 SUS304/ SUS316 Stainless Steel		耐热合金 钛合金 Ti-6Al-4V Nickel Alloy Titanium Alloy		铝合金 Aluminum Alloy						
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC												
		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)					
侧面加工 Side Milling	外径 Dia. of Mill (mm)																					
	1	38200	750	31850	540	25500	320	17500	130			17500	70	12740	50	31700	650					
	2	19100	750	15900	540	12730	320	9550	150			11150	150	7960	80	15900	650					
	4	9550	750	7960	540	6370	320	4780	150			6370	250	4780	105	7950	650					
	6	6370	750	5300	540	4240	320	3180	150			4240	250	3180	120	5300	650					
	8	4800	750	3980	540	3180	320	2390	150			3180	250	2390	120	3980	650					
	10	3820	600	3180	480	2550	320	1910	130			2550	250	1910	120	3180	650					
	12	3180	570	2650	420	2120	280	1460	100			2120	250	1320	90	2650	650					
	16	1790	400	1790	300	1190	200	1100	100			1590	200	800	60	1980	650					
	20	1430	300	1430	230	950	160	880	60			1110	150	630	55	1590	650					
切削量 Depth of cut	粗加工 Roughing	ap	2DC				0.1DC(MAX 1.0mm)				φ 14不足 0.02DC φ 14以上 0.01DC				RVM4G-2.5D (推荐使用 4 刃 G 型耐崩型 2.5D)				2DC		1.5DC	
	精加工 Finishing	ae	0.05DC(MAX 0.3mm)				0.01DC				Please use RVM4G-2.5D (Four Flutes 2.5D G type Gashland)				0.1DC (MAX 1.0mm)		0.02DC		0.1DC			
	粗加工 Roughing	ap	0.05DC(MAX 0.3mm)				0.01DC				Please use RVM4G-2.5D (Four Flutes 2.5D G type Gashland)				0.05DC		0.01DC		0.1DC			
	精加工 Finishing	ae	0.05DC(MAX 0.3mm)				0.01DC				Please use RVM4G-2.5D (Four Flutes 2.5D G type Gashland)				0.05DC		0.01DC		0.1DC			
	1	31850	530	25500	330	20700	250	7500	55			12740	60	6370	18	19000	150					
	2	15900	530	12730	330	10350	250	4500	70			7960	85	3980	27	9500	150					
	4	7960	530	6370	330	5170	250	3980	130			4780	150	2390	39	4800	150					
	6	5300	530	4240	330	3450	250	2650	130			3180	150	1590	44	3200	150					
	8	3980	530	3180	330	2590	250	1990	130			2390	150	1200	44	2400	150					
	10	3180	490	2550	290	2070	230	1590	130			1910	150	950	46	1900	150					
槽加工 Grooving	12	2530	430	2120	250	1670	200	1320	130			1460	130	660	34	1600	150					
	16	1890	330	1350	170	1100	140	900	90			1000	100	400	21	1200	150					
	20	1430	250	950	130	780	100	550	55			800	80	310	17	950	150					
	粗加工 Roughing	ap	1DC(MAX 10mm)				0.2DC				0.5DC				0.2DC		1DC (MAX 10mm)					
	精加工 Finishing	ap	1.5DC				1.5DC				1.5DC				1.5DC		1.5DC					
	精加工 Finishing	ae	0.02DC 以下				0.02DC 以下				0.02DC 以下				0.02DC 以下		0.02DC 以下					
	粗加工 Roughing	ap	1DC(MAX 10mm)				0.2DC				0.5DC				0.2DC		1DC (MAX 10mm)					
	精加工 Finishing	ap	1.5DC				1.5DC				1.5DC				1.5DC		1.5DC					
	精加工 Finishing	ae	0.02DC 以下				0.02DC 以下				0.02DC 以下				0.02DC 以下		0.02DC 以下					
	精加工 Finishing	ae	0.02DC 以下				0.02DC 以下				0.02DC 以下				0.02DC 以下		0.02DC 以下					

RVM2G-2.5D/RVM2S-2.5D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工场合, 请使用气冷。
- 3) 淬硬钢 (45~55HRC) 加工场合请使用干式气冷加工。
- 4) 淬硬钢 (55~60HRC) 不推荐加工。推荐使用 RVM4G-2.5D(4 刃 G 型耐崩型 2.5D)。
- 5) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 6) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。
- 7) S 型槽加工场合, 请将进给速度设为 20%。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When processing Hardened Steel (45 to 55HRC), use an air blow for dry process.
- 4) It is not recommended for processing Hardened Steel (55 to 60 HRC). Please use RVM4G-2.5D(Four Flutes G type Gashland).
- 5) Use in wet condition in case of Stainless Steel, Nickel Alloy and Titanium Alloy.
- 6) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.
- 7) When grooving with S type, set the feed rate to 20%.

31. 32 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AquaREVO 铣刀的基准切削条件

Standard Cutting Condition for AquaREVO Mills

RVM4G-1.5D | AquaREVO铣刀 4刃 G型 1.5D AquaREVO Mills Four Flutes 1.5D G type

被削材 Work Material	一般结构钢 碳钢 / 铸铁 SS/S-C/FC- Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM/NAK/HPM Alloy Steel Heat Treated Steel		调质钢 淬硬钢 Heat Treated Steel Hardened Steel		淬硬钢 Hardened Steel		淬硬钢 SKD11 Hardened Steel		不锈钢 SUS304/ SUS316 Stainless Steel		耐热合金 钛合金 Ti-6Al-4V Nickel Alloy Titanium Alloy		铝合金 Aluminum Alloy			
	150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC									
	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)			
侧面加工 Side Milling	1	38200	2200	31850	1600	25500	1100	19000	500	17500	45	20000	450	12740	110	31700	1300	粗加工 Roughing 
	2	19100	2200	15900	1600	12730	1100	10400	600	9550	50	11150	500	7960	180	15900	1300	
	4	9550	2200	7960	1600	6370	1100	5500	850	5970	70	6370	650	4780	220	7950	1300	
	6	6370	2200	5300	1600	4240	1100	4200	850	4000	70	4240	650	3180	260	5300	1300	
	8	5000	2200	4200	1600	3600	1100	3200	850	2980	70	3180	650	2390	260	3980	1300	
	10	4100	1800	3500	1400	2900	960	2500	670	2390	60	2550	650	1910	260	3180	1300	
	12	3180	1550	2800	1300	2120	800	1800	540	1990	50	2120	650	1320	200	2650	1300	
	16	2000	1200	1900	900	1400	600	1300	500	1390	45	1590	450	800	130	1980	1300	
	20	1500	900	1430	600	1050	450	900	400	1110	35	1110	350	630	115	1590	1300	
切削量 Depth of cut	ap	1.5DC						0.01DC		0.2DC (MAX 2.0mm)		0.02DC		0.1DC		精加工 Finishing 		
1	31850	1060	25500	660	20700	500	7500	110	12740		120	6370	32	25500	400			
2	15900	1060	12730	660	10350	500	4500	140	7960		170	3980	48	12700	400			
4	7960	1060	6370	660	5170	500	3980	260	4780		300	2390	76	6400	400			
6	5300	1060	4240	660	3450	500	2650	260	3180		300	1590	82	4250	400			
8	3980	1060	3180	660	2590	500	1990	260	不推荐 Not recommended	2390		300	1200	82	3200		400	
10	3180	970	2550	600	2070	400	1590	260		1910		300	950	66	2550		400	
12	2530	850	2120	500	1670	350	1320	260		1460		260	660	58	2120		400	
16	1890	660	1350	340	1100	280	900	180		1000		200	400	49	1600		400	
20	1430	500	950	260	780	200	550	110		800		160	310	44	1270	400		
切削量 Depth of cut	ap	1DC(MAX 10mm)						0.2DC		0.5DC		0.2DC		1DC (MAX 10mm)				

RVM4G-1.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工场合，请使用气冷。
- 3) 淬硬钢（45 ~ 60HRC）加工场合请使用干式气冷加工。
- 4) 淬硬钢（55 ~ 60HRC）不推荐槽加工。
- 5) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 6) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When processing Hardened Steel (45 to 60HRC), use an air blow for dry process.
- 4) It is not recommended for grooving Hardened Steel (55 to 60 HRC).
- 5) Use in wet condition in case of Stainless Steel, Nickel Alloy and Titanium Alloy.
- 6) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

30 ◀ ▶ 尺寸表 Stocked Sized

切削工具

套装商品
其它

精密工具

技术资料
索引

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

RVM4G-2.5D RVM4S-2.5D

AquaREVO铣刀 4刃 G型 2.5D AquaREVO Mills Four Flutes 2.5D G type AquaREVO铣刀 4刃 S型 2.5D AquaREVO Mills Four Flutes 2.5D S type

被削材 Work Material		一般结构钢 碳钢 / 铸铁 SS/S-C/FC- Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM/NAK/HPM Alloy Steel Heat Treated Steel		调质钢 淬硬钢 Heat Treated Steel Hardened Steel		淬硬钢 Hardened Steel		淬硬钢 SKD11 Hardened Steel		不锈钢 SUS304/ SUS316 Stainless Steel		耐热合金 钛合金 Ti-6Al-4V Nickel Alloy Titanium Alloy		铝合金 Aluminum Alloy				
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC										
外径 Dia. of Mill (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度				
	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)				
1	38200	1500	31850	1080	25500	640	17500	350	17500	45	20000	100	12740	100	31700	1300				
2	19100	1500	15900	1080	12730	640	9550	400	9550	50	11150	210	7960	160	15900	1300				
4	9550	1500	7960	1080	6370	640	5970	530	5970	70	6370	350	4780	210	7950	1300				
6	6370	1500	5300	1080	4240	640	4000	530	4000	70	4240	350	3180	240	5300	1300				
8	4800	1500	3980	1080	3180	640	2980	530	2980	70	3180	350	2390	240	3980	1300				
10	3820	1200	3180	960	2550	640	2390	450	2390	60	2550	350	1910	240	3180	1300				
12	3180	1140	2650	840	2120	560	1990	380	1990	50	2120	350	1320	180	2650	1300				
16	1790	800	1790	600	1190	400	1390	350	1390	45	1590	300	800	120	1980	1300				
20	1430	600	1430	460	950	320	1110	280	1110	35	1110	220	630	110	1590	1300				
侧面加工 Side Milling	切削量 Depth of cut	粗加工 Roughing	ap	2DC				1.5DC				2DC				1.5DC				
		精加工 Finishing	ae	0.2DC(MAX 1.0mm)				φ 14不足 0.03DC φ 14以上 0.01DC				0.01DC				0.1DC				
				2DC				不推荐 Not recommended				2DC				1.5DC				
				0.05DC(MAX 0.3mm)				0.01DC				0.05DC				0.1DC				
槽加工 Grooving	切削量 Depth of cut	粗加工 Roughing	ap	1	31850	1060	25500	660	20700	500	7500	110	12740	120	6370	32	25500	400		
				2	15900	1060	12730	660	10350	500	4500	140	7960	170	3980	48	12700	400		
				4	7960	1060	6370	660	5170	500	3980	260	4780	300	2390	76	6400	400		
				6	5300	1060	4240	660	3450	500	2650	260	3180	300	1590	82	4250	400		
				8	3980	1060	3180	660	2590	500	1990	260	2390	300	1200	82	3200	400		
				10	3180	970	2550	600	2070	400	1590	260	1910	300	950	66	2550	400		
				12	2530	850	2120	500	1670	350	1320	260	1460	260	660	58	2120	400		
				16	1890	660	1350	340	1100	280	900	180	1000	200	400	49	1600	400		
				20	1430	500	950	260	780	200	550	110	800	160	310	44	1270	400		
				精加工 Finishing	ae	1DC(MAX 10mm)				0.2DC				0.5DC				0.2DC		1DC (MAX 10mm)
						1.5DC								1.5DC						
						0.02DC 以下								0.02DC 以下						

RVM4G-2.5D/RVM4S-2.5D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工场合, 请使用气冷。
- 3) 淬硬钢 (45~60HRC) 加工场合请使用干式气冷加工。
- 4) 淬硬钢 (55~60HRC) 不推荐使用 RVM4S-2.5D(4刃 S 型锋利型)。推荐使用 RVM4G-2.5D(4刃 G 型耐崩型), 但不推荐槽加工。
- 5) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工及侧面加工。
- 6) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。
- 7) S 型槽加工场合, 请将进给速度设为 30%。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When processing Hardened Steel (45 to 60HRC), use an air blow for dry process.
- 4) It is not recommended for processing Hardened Steel (55 to 60 HRC) to use RVM4S-2.5D (Four Flutes S type Sharp Corner). Please use RVM4G-2.5D (Four Flutes G type Gashland). But it is not recommended for grooving, and finishing of side milling.
- 5) Use in wet condition in case of Stainless Steel, Nickel Alloy and Titanium Alloy.
- 6) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.
- 7) When grooving with S type, set the feed rate to 30%.

31、32 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

AquaREVO 铣刀的基准切削条件

Standard Cutting Condition for AquaREVO Mills

RVM4G-4D | AquaREVO铣刀4刃4D G型 AquaREVO Mills Four Flutes 4D G type

被削材 Work Material	一般结构钢 碳钢 / 铸铁 SS/S-C/FC- Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM/NAK/HPM Alloy Steel Heat Treated Steel		调质钢 淬硬钢 Heat Treated Steel Hardened Steel		淬硬钢 SKD61 Hardened Steel		淬硬钢 SKD11 Hardened Steel		不锈钢 SUS304/ SUS316 Stainless Steel		耐热合金 钛合金 Ti-6Al-4V Nickel Alloy Titanium Alloy		铝合金 Aluminum Alloy	
	150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC							
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	25500	400	22300	180	19100	75	12730	110	12730	35	19100	110	12700	60	31700	1300
2	15900	500	14300	230	12730	100	7160	140	7160	50	12730	180	6370	60	15900	1300
4	9550	1375	7960	970	6370	580	4770	230	4770	70	6370	310	3980	130	7950	1300
6	6370	1500	5300	1080	4240	640	4000	530	4000	70	4240	350	2650	130	5300	1300
8	4800	1500	3980	1080	3180	640	2980	530	2980	70	3180	350	2390	240	3980	1300
10	3820	1200	3180	960	2550	640	2390	450	2390	60	2550	350	1910	240	3180	1300
12	3180	1140	2650	840	2120	560	1990	380	1990	50	2120	350	1320	180	2650	1300
16	1790	800	1790	600	1190	400	1390	350	1390	45	1590	300	800	120	1980	1300
20	1430	600	1430	460	950	320	1110	280	1110	35	1110	220	630	110	1590	1300
切削量 Depth of cut	粗加工 Roughing	ap	4DC				0.1DC (MAX 1.0mm) ※ φ 2.5 以下不推荐				0.02DC		0.1DC (MAX 1.0mm) ※ φ 2.5 以下不推荐		不推荐	
		ae													0.1DC	
	精加工 Finishing	ap	4DC										0.05DC		0.01DC	
		ae	0.05DC (MAX 0.3mm) ※ φ 2.5 以下 0.03DC		0.05DC (MAX 0.3mm) ※ φ 2.5 以下 0.03DC		0.01DC						0.05DC ※ φ 2.5 以下 0.02DC		0.01DC	



RVM4G-4D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度机床、刀柄。
- 2) 干式加工场合，请使用气冷。
- 3) 淬硬钢（45~60HRC）加工场合请使用干式气冷加工。
- 4) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 5) 发生振动时，请按同比例降低上表中的转速和进给速度或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When processing hardened steel (45 to 60HRC), use an air blow for dry process.
- 4) Use in wet condition in case of Stainless, Nickel Alloy, Titanium Alloy.
- 5) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

33 ◀ • 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

RVMSUS4G-2.5D | AquaREVO铣刀不锈钢用 4刃2.5D G型 AquaREVO Mills for Stainless Steel Four Flutes 2.5D G type

	被削材 Work Material	不锈钢 Stainless Steel						钛合金 Ti-6Al-4V Titanium Alloy	耐热合金 Nickel Alloy		一般结构用钢 碳素钢 / 铸铁 SS/S-C/FC- Structural Steel Carbon Steel Cast Iron	合金钢 SCM/SCr Alloy Steel	预硬钢 调质钢 淬硬钢		铝合金 AC/ADC Aluminum Alloy				
		奥氏体系 不锈钢 SUS304/SUS316 Austenitic Stainless Steel		马氏体系 铁素体系 SUS420/SUS430 Martensitic Ferritic Stainless Steel		析出硬化系 SUS630 Precipitation Hardening Stainless Steel							Pre-Hardened Steel Heat treated Steel Mold Steel						
										150 ~ 250HB		~ 250HB		20 ~ 45HRC					
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		
	3	12700	1200	12700	1200	12700	840	8500	680	6400	220	13800	1500	13800	1100	10600	640	12700	1300
	4	9600	1200	9600	1200	9600	840	6400	720	4800	230	10400	1500	10400	1200	8000	640	9600	1300
	5	7600	1200	7600	1200	7600	840	5100	750	3800	260	8300	1500	8300	1300	6400	640	8600	1300
	6	6400	1200	6400	1200	6400	840	4300	800	3200	260	6900	1500	6900	1300	5300	640	7200	1300
	8	4800	1200	4800	1200	4800	840	3200	800	2400	260	5200	1500	5200	1300	4000	640	6000	1300
	10	3800	1200	3800	1200	3800	840	2600	650	1900	260	4100	1300	4100	1300	3200	640	4800	1300
	12	2900	1100	2900	1100	2900	770	2100	600	1600	230	3500	1300	3500	1300	2700	580	4300	1300
	16	2100	790	2100	790	2100	550	1600	500	1200	170	2600	1100	2600	1100	2000	540	3400	1300
20	1600	760	1600	760	1600	530	1300	460	960	130	2100	1100	2100	1100	1600	510	2900	1300	
侧面加工 Depth of cut	粗加工 Roughing	ap		2.5DC				2.5DC		2.5DC		2.5DC				2.5DC			
	ae			0.2DC				0.2DC		0.05DC		0.2DC				0.1DC			
	精加工 Finishing	ap		2.5DC				2.5DC		2.5DC		2.5DC				2.5DC			
		ae		0.05DC				0.05DC		0.01DC		0.05DC				0.1DC			
槽加工 Grooving	3	10600	420	10600	430	10600	300	6400	360	6400	130	10600	1100	9600	660	8000	460	12700	400
	4	7200	450	7200	500	7200	350	4800	380	4800	130	8000	1100	7200	660	6400	500	9600	400
	5	5100	480	5100	560	5100	390	3800	380	3800	130	6400	1100	5700	660	5100	500	8600	400
	6	4300	480	3700	600	3700	420	3200	410	3200	150	5300	1100	4800	730	4300	500	7200	400
	8	3200	480	2800	600	2800	420	2400	410	2400	150	4000	1100	3600	730	3200	500	6000	400
	10	2600	410	2200	500	2200	350	1900	330	1900	130	3200	970	2900	730	2600	400	4800	400
	12	2000	380	1900	500	1900	350	1600	300	1600	120	2500	920	2400	730	2100	350	4300	400
	16	1200	320	1400	380	1400	260	1200	260	1000	90	1900	660	1800	630	1500	330	3400	400
	20	800	270	1100	350	1100	240	960	220	720	70	1400	630	1400	600	1200	320	2900	400
槽加工 Depth of cut	ap			1.0DC				1.0DC		0.5DC		1.0DC				1.0DC			

RVMSUS4G-2.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度机床、刀柄。
- 2) 不锈钢、耐热合金、钛合金、铝合金加工时，请采用湿式加工。
- 3) 除了上記 2) 以外的被削材，请采用干式气冷加工。
- 4) 如果想要精加工表面粗糙度小时，请降低进给速度。
- 5) 发生振动时，请按同比例降低上表中的转速和进给速度或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use in wet condition case of Stainless, Nickel Alloy, Titanium Alloy, Aluminum Alloy.
- 3) For dry machining, with work materials other than 2) above, please use an air blow.
- 4) If you want to reduce the surface roughness in finishing, please apply lower feed.
- 5) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

33 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具





技术资料
索引

刃数・刃尖类型 推荐加工方法

Recommended machining method by number of blade and cutting edge

优选 Excellent

适用 Good


刃数 Number of teeth	刃尖形状 Cutting edge shape	刃长 Length of cut			
		1.5D	2.5D	4D	
2刃 Two Flutes	G型 (耐崩型) 重视耐崩损性 G type(Gashland) Emphasis on chipping resistance 	RVM2G-1.5D 侧面 Side 精加工 Finishing 	RVM2G-2.5D 槽 Groove 开槽加工 Pocket milling 粗加工 Roughing 精加工 Finishing 	-	
	S型 (锋利型) 重视切削锋利性 S type(Sharp corner) Emphasis on sharpness 	-	RVM2S-2.5D 精加工去除残留余量 For finishing corner removal 槽 Groove 侧面 Side 粗加工 Roughing 精加工 Finishing 残留余量清除 Removal of corner rest 	-	
4刃 Four Flutes	G型 (耐崩型) 重视耐崩损性 G type(Gashland) Emphasis on chipping resistance 	RVM4G-1.5D 侧面 Side 粗加工 Roughing 精加工 Finishing 	RVM4G-2.5D 槽 Groove 开槽加工 Pocket milling 粗加工 Roughing 精加工 Finishing 平面 Plane 粗加工 Roughing 精加工 Finishing 	RVM4G-4D 侧面 Side 开槽加工 Pocket milling 粗加工 Roughing 精加工 Finishing 	
	S型 (锋利型) 重视切削锋利性 S type(Sharp corner) Emphasis on sharpness 	-	RVM4S-2.5D 精加工去除残留余量 For finishing corner removal 槽 Groove 侧面 Side 粗加工 Roughing 精加工 Finishing 残留余量清除 Removal of corner rest 	-	

G 型 (耐崩型) 的残留余量

Guideline of remaining corner of G type (Gashland)

单位 (Unit) : mm

DC	k	m
1	0.05	0.005
3	0.10	0.015
6	0.20	0.030
10	0.30	0.040
20	0.40	0.050



外径公差

DC tolerance

单位 (Unit) : mm

外径 DC		公差
超过 Above	以下 Up to	Tolerance
	3	0 ~ -0.015
3	12	0 ~ -0.020
12		0 ~ -0.030

被削材推荐表
Applicable Work Materials

	一般 结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢 调质钢 Alloy Steel Heat Treated Steel	预硬钢 Pre-Hardened Steel	调质钢 淬硬钢 Heat Treated Steel Hardened Steel	淬硬钢 Hardened Steel			不锈钢 Stainless Steel	钛合金 Titanium Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy
	SS400	S45C S50C	SCM SCr	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC	60 ~ 66HRC	SUS304 SUS316	Ti-6Al-4V	FC FCD	AC ADC
AquaREVO 铣刀 AquaREVO Mills	◎	◎	◎	◎	◎	◎	○	—	◎	○	◎	○

◎：优选 Excellent ○：适用 Good —：不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

被削材推荐表
Applicable Work Materials

	不锈钢 Stainless Steel			钛合金 Titanium Alloy	耐热合金 Nickel Alloy	一般结构用钢 碳素钢 合金钢 Structural Steel Carbon Steel Alloy Steel	预硬钢 调质钢 淬硬钢 Pre-Hardened Steel Heat treated Steel Mold Steel	淬硬钢 Hardened Steel	铝合金 Aluminum Alloy
	奥氏体系 Austenitic Stainless Steel	马氏体系 铁素体系 Martensitic Ferritic Stainless Steel	析出硬化系 Precipitation Hardening Stainless Steel						
	SUS304 SUS316	SUS420 SUS430	SUS630						
AquaREVO 铣刀 不锈钢用	◎	◎	◎	○	○	○	○	—	○

◎：优选 Excellent ○：适用 Good —：不推荐 Not recommended

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具





技术资料
索引




硬质合金钻头

Carbide Drills

商品一览 Product List	A-2
各类被削材选型基准表 Selection Chart According to Work Materials	A-6
尺寸表 Size List	A-12
硬质合金钻头的基准切削条件 Standard Cutting Condition for Carbide Drills	A-146

页 Page	商品编码 Code	品名 Product Name		表面处理 Coating	尺寸 Size
新商品	A-12	AQDEXS AQUA EX 短刃钻 AQUA Drills EX Stub		AQEX	φ2~φ16
	A-14	AQDEXR AQUA EX 标准刃钻 AQUA Drills EX Regular		AQEX	φ2~φ16
	A-16	AQDEXSL AQUA EX 中长刃钻 AQUA Drills EX Semi-long		AQEX	φ0.5~φ16
硬质合金钻头	A-18	AQDEXE AQUA EX 长刃钻 AQUA Drills EX Extension		AQEX	φ2~φ16
	A-20	PF2D AQUA EX 飞速钻 2D AQUA Drills EX Power Feed 2D		AQEX	φ1~φ16
	A-24	PF4D AQUA EX 飞速钻 4D AQUA Drills EX Power Feed 4D		AQEX	φ1~φ16
	A-27	AQDEXDLM-4D AQUA EX 微型钻 螺旋角 渐弱型 AQUA Drills EX Micro Twist Angle Decrescendo Type		AQEX	φ0.5~φ3
高速钢钻头	A-30	AQDEXSN AQUA EX 短刃钻 耐热合金用 AQUA Drills EX Stub for Titanium Alloy and Nickel Alloy		AQEX	φ3~φ13
	A-31	AQDEXRN AQUA EX 标准刃钻 耐热合金用 AQUA Drills EX for Titanium Alloy and Nickel Alloy		AQEX	φ3~φ13
	A-32	AQDEXOH3D AQUA EX 油孔钻 3D AQUA Drills EX Oil-Hole 3D		AQEX	φ1~φ16
	A-35	AQDEXOH5D AQUA EX 油孔钻 5D AQUA Drills EX Oil-Hole 5D		AQEX	φ1~φ16
丝锥	A-38	AQDEXOH8D AQUA EX 油孔钻 8D AQUA Drills EX Oil-Hole 8D		AQEX	φ3~φ16
	A-40	AQDEXOH10D AQUA EX 油孔钻 10D AQUA Drills EX Oil-Hole 10D		AQEX	φ1~φ12
	A-41	AQDEXOH15D AQUA EX 油孔钻 15D AQUA Drills EX Oil-Hole 15D		AQEX	φ1~φ12
	A-42	AQDEXOH20D AQUA EX 油孔钻 20D AQUA Drills EX Oil-Hole 20D		AQEX	φ1~φ10
硬质合金立铣刀	A-43	AQDEXOH25D AQUA EX 油孔钻 25D AQUA Drills EX Oil-Hole 25D		AQEX	φ3~φ10
	A-44	AQDEXOH30D AQUA EX 油孔钻 30D AQUA Drills EX Oil-Hole 30D		AQEX	φ3~φ10
	A-45	AQDEXOH35D AQUA EX 油孔钻 35D AQUA Drills EX Oil-Hole 35D		AQEX	φ3~φ8
	A-45	AQDEXOH40D AQUA EX 油孔钻 40D AQUA Drills EX Oil-Hole 40D		AQEX	φ3~φ7.5
高速钢立铣刀	A-46	AQDEXOH45D AQUA EX 油孔钻 45D AQUA Drills EX Oil-Hole 45D		AQEX	φ3~φ7
	A-46	AQDEXOH50D AQUA EX 油孔钻 50D AQUA Drills EX Oil-Hole 50D		AQEX	φ3~φ6
	A-47	AQDEXOHPLT AQUA EX 油孔引导钻 AQUA Drills EX Oil-Hole Pilot		AQEX	φ1.015~φ12.03
	A-48	AQDEXZOHPLT AQUA EX 油孔平头引导钻 AQUA Drills EX FLAT Oil-Hole Pilot		AQEX	φ3.03~φ12.03
套装商品 其它	A-49	AQDEXOH3F3D AQUA EX 3 刃油孔钻 3D AQUA Drills EX Oil-Hole 3 Flutes 3D		AQEX	φ3~φ16
	A-51	AQDEXOH3F5D AQUA EX 3 刃油孔钻 5D AQUA Drills EX Oil-Hole 3 Flutes 5D		AQEX	φ3~φ16
	A-52	AQDEXOH3F10D AQUA EX 3 刃油孔钻 10D AQUA Drills EX Oil-Hole 3 Flutes 10D		AQEX	φ3~φ16
	A-53	AQDEX3FR AQUA EX 标准刃 3 刃钻 AQUA Drills EX 3 Flutes Regular		AQEX	φ3~φ16
精密工具	A-56	AQDEX3FH AQUA EX 高硬型 3 刃钻 AQUA Drills EX 3 Flutes Hard		AQEX	φ3~φ16
	A-57	AQD3F AQUA 3 刃钻 AQUA Drills 3 Flutes		AQ	φ3~φ16
	A-61	AQDED3F AQUA 带底刃 3 刃钻 AQUA Drills 3 Flutes with end cutting teeth		AQ	φ3~φ12
	A-62	AQDEXZS AQUA EX 平头钻 短刃型 AQUA Drills EX FLAT Short		AQEX	φ2~φ20
技术资料 索引	A-64	AQDEXZ AQUA EX 平头钻 AQUA Drills EX FLAT		AQEX	φ0.2~φ20
	A-70	AQDEXZ-R AQUA EX 平头钻 带 R 角 AQUA Drills EX FLAT Radius		AQEX	φ3~φ12
	A-71	AQDEXZR AQUA EX 平头钻 标准刃型 AQUA Drills EX FLAT Regular		AQEX	φ3~φ20

页 Page	商品编码 Code	品名 Product Name		表面处理 Coating	尺寸 Size
A-73	AQDEXZLS	AQUA EX 平头钻 长柄型 AQUA Drills EX FLAT Long Shank		AQEX	φ3~φ20
A-74	AQDEXZOH3D	AQUA EX 油孔平头钻 3D AQUA Drills EX FLAT Oil-Hole 3D		AQEX	φ1~φ16
A-75	AQDEXZOH5D	AQUA EX 油孔平头钻 5D AQUA Drills EX FLAT Oil-Hole 5D		AQEX	φ1~φ16
A-76	AQDEXZ3FR	AQUA EX 3 刃标准型平头钻 AQUA Drills EX FLAT 3 Flutes Regular		AQEX	φ3~φ12
A-77	AQDEXST	AQUA EX 定心钻 AQUA Drills EX Starting		AQEX	φ3~φ20
A-78	AQDEXXOH5D	AQUA EX X 型油孔钻 铸铁用 5D AQUA Drills EX Oil-Hole Cross for cast metal 5D		AQEX	φ3~φ12
A-79	AQDEXXOH10D	AQUA EX X 型油孔钻 铸铁用 10D AQUA Drills EX Oil-Hole Cross for cast metal 10D		AQEX	φ3~φ12
A-80	AQDEX-HCD	AQUA EX 平头小螺丝钻 沉孔用 AQUA Drills EX Machine screw counter bore		AQEX	M3~M8
A-80	AQDEX-SCD	AQUA EX 盘头小螺丝平头钻 沉孔用 AQUA Drills EX Machine screw counter sink		AQEX	M3~M8
A-80	AQDEX-RCD	AQUA EX 六角螺栓钻 沉孔用 AQUA Drills EX Counter bore for hexagon socket head bolts		AQEX	M3~M12
A-81	AQDEXZ-HCD	AQUA EX 平头小螺丝平头钻 沉孔用 AQUA Drills EX FLAT Machine screw counter bore		AQEX	M3~M8
A-81	AQDEXZ-SCD	AQUA EX 盘头小螺丝平头钻 沉孔用 AQUA Drills EX FLAT Machine screw counter sink		AQEX	M3~M8
A-81	AQDEXZ-RCD	AQUA EX 六角螺栓平头钻 沉孔用 AQUA Drills EX FLAT Counter bore for hexagon socket head bolts		AQEX	M3~M12
A-82	AQMD	AQUA 微型钻头 AQUA Micro Drills		AQ	φ0.2~φ1.99
A-84	AQDH	AQUA 钻头 高硬型 AQUA Drills Hard		AQ	φ2~φ12
A-85	AQDFC	AQUA 钻头 铸铁专用型 AQUA Drills FC		AQ	φ2~φ12
A-86	MQLPLD	MQL 强力长钻头 MQL Power Long Drills		AQ	φ3~φ10
A-90	PLOH3D	白金油孔钻 3D PLATINA Oil-Hole Drills (3D)		P	φ5~φ20
A-92	PLOH5D	白金油孔钻 5D PLATINA Oil-Hole Drills (5D)		P	φ5~φ20
A-94	PLOH7D	白金油孔钻 7D PLATINA Oil-Hole Drills (7D)		P	φ5~φ20
A-96	DLCMD	DLC 微型钻头 DLC Micro Drills		DLC	φ0.5~φ1.9
A-97	DLCDR	DLC 钻头 标准型 DLC Drills Regular		DLC	φ2~φ12
A-98	DLCDLM-4D	DLC 微型钻头螺旋角渐弱型 NEW! DLC Drills Micro Twist Angle Decrescendo Type		DLC	φ0.5~φ3.0
A-101	DLCDL-4D	DLC 钻头螺旋角渐弱型 NEW! DLC Drills Twist Angle Decrescendo Type		DLC	φ3.1~φ16.0
A-102	DLCFFDR	DLC 抛光钻头 标准型 DLC Burnishing Drills Regular		DLC	φ2~φ20
A-104	DLCFFDOH4D	DLC 抛光油孔钻 4D New Size DLC Burnishing Drills Oil-Hole 4D		DLC	φ3~φ12
A-106	DLCFFDOH8D	DLC 抛光油孔钻 8D New Size DLC Burnishing Drills Oil-Hole 8D		DLC	φ3~φ12
A-108	DLCDOH3D	DLC 油孔钻 3D DLC Drills Oil-Hole 3D		DLC	φ1~φ12
A-109	DLCDOH5D	DLC 油孔钻 5D DLC Drills Oil-Hole 5D		DLC	φ1~φ12
A-110	DLCDOH8D	DLC 油孔钻 8D DLC Drills Oil-Hole 8D		DLC	φ1~φ12
A-111	DLCDOH10D	DLC 油孔钻 10D DLC Drills Oil-Hole 10D		DLC	φ1~φ12
A-112	DLCDOH15D	DLC 油孔钻 15D DLC Drills Oil-Hole 15D		DLC	φ1~φ12
A-113	DLCDOH20D	DLC 油孔钻 20D DLC Drills Oil-Hole 20D		DLC	φ1~φ10
A-114	DLCDOH25D	DLC 油孔钻 25D DLC Drills Oil-Hole 25D		DLC	φ3~φ8

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

页 Page	商品编码 Code	品名 Product Name		表面处理 Coating	尺寸 Size
A-114	DLCD0H30D	DLC 油孔钻 30D DLC Drills Oil-Hole 30D		DLC	φ3~φ8
A-115	DLCD0H35D	DLC 油孔钻 35D DLC Drills Oil-Hole 35D		DLC	φ3~φ8
A-115	DLCD0H40D	DLC 油孔钻 40D DLC Drills Oil-Hole 40D		DLC	φ3~φ7.5
A-116	DLCD0H45D	DLC 油孔钻 45D DLC Drills Oil-Hole 45D		DLC	φ3~φ7
A-116	DLCD0H50D	DLC 油孔钻 50D DLC Drills Oil-Hole 50D		DLC	φ3~φ6
A-117	DLCD0HPLT	DLC 油孔引导钻 DLC Drills Oil-Hole Pilot		DLC	φ1.015~φ12.03
A-118	DLCDZR	DLC 平头钻标准型 DLC Drills FLAT Regular		DLC	φ1~φ20
A-121	DLCDZLS	DLC 平头钻长柄型 DLC Drills FLAT Long Shank		DLC	φ3~φ16
A-122	DLCDZ0H5D	DLC 油孔平头钻 5D DLC Drills FLAT Oil-Hole 5D		DLC	φ3~φ16
A-123	DLCDZ3F	DLC 3 刃平头钻 DLC Drills FLAT 3 Flutes		DLC	φ3~φ12
A-124	DCDCF	晶体金刚石涂层钻头 Crystal Diamond Coat Drills		DIA	φ2~φ13
A-125	DCD	金刚石涂层钻头 Diamond Coating Drills		DIA	φ0.4~φ13
A-127	DFFD	金刚石涂层的 FF 钻头 Diamond Coating FF Drills		DIA	φ3~φ13
A-128	AQDEXVF1.5D	AQUA EX VF 钻头 1.5D AQUA Drills EX VF 1.5D		—	φ14~φ32
A-130	AQDEXVF3D	AQUA EX VF 钻头 3D AQUA Drills EX VF 3D		—	φ14~φ32
A-132	AQDEXVF5D	AQUA EX VF 钻头 5D AQUA Drills EX VF 5D		—	φ14~φ32
A-134	AQDEXVF8D	AQUA EX VF 钻头 8D AQUA Drills EX VF 8D		—	φ14~φ32
A-136	TVF	AQUA EX 通用 VF 钻刀片 For AQUA Drills EX VF Insert		AQEX	φ14~φ32
A-137	TVFZ	AQUA EX 平头 VF 钻刀片 For AQUA Drills EX VF Insert FLAT Type		AQEX	φ14~φ32
A-138	TVFDLC	AQUA EX VF 型用 DLC 刀片 For AQUA Drills EX VF DLC Insert		DLC	φ14~φ32
A-139	TVFZDLC	AQUA EX VF 型用 DLC 平头刀片 For AQUA Drills EX VF DLC Insert FLAT Type		DLC	φ14~φ32
A-140	NWDX2D	AQUA 钻头 NWDX 型 2D AQUA Drills NWDX 2D		—	φ13~φ55
A-141	NWDX3D	AQUA 钻头 NWDX 型 3D AQUA Drills NWDX 3D		—	φ13~φ55
A-142	NWDX4D	AQUA 钻头 NWDX 型 4D AQUA Drills NWDX 4D		—	φ13~φ55
A-143	NWDXT	AQUA 钻头 NWDX 用刀片 For AQUA Drills NWDX Insert		AQ	φ13~φ55

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表

Selection Chart According to Work Materials


硬质合金钻头

Carbide Drills

	商品编码 Code	品名 Product Name	刊载页数 Page		带油孔 Internal Coolant	*1 钻头 深度 L/D	尺寸 Size	表面 处理 Coating	用途·特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition							
新商品											
硬质合金钻头	AQDEXS	AQUA EX 短刃钻 AQUA Drills EX Stub	A-12	A-146	—	3	φ2~φ16	AQEX		●	
	AQDEXR	AQUA EX 标准刃钻 AQUA Drills EX Regular	A-14	A-147		5	φ2~φ16	AQEX		●	
	AQDEXSL	AQUA EX 中长刃钻 AQUA Drills EX Semi-long	A-16	A-146		7	φ0.5~φ16	AQEX		□	
	AQDEXE	AQUA EX 长刃钻 AQUA Drills EX Extension	A-18	A-147		8	φ2~φ16	AQEX		□	
高速钢钻头	PF2D	AQUA EX 飞速钻 2D AQUA Drills EX Power Feed 2D	A-20	A-148	—	2	φ1~φ16	AQEX	也支持高进给用 工件旋转	●□	
	PF4D	AQUA EX 飞速钻 4D AQUA Drills EX Power Feed 4D	A-24	A-149		4	φ1~φ16	AQEX	For high feed cutting, and work rotation as well	●□	
丝锥	AQDEXDLM-4D	AQUA EX 微型钻 螺旋角 渐弱型 AQUA Drills EX Micro Twist Angle Decrescendo Type	A-27	A-150	—	4	φ0.5~φ3	AQEX		□	
	AQDEXSN	AQUA EX 短刃钻 耐热合金用 AQUA Drills EX Stub for Titanium Alloy and Nickel Alloy	A-30	A-150		3	φ3~φ13	AQEX	耐热合金用	□	
	AQDEXRN	AQUA EX 标准刃钻 耐热合金用 AQUA Drills EX for Titanium Alloy and Nickel Alloy	A-31	A-150		5	φ3~φ13	AQEX	For Heat Resistant Alloy	□	
硬质合金立铣刀	AQDEXOH3D	AQUA EX 油孔钻 3D AQUA Drills EX Oil-Hole 3D	A-32	A-152	带油孔	3	φ1~φ16	AQEX		●□	
	AQDEXOH5D	AQUA EX 油孔钻 5D AQUA Drills EX Oil-Hole 5D	A-35	A-152		5	φ1~φ16	AQEX		●□	
	AQDEXOH8D	AQUA EX 油孔钻 8D AQUA Drills EX Oil-Hole 8D	A-38	A-152		8	φ3~φ16	AQEX		●	
	AQDEXOH10D	AQUA EX 油孔钻 10D AQUA Drills EX Oil-Hole 10D	A-40	A-154		10	φ1~φ12	AQEX		●	
高速钢立铣刀	AQDEXOH15D	AQUA EX 油孔钻 15D AQUA Drills EX Oil-Hole 15D	A-41	A-154	带油孔	15	φ1~φ12	AQEX		●	
	AQDEXOH20D	AQUA EX 油孔钻 20D AQUA Drills EX Oil-Hole 20D	A-42	A-154		20	φ1~φ10	AQEX		●	
	AQDEXOH25D	AQUA EX 油孔钻 25D AQUA Drills EX Oil-Hole 25D	A-43	A-154		20	φ3~φ10	AQEX		●	
	AQDEXOH30D	AQUA EX 油孔钻 30D AQUA Drills EX Oil-Hole 30D	A-44	A-154		30	φ3~φ10	AQEX		●	
切削工具	AQDEXOH35D	AQUA EX 油孔钻 35D AQUA Drills EX Oil-Hole 35D	A-45	A-156	带油孔	30~	φ3~φ8	AQEX		□	
	AQDEXOH40D	AQUA EX 油孔钻 40D AQUA Drills EX Oil-Hole 40D	A-45	A-156		30~	φ3~φ7.5	AQEX		□	
	AQDEXOH45D	AQUA EX 油孔钻 45D AQUA Drills EX Oil-Hole 45D	A-46	A-156		30~	φ3~φ7	AQEX		□	
	AQDEXOH50D	AQUA EX 油孔钻 50D AQUA Drills EX Oil-Hole 50D	A-46	A-156		30~	φ3~φ6	AQEX		□	
套装商品 其它	AQDEXOHPLT	AQUA EX 油孔引导钻 AQUA Drills EX Oil-Hole Pilot	A-47	A-158	带油孔	3	φ1.015 ~φ12.03	AQEX	导向孔 Guide boring	●	
	AQDEXZOHPLT	AQUA EX 油孔平头引导钻 AQUA Drills EX FLAT Oil-Hole Pilot	A-48	A-165		3	φ3.03 ~φ12.03	AQEX	导向孔、平头 Guide boring, Flat	□	
精密工具	AQDEXOH3F3D	AQUA EX 3 刃油孔钻 3D AQUA Drills EX Oil-Hole 3 Flutes 3D	A-49	A-159	带油孔	3	φ3~φ16	AQEX	高精度 High Precision	●□	
	AQDEXOH3F5D	AQUA EX 3 刃油孔钻 5D AQUA Drills EX Oil-Hole 3 Flutes 5D	A-51	A-159		5	φ3~φ16	AQEX		●	
	AQDEXOH3F10D	AQUA EX 3 刃油孔钻 10D AQUA Drills EX Oil-Hole 3 Flutes 10D	A-52	A-159		10	φ3~φ16	AQEX		●□	
技术资料 索引	AQDEX3FR	AQUA EX 标准刃 3 刃钻 AQUA Drills EX 3 Flutes Regular	A-53	A-160	—	5	φ3~φ16	AQEX		●□	
	AQDEX3FH	AQUA EX 高硬型 3 刃钻 AQUA Drills EX 3 Flutes Hard	A-56	A-160		3	φ3~φ16	AQEX	高精度、高硬度 High Precision-High Hardness	●	
	AQD3F	AQUA 3 刃钻 AQUA Drills 3 Flutes	A-57	A-161		3	φ3~φ16	AQ	高精度 High Precision	●□	
	AQDED3F	AQUA 带底刃 3 刃钻 AQUA Drills 3 Flutes with end cutting teeth	A-61	A-161		3	φ3~φ12	AQ		●□	
	AQDEXZS	AQUA EX 平头钻 短刃型 AQUA Drills EX FLAT Short	A-62	A-162	—	1	φ2~φ20	AQEX	平头 Flat	●	

* 1 开孔深度以 L/D 的值为大致标准。不同种类的钻头直径不同，其数值可能有变化。

* 1 Some sizes does not meet this preference. Please make sure of flute length of each sizes before use.

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended													
商品照片 Product Photography	被削材 Work Materials												
		一般结构用钢	碳钢	合金钢・调质钢	模具钢・预硬钢	高硬度钢		不锈钢		钛合金・耐热合金	铸铁	铝合金	铜合金
		SS400	S45C S50C	SCM NAK	30~40 HRC	40~50 HRC	50~65 HRC	SUS304 SUS316	SUS420	Titanium Alloy・Heat Resistant Alloy	FC FCD	AC ADC	Cu
		○	○	○	○	○	—	○	○	—	○	—	—
		○	○	○	○	○	—	○	○	—	○	—	—
		○	○	○	○	○	—	○	○	×	○	—	—
		○	○	○	○	○	—	○	○	—	◎	—	—
		○	○	○	○	○	—	×	×	—	○	×	×
		○	○	○	○	○	—	×	×	—	○	×	×
		—	—	—	—	—	—	—	—	◎	—	—	—
		—	—	—	—	—	—	—	—	◎	—	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—
		○	○	○	○	○	—	○	○	○	◎	—	—

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表

Selection Chart According to Work Materials



硬质合金钻头

Carbide Drills

	商品编码 Code	品名 Product Name	刊载页数 Page		带油孔 Internal Coolant	*1 钻孔 深度 L/D	尺寸 Size	表面 处理 Coating	用途・特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition							
新品											
硬质合金钻头	AQDEXZ	AQUA EX 平头钻 AQUA Drills EX FLAT	A-64	A-163	—	2	φ02~φ20	AQEX	平头 Flat	●□	
	AQDEXZ-R	AQUA EX 平头钻 带 R 角 AQUA Drills EX FLAT Radius	A-70	A-163		2	φ3~φ12	AQEX		●	
	AQDEXZR	AQUA EX 平头钻 标准刃型 AQUA Drills EX FLAT Regular	A-71	A-164		4	φ3~φ20	AQEX		●□	
	AQDEXZLS	AQUA EX 平头钻 长柄型 AQUA Drills EX FLAT Long Shank	A-73	A-165		2	φ3~φ20	AQEX		●	
高速钢钻头	AQDEXZOH3D	AQUA EX 油孔平头钻 3D AQUA Drills EX FLAT Oil-Hole 3D	A-74	A-165	带油孔	3	φ1~φ16	AQEX	平头、高精度 Flat, Hi-Precision	●	
	AQDEXZOH5D	AQUA EX 油孔平头钻 5D AQUA Drills EX FLAT Oil-Hole 5D	A-75	A-166		5	φ1~φ16	AQEX		●	
	AQDEXZ3FR	AQUA EX 3 刃标准型平头钻 AQUA Drills EX FLAT 3 Flutes Regular	A-76	A-166		5	φ3~φ12	AQEX		□	
	AQDEXST	AQUA EX 定心钻 AQUA Drills EX Starting	A-77	A-167		—	φ3~φ20	AQEX		●□	
丝锥	AQDEXXOH5D	AQUA EX X 型油孔钻 铸铁用 5D AQUA Drills EX Oil-Hole Cross for cast metal 5D	A-78	A-151	带油孔	5	φ3~φ12	AQEX	铸件交叉孔 For Cross Hole	□	
	AQDEXXOH10D	AQUA EX X 型油孔钻 铸铁用 10D AQUA Drills EX Oil-Hole Cross for cast metal 10D	A-79	A-151		10	φ3~φ12	AQEX		□	
	AQDEX-HCD	AQUA EX 平头小螺丝钻 沉孔用 AQUA Drills EX Machine screw counter bore	A-80	A-168		—	M3~M8	AQEX		□	
	AQDEX-SCD	AQUA EX 盘头小螺丝平头钻 沉孔用 AQUA Drills EX Machine screw counter sink	A-80	A-168		—	M3~M8	AQEX		□	
硬质合金立铣刀	AQDEX-RCD	AQUA EX 六角螺栓钻 沉孔用 AQUA Drills EX Counter bore for hexagon socket head bolts	A-80	A-168	—	—	M3~M12	AQEX	螺丝、螺栓、沉孔 Screw and bolt counter bore	□	
	AQDEXZ-HCD	AQUA EX 平头小螺丝平头钻 沉孔用 AQUA Drills EX FLAT Machine screw counter bore	A-81	A-168		—	M3~M8	AQEX		□	
	AQDEXZ-SCD	AQUA EX 盘头小螺丝平头钻 沉孔用 AQUA Drills EX FLAT Machine screw counter sink	A-81	A-168		—	M3~M8	AQEX		□	
	AQDEXZ-RCD	AQUA EX 六角螺栓平头钻 沉孔用 AQUA Drills EX FLAT Counter bore for hexagon socket head bolts	A-81	A-168		—	M3~M12	AQEX		□	
高速钢立铣刀	AQMD	AQUA 微型钻头 AQUA Micro Drills	A-82	A-169	—	7	φ02~φ1.99	AQ	高硬度 High Hardness	●	
	AQDH	AQUA 钻头 高硬型 AQUA Drills Hard	A-84	A-170		3	φ2~φ12	AQ		●□	
	AQDFC	AQUA 钻头 铸铁专用型 AQUA Drills FC	A-85	A-171		5	φ2~φ12	AQ		●△	
	MQLPLD	MQL 强力长钻头 MQL Power Long Drills	A-86	A-172		10~	φ3~φ10	AQ		□	
套装商品 其它	PLOH3D	白金油孔钻 3D PLATINA Oil-Hole Drills (3D)	A-90	A-173	带油孔	3	φ5~φ20	P		□	
	PLOH5D	白金油孔钻 5D PLATINA Oil-Hole Drills (5D)	A-92	A-173		5	φ5~φ20	P		□	
	PLOH7D	白金油孔钻 7D PLATINA Oil-Hole Drills (7D)	A-94	A-173		7	φ5~φ20	P		□	
精密工具	DLCMD	DLC 微型钻头 DLC Micro Drills	A-96	A-174	—	7	φ0.5~φ1.9	DLC	铝、有色金属 For Aluminum・Non-Ferrous Metal	●	
	DLCDR	DLC 钻头 标准型 DLC Drills Regular	A-97	A-174		5	φ2~φ12	DLC		●	
	DLCDLM-4D	DLC 微型钻头螺旋角渐弱型 DLC Drills Micro Twist Angle Decrescendo Type	A-98	A-175		4	φ0.5~φ3	DLC		□	
	DLCDL-4D	DLC 钻头螺旋角渐弱型 DLC Drills Twist Angle Decrescendo Type	A-101	A-176		4	φ3.1~φ16	DLC		□	
技术资料 索引	DLCFFDR	DLC 抛光钻头 标准型 DLC Burnishing Drills Regular	A-102	A-177	带油孔	4	φ2~φ20	DLC		□	
	DLCFFDOH4D	DLC 抛光油孔钻 4D DLC Burnishing Drills Oil-Hole 4D	A-104	A-177		4	φ3~φ12	DLC		□	
	DLCFFDOH8D	DLC 抛光油孔钻 8D DLC Burnishing Drills Oil-Hole 8D	A-106	A-177		8	φ3~φ12	DLC		□	
	DLCDOH3D	DLC 油孔钻 3D DLC Drills Oil-Hole 3D	A-108	A-178		3	φ1~φ12	DLC		□	

* 1 开孔深度以 L/D 的值为大致标准。不同种类的钻头直径不同，其数值可能有变化。
* 1 Some sizes does not meet this preference. Please make sure of flute length of each sizes before use.

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

商品照片 Product Photography	被削材 Work Materials											
	一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢・调质钢 Alloy Steel Heat Treated Steel	模具钢・预硬钢 Mold Steel Pre-hardened Steel	高硬度钢 Hardened Steel		不锈钢 Stainless Steel		钛合金・耐热合金 Titanium Alloy Heat Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy
	SS400	S45C S50C	SCM NAK	30~40 HRC	40~50 HRC	50~65 HRC	SUS304 SUS316	SUS420		FC FCD	AC ADC	Cu
	◎	◎	◎	◎	○	—	○*2	◎	—	◎	○	○
	◎	◎	◎	◎	○	—	—	◎	—	◎	○	○
	◎	◎	◎	◎	○	—	—	◎	—	◎	○	○
	◎	◎	◎	◎	○	—	—	◎	—	◎	○	○
	◎	◎	◎	◎	○	—	○	◎	—	◎	◎	◎
	◎	◎	◎	◎	○	—	○	◎	—	◎	◎	◎
	◎	○	—	—	×	×	×	—	×	◎	—	—
	◎	◎	◎	◎	○	—	◎	◎	—	◎	○	○
	—	—	—	—	—	—	—	—	—	◎	◎*3	—
	—	—	—	—	—	—	—	—	—	◎	◎*3	—
	◎	◎	◎	—	—	—	—	—	—	◎	—	—
	◎	◎	◎	—	—	—	—	—	—	◎	—	—
	◎	◎	◎	—	—	—	—	—	—	◎	—	—
	◎	◎	◎	—	—	—	—	—	—	◎	—	—
	◎	◎	◎	—	—	—	—	—	—	◎	—	—
	◎	◎	◎	◎	◎	—	◎	◎	○	○	×	—
	×	×	×	×	—	◎	×	×	×	—	×	×
	◎	○	—	—	—	—	×	○	×	◎	—	—
	—	◎	◎	◎	—	×	—	—	×	◎	—	—
	◎	◎	◎	◎	○	—	○	○	×	○	—	—
	◎	◎	◎	◎	○	—	○	○	×	○	—	—
	◎	◎	◎	◎	○	—	○	○	×	○	—	—
	—	—	×	×	×	×	×	×	×	×	◎	○
	—	—	×	×	×	×	×	×	×	×	◎	○
	×	×	×	×	×	×	×	×	×	×	◎	○
	×	×	×	×	×	×	×	×	×	×	◎	○
	×	×	×	×	×	×	×	×	×	×	◎	○
	×	×	×	×	×	×	×	×	×	×	◎	○
	×	×	×	×	×	×	×	×	×	×	◎	○
	×	×	×	×	×	×	×	×	×	×	◎	○

*2 仅直径 1.99mm 以下 SUS304 为○ *2 Outside diameters under 1.99mm are applicable for SUS304.

*3 仅限铝合金铸件 *3 Only for Aluminum Alloy Casting

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表

Selection Chart According to Work Materials

硬质合金钻头


Carbide Drills

	商品编码 Code	品名 Product Name	刊载页数 Page		带油孔 Internal Coolant	*1 钻孔 深度 L/D	尺寸 Size	表面 处理 Coating	用途・特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition							
新商品											
硬质合金钻头	DLCD0H5D	DLC 油孔钻 5D DLC Drills Oil-Hole 5D	A-109	A-178	带油孔	5	φ1~φ12	DLC	铝、有色金属 For Aluminum-Non-Ferrous Metal	☐	
	DLCD0H8D	DLC 油孔钻 8D DLC Drills Oil-Hole 8D	A-110	A-178		8	φ1~φ12	DLC		☐	
	DLCD0H10D	DLC 油孔钻 10D DLC Drills Oil-Hole 10D	A-111	A-178		10	φ1~φ12	DLC		☐	
高速钢钻头	DLCD0H15D	DLC 油孔钻 15D DLC Drills Oil-Hole 15D	A-112	A-178		15	φ1~φ12	DLC		☐	
	DLCD0H20D	DLC 油孔钻 20D DLC Drills Oil-Hole 20D	A-113	A-178		20	φ1~φ10	DLC		☐	
	DLCD0H25D	DLC 油孔钻 25D DLC Drills Oil-Hole 25D	A-114	A-179		25	φ3~φ8	DLC		☐	
丝锥	DLCD0H30D	DLC 油孔钻 30D DLC Drills Oil-Hole 30D	A-114	A-179		30	φ3~φ8	DLC		☐	
	DLCD0H35D	DLC 油孔钻 35D DLC Drills Oil-Hole 35D	A-115	A-179		30~	φ3~φ8	DLC		☐	
	DLCD0H40D	DLC 油孔钻 40D DLC Drills Oil-Hole 40D	A-115	A-179		30~	φ3~φ7.5	DLC		☐	
硬质合金立铣刀	DLCD0H45D	DLC 油孔钻 45D DLC Drills Oil-Hole 45D	A-116	A-179		30~	φ3~φ7	DLC		☐	
	DLCD0H50D	DLC 油孔钻 50D DLC Drills Oil-Hole 50D	A-116	A-179		30~	φ3~φ6	DLC		☐	
	DLCD0HPLT	DLC 油孔引导钻 DLC Drills Oil-Hole Pilot	A-117	A-180		3	φ1.015 ~φ12.03	DLC		☐	
高速钢立铣刀	DLCDZR	DLC 平头钻标准型 DLC Drills FLAT Regular	A-118	A-181	—	4	φ1~φ20	DLC	平头、铝、有色金属 Flat, For Aluminum-Non-Ferrous Metal	☐	
	DLCDZLS	DLC 平头钻长柄型 DLC Drills FLAT Long Shank	A-121	A-181		10	φ3~φ16	DLC		☐	
	DLCDZ0H5D	DLC 油孔平头钻 5D DLC Drills FLAT Oil-Hole 5D	A-122	A-182		5	φ3~φ16	DLC		☐	
切削工具	DLCDZ3F	DLC 3刃平头钻 DLC Drills FLAT 3 Flutes	A-123	A-182	—	5	φ3~φ12	DLC	平头、高精度、铝/有色金属 Flat, Hi-Precision, For Aluminum-Non-Ferrous Metal	☐	
	DCDCF	晶体金刚石涂层钻头 Crystal Diamond Coat Drills	A-124	A-183		5	φ2~φ13	DIA	CFRP 加工用 For CFRP	☐	
	DCD	金刚石涂层钻头 Diamond Coating Drills	A-125	A-183		5	φ0.4~φ13	DIA	铝、有色金属 For Aluminum-Non-Ferrous Metal	☐	
套装商品 其它	DFFD	金刚石涂层的 FF 钻头 Diamond Coating FF Drills	A-127	A-183	带油孔	5	φ3~φ13	DIA	可更换切削刃（钻杆） Indexable Insert Drills (Holder)	☐	
	AQDEXVF1.5D	AQUA EX VF 钻头 1.5D AQUA Drills EX VF 1.5D	A-128	A-184		1.5	φ14~φ32	—		●	
	AQDEXVF3D	AQUA EX VF 钻头 3D AQUA Drills EX VF 3D	A-130	A-184		3	φ14~φ32	—		●	
精密工具	AQDEXVF5D	AQUA EX VF 钻头 5D AQUA Drills EX VF 5D	A-132	A-184		5	φ14~φ32	—		●	
	AQDEXVF8D	AQUA EX VF 钻头 8D AQUA Drills EX VF 8D	A-134	A-184		8	φ14~φ32	—		●	
	TVF	AQUA EX 通用 VF 钻刀片 For AQUA Drills EX VF Insert	A-136	A-184		—	φ14~φ32	AQEX	可更换切削刃 Indexable Insert Drills	●	
技术资料 索引	TVFZ	AQUA EX 平头 VF 钻刀片 For AQUA Drills EX VF Insert FLAT Type	A-137	A-184		—	φ14~φ32	AQEX	平头、可更换切削刃 Flat, Indexable Insert Drills	●	
	TVFDLC	AQUA EX VF 型用 DLC 刀片 For AQUA Drills EX VF DLC Insert	A-138	A-185		—	φ14~φ32	DLC	可更换切削刃 Indexable Insert Drills	☐	
	TVFZDLC	AQUA EX VF 型用 DLC 平头刀片 For AQUA Drills EX VF DLC Insert FLAT Type	A-139	A-185		—	φ14~φ32	DLC	平头、可更换切削刃 Flat, Indexable Insert Drills	☐	
	NWDX2D	AQUA 钻头 NWDX 型 2D AQUA Drills NWDX 2D	A-140	A-144		2	φ13~φ55	—	可更换切削刃（钻杆） Indexable Insert Drills (Holder)	●	
	NWDX3D	AQUA 钻头 NWDX 型 3D AQUA Drills NWDX 3D	A-141	A-144		3	φ13~φ55	—		●	
	NWDX4D	AQUA 钻头 NWDX 型 4D AQUA Drills NWDX 4D	A-142	A-144		4	φ13~φ55	—		●	
	NWDXXT	AQUA 钻头 NWDX 用刀片 For AQUA Drills NWDX Insert	A-143	A-144		—	φ13~φ55	AQ	可更换切削刃 Indexable Insert Drills	●	

*1 开孔深度以 L/D 的值为大致标准。不同种类的钻头直径不同，其数值可能有变化。

*1 Some sizes does not meet this preference. Please make sure of flute length of each sizes before use.

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

商品照片 Product Photography		被削材 Work Materials											
		一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢・调质钢 Alloy Steel Heat Treated Steel	模具钢・预硬钢 Mold Steel Pre-Hardened Steel	高硬度钢 Hardened Steel		不锈钢 Stainless Steel		钛合金・耐热合金 Titanium Alloy Heat Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy
						40~50 HRC	50~65 HRC	SUS304 SUS316	SUS420				
SS400	S45C S50C	SCM NAK	30~40 HRC	40~50 HRC	50~65 HRC	SUS304 SUS316	SUS420	钛合金・耐热合金 Titanium Alloy Heat Resistant Alloy	FC FCD	AC ADC	Cu		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	—	—	×	×	×	×	×	×	×	◎	○		
	—	—	×	×	×	×	×	×	×	◎	○		
	—	—	×	×	×	×	×	×	×	◎	○		
	—	—	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	○	—		
	×	×	×	×	×	×	×	×	×	◎	○		
	×	×	×	×	×	×	×	×	×	◎	○		
	—	—	—	—	—	—	—	—	—	—	—		
	—	—	—	—	—	—	—	—	—	—	—		
	—	—	—	—	—	—	—	—	—	—	—		
	—	—	—	—	—	—	—	—	—	—	—		
	◎	◎	◎	○	—	×	◎	◎	—	◎	—		
	◎	◎	◎	○	—	×	◎	◎	—	◎	—		
	—	—	×	×	—	×	×	×	×	◎	○		
	—	—	×	×	—	×	×	×	×	◎	○		
	—	—	—	—	—	—	—	—	—	—	—		
	—	—	—	—	—	—	—	—	—	—	—		
	—	—	—	—	—	—	—	—	—	—	—		
	◎	◎	◎	○	×	×	○	○	—	◎	—		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适用领域较广，从中低速到高速，一般均可实现稳定的高效率加工。

This drill has wide range of application that can be high efficient drilling, and tool long life on a wide-ranging cutting condition.

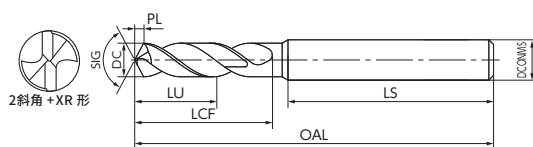

LIST 9600

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXS0200	2.0	6.0	8.4	34	45.4	3	0.4	
AQDEXS0210	2.1	6.3	10.4	32				
AQDEXS0220	2.2	6.6	10.5		30	45.5	4	0.5
AQDEXS0230	2.3	6.9						
AQDEXS0240	2.4	7.2	13.5	33	45.6	5	0.6	
AQDEXS0250	2.5	7.5						
AQDEXS0260	2.6	7.8	13.6	34	54.6	6	0.7	
AQDEXS0270	2.7	8.1						
AQDEXS0280	2.8	8.4	19.7	33	54.7	7	0.8	
AQDEXS0290	2.9	8.7						
AQDEXS0300	3.0	9.0	21.7	36	54.8	8	0.9	
AQDEXS0310	3.1	9.3						
AQDEXS0320	3.2	9.6	23.8	36	61.8	9	1.0	
AQDEXS0330	3.3	9.9						
AQDEXS0340	3.4	10.2	26.0	38	61.9	10	1.1	
AQDEXS0350	3.5	10.5						
AQDEXS0360	3.6	10.8	28.2	40	62.0	11	1.2	
AQDEXS0370	3.7	11.1						
AQDEXS0380	3.8	11.4	32.3	40	66.1	12	1.3	
AQDEXS0390	3.9	11.7						
AQDEXS0400	4.0	12.0	34.4	43	66.2	13	1.4	
AQDEXS0410	4.1	12.3						
AQDEXS0420	4.2	12.6	34.5	44	74.3	14	1.5	
AQDEXS0430	4.3	12.9						
AQDEXS0440	4.4	13.2	37.6	46	74.4	15	1.6	
AQDEXS0450	4.5	13.5						
AQDEXS0460	4.6	13.8	39.8	48	79.5	16	1.7	
AQDEXS0470	4.7	14.1						
AQDEXS0480	4.8	14.4	43.0	50	79.6	17	1.8	
AQDEXS0490	4.9	14.7						
AQDEXS0500	5.0	15.0	43.1	53	83.7	18	1.9	
AQDEXS0510	5.1	15.3						
AQDEXS0520	5.2	15.6	43.2	54	88.9	19	2.0	
AQDEXS0530	5.3	15.9						
AQDEXS0540	5.4	16.2	43.3	56	89.0	20	2.1	
AQDEXS0550	5.5	16.5						
AQDEXS0560	5.6	16.8	43.4	57	95.2	21	2.2	
AQDEXS0570	5.7	17.1						
AQDEXS0580	5.8	17.4	43.5	58	95.3	22	2.3	
AQDEXS0590	5.9	17.7						
AQDEXS0600	6.0	18.0	43.6	60	95.4	23	2.4	
AQDEXS0610	6.1	18.3						
AQDEXS0620	6.2	18.6	43.7	63	95.5	24	2.5	
AQDEXS0630	6.3	18.9						
AQDEXS0640	6.4	19.2	43.8	66	95.6	25	2.6	
AQDEXS0650	6.5	19.5						
AQDEXS0660	6.6	19.8	43.9	69	95.7	26	2.7	
AQDEXS0670	6.7	20.1						
AQDEXS0680	6.8	20.4	44.0	72	95.8	27	2.8	
AQDEXS0690	6.9	20.7						
AQDEXS0700	7.0	21.0	44.1	75	95.9	28	2.9	
AQDEXS0710	7.1	21.3						
AQDEXS0720	7.2	21.6	44.2	78	96.0	29	3.0	
AQDEXS0730	7.3	21.9						
AQDEXS0740	7.4	22.2	44.3	81	96.1	30	3.1	
AQDEXS0750	7.5	22.5						
AQDEXS0760	7.6	22.8	44.4	84	96.2	31	3.2	
AQDEXS0770	7.7	23.1						
AQDEXS0780	7.8	23.4	44.5	87	96.3	32	3.3	
AQDEXS0790	7.9	23.7						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXS0800	8.0	24.0	37.7	42	79.7	8	1.7	
AQDEXS0810	8.1	24.3						
AQDEXS0820	8.2	24.6	37.8	44	83.7	9	1.8	
AQDEXS0830	8.3	24.9						
AQDEXS0840	8.4	25.2	39.8	46	83.8	10	2.0	
AQDEXS0850	8.5	25.5						
AQDEXS0860	8.6	25.8	39.9	47	83.9	11	2.1	
AQDEXS0870	8.7	26.1						
AQDEXS0880	8.8	26.4	40.0	48	89.0	12	2.2	
AQDEXS0890	8.9	26.7						
AQDEXS0900	9.0	27.0	43.0	50	89.1	13	2.3	
AQDEXS0910	9.1	27.3						
AQDEXS0920	9.2	27.6	43.1	51	95.1	14	2.4	
AQDEXS0930	9.3	27.9						
AQDEXS0940	9.4	28.2	43.2	52	95.2	15	2.5	
AQDEXS0950	9.5	28.5						
AQDEXS0960	9.6	28.8	47.2	48	95.3	16	2.6	
AQDEXS0970	9.7	29.1						
AQDEXS0980	9.8	29.4	47.3	53	102.3	17	2.7	
AQDEXS0990	9.9	29.7						
AQDEXS1000	10.0	30.0	47.4	51	102.4	18	2.8	
AQDEXS1010	10.1	30.3						
AQDEXS1020	10.2	30.6	49.4	51.7	102.7	19	2.9	
AQDEXS1030	10.3	30.9						
AQDEXS1040	10.4	31.2	49.5	51.9	102.8	20	3.0	
AQDEXS1050	10.5	31.5						
AQDEXS1060	10.6	31.8	51.6	52.7	107.7	21	3.1	
AQDEXS1070	10.7	32.1						
AQDEXS1080	10.8	32.4	51.7	52.8	107.8	22	3.2	
AQDEXS1090	10.9	32.7						
AQDEXS1100	11.0	33.0	51.8	52.9	107.9	23	3.3	
AQDEXS1110	11.1	33.3						
AQDEXS1120	11.2	33.6	51.9	53.0	108.0	24	3.4	
AQDEXS1130	11.3	33.9						
AQDEXS1140	11.4	34.2	52.0	53.1	108.1	25	3.5	
AQDEXS1150	11.5	34.5						
AQDEXS1160	11.6	34.8	52.1	53.2	108.2	26	3.6	
AQDEXS1170	11.7	35.1						
AQDEXS1180	11.8	35.4	52.2	53.3	108.3	27	3.7	
AQDEXS1190	11.9	35.7						
AQDEXS1200	12.0	36.0	52.3	53.4	108.4	28	3.8	
AQDEXS1210	12.1	36.3						
AQDEXS1220	12.2	36.6	52.4	53.5	108.5	29	3.9	
AQDEXS1230	12.3	36.9						
AQDEXS1240	12.4	37.2	52.5	53.6	108.6	30	4.0	
AQDEXS1250	12.5	37.5						
AQDEXS1260	12.6	37.8	52.6	53.7	108.7	31	4.1	
AQDEXS1270	12.7	38.1						
AQDEXS1280	12.8	38.4	52.7	53.8	108.8	32	4.2	
AQDEXS1290	12.9	38.7						
AQDEXS1300	13.0	39.0	52.8	53.9	108.9	33	4.3	
AQDEXS1310	13.1	39.3						
AQDEXS1320	13.2	39.6	52.9	54.0	109.0	34	4.4	
AQDEXS1330	13.3	39.9						
AQDEXS1340	13.4	40.2	53.0	54.1	109.1	35	4.5	
AQDEXS1350	13.5	40.5						
AQDEXS1360	13.6	40.8	53.1	54.2	109.2	36	4.6	
AQDEXS1370	13.7	41.1						
AQDEXS1380	13.8	41.4	53.2	54.3	109.3	37	4.7	
AQDEXS1390	13.9	41.7						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock						
AQDEXS1400	14.0	42.0	54.9	53	107.9	14	2.9	●						
AQDEXS1410	14.1	42.3		55	110.9	15								
AQDEXS1420	14.2	42.6												
AQDEXS1430	14.3	42.9	55.0		111.0		3.0							
AQDEXS1440	14.4	43.2												
AQDEXS1450	14.5	43.5	56.0											
AQDEXS1460	14.6	43.8												
AQDEXS1470	14.7	44.1												
AQDEXS1480	14.8	44.4	56.1		111.1		3.1							
AQDEXS1490	14.9	44.7												
AQDEXS1500	15.0	45.0	57	115.1	16	3.2								
AQDEXS1510	15.1	45.3							56.2					
AQDEXS1520	15.2	45.6		115.2										
AQDEXS1530	15.3	45.9												
AQDEXS1540	15.4	46.2		58.2					3.3					
AQDEXS1550	15.5	46.5												
AQDEXS1560	15.6	46.8		58.3		115.3								
AQDEXS1570	15.7	47.1												
AQDEXS1580	15.8	47.4				115.3								
AQDEXS1590	15.9	47.7												
AQDEXS1600	16.0	48.0												


一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	○	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

加工硬度超过 50HRC 的高硬度钢，推荐使用 AQDH(A-84)。

●适用领域较广，从中低速到高速，一般均可实现稳定的高效率加工。

This drill has wide range of application that can be high efficient drilling, and tool long life on a wide-ranging cutting condition.

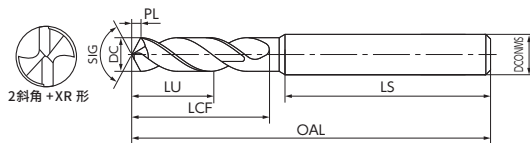

LIST 9602

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXR0200	2.0	10.0	15.4	31	49.4		0.4	
AQDEXR0210	2.1	10.5	17.4					
AQDEXR0220	2.2	11.0						
AQDEXR0230	2.3	11.5	17.5		49.5	3	0.5	
AQDEXR0240	2.4	12.0						
AQDEXR0250	2.5	12.5		30				
AQDEXR0260	2.6	13.0	19.5					
AQDEXR0270	2.7	13.5						
AQDEXR0280	2.8	14.0			49.6		0.6	
AQDEXR0290	2.9	14.5	19.6					
AQDEXR0300	3.0	15.0						
AQDEXR0310	3.1	15.5	24.6		60.6			
AQDEXR0320	3.2	16.0						
AQDEXR0330	3.3	16.5	24.7	34	60.7		0.7	
AQDEXR0340	3.4	17.0				4		
AQDEXR0350	3.5	17.5						
AQDEXR0360	3.6	18.0	27.7					
AQDEXR0370	3.7	18.5						
AQDEXR0380	3.8	19.0		33	60.8		0.8	
AQDEXR0390	3.9	19.5	27.8					
AQDEXR0400	4.0	20.0						
AQDEXR0410	4.1	20.5	31.8		76.8			
AQDEXR0420	4.2	21.0						
AQDEXR0430	4.3	21.5	31.9	43	76.9		0.9	
AQDEXR0440	4.4	22.0				5		
AQDEXR0450	4.5	22.5						
AQDEXR0460	4.6	23.0						
AQDEXR0470	4.7	23.5	39.0	38	77.0		1.0	
AQDEXR0480	4.8	24.0						
AQDEXR0490	4.9	24.5						
AQDEXR0500	5.0	25.0						
AQDEXR0510	5.1	25.5						
AQDEXR0520	5.2	26.0						
AQDEXR0530	5.3	26.5	40.1		82.1		1.1	
AQDEXR0540	5.4	27.0				6		
AQDEXR0550	5.5	27.5						
AQDEXR0560	5.6	28.0						
AQDEXR0570	5.7	28.5						
AQDEXR0580	5.8	29.0	42.2		82.2		1.2	
AQDEXR0590	5.9	29.5						
AQDEXR0600	6.0	30.0						
AQDEXR0610	6.1	30.5						
AQDEXR0620	6.2	31.0						
AQDEXR0630	6.3	31.5	43.3		84.3		1.3	
AQDEXR0640	6.4	32.0						
AQDEXR0650	6.5	32.5						
AQDEXR0660	6.6	33.0				7		
AQDEXR0670	6.7	33.5						
AQDEXR0680	6.8	34.0	44.4		84.4		1.4	
AQDEXR0690	6.9	34.5						
AQDEXR0700	7.0	35.0						
AQDEXR0710	7.1	35.5						
AQDEXR0720	7.2	36.0						
AQDEXR0730	7.3	36.5	46.5	43	91.5		1.5	
AQDEXR0740	7.4	37.0						
AQDEXR0750	7.5	37.5	46.6			8		
AQDEXR0760	7.6	38.0						
AQDEXR0770	7.7	38.5			91.6		1.6	
AQDEXR0780	7.8	39.0	49.6	42				
AQDEXR0790	7.9	39.5						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXR0800	8.0	40.0	49.7	42	91.7	8		
AQDEXR0810	8.1	40.5						
AQDEXR0820	8.2	41.0	54.7		99.7		1.7	
AQDEXR0830	8.3	41.5						
AQDEXR0840	8.4	42.0				9		
AQDEXR0850	8.5	42.5	54.8	43				
AQDEXR0860	8.6	43.0						
AQDEXR0870	8.7	43.5	56.8		99.8		1.8	
AQDEXR0880	8.8	44.0						
AQDEXR0890	8.9	44.5						
AQDEXR0900	9.0	45.0	56.9		99.9			
AQDEXR0910	9.1	45.5						
AQDEXR0920	9.2	46.0	59.9		106.9		1.9	
AQDEXR0930	9.3	46.5						
AQDEXR0940	9.4	47.0				10		
AQDEXR0950	9.5	47.5	60.0	45				
AQDEXR0960	9.6	48.0			107.0		2.0	
AQDEXR0970	9.7	48.5	62.0					
AQDEXR0980	9.8	49.0						
AQDEXR0990	9.9	49.5	62.1		107.1			
AQDEXR1000	10.0	50.0						
AQDEXR1010	10.1	50.5						
AQDEXR1020	10.2	51.0	68.1		116.1		2.1	
AQDEXR1030	10.3	51.5						
AQDEXR1040	10.4	52.0	68.2					
AQDEXR1050	10.5	52.5				11		
AQDEXR1060	10.6	53.0	70.2	46	116.2		2.2	
AQDEXR1070	10.7	53.5						
AQDEXR1080	10.8	54.0						
AQDEXR1090	10.9	54.5	70.3		116.3			
AQDEXR1100	11.0	55.0						
AQDEXR1110	11.1	55.5						
AQDEXR1120	11.2	56.0	73.3		123.3		2.3	
AQDEXR1130	11.3	56.5						
AQDEXR1140	11.4	57.0	73.4					
AQDEXR1150	11.5	57.5				12		
AQDEXR1160	11.6	58.0						
AQDEXR1170	11.7	58.5	75.4	48	123.4		2.4	
AQDEXR1180	11.8	59.0						
AQDEXR1190	11.9	59.5						
AQDEXR1200	12.0	60.0	75.5		123.5			
AQDEXR1210	12.1	60.5						
AQDEXR1220	12.2	61.0	78.5		139.5		2.5	
AQDEXR1230	12.3	61.5						
AQDEXR1240	12.4	62.0	78.6					
AQDEXR1250	12.5	62.5				13		
AQDEXR1260	12.6	63.0	80.6	59	139.6		2.6	
AQDEXR1270	12.7	63.5						
AQDEXR1280	12.8	64.0						
AQDEXR1290	12.9	64.5	80.7		139.7			
AQDEXR1300	13.0	65.0						
AQDEXR1310	13.1	65.5	86.7		149.7			
AQDEXR1320	13.2	66.0						
AQDEXR1330	13.3	66.5						
AQDEXR1340	13.4	67.0	86.8					
AQDEXR1350	13.5	67.5				14		
AQDEXR1360	13.6	68.0						
AQDEXR1370	13.7	68.5	88.8					
AQDEXR1380	13.8	69.0						
AQDEXR1390	13.9	69.5	88.9		149.9		2.9	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXR1400	14.0	70.0	88.9	61	149.9	14		
AQDEXR1410	14.1	70.5					2.9	
AQDEXR1420	14.2	71.0	91.9		155.9			
AQDEXR1430	14.3	71.5						
AQDEXR1440	14.4	72.0	92.0					
AQDEXR1450	14.5	72.5		62	156.0	15	3.0	
AQDEXR1460	14.6	73.0	94.0					
AQDEXR1470	14.7	73.5						
AQDEXR1480	14.8	74.0						
AQDEXR1490	14.9	74.5	94.1		156.1		3.1	●
AQDEXR1500	15.0	75.0						
AQDEXR1510	15.1	75.5	97.1		163.1			
AQDEXR1520	15.2	76.0						
AQDEXR1530	15.3	76.5						
AQDEXR1540	15.4	77.0	97.2		163.2	16	3.2	
AQDEXR1550	15.5	77.5		64				
AQDEXR1560	15.6	78.0	99.2					
AQDEXR1570	15.7	78.5						
AQDEXR1580	15.8	79.0	99.3		163.3		3.3	
AQDEXR1590	15.9	79.5						
AQDEXR1600	16.0	80.0						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	○	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●从新材到高硬度钢，一般均能稳定高效地进行深孔加工的钻头。

This drill provides reliable high performance for drilling deep holes in materials ranging from Unhardened Steel to Hardened Steel.

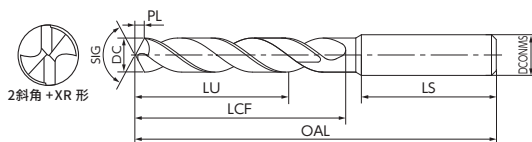

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXSL0050	0.50	3.5	6.1	36.8	48.1	0.1		
AQDEXSL0055	0.55	3.9		35.9				
AQDEXSL0060	0.60	4.2	7.1	36.0				
AQDEXSL0065	0.65	4.6		34.1				
AQDEXSL0070	0.70	4.9	9.1	34.2	48.2	0.2		
AQDEXSL0075	0.75	5.3	10.2	33.3				
AQDEXSL0080	0.80	5.6		33.4				
AQDEXSL0085	0.85	6.0	11.2	32.5				
AQDEXSL0090	0.90	6.3		32.6	50.2	0.3		
AQDEXSL0095	0.95	6.7	12.2	31.7				
AQDEXSL0100	1.00	7.0		31.8				
AQDEXSL0105	1.05	7.4	14.2	31.4				
AQDEXSL0110	1.10	7.7		31.5	52.3	0.4		
AQDEXSL0115	1.15	8.1	15.2	30.5				
AQDEXSL0120	1.20	8.4		30.6				
AQDEXSL0125	1.25	8.8	16.3	31.7				
AQDEXSL0130	1.30	9.1		31.8	54.3	0.5		
AQDEXSL0135	1.35	9.5	17.3	30.9				
AQDEXSL0140	1.40	9.8		31.0				
AQDEXSL0145	1.45	10.2	18.3	30.1				
AQDEXSL0150	1.50	10.5		30.2	54.4	0.6		
AQDEXSL0155	1.55	10.9	20.3	28.3				
AQDEXSL0160	1.60	11.2		28.4				
AQDEXSL0165	1.65	11.6	21.3	29.5				
AQDEXSL0170	1.70	11.9	21.4	29.6	56.4	0.7		
AQDEXSL0175	1.75	12.3		28.7				
AQDEXSL0180	1.80	12.6	22.4	28.8				
AQDEXSL0185	1.85	13.0		27.9				
AQDEXSL0190	1.90	13.3	23.4	28.0	56.5	0.8		
AQDEXSL0195	1.95	13.7		28.1				
AQDEXSL0200	2.00	14.0	24.4	31.0				
AQDEXSL0205	2.05	14.4						
AQDEXSL0210	2.10	14.7	25.4		61.5	0.9		
AQDEXSL0215	2.15	15.1						
AQDEXSL0220	2.20	15.4	25.5					
AQDEXSL0225	2.25	15.8						
AQDEXSL0230	2.30	16.1			64.6	1.0		
AQDEXSL0235	2.35	16.5	30.5					
AQDEXSL0240	2.40	16.8						
AQDEXSL0245	2.45	17.2						
AQDEXSL0250	2.50	17.5			68.6	1.1		
AQDEXSL0255	2.55	17.9	30.5					
AQDEXSL0260	2.60	18.2						
AQDEXSL0265	2.65	18.6						
AQDEXSL0270	2.70	18.9			68.7	1.2		
AQDEXSL0275	2.75	19.3	33.6					
AQDEXSL0280	2.80	19.6						
AQDEXSL0285	2.85	20.0						
AQDEXSL0290	2.90	20.3			71.7	1.3		
AQDEXSL0295	2.95	20.7						
AQDEXSL0300	3.00	21.0						
AQDEXSL0305	3.05	21.4	36.6					
AQDEXSL0310	3.10	21.7			71.7	1.4		
AQDEXSL0315	3.15	22.1						
AQDEXSL0320	3.20	22.4						
AQDEXSL0325	3.25	22.8	36.7					
AQDEXSL0330	3.30	23.1			71.7	1.5		
AQDEXSL0335	3.35	23.5						
AQDEXSL0340	3.40	23.8						
AQDEXSL0345	3.45	24.2	39.7					

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXSL0350	3.50	24.5			71.7	0.7		
AQDEXSL0355	3.55	24.9	39.7					
AQDEXSL0360	3.60	25.2						
AQDEXSL0365	3.65	25.6						
AQDEXSL0370	3.70	25.9	39.8		71.8	0.8		
AQDEXSL0375	3.75	26.3						
AQDEXSL0380	3.80	26.6						
AQDEXSL0385	3.85	27.0	43.8					
AQDEXSL0390	3.90	27.3			75.8	0.9		
AQDEXSL0395	3.95	27.7						
AQDEXSL0400	4.00	28.0						
AQDEXSL0405	4.05	28.4	43.9					
AQDEXSL0410	4.10	28.7			85.8	1.0		
AQDEXSL0415	4.15	29.1						
AQDEXSL0420	4.20	29.4						
AQDEXSL0425	4.25	29.8	47.9					
AQDEXSL0430	4.30	30.1			89.9	1.1		
AQDEXSL0435	4.35	30.5						
AQDEXSL0440	4.40	30.8						
AQDEXSL0445	4.45	31.2	48.0					
AQDEXSL0450	4.50	31.5			90.0	1.2		
AQDEXSL0455	4.55	31.9						
AQDEXSL0460	4.60	32.2						
AQDEXSL0465	4.65	32.6	53.0					
AQDEXSL0470	4.70	32.9			95.0	1.3		
AQDEXSL0475	4.75	33.3						
AQDEXSL0480	4.80	33.6						
AQDEXSL0485	4.85	34.0	53.1					
AQDEXSL0490	4.90	34.3			95.1	1.4		
AQDEXSL0495	4.95	34.7						
AQDEXSL0500	5.00	35.0						
AQDEXSL0505	5.05	35.4	58.1					
AQDEXSL0510	5.10	35.7			100.1	1.5		
AQDEXSL0515	5.15	36.1						
AQDEXSL0520	5.20	36.4						
AQDEXSL0525	5.25	36.8	58.2					
AQDEXSL0530	5.30	37.1			100.2	1.6		
AQDEXSL0535	5.35	37.5						
AQDEXSL0540	5.40	37.8						
AQDEXSL0545	5.45	38.2	64.3					
AQDEXSL0550	5.50	38.5			108.3	1.7		
AQDEXSL0555	5.55	38.9						
AQDEXSL0560	5.60	39.2						
AQDEXSL0565	5.65	39.6	64.3					
AQDEXSL0570	5.70	39.9			108.3	1.8		
AQDEXSL0575	5.75	40.3						
AQDEXSL0580	5.80	40.6						
AQDEXSL0585	5.85	41.0	64.3					
AQDEXSL0590	5.90	41.3			108.3	1.9		
AQDEXSL0595	5.95	41.7						
AQDEXSL0600	6.00	42.0						
AQDEXSL0605	6.05	42.4	64.3					
AQDEXSL0610	6.10	42.7			108.3	2.0		
AQDEXSL0615	6.15	43.1						
AQDEXSL0620	6.20	43.4						
AQDEXSL0625	6.25	43.8	64.3					
AQDEXSL0630	6.30	44.1			108.3	2.1		
AQDEXSL0635	6.35	44.5						
AQDEXSL0640	6.40	44.8						
AQDEXSL0645	6.45	45.2	64.3					

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DOOIMS	先端 PL	在庫 Stock
AQDEXSL1040	10.40	72.8						
AQDEXSL1050	10.50	73.5	89.2		146.2			
AQDEXSL1060	10.60	74.2					2.2	
AQDEXSL1070	10.70	74.9	96.2	46.0	153.2	11		
AQDEXSL1080	10.80	75.6						
AQDEXSL1090	10.90	76.3						
AQDEXSL1100	11.00	77.0					2.3	
AQDEXSL1110	11.10	77.7	96.3		153.3			
AQDEXSL1120	11.20	78.4						
AQDEXSL1130	11.30	79.1						
AQDEXSL1140	11.40	79.8						
AQDEXSL1150	11.50	80.5						
AQDEXSL1160	11.60	81.2	96.4	48.0	153.4	12	2.4	
AQDEXSL1170	11.70	81.9						
AQDEXSL1180	11.80	82.6						
AQDEXSL1190	11.90	83.3						
AQDEXSL1200	12.00	84.0						
AQDEXSL1210	12.10	84.7	103.5		160.5		2.5	
AQDEXSL1220	12.20	85.4						
AQDEXSL1230	12.30	86.1		55.0				
AQDEXSL1240	12.40	86.8						
AQDEXSL1250	12.50	87.5	103.6		160.6	13	2.6	
AQDEXSL1260	12.60	88.2						
AQDEXSL1270	12.70	88.9		57.0				
AQDEXSL1280	12.80	89.6						
AQDEXSL1290	12.90	90.3						
AQDEXSL1300	13.00	91.0	103.7		160.7		2.7	
AQDEXSL1310	13.10	91.7						
AQDEXSL1320	13.20	92.4		55.0				
AQDEXSL1330	13.30	93.1						
AQDEXSL1340	13.40	93.8		58.0				
AQDEXSL1350	13.50	94.5	110.8		170.8	14	2.8	
AQDEXSL1360	13.60	95.2						
AQDEXSL1370	13.70	95.9		59.0				
AQDEXSL1380	13.80	96.6						
AQDEXSL1390	13.90	97.3	110.9		170.9		2.9	
AQDEXSL1400	14.00	98.0						
AQDEXSL1410	14.10	98.7	116.9		175.9			
AQDEXSL1420	14.20	99.4		57.0				
AQDEXSL1430	14.30	100.1						
AQDEXSL1440	14.40	100.8			176.0		3.0	
AQDEXSL1450	14.50	101.5	117.0					
AQDEXSL1460	14.60	102.2			183.0	15		
AQDEXSL1470	14.70	102.9		59.0				
AQDEXSL1480	14.80	103.6						
AQDEXSL1490	14.90	104.3	117.1		183.1		3.1	
AQDEXSL1500	15.00	105.0						
AQDEXSL1510	15.10	105.7	123.1		188.1			
AQDEXSL1520	15.20	106.4		63.0				
AQDEXSL1530	15.30	107.1						
AQDEXSL1540	15.40	107.8	123.2		188.2	16	3.2	
AQDEXSL1550	15.50	108.5						
AQDEXSL1560	15.60	109.2						
AQDEXSL1570	15.70	109.9		64.0				
AQDEXSL1580	15.80	110.6	123.3		188.3		3.3	
AQDEXSL1590	15.90	111.3						
AQDEXSL1600	16.00	112.0						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	○	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	×	○	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●适合用于深位置的孔加工。

This drill is suitable for drilling of deep holes.

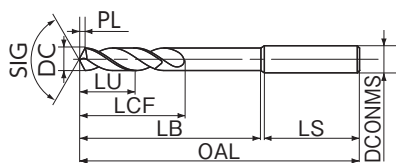

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	径长 LB	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXE0200	2.0	6.0	8.4	24.5	31	56.4		0.4	
AQDEXE0210	2.1	6.3	10.4	25.6					
AQDEXE0220	2.2	6.6		25.8		56.5			
AQDEXE0230	2.3	6.9		30.9				0.5	
AQDEXE0240	2.4	7.2		31.0		61.5	3		
AQDEXE0250	2.5	7.5		31.1	30				
AQDEXE0260	2.6	7.8	13.5	31.1					
AQDEXE0270	2.7	8.1		34.3					
AQDEXE0280	2.8	8.4		34.4		64.6		0.6	
AQDEXE0290	2.9	8.7		34.5					
AQDEXE0300	3.0	9.0							
AQDEXE0310	3.1	9.3	19.6	35.7		68.6			
AQDEXE0320	3.2	9.6		35.9		68.7			
AQDEXE0330	3.3	9.9		36.0				0.7	
AQDEXE0340	3.4	10.2	19.7	39.1		71.7	4		
AQDEXE0350	3.5	10.5		39.2					
AQDEXE0360	3.6	10.8	21.7	39.3	32			0.8	
AQDEXE0370	3.7	11.1		39.4		71.8			
AQDEXE0380	3.8	11.4		43.5					
AQDEXE0390	3.9	11.7	21.8	43.6		75.8			
AQDEXE0400	4.0	12.0		43.7					
AQDEXE0410	4.1	12.3	23.8	46.9		85.8			
AQDEXE0420	4.2	12.6		47.1		85.9			
AQDEXE0430	4.3	12.9	23.9	51.2		89.9		0.9	
AQDEXE0440	4.4	13.2		51.3					
AQDEXE0450	4.5	13.5		51.4	38	90.0	5		
AQDEXE0460	4.6	13.8		51.5					
AQDEXE0470	4.7	14.1	26.0	51.6		95.0		1.0	
AQDEXE0480	4.8	14.4		56.7					
AQDEXE0490	4.9	14.7		56.8					
AQDEXE0500	5.0	15.0		56.9					
AQDEXE0510	5.1	15.3		54.2		95.1		1.1	
AQDEXE0520	5.2	15.6	26.1	54.3					
AQDEXE0530	5.3	15.9		54.4					
AQDEXE0540	5.4	16.2		59.5		100.1	6		
AQDEXE0550	5.5	16.5		59.6					
AQDEXE0560	5.6	16.8		59.7					
AQDEXE0570	5.7	17.1		59.8					
AQDEXE0580	5.8	17.4	28.2	59.9		100.2		1.2	
AQDEXE0590	5.9	17.7		60.0					
AQDEXE0600	6.0	18.0		60.1					
AQDEXE0610	6.1	18.3		67.4	40				
AQDEXE0620	6.2	18.6		67.5					
AQDEXE0630	6.3	18.9	32.3	67.6		108.3		1.3	
AQDEXE0640	6.4	19.2		67.7					
AQDEXE0650	6.5	19.5		67.9					
AQDEXE0660	6.6	19.8		68.0		108.4	7		
AQDEXE0670	6.7	20.1		74.1				1.4	
AQDEXE0680	6.8	20.4	34.4	74.2		114.4			
AQDEXE0690	6.9	20.7		74.3					
AQDEXE0700	7.0	21.0		70.6					
AQDEXE0710	7.1	21.3		70.7					
AQDEXE0720	7.2	21.6	34.5	70.8	43	114.5		1.5	
AQDEXE0730	7.3	21.9							
AQDEXE0740	7.4	22.2							
AQDEXE0750	7.5	22.5	34.6	71.0		114.6	8		
AQDEXE0760	7.6	22.8		78.1					
AQDEXE0770	7.7	23.1	37.6	78.2				1.6	
AQDEXE0780	7.8	23.4		78.3	42	120.6			
AQDEXE0790	7.9	23.7		78.4					

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	径长 LB	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXE0800	8.0	24.0		78.6	42	120.7		8	
AQDEXE0810	8.1	24.3		82.8					
AQDEXE0820	8.2	24.6	37.7	82.9		126.7		1.7	
AQDEXE0830	8.3	24.9		83.0					
AQDEXE0840	8.4	25.2		83.2		126.8	43	9	
AQDEXE0850	8.5	25.5	37.8	89.3					
AQDEXE0860	8.6	25.8		89.4		132.8		1.8	
AQDEXE0870	8.7	26.1		89.5					
AQDEXE0880	8.8	26.4	39.8	89.6					
AQDEXE0890	8.9	26.7		89.7					
AQDEXE0900	9.0	27.0		87.0					
AQDEXE0910	9.1	27.3		87.1		132.9	39.9	1.9	
AQDEXE0920	9.2	27.6		87.2					
AQDEXE0930	9.3	27.9		87.4		133.0			
AQDEXE0940	9.4	28.2	40.0	93.5			45	10	
AQDEXE0950	9.5	28.5		93.6		139.0		2.0	
AQDEXE0960	9.6	28.8		93.7					
AQDEXE0970	9.7	29.1	43.0	93.8		139.1			
AQDEXE0980	9.8	29.4		93.9					
AQDEXE0990	9.9	29.7		99.1					
AQDEXE1000	10.0	30.0		99.2		146.1		2.1	
AQDEXE1010	10.1	30.3	43.1	99.3					
AQDEXE1020	10.2	30.6		99.5					
AQDEXE1030	10.3	30.9		99.6		146.2	46	11	
AQDEXE1040	10.4	31.2		99.7				2.2	
AQDEXE1050	10.5	31.5	43.2	106.8		153.2			
AQDEXE1060	10.6	31.8		107.0					
AQDEXE1070	10.7	32.1	47.2	107.1					
AQDEXE1080	10.8	32.4		104.3		153.3	47.3	2.3	
AQDEXE1090	10.9	32.7		104.4					
AQDEXE1100	11.0	33.0		104.5					
AQDEXE1110	11.1	33.3		104.7					
AQDEXE1120	11.2	33.6		104.8					
AQDEXE1130	11.3	33.9		104.9					
AQDEXE1140	11.4	34.2	47.4	105.0			48	12	
AQDEXE1150	11.5	34.5		105.1		153.4		2.4	
AQDEXE1160	11.6	34.8		105.2					
AQDEXE1170	11.7	35.1	49.4	105.3					
AQDEXE1180	11.8	35.4		105.4					
AQDEXE1190	11.9	35.7		105.5					
AQDEXE1200	12.0	36.0		105.6					
AQDEXE1210	12.1	36.3	49.5	105.7		160.5		2.5	
AQDEXE1220	12.2	36.6		105.8					
AQDEXE1230	12.3	36.9		105.9					
AQDEXE1240	12.4	37.2	49.6	106.0					
AQDEXE1250	12.5	37.5		106.1					
AQDEXE1260	12.6	37.8	51.6	106.2		160.6	57	13	
AQDEXE1270	12.7	38.1		106.3					
AQDEXE1280	12.8	38.4		106.4					
AQDEXE1290	12.9	38.7	51.7	106.5		160.7			
AQDEXE1300	13.0	39.0		106.6				2.7	
AQDEXE1310	13.1	39.3		106.7					
AQDEXE1320	13.2	39.6	52.7	106.8		170.7			
AQDEXE1330	13.3	39.9		106.9					
AQDEXE1340	13.4	40.2	52.8	107.0					
AQDEXE1350	13.5	40.5		107.1					
AQDEXE1360	13.6	40.8		107.2					
AQDEXE1370	13.7	41.1	54.8	107.3					
AQDEXE1380	13.8	41.4		107.4					
AQDEXE1390	13.9	41.7	54.9	107.5		170.9		2.9	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	径长 LB	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXE1400	14.0	42.0	54.9	111.7	59	170.9	14	2.9	□
AQDEXE1410	14.1	42.3		115.9		175.9	15		
AQDEXE1420	14.2	42.6		116.0		176.0			
AQDEXE1430	14.3	42.9	116.2	183.0					
AQDEXE1440	14.4	43.2	116.3				183.1		
AQDEXE1450	14.5	43.5	116.4			188.1			
AQDEXE1460	14.6	43.8	123.4	188.2					
AQDEXE1470	14.7	44.1	123.5				16		
AQDEXE1480	14.8	44.4	123.7			3.1			
AQDEXE1490	14.9	44.7	123.8	3.2					
AQDEXE1500	15.0	45.0	123.9		3.3				
AQDEXE1510	15.1	45.3	123.1			64			
AQDEXE1520	15.2	45.6	123.2	188.3					
AQDEXE1530	15.3	45.9	123.4		18				
AQDEXE1540	15.4	46.2	123.5			18			
AQDEXE1550	15.5	46.5	123.6	18					
AQDEXE1560	15.6	46.8	123.8		18				
AQDEXE1570	15.7	47.1	123.9			18			
AQDEXE1580	15.8	47.4	124.0	18					
AQDEXE1590	15.9	47.7	124.1		18				
AQDEXE1600	16.0	48.0	124.1			18			

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	◎	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●在容易出现切屑堵塞的车床加工及加工中心的超高进给加工中，可实现高精度、长寿命的 2D 用钻头。

Realize high accuracy and longer tool life in ultra high speed drilling in machining center or turning machine where chip jamming is easy to occur.(2D)

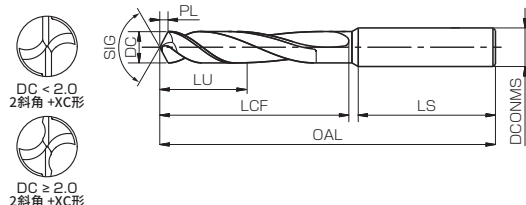

LIST 9850

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PF2D0100	1.00	2.0	4.2	36.8	45.2		0.2	
PF2D0110	1.10	2.2	4.6	36.6				
PF2D0120	1.20	2.4	5.0	36.3	45.3		0.3	●
PF2D0130	1.30	2.6	5.5	36.1				
PF2D0140	1.40	2.8	5.9	35.9	45.4		0.4	□
PF2D0150	1.50	3.0	6.3	35.7				
PF2D0160	1.60	3.2	6.4	35.9	45.5		0.5	□
PF2D0170	1.70	3.4	6.4	36.1				
PF2D0180	1.80	3.6	6.4	36.3	45.6		0.6	●
PF2D0190	1.90	3.8	6.4	36.4				
PF2D0200	2.00	4.0	6.4	35.0	45.7		0.7	□
PF2D0201	2.01	4.0	6.4	35.0				
PF2D0202	2.02	4.0	6.4	35.0	45.8		0.8	●
PF2D0203	2.03	4.0	6.4	35.0				
PF2D0204	2.04	4.0	6.4	35.0	45.9		0.9	□
PF2D0205	2.05	4.0	6.4	35.0				
PF2D0206	2.06	4.0	6.4	35.0	46.0		1.0	●
PF2D0207	2.07	4.0	6.4	35.0				
PF2D0208	2.08	4.0	6.4	35.0	46.1		1.1	□
PF2D0209	2.09	4.0	6.4	35.0				
PF2D0210	2.10	4.0	6.4	35.0	46.2		1.2	●
PF2D0211	2.11	4.0	6.4	35.0				
PF2D0212	2.12	4.0	6.4	35.0	46.3		1.3	□
PF2D0213	2.13	4.0	6.4	35.0				
PF2D0214	2.14	4.0	6.4	35.0	46.4		1.4	●
PF2D0215	2.15	4.0	6.4	35.0				
PF2D0216	2.16	4.0	6.4	35.0	46.5		1.5	□
PF2D0217	2.17	4.0	6.4	35.0				
PF2D0218	2.18	4.0	6.4	35.0	46.6		1.6	●
PF2D0219	2.19	4.0	6.4	35.0				
PF2D0220	2.20	4.0	6.4	35.0	46.7		1.7	□
PF2D0221	2.21	4.0	6.4	35.0				
PF2D0222	2.22	4.0	6.4	35.0	46.8		1.8	●
PF2D0223	2.23	4.0	6.4	35.0				
PF2D0224	2.24	4.0	6.4	35.0	46.9		1.9	□
PF2D0225	2.25	4.0	6.4	35.0				
PF2D0226	2.26	4.0	6.4	35.0	47.0		2.0	●
PF2D0227	2.27	4.0	6.4	35.0				
PF2D0228	2.28	4.0	6.4	35.0	47.1		2.1	□
PF2D0229	2.29	4.0	6.4	35.0				
PF2D0230	2.30	4.0	6.4	35.0	47.2		2.2	●
PF2D0231	2.31	4.0	6.4	35.0				
PF2D0232	2.32	4.0	6.4	35.0	47.3		2.3	□
PF2D0233	2.33	4.0	6.4	35.0				
PF2D0234	2.34	4.0	6.4	35.0	47.4		2.4	●
PF2D0235	2.35	4.0	6.4	35.0				
PF2D0236	2.36	4.0	6.4	35.0	47.5		2.5	□
PF2D0237	2.37	4.0	6.4	35.0				
PF2D0238	2.38	4.0	6.4	35.0	47.6		2.6	●
PF2D0239	2.39	4.0	6.4	35.0				
PF2D0240	2.40	4.0	6.4	35.0	47.7		2.7	□
PF2D0241	2.41	4.0	6.4	35.0				
PF2D0242	2.42	4.0	6.4	35.0	47.8		2.8	●
PF2D0243	2.43	4.0	6.4	35.0				
PF2D0244	2.44	4.0	6.4	35.0	47.9		2.9	□
PF2D0245	2.45	4.0	6.4	35.0				
PF2D0246	2.46	4.0	6.4	35.0	48.0		3.0	●
PF2D0247	2.47	4.0	6.4	35.0				
PF2D0248	2.48	4.0	6.4	35.0	48.1		3.1	□
PF2D0249	2.49	4.0	6.4	35.0				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock																																							
PF2D0250	2.50	5.0	8.5	33.0	45.5		0.5	●																																							
PF2D0251	2.51		10.5																																												
PF2D0252	2.52	5.1												□																																	
PF2D0253	2.53														5.2				●																												
PF2D0254	2.54																			5.3				□																							
PF2D0255	2.55																								5.4				●																		
PF2D0256	2.56																													5.5				□													
PF2D0257	2.57																																		5.6				●								
PF2D0258	2.58																																							5.7				□			
PF2D0259	2.59																																												5.8		
PF2D0260	2.60				5.9																																										
PF2D0261	2.61		6.0							●																																					
PF2D0262	2.62	6.1									16.6	34.0	54.6	4																																	
PF2D0263	2.63														6.2																																
PF2D0264	2.64																																														
PF2D0265	2.65																																														
PF2D0266	2.66																																														
PF2D0267	2.67																																														
PF2D0268	2.68																																														
PF2D0269	2.69																																														
PF2D0270	2.70																																														
PF2D0271	2.71																																														
PF2D0272	2.72																																														
PF2D0273	2.73																																														
PF2D0274	2.74																																														
PF2D0275	2.75																																														
PF2D0276	2.76																																														
PF2D0277	2.77																																														
PF2D0278	2.78																																														
PF2D0279	2.79																																														
PF2D0280	2.80																																														
PF2D0281	2.81																																														
PF2D0282	2.82																																														
PF2D0283	2.83																																														
PF2D0284	2.84																																														
PF2D0285	2.85																																														
PF2D0286	2.86																																														
PF2D0287	2.87																																														
PF2D0288	2.88																																														
PF2D0289	2.89																																														
PF2D0290	2.90																																														
PF2D0291	2.91																																														
PF2D0292	2.92																																														
PF2D0293	2.93																																														
PF2D0294	2.94																																														
PF2D0295	2.95																																														
PF2D0296	2.96																																														
PF2D0297	2.97																																														
PF2D0298	2.98																																														
PF2D0299	2.99																																														
PF2D0300	3.00																																														
PF2D0301	3.01																																														
PF2D0302	3.02																																														
PF2D0303	3.03																																														
PF2D0304	3.04																																														
PF2D0305	3.05																																														
PF2D0306	3.06																																														
PF2D0307	3.07																																														
PF2D0308	3.08																																														
PF2D0309	3.09																																														

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock		
PF2D0310	3.10	6.2	16.6	34.0	54.6	4	0.6	●		
PF2D0311	3.11									
PF2D0312	3.12									
PF2D0313	3.13	6.3						□		
PF2D0314	3.14									
PF2D0315	3.15									
PF2D0316	3.16	6.4						●		
PF2D0317	3.17									
PF2D0318	3.18									
PF2D0319	3.19	6.5						□		
PF2D0320	3.20									
PF2D0321	3.21									
PF2D0322	3.22	6.6						●		
PF2D0323	3.23									
PF2D0324	3.24									
PF2D0325	3.25	6.7						□		
PF2D0326	3.26									
PF2D0327	3.27									
PF2D0328	3.28	6.8						●		
PF2D0329	3.29									
PF2D0330	3.30									
PF2D0331	3.31	6.9						□		
PF2D0332	3.32									
PF2D0333	3.33									
PF2D0334	3.34	7.0						●		
PF2D0335	3.35									
PF2D0336	3.36									
PF2D0337	3.37	7.1						□		
PF2D0338	3.38									
PF2D0339	3.39									
PF2D0340	3.40	7.2						●		
PF2D0341	3.41									
PF2D0342	3.42									
PF2D0343	3.43	7.3						□		
PF2D0344	3.44									
PF2D0345	3.45									
PF2D0346	3.46	7.4						●		
PF2D0347	3.47									
PF2D0348	3.48									
PF2D0349	3.49	7.5						□		
PF2D0350	3.50									
PF2D0351	3.51									
PF2D0352	3.52	7.6						●		
PF2D0353	3.53									
PF2D0354	3.54									
PF2D0355	3.55	7.7						□		
PF2D0356	3.56									
PF2D0357	3.57									
PF2D0358	3.58	7.8						●		
PF2D0359	3.59									
PF2D0360	3.60									
PF2D0361	3.61	7.9						□		
PF2D0362	3.62									
PF2D0363	3.63									
PF2D0364	3.64	8.0						□		
PF2D0365	3.65									
PF2D0366	3.66									
PF2D0367	3.67	8.1						●		
PF2D0368	3.68									
PF2D0369	3.69									

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PF2D0370	3.70	7.4	17.8	34.0	54.8	4	0.8	●
PF2D0371	3.71							
PF2D0372	3.72							
PF2D0373	3.73	7.5						
PF2D0374	3.74							
PF2D0375	3.75							□
PF2D0376	3.76	7.6						
PF2D0377	3.77							
PF2D0378	3.78							
PF2D0379	3.79	7.7						
PF2D0380	3.80							
PF2D0381	3.81							
PF2D0382	3.82	7.8						
PF2D0383	3.83							
PF2D0384	3.84							
PF2D0385	3.85	7.9						
PF2D0386	3.86							
PF2D0387	3.87							
PF2D0388	3.88	8.0						
PF2D0389	3.89							
PF2D0390	3.90							
PF2D0391	3.91	8.1						
PF2D0392	3.92							
PF2D0393	3.93							
PF2D0394	3.94	8.2						
PF2D0395	3.95							
PF2D0396	3.96							
PF2D0397	3.97	8.3						
PF2D0398	3.98							
PF2D0399	3.99							
PF2D0400	4.00	8.4						
PF2D0401	4.01							
PF2D0402	4.02							
PF2D0403	4.03	8.5						
PF2D0404	4.04							
PF2D0405	4.05							
PF2D0410	4.10	8.6						
PF2D0415	4.15							
PF2D0420	4.20							
PF2D0425	4.25	8.7						
PF2D0430	4.30							
PF2D0435	4.35							
PF2D0440	4.40	8.8						
PF2D0445	4.45							
PF2D0450	4.50							
PF2D0455	4.55	8.9						
PF2D0460	4.60							
PF2D0465	4.65							
PF2D0470	4.70	9.0						
PF2D0475	4.75							
PF2D0480	4.80							
PF2D0485	4.85	9.1						
PF2D0490	4.90							
PF2D0495	4.95							
PF2D0498	4.98	9.2						
PF2D0499	4.99							
PF2D0500	5.00							
PF2D0501	5.01	10.0						
PF2D0502	5.02							
PF2D0503	5.03							
PF2D0505	5.05	10.1						

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新品

← 上一页 Previous Page

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCDNMS	先端 PL	在庫 Stock
PF2D0510	5.10	10.2					●	●
PF2D0515	5.15	10.3					□	□
PF2D0520	5.20	10.4					●	●
PF2D0525	5.25	10.5					□	□
PF2D0530	5.30	10.6	21.1		66.1	1.1	●	●
PF2D0535	5.35	10.7					□	□
PF2D0540	5.40	10.8					●	●
PF2D0545	5.45	10.9					□	□
PF2D0550	5.50	11.0					●	●
PF2D0555	5.55	11.1	22.1				□	□
PF2D0560	5.60	11.2		41.0		6	●	●
PF2D0565	5.65	11.3					□	□
PF2D0570	5.70	11.4					●	●
PF2D0575	5.75	11.5					□	□
PF2D0580	5.80	11.6					●	●
PF2D0585	5.85	11.7	22.2		66.2	1.2	□	□
PF2D0590	5.90	11.8					●	●
PF2D0595	5.95	11.9					□	□
PF2D0598	5.98						●	●
PF2D0599	5.99						□	□
PF2D0600	6.00	12.0					●	●
PF2D0601	6.01						□	□
PF2D0602	6.02		26.2		74.2		□	□
PF2D0603	6.03	12.1					●	●
PF2D0605	6.05						□	□
PF2D0610	6.10	12.2					●	●
PF2D0615	6.15	12.3					□	□
PF2D0620	6.20	12.4					●	●
PF2D0625	6.25	12.5					□	□
PF2D0630	6.30	12.6	26.3		74.3	1.3	●	●
PF2D0635	6.35	12.7					□	□
PF2D0640	6.40	12.8					●	●
PF2D0645	6.45	12.9					□	□
PF2D0650	6.50	13.0					●	●
PF2D0655	6.55	13.1					□	□
PF2D0660	6.60	13.2					●	●
PF2D0665	6.65	13.3					□	□
PF2D0670	6.70	13.4					●	●
PF2D0675	6.75	13.5					□	□
PF2D0680	6.80	13.6					●	●
PF2D0685	6.85	13.7					□	□
PF2D0690	6.90	13.8					●	●
PF2D0695	6.95	13.9					□	□
PF2D0698	6.98						●	●
PF2D0699	6.99						□	□
PF2D0700	7.00	14.0					●	●
PF2D0701	7.01						□	□
PF2D0702	7.02						●	●
PF2D0703	7.03	14.1					□	□
PF2D0705	7.05						●	●
PF2D0710	7.10	14.2					□	□
PF2D0715	7.15	14.3					●	●
PF2D0720	7.20	14.4					□	□
PF2D0725	7.25	14.5					●	●
PF2D0730	7.30	14.6					□	□
PF2D0735	7.35	14.7					●	●
PF2D0740	7.40	14.8					□	□
PF2D0745	7.45	14.9					●	●
PF2D0750	7.50	15.0	27.6				□	□
PF2D0755	7.55	15.1	29.6				●	●

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCDNMS	先端 PL	在庫 Stock
PF2D0760	7.60	15.2					●	●
PF2D0765	7.65	15.3					□	□
PF2D0770	7.70	15.4					●	●
PF2D0775	7.75	15.5					□	□
PF2D0780	7.80	15.6	29.6		79.6	1.6	●	●
PF2D0785	7.85	15.7					□	□
PF2D0790	7.90	15.8					●	●
PF2D0795	7.95	15.9					□	□
PF2D0798	7.98						●	●
PF2D0799	7.99						□	□
PF2D0800	8.00	16.0					●	●
PF2D0801	8.01						□	□
PF2D0802	8.02						●	●
PF2D0803	8.03	16.1					□	□
PF2D0805	8.05						●	●
PF2D0810	8.10	16.2	29.7			1.7	□	□
PF2D0815	8.15	16.3					●	●
PF2D0820	8.20	16.4					□	□
PF2D0825	8.25	16.5					●	●
PF2D0830	8.30	16.6					□	□
PF2D0835	8.35	16.7					●	●
PF2D0840	8.40	16.8					□	□
PF2D0845	8.45	16.9	29.8				●	●
PF2D0850	8.50	17.0					□	□
PF2D0855	8.55	17.1					●	●
PF2D0860	8.60	17.2					□	□
PF2D0865	8.65	17.3					●	●
PF2D0870	8.70	17.4	30.8			1.8	□	□
PF2D0875	8.75	17.5					●	●
PF2D0880	8.80	17.6					□	□
PF2D0885	8.85	17.7					●	●
PF2D0890	8.90	17.8					□	□
PF2D0895	8.95	17.9					●	●
PF2D0898	8.98						□	□
PF2D0899	8.99						●	●
PF2D0900	9.00	18.0					□	□
PF2D0901	9.01						●	●
PF2D0902	9.02						□	□
PF2D0903	9.03	18.1	30.9			1.9	●	●
PF2D0905	9.05						□	□
PF2D0910	9.10	18.2					●	●
PF2D0915	9.15	18.3					□	□
PF2D0920	9.20	18.4					●	●
PF2D0925	9.25	18.5					□	□
PF2D0930	9.30	18.6					●	●
PF2D0935	9.35	18.7					□	□
PF2D0940	9.40	18.8					●	●
PF2D0945	9.45	18.9	31.0				□	□
PF2D0950	9.50	19.0					●	●
PF2D0955	9.55	19.1					□	□
PF2D0960	9.60	19.2					●	●
PF2D0965	9.65	19.3	33.0			2.0	□	□
PF2D0970	9.70	19.4					●	●
PF2D0975	9.75	19.5					□	□
PF2D0980	9.80	19.6					●	●
PF2D0985	9.85	19.7					□	□
PF2D0990	9.90	19.8					●	●
PF2D0995	9.95	19.9					□	□
PF2D0998	9.98						●	●
PF2D0999	9.99	20.0	33.1			2.1	□	□

新商品

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PF2D1000	10.00	20.0	33.1	54.0	89.1	10		
PF2D1010	10.10	20.2						
PF2D1020	10.20	20.4	36.1		95.1		2.1	
PF2D1030	10.30	20.6		55.0				
PF2D1040	10.40	20.8	36.2			11		
PF2D1050	10.50	21.0			95.2		2.2	
PF2D1060	10.60	21.2						
PF2D1070	10.70	21.4	38.2					
PF2D1080	10.80	21.6		54.0				
PF2D1090	10.90	21.8			95.3			
PF2D1100	11.00	22.0						
PF2D1110	11.10	22.2	38.3		102.3		2.3	
PF2D1120	11.20	22.4						
PF2D1130	11.30	22.6		60.0				
PF2D1140	11.40	22.8			102.3			
PF2D1150	11.50	23.0	38.4			12	2.4	
PF2D1160	11.60	23.2			102.4			
PF2D1170	11.70	23.4	41.4					
PF2D1180	11.80	23.6		58.0				
PF2D1190	11.90	23.8	41.5					
PF2D1200	12.00	24.0			102.5		2.5	
PF2D1210	12.10	24.2						
PF2D1220	12.20	24.4	46.5					
PF2D1230	12.30	24.6		52.0				
PF2D1240	12.40	24.8	46.6			13	2.6	
PF2D1250	12.50	25.0			102.6			
PF2D1260	12.60	25.2	48.6					
PF2D1270	12.70	25.4		51.0				
PF2D1280	12.80	25.6			102.7		2.7	●
PF2D1290	12.90	25.8	48.7					
PF2D1300	13.00	26.0						
PF2D1310	13.10	26.2	50.7		107.7			
PF2D1320	13.20	26.4						
PF2D1330	13.30	26.6						
PF2D1340	13.40	26.8	50.8			14	2.8	
PF2D1350	13.50	27.0			107.8			
PF2D1360	13.60	27.2	51.8					
PF2D1370	13.70	27.4						
PF2D1380	13.80	27.6			107.9		2.9	
PF2D1390	13.90	27.8	51.9					
PF2D1400	14.00	28.0						
PF2D1410	14.10	28.2	54.9		110.9			
PF2D1420	14.20	28.4						
PF2D1430	14.30	28.6						
PF2D1440	14.40	28.8	55.0					
PF2D1450	14.50	29.0			111.0	15	3.0	
PF2D1460	14.60	29.2	56.0					
PF2D1470	14.70	29.4						
PF2D1480	14.80	29.6						
PF2D1490	14.90	29.8	56.1		111.1		3.1	
PF2D1500	15.00	30.0						
PF2D1510	15.10	30.2	57.1		115.1			
PF2D1520	15.20	30.4						
PF2D1530	15.30	30.6		54.0		16	3.2	
PF2D1540	15.40	30.8	57.2					
PF2D1550	15.50	31.0			115.2			
PF2D1560	15.60	31.2	59.2					
PF2D1570	15.70	31.4						
PF2D1580	15.80	31.6	59.3	53.0	115.3		3.3	
PF2D1590	15.90	31.8						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PF2D1600	16.00	32.0	59.3	53.0	115.3	16	3.3	●

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具


一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	—	○	×	×

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

技术资料
索引

●在容易出现切屑堵塞的车床加工及加工中心的超高进给加工中，可实现高精度、长寿命的 4D 用钻头。

Realize high accuracy and longer tool life in ultra high speed drilling in machining center or turning machine where chip jamming is easy to occur.(4D)

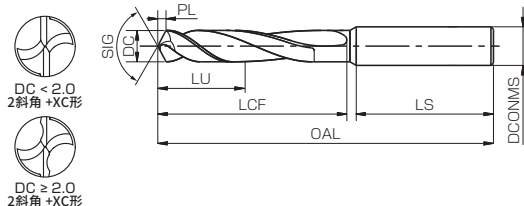

LIST 9852

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL
PF4D0100	1.00	4.0	7.2	37.8	49.2		0.2
PF4D0110	1.10	4.4	7.9	37.3			
PF4D0120	1.20	4.8	8.6	36.7			
PF4D0130	1.30	5.2	9.4	36.2	49.3		0.3
PF4D0140	1.40	5.6	10.1	35.7			
PF4D0150	1.50	6.0	10.8	35.2			
PF4D0160	1.60	6.4	11.5	34.7	49.4		0.4
PF4D0170	1.70	6.8	12.3	34.2			
PF4D0180	1.80	7.2	13.0	33.7			
PF4D0190	1.90	7.6	13.7	33.1	49.4		0.4
PF4D0200	2.00	8.0	15.4	30.0			
PF4D0201	2.01						
PF4D0202	2.02				49.5		0.5
PF4D0203	2.03	8.1	17.4				
PF4D0205	2.05	8.2					
PF4D0210	2.10	8.4			49.5		0.5
PF4D0215	2.15	8.6					
PF4D0220	2.20	8.8		28.0			
PF4D0225	2.25	9.0			49.6		0.6
PF4D0230	2.30	9.2					
PF4D0235	2.35	9.4					
PF4D0240	2.40	9.6			49.6		0.6
PF4D0245	2.45	9.8					
PF4D0250	2.50	10.0					
PF4D0255	2.55	10.2			49.6		0.6
PF4D0260	2.60	10.4					
PF4D0265	2.65	10.6					
PF4D0270	2.70	10.8			49.6		0.6
PF4D0275	2.75	11.0					
PF4D0280	2.80	11.2					
PF4D0285	2.85	11.4			49.6		0.6
PF4D0290	2.90	11.6					
PF4D0295	2.95	11.8					
PF4D0298	2.98	11.9			49.6		0.6
PF4D0299	2.99						
PF4D0300	3.00	12.0					
PF4D0301	3.01				60.6		0.7
PF4D0302	3.02	12.1					
PF4D0303	3.03						
PF4D0305	3.05	12.2			60.6		0.7
PF4D0310	3.10	12.4					
PF4D0315	3.15	12.6					
PF4D0320	3.20	12.8			60.7		0.7
PF4D0325	3.25	13.0					
PF4D0330	3.30	13.2					
PF4D0335	3.35	13.4			60.7		0.7
PF4D0340	3.40	13.6					
PF4D0345	3.45	13.8					
PF4D0350	3.50	14.0			60.8		0.8
PF4D0355	3.55	14.2					
PF4D0360	3.60	14.4					
PF4D0365	3.65	14.6			60.8		0.8
PF4D0370	3.70	14.8					
PF4D0375	3.75	15.0					
PF4D0380	3.80	15.2			60.8		0.8
PF4D0385	3.85	15.4					
PF4D0390	3.90	15.6					
PF4D0395	3.95	15.8			60.8		0.8
PF4D0398	3.98	15.9					
PF4D0399	3.99	16.0					

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL
PF4D0400	4.00	16.0	27.8	30.0	60.8	4	0.8
PF4D0401	4.01						
PF4D0402	4.02						
PF4D0403	4.03	16.1	31.8	41.0	76.8	5	0.9
PF4D0405	4.05						
PF4D0410	4.10						
PF4D0415	4.15	16.6	31.9	41.0	76.9	5	0.9
PF4D0420	4.20						
PF4D0425	4.25						
PF4D0430	4.30	17.2	38.9	35.0	77.0	6	1.0
PF4D0435	4.35						
PF4D0440	4.40						
PF4D0445	4.45	17.8	39.0	35.0	77.0	6	1.0
PF4D0450	4.50						
PF4D0455	4.55						
PF4D0460	4.60	18.2	40.0	38.0	82.0	6	1.1
PF4D0465	4.65						
PF4D0470	4.70						
PF4D0475	4.75	18.4	40.1	38.0	82.1	6	1.1
PF4D0480	4.80						
PF4D0485	4.85						
PF4D0490	4.90	19.6	42.1	37.0	82.2	7	1.2
PF4D0495	4.95						
PF4D0498	4.98						
PF4D0499	4.99	20.0	42.2	37.0	82.2	7	1.2
PF4D0500	5.00						
PF4D0501	5.01						
PF4D0502	5.02	20.1	42.2	37.0	82.2	7	1.2
PF4D0503	5.03						
PF4D0505	5.05						
PF4D0510	5.10	20.4	42.2	37.0	82.2	7	1.2
PF4D0515	5.15						
PF4D0520	5.20						
PF4D0525	5.25	21.0	43.2	43.3	84.2	7	1.3
PF4D0530	5.30						
PF4D0535	5.35						
PF4D0540	5.40	21.2	43.2	43.3	84.3	7	1.3
PF4D0545	5.45						
PF4D0550	5.50						
PF4D0555	5.55	22.2	43.3	43.3	84.3	7	1.3
PF4D0560	5.60						
PF4D0565	5.65						
PF4D0570	5.70	22.8	43.3	43.3	84.3	7	1.3
PF4D0575	5.75						
PF4D0580	5.80						
PF4D0585	5.85	23.4	43.3	43.3	84.3	7	1.3
PF4D0590	5.90						
PF4D0595	5.95						
PF4D0598	5.98	23.9	43.3	43.3	84.3	7	1.3
PF4D0599	5.99						
PF4D0600	6.00						
PF4D0601	6.01	24.1	43.3	43.3	84.3	7	1.3
PF4D0602	6.02						
PF4D0603	6.03						
PF4D0605	6.05	24.2	43.3	43.3	84.3	7	1.3
PF4D0610	6.10						
PF4D0615	6.15						
PF4D0620	6.20	24.8	43.3	43.3	84.3	7	1.3
PF4D0625	6.25						
PF4D0630	6.30						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCNMS	先端 PL
PF4D0635	6.35	25.4	43.3	37.0	84.3	7	1.3
PF4D0640	6.40	25.6					
PF4D0645	6.45	25.8					
PF4D0650	6.50	26.0					
PF4D0655	6.55	26.2	44.4	41.0	84.4	8	1.4
PF4D0660	6.60	26.4					
PF4D0665	6.65	26.6					
PF4D0670	6.70	26.8					
PF4D0675	6.75	27.0					
PF4D0680	6.80	27.2					
PF4D0685	6.85	27.4					
PF4D0690	6.90	27.6					
PF4D0695	6.95	27.8	46.5	41.0	91.5	9	1.5
PF4D0698	6.98	27.9					
PF4D0699	6.99						
PF4D0700	7.00	28.0					
PF4D0701	7.01						
PF4D0702	7.02	28.1					
PF4D0703	7.03						
PF4D0705	7.05	28.2					
PF4D0710	7.10	28.4	46.6	40.0	91.6	10	1.6
PF4D0715	7.15	28.6					
PF4D0720	7.20	28.8					
PF4D0725	7.25	29.0					
PF4D0730	7.30	29.2					
PF4D0735	7.35	29.4					
PF4D0740	7.40	29.6					
PF4D0745	7.45	29.8					
PF4D0750	7.50	30.0	49.6	41.0	91.7	11	1.7
PF4D0755	7.55	30.2					
PF4D0760	7.60	30.4					
PF4D0765	7.65	30.6					
PF4D0770	7.70	30.8					
PF4D0775	7.75	31.0					
PF4D0780	7.80	31.2					
PF4D0785	7.85	31.4					
PF4D0790	7.90	31.6	49.7	41.0	99.7	12	2.2
PF4D0795	7.95	31.8					
PF4D0798	7.98	31.9					
PF4D0799	7.99						
PF4D0800	8.00	32.0					
PF4D0801	8.01						
PF4D0802	8.02	32.1					
PF4D0803	8.03						
PF4D0805	8.05	32.2	54.7	41.0	99.8	13	2.3
PF4D0810	8.10	32.4					
PF4D0815	8.15	32.6					
PF4D0820	8.20	32.8					
PF4D0825	8.25	33.0					
PF4D0830	8.30	33.2					
PF4D0835	8.35	33.4					
PF4D0840	8.40	33.6					
PF4D0845	8.45	33.8	54.8	40.0	99.8	14	2.4
PF4D0850	8.50	34.0					
PF4D0855	8.55	34.2					
PF4D0860	8.60	34.4					
PF4D0865	8.65	34.6					
PF4D0870	8.70	34.8					
PF4D0875	8.75	35.0					
PF4D0880	8.80	35.2					

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCNMS	先端 PL						
PF4D0885	8.85	35.4	56.8	40.0	99.8	9	1.8						
PF4D0890	8.90	35.6			99.9		106.9	10	2.0				
PF4D0895	8.95	35.8	56.9							107.0	11	2.2	
PF4D0898	8.98	35.9											59.9
PF4D0899	8.99	36.0		60.0	107.1	13							
PF4D0900	9.00		62.0				107.1	14	2.5				
PF4D0901	9.01									62.1	107.1	15	2.6
PF4D0902	9.02	62.1											
PF4D0903	9.03			62.1	107.1	17							
PF4D0905	9.05		62.1				107.1	18	2.9				
PF4D0910	9.10									62.1	107.1	19	3.0
PF4D0915	9.15	62.1											
PF4D0920	9.20			62.1	107.1	21							
PF4D0925	9.25		62.1				107.1	22	3.3				
PF4D0930	9.30									62.1	107.1	23	3.4
PF4D0935	9.35	62.1											
PF4D0940	9.40			62.1	107.1	25							
PF4D0945	9.45		62.1				107.1	26	3.7				
PF4D0950	9.50									62.1	107.1	27	3.8
PF4D0955	9.55	62.1											
PF4D0960	9.60			62.1	107.1	29							
PF4D0965	9.65		62.1				107.1	30	4.1				
PF4D0970	9.70									62.1	107.1	31	4.2
PF4D0975	9.75	62.1											
PF4D0980	9.80			62.1	107.1	33							
PF4D0985	9.85		62.1				107.1	34	4.5				
PF4D0990	9.90									62.1	107.1	35	4.6
PF4D0995	9.95	62.1											
PF4D0998	9.98			62.1	107.1	37							
PF4D0999	9.99		62.1				107.1	38	4.9				
PF4D1000	10.00									62.1	107.1	39	5.0
PF4D1010	10.10	62.1											
PF4D1020	10.20			62.1	107.1	41							
PF4D1030	10.30		62.1				107.1	42	5.3				
PF4D1040	10.40									62.1	107.1	43	5.4
PF4D1050	10.50	62.1											
PF4D1060	10.60			62.1	107.1	45							
PF4D1070	10.70		62.1				107.1	46	5.7				
PF4D1080	10.80									62.1	107.1	47	5.8
PF4D1090	10.90	62.1											
PF4D1100	11.00			62.1	107.1	49							
PF4D1110	11.10		62.1				107.1	50	6.1				
PF4D1120	11.20									62.1	107.1	51	6.2
PF4D1130	11.30	62.1											
PF4D1140	11.40			62.1	107.1	53							
PF4D1150	11.50		62.1				107.1	54	6.5				
PF4D1160	11.60									62.1	107.1	55	6.6
PF4D1170	11.70	62.1											
PF4D1180	11.80			62.1	107.1	57							
PF4D1190	11.90		62.1				107.1	58	6.9				
PF4D1200	12.00									62.1	107.1	59	7.0
PF4D1210	12.10	62.1											
PF4D1220	12.20			62.1	107.1	61							
PF4D1230	12.30		62.1				107.1	62	7.3				
PF4D1240	12.40									62.1	107.1	63	7.4
PF4D1250	12.50	62.1											
PF4D1260	12.60			62.1	107.1	65							
PF4D1270	12.70		62.1				107.1	66	7.7				
PF4D1280	12.80									62.1	107.1	67	7.8
PF4D1290	12.90	62.1											
PF4D1300	13.00			62.1	107.1	69							
PF4D1310	13.10		62.1				107.1	70	8.1				
PF4D1320	13.20									62.1	107.1	71	8.2
PF4D1330	13.30	62.1											
PF4D1340	13.40			62.1	107.1	73							
PF4D1350	13.50		62.1				107.1	74	8.5				
PF4D1360	13.60									62.1	107.1	75	8.6
PF4D1370	13.70	62.1											
PF4D1380	13.80			62.1	107.1	77							
PF4D1390	13.90		62.1				107.1	78	8.9				
PF4D1400	14.00									62.1	107.1	79	9.0
PF4D1410	14.10	62.1											
PF4D1420	14.20			62.1	107.1	81							
PF4D1430	14.30		62.1				107.1	82	9.3				
PF4D1440	14.40									62.1	107.1	83	9.4
PF4D1450	14.50	62.1											
PF4D1460	14.60			62.1	107.1	85							
PF4D1470	14.70		62.1				107.1	86	9.7				
PF4D1480	14.80									62.1	107.1	87	9.8
PF4D1490	14.90	62.1											
PF4D1500	15.00			62.1	107.1	89							
PF4D1510	15.10		62.1				107.1	90	10.1				
PF4D1520	15.20									62.1	107.1	91	10.2
PF4D1530	15.30	62.1											
PF4D1540	15.40			62.1	107.1	93							
PF4D1550	15.50		62.1				107.1	94	10.5				
PF4D1560	15.60									62.1	107.1	95	10.6
PF4D1570	15.70	62.1											
PF4D1580	15.80			62.1	107.1	97							
PF4D1590	15.90		62.1				107.1	98	10.9				
PF4D1600	16.00									62.1	107.1	99	11.0
PF4D1610	16.10	62.1											
PF4D1620	16.20			62.1	107.1	101							
PF4D1630	16.30		62.1				107.1	102	11.3				
PF4D1640	16.40									62.1	107.1	103	11.4
PF4D1650	16.50	62.1											
PF4D1660	16.60			62.1	107.1	105							
PF4D1670	16.70		62.1				107.1	106	11.7				
PF4D1680	16.80									62.1	107.1	107	11.8
PF4D1690	16.90	62.1											
PF4D1700	17.00			62.1	107.1	109							
PF4D1710	17.10		62.1				107.1	110	12.1				
PF4D1720	17.20									62.1	107.1	111	12.2
PF4D1730	17.30	62.1											
PF4D1740	17.40			62.1	107.1	113							
PF4D1750	17.50		62.1				107.1	114	12.5				
PF4D1760	17.60									62.1	107.1	115	12.6
PF4D1770	17.70	62.1											
PF4D1780	17.80			62.1	107.1	117							
PF4D1790	17.90		62.1				107.1	118	12.9				
PF4D1800	18.00									62.1	107.1	119	13.0
PF4D1810	18.10	62.1											
PF4D1820	18.20			62.1	107.1	121							
PF4D1830	18.30		62.1				107.1	122	13.3				
PF4D1840	18.40									62.1	107.1	123	13.4
PF4D1850	18.50	62.1											
PF4D1860	18.60			62.1	107.1	125							
PF4D1870	18.70		62.1				107.1	126	13.7				
PF4D1880	18.80									62.1	107.1	127	13.8
PF4D1890	18.90	62.1											
PF4D1900	19.00			62.1	107.1	129							
PF4D1910	19.10		62.1				107.1	130	14.1				
PF4D1920	19.20									62.1	107.1	131	14.2
PF4D1930	19.30	62.1											
PF4D1940	19.40			62.1	107.1	133							
PF4D1950	19.50		62.1				107.1	134	14.5				
PF4D1960	19.60									62.1	107.1	135	14.6
PF4D1970	19.70	62.1											
PF4D1980	19.80			62.1	107.1	137							
PF4D1990	19.90		62.1				107.1	138	14.9				
PF4D2000	20.00									62.1	107.1	139	15.0
PF4D2010	20.10	62.1											
PF4D2020	20.20			62.1	107.1	141							
PF4D2030	20.30		62.1				107.1	142	15.3				
PF4D2040	20.40									62.1	107.1	143	15.4
PF4D2050	20.50	62.1											
PF4D2060	20.60			62.1	107.1	145							
PF4D2070	20.70		62.1				107.1	146	15.7				
PF4D2080	20.80									62.1	107.1	147	15.8
PF4D2090	20.90	62.1											
PF4D2100	21.00			62.1	107.1	149							
PF4D2110	21.10		62.1				107.1	150	16.1				
PF4D2120	21.20									62.1	107.1	151	16.2
PF4D2130	21.30	62.1											
PF4D2140	21.40			62.1	107.1	153							
PF4D2150	21.50		62.1				107.1	154	16.5				
PF4D2160	21.60									62.1	107.1	155	16.6
PF4D2170	21.70	62.1											
PF4D2180	21.80			62.1	107.1	157							
PF4D2190	21.90		62.1				107.1	158	16.9				
PF4D2200	22.00									62.1	107.1	159	17.0
PF4D2210	22.10	62.1											
PF4D2220	22.20			62.1	107.1	161							
PF4D2230	22.30		62.1				107.1	162	17.3				
PF4D2240	22.40									62.1	107.1	163	17.4
PF4D2250	22.50	62.1											
PF4D2260	22.60			62.1	107.1	165							
PF4D2270	22.70		62.1				107.1	166	17.7				
PF4D2280	22.80									62.1	107.1	167	17.8
PF4D2290	22.90	62.1											
PF4D2300	23.00			62.1	107.1	169							
PF4D2310	23.10		62.1				107.1	170	18.1				
PF4D2320	23.20									62.1	107.1	171	18.2
PF4D2330	23.30	62.1											
PF4D2340	23.40			62.1	107.1	173							
PF4D2350	23.50		62.1				107.1	174	18.5				
PF4D2360	23.60									62.1	107.1	175	18.6
PF4D2370	23.70	62.1											
PF4D2380													

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新商品

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL		
PF4D1300	13.00	52.0	80.7	56.0	139.7	13	2.7		
PF4D1310	13.10	52.4	86.7	59.0	149.7	14			
PF4D1320	13.20	52.8							
PF4D1330	13.30	53.2							
PF4D1340	13.40	53.6	86.8		58.0		149.8	14	
PF4D1350	13.50	54.0							
PF4D1360	13.60	54.4	88.8	149.9		149.9	2.8		
PF4D1370	13.70	54.8							
PF4D1380	13.80	55.2	88.9		60.0			155.9	15
PF4D1390	13.90	55.6							
PF4D1400	14.00	56.0	91.9	156.0		156.1	3.0		
PF4D1410	14.10	56.4							
PF4D1420	14.20	56.8	92.0		59.0			156.1	3.1
PF4D1430	14.30	57.2							
PF4D1440	14.40	57.6	94.0	97.1		163.1	16		
PF4D1450	14.50	58.0							
PF4D1460	14.60	58.4	94.1		62.0			163.2	3.2
PF4D1470	14.70	58.8							
PF4D1480	14.80	59.2	99.2	61.0		163.3	3.3		
PF4D1490	14.90	59.6							
PF4D1500	15.00	60.0	97.1		99.2			163.2	3.2
PF4D1510	15.10	60.4							
PF4D1520	15.20	60.8	97.2	99.3		163.3	3.3		
PF4D1530	15.30	61.2							
PF4D1540	15.40	61.6	99.2		99.3			163.3	3.3
PF4D1550	15.50	62.0							
PF4D1560	15.60	62.4	99.3	61.0		163.3	3.3		
PF4D1570	15.70	62.8							
PF4D1580	15.80	63.2	99.3		61.0			163.3	3.3
PF4D1590	15.90	63.6							
PF4D1600	16.00	64.0							

切削工具

套装商品
其它

精密工具

技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	—	○	×	×

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

AQDEXDLM-4D

AQUA EX 微型钻 螺旋角 渐弱型
AQUA Drills EX Micro Twist Angle Decrescendo Type

切削条件 Cutting Condition ▶ A-150

Carbide
工具材料

AQ
EX
涂层

h7
直径公差

135°
先端角


30°
螺旋角

h6
柄径公差

0.5-3.0
直径范围

●在容易出现切屑堵塞的车床加工及加工中心的超高速进给加工中，可实现高精度、长寿命的4D用钻头。

Realize high accuracy and longer tool life in ultra high speed drilling in machining center or turning machine where chip jamming is easy to occur.(4D)

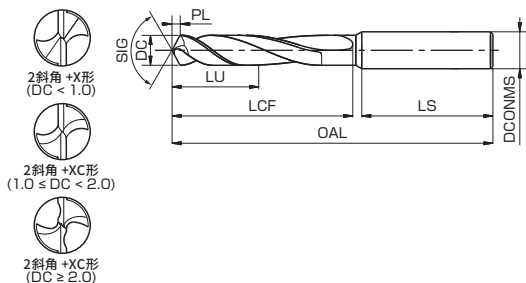

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXDLM-4D0050	0.50	2.0	3.6	29.3				
AQDEXDLM-4D0051	0.51							
AQDEXDLM-4D0052	0.52	2.1		29.0				
AQDEXDLM-4D0053	0.53		4.0					
AQDEXDLM-4D0054	0.54							
AQDEXDLM-4D0055	0.55	2.2						
AQDEXDLM-4D0056	0.56							
AQDEXDLM-4D0057	0.57							
AQDEXDLM-4D0058	0.58	2.3	4.3	28.8				
AQDEXDLM-4D0059	0.59							
AQDEXDLM-4D0060	0.60	2.4			38.1		0.1	
AQDEXDLM-4D0061	0.61							
AQDEXDLM-4D0062	0.62							
AQDEXDLM-4D0063	0.63	2.5	4.7	28.5				
AQDEXDLM-4D0064	0.64							
AQDEXDLM-4D0065	0.65	2.6						
AQDEXDLM-4D0066	0.66							
AQDEXDLM-4D0067	0.67							
AQDEXDLM-4D0068	0.68	2.7	5.0	28.3				
AQDEXDLM-4D0069	0.69							
AQDEXDLM-4D0070	0.70	2.8						
AQDEXDLM-4D0071	0.71							
AQDEXDLM-4D0072	0.72	2.9	5.4	28.0				
AQDEXDLM-4D0073	0.73							
AQDEXDLM-4D0074	0.74	3.0	5.5					
AQDEXDLM-4D0075	0.75							
AQDEXDLM-4D0076	0.76							
AQDEXDLM-4D0077	0.77	3.1						
AQDEXDLM-4D0078	0.78		5.8	27.8		3		□
AQDEXDLM-4D0079	0.79							
AQDEXDLM-4D0080	0.80	3.2						
AQDEXDLM-4D0081	0.81							
AQDEXDLM-4D0082	0.82	3.3	6.2	27.5				
AQDEXDLM-4D0083	0.83							
AQDEXDLM-4D0084	0.84	3.4						
AQDEXDLM-4D0085	0.85							
AQDEXDLM-4D0086	0.86							
AQDEXDLM-4D0087	0.87	3.5	6.5	27.3				
AQDEXDLM-4D0088	0.88							
AQDEXDLM-4D0089	0.89	3.6			38.2		0.2	
AQDEXDLM-4D0090	0.90							
AQDEXDLM-4D0091	0.91							
AQDEXDLM-4D0092	0.92	3.7	6.8	27.1				
AQDEXDLM-4D0093	0.93							
AQDEXDLM-4D0094	0.94	3.8						
AQDEXDLM-4D0095	0.95							
AQDEXDLM-4D0096	0.96	3.9	7.2	26.7				
AQDEXDLM-4D0097	0.97							
AQDEXDLM-4D0098	0.98	4.0		26.8				
AQDEXDLM-4D0099	0.99							
AQDEXDLM-4D0100	1.00							
AQDEXDLM-4D0101	1.01	4.1		26.2				
AQDEXDLM-4D0102	1.02							
AQDEXDLM-4D0103	1.03	4.2	7.9					
AQDEXDLM-4D0104	1.04							
AQDEXDLM-4D0105	1.05							
AQDEXDLM-4D0106	1.06	4.3		26.3				
AQDEXDLM-4D0107	1.07							
AQDEXDLM-4D0108	1.08	4.4						
AQDEXDLM-4D0109	1.09							

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXDLM-4D0110	1.10	4.4	7.9	26.3				
AQDEXDLM-4D0111	1.11							
AQDEXDLM-4D0112	1.12	4.5		25.6				
AQDEXDLM-4D0113	1.13							
AQDEXDLM-4D0114	1.14							
AQDEXDLM-4D0115	1.15	4.6	8.6	38.2			0.2	
AQDEXDLM-4D0116	1.16							
AQDEXDLM-4D0117	1.17	4.7		25.7				
AQDEXDLM-4D0118	1.18							
AQDEXDLM-4D0119	1.19	4.8						
AQDEXDLM-4D0120	1.20							
AQDEXDLM-4D0121	1.21							
AQDEXDLM-4D0122	1.22	4.9		25.1				
AQDEXDLM-4D0123	1.23							
AQDEXDLM-4D0124	1.24	5.0	9.4	25.2				
AQDEXDLM-4D0125	1.25							
AQDEXDLM-4D0126	1.26							
AQDEXDLM-4D0127	1.27	5.1		24.7				
AQDEXDLM-4D0128	1.28							
AQDEXDLM-4D0129	1.29	5.2		24.6				
AQDEXDLM-4D0130	1.30							
AQDEXDLM-4D0131	1.31	5.3	10.1	38.3				
AQDEXDLM-4D0132	1.32							
AQDEXDLM-4D0133	1.33	5.4		24.7				
AQDEXDLM-4D0134	1.34							
AQDEXDLM-4D0135	1.35	5.5		24.1				
AQDEXDLM-4D0136	1.36							
AQDEXDLM-4D0137	1.37	5.6	10.8	24.2			0.3	
AQDEXDLM-4D0138	1.38							
AQDEXDLM-4D0139	1.39	5.7		24.2				
AQDEXDLM-4D0140	1.40							
AQDEXDLM-4D0141	1.41	5.8		24.2				
AQDEXDLM-4D0142	1.42							
AQDEXDLM-4D0143	1.43	5.9		24.2				
AQDEXDLM-4D0144	1.44							
AQDEXDLM-4D0145	1.45	6.0	11.5	35.6				
AQDEXDLM-4D0146	1.46							
AQDEXDLM-4D0147	1.47	6.1		35.7				
AQDEXDLM-4D0148	1.48							
AQDEXDLM-4D0149	1.49	6.2		35.1				
AQDEXDLM-4D0150	1.50							
AQDEXDLM-4D0151	1.51	6.3		35.2				
AQDEXDLM-4D0152	1.52							
AQDEXDLM-4D0153	1.53	6.4		35.2				
AQDEXDLM-4D0154	1.54							
AQDEXDLM-4D0155	1.55	6.5	12.2	50.4			0.4	
AQDEXDLM-4D0156	1.56							
AQDEXDLM-4D0157	1.57	6.6		50.4				
AQDEXDLM-4D0158	1.58							
AQDEXDLM-4D0159	1.59	6.7		50.4				
AQDEXDLM-4D0160	1.60							
AQDEXDLM-4D0161	1.61	6.8	12.3	50.4				
AQDEXDLM-4D0162	1.62							
AQDEXDLM-4D0163	1.63							
AQDEXDLM-4D0164	1.64							
AQDEXDLM-4D0165	1.65							
AQDEXDLM-4D0166	1.66							
AQDEXDLM-4D0167	1.67							
AQDEXDLM-4D0168	1.68							
AQDEXDLM-4D0169	1.69							

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Next Page 下一页 ➔

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	在庫 Stock
AQDEXDLM-4D0290	2.90	11.6	19.6	28.0	50.6	3	0.6	☐
AQDEXDLM-4D0291	2.91							
AQDEXDLM-4D0292	2.92							
AQDEXDLM-4D0293	2.93							
AQDEXDLM-4D0294	2.94							
AQDEXDLM-4D0295	2.95							
AQDEXDLM-4D0296	2.96							
AQDEXDLM-4D0297	2.97							
AQDEXDLM-4D0298	2.98							
AQDEXDLM-4D0299	2.99							
AQDEXDLM-4D0300	3.00							

●用于耐热合金难削材加工，兼具耐磨性和耐崩性的钻头。

This drill has both wear and chipping resistance for Heat Resistant Alloy that are Difficult-to-Cut Material.

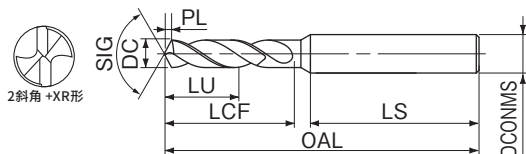

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXSN0300	3.000	9.0	13.5	30	45.5	3	0.5	□
AQDEXSN0310	3.100	9.3						
AQDEXSN03175	3.175	9.5						
AQDEXSN0320	3.200	9.6	19.6	32	54.6		0.6	
AQDEXSN0330	3.300	9.9						
AQDEXSN0340	3.400	10.2						
AQDEXSN0350	3.500	10.5						
AQDEXSN0360	3.600	10.8						
AQDEXSN0370	3.700	11.1						
AQDEXSN0380	3.800	11.4	21.7	30	54.7		0.7	
AQDEXSN0390	3.900	11.7						□
AQDEXSN0400	4.000	12.0						
AQDEXSN0410	4.100	12.3	23.7		61.7			
AQDEXSN0420	4.200	12.6						
AQDEXSN0430	4.300	12.9						
AQDEXSN0440	4.400	13.2	23.8	35	61.8		0.8	
AQDEXSN0450	4.500	13.5						
AQDEXSN0460	4.600	13.8	25.8					
AQDEXSN0470	4.700	14.1						
AQDEXSN04763	4.763	14.3						
AQDEXSN0480	4.800	14.4						□
AQDEXSN0490	4.900	14.7						
AQDEXSN0500	5.000	15.0						
AQDEXSN0510	5.100	15.3	25.9				0.9	
AQDEXSN0520	5.200	15.6						
AQDEXSN0530	5.300	15.9						
AQDEXSN0540	5.400	16.2	26.0					
AQDEXSN0550	5.500	16.5						
AQDEXSN0560	5.600	16.8						
AQDEXSN0570	5.700	17.1	28.0					
AQDEXSN0580	5.800	17.4						□
AQDEXSN0590	5.900	17.7	28.1					
AQDEXSN0600	6.000	18.0						
AQDEXSN0610	6.100	18.3						
AQDEXSN0620	6.200	18.6	32.1				1.1	
AQDEXSN0630	6.300	18.9						
AQDEXSN0635	6.350	19.1						
AQDEXSN0640	6.400	19.2	32.2					
AQDEXSN0650	6.500	19.5						
AQDEXSN0660	6.600	19.8						
AQDEXSN0670	6.700	20.1	34.2					□
AQDEXSN0680	6.800	20.4						
AQDEXSN0690	6.900	20.7						
AQDEXSN0700	7.000	21.0						
AQDEXSN0710	7.100	21.3						
AQDEXSN0720	7.200	21.6	34.3					
AQDEXSN0730	7.300	21.9						
AQDEXSN0740	7.400	22.2						
AQDEXSN0750	7.500	22.5	34.4					
AQDEXSN0760	7.600	22.8						
AQDEXSN0770	7.700	23.1						□
AQDEXSN0780	7.800	23.4						
AQDEXSN0790	7.900	23.7	37.4					
AQDEXSN07938	7.938	23.8						
AQDEXSN0800	8.000	24.0						
AQDEXSN0810	8.100	24.3						
AQDEXSN0820	8.200	24.6						
AQDEXSN0830	8.300	24.9	37.5					
AQDEXSN0840	8.400	25.2						
AQDEXSN0850	8.500	25.5						

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXSN0860	8.600	25.8						□
AQDEXSN0870	8.700	26.1						
AQDEXSN0880	8.800	26.4	39.6	41	83.6	9	1.6	
AQDEXSN0890	8.900	26.7						
AQDEXSN0900	9.000	27.0						
AQDEXSN0910	9.100	27.3						
AQDEXSN0920	9.200	27.6						
AQDEXSN0930	9.300	27.9	39.7	46	88.7		1.7	
AQDEXSN0940	9.400	28.2						
AQDEXSN0950	9.500	28.5						
AQDEXSN09525	9.525	28.6						□
AQDEXSN0960	9.600	28.8	42.7			10		
AQDEXSN0970	9.700	29.1						
AQDEXSN0980	9.800	29.4						
AQDEXSN0990	9.900	29.7	42.8				1.8	
AQDEXSN1000	10.000	30.0						
AQDEXSN1010	10.100	30.3						
AQDEXSN1020	10.200	30.6						
AQDEXSN1030	10.300	30.9	42.9	49	94.8		1.9	
AQDEXSN1040	10.400	31.2						
AQDEXSN1050	10.500	31.5						□
AQDEXSN1060	10.600	31.8	46.9			11		
AQDEXSN1070	10.700	32.1						
AQDEXSN1080	10.800	32.4	47.0	45	95.0		2.0	
AQDEXSN1090	10.900	32.7						
AQDEXSN1100	11.000	33.0						
AQDEXSN1110	11.100	33.3	47.1					
AQDEXSN1113	11.113	33.3						
AQDEXSN1120	11.200	33.6						
AQDEXSN1130	11.300	33.9	52				2.1	
AQDEXSN1140	11.400	34.2						□
AQDEXSN1150	11.500	34.5	47.1			12		
AQDEXSN1160	11.600	34.8						
AQDEXSN1170	11.700	35.1	49.1					
AQDEXSN1180	11.800	35.4						
AQDEXSN1190	11.900	35.7						
AQDEXSN1200	12.000	36.0	49.2	50	102.2		2.2	
AQDEXSN1210	12.100	36.3						
AQDEXSN1220	12.200	36.6						
AQDEXSN1230	12.300	36.9	49.3					
AQDEXSN1240	12.400	37.2						□
AQDEXSN1250	12.500	37.5	51.3	48	102.3		2.3	
AQDEXSN1260	12.600	37.8						
AQDEXSN1270	12.700	38.1						
AQDEXSN1280	12.800	38.4						
AQDEXSN1290	12.900	38.7	51.4					
AQDEXSN1300	13.000	39.0						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30~40 HRC	40~50 HRC	50~65HRC
—	—	—	—	—	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	◎	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●用于耐热合金难削材加工，兼具耐磨性和耐崩性的钻头。

This drill has both wear and chipping resistance for Heat Resistant Alloy that are Difficult-to-Cut Material.

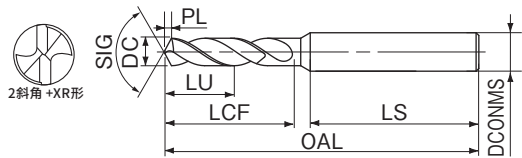

新商品

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXRN0300	3.000	15.0	19.5	30	49.5	3	0.5	
AQDEXRN0310	3.100	15.5						
AQDEXRN03175	3.175	15.9						
AQDEXRN0320	3.200	16.0	24.6	34	60.6		0.6	
AQDEXRN0330	3.300	16.5						
AQDEXRN0340	3.400	17.0				4		
AQDEXRN0350	3.500	17.5						
AQDEXRN0360	3.600	18.0						
AQDEXRN0370	3.700	18.5						
AQDEXRN0380	3.800	19.0	27.7	33	60.7		0.7	
AQDEXRN0390	3.900	19.5						
AQDEXRN0400	4.000	20.0						
AQDEXRN0410	4.100	20.5	31.7		76.7			
AQDEXRN0420	4.200	21.0						
AQDEXRN0430	4.300	21.5						
AQDEXRN0440	4.400	22.0	31.8	43	76.8		0.8	
AQDEXRN0450	4.500	22.5						
AQDEXRN0460	4.600	23.0	38.8			5		
AQDEXRN0470	4.700	23.5						
AQDEXRN04763	4.763	23.8						
AQDEXRN0480	4.800	24.0	38.9	38	76.9		0.9	
AQDEXRN0490	4.900	24.5						
AQDEXRN0500	5.000	25.0						
AQDEXRN0510	5.100	25.5	39.9		81.9			
AQDEXRN0520	5.200	26.0						
AQDEXRN0530	5.300	26.5						
AQDEXRN0540	5.400	27.0	40.0		82.0	6	1.0	
AQDEXRN0550	5.500	27.5						
AQDEXRN0560	5.600	28.0						
AQDEXRN0570	5.700	28.5	42.0		82.1			
AQDEXRN0580	5.800	29.0						
AQDEXRN0590	5.900	29.5	42.1		82.1		1.1	
AQDEXRN0600	6.000	30.0						
AQDEXRN0610	6.100	30.5						
AQDEXRN0620	6.200	31.0	43.1	40	84.1			
AQDEXRN0630	6.300	31.5						
AQDEXRN06350	6.350	31.8						
AQDEXRN0640	6.400	32.0						
AQDEXRN0650	6.500	32.5	43.2		84.2	7	1.2	
AQDEXRN0660	6.600	33.0						
AQDEXRN0670	6.700	33.5	44.2					
AQDEXRN0680	6.800	34.0						
AQDEXRN0690	6.900	34.5						
AQDEXRN0700	7.000	35.0	44.3		84.3			
AQDEXRN0710	7.100	35.5					1.3	
AQDEXRN0720	7.200	36.0						
AQDEXRN0730	7.300	36.5	46.3	43	91.3			
AQDEXRN0740	7.400	37.0						
AQDEXRN0750	7.500	37.5	46.4					
AQDEXRN0760	7.600	38.0						
AQDEXRN0770	7.700	38.5						
AQDEXRN0780	7.800	39.0	49.4	42	91.4		1.4	
AQDEXRN0790	7.900	39.5						
AQDEXRN07938	7.938	39.7						
AQDEXRN0800	8.000	40.0	49.5		91.5			
AQDEXRN0810	8.100	40.5						
AQDEXRN0820	8.200	41.0						
AQDEXRN0830	8.300	41.5	54.5	43	99.5	9	1.5	
AQDEXRN0840	8.400	42.0						
AQDEXRN0850	8.500	42.5						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXRN0860	8.600	43.0						
AQDEXRN0870	8.700	43.5						
AQDEXRN0880	8.800	44.0	56.6	43	99.6	9	1.6	
AQDEXRN0890	8.900	44.5						
AQDEXRN0900	9.000	45.0						
AQDEXRN0910	9.100	45.5						
AQDEXRN0920	9.200	46.0						
AQDEXRN0930	9.300	46.5	59.7		106.7		1.7	
AQDEXRN0940	9.400	47.0						
AQDEXRN0950	9.500	47.5						
AQDEXRN09525	9.525	47.6						
AQDEXRN0960	9.600	48.0	61.7	45		10		
AQDEXRN0970	9.700	48.5						
AQDEXRN0980	9.800	49.0						
AQDEXRN0990	9.900	49.5	61.8		106.8		1.8	
AQDEXRN1000	10.000	50.0						
AQDEXRN1010	10.100	50.5	67.8		115.8			
AQDEXRN1020	10.200	51.0						
AQDEXRN1030	10.300	51.5						
AQDEXRN1040	10.400	52.0	67.9		115.9		1.9	
AQDEXRN1050	10.500	52.5						
AQDEXRN1060	10.600	53.0						
AQDEXRN1070	10.700	53.5	69.9	46		11		
AQDEXRN1080	10.800	54.0						
AQDEXRN1090	10.900	54.5	70.0		116.0			
AQDEXRN1100	11.000	55.0						
AQDEXRN1110	11.100	55.5					2.0	
AQDEXRN11113	11.113	55.6	73.0		123.0			
AQDEXRN1120	11.200	56.0						
AQDEXRN1130	11.300	56.5						
AQDEXRN1140	11.400	57.0	73.1					
AQDEXRN1150	11.500	57.5						
AQDEXRN1160	11.600	58.0	48	123.1		12	2.1	
AQDEXRN1170	11.700	58.5	75.1					
AQDEXRN1180	11.800	59.0						
AQDEXRN1190	11.900	59.5	75.2		123.2			
AQDEXRN1200	12.000	60.0						
AQDEXRN1210	12.100	60.5						
AQDEXRN1220	12.200	61.0	78.2		139.2		2.2	
AQDEXRN1230	12.300	61.5						
AQDEXRN1240	12.400	62.0	78.3					
AQDEXRN1250	12.500	62.5						
AQDEXRN1260	12.600	63.0						
AQDEXRN1270	12.700	63.5	80.3	59	139.3		2.3	
AQDEXRN1280	12.800	64.0						
AQDEXRN1290	12.900	64.5						
AQDEXRN1300	13.000	65.0	80.4		139.4		2.4	

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65 HRC
—	—	—	—	—	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	◎	—	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

- 本钻头可以实现稳定的湿式加工、MQL 加工。
- 可以进行钻头直径 3D 用高效率孔加工。

This drill provides reliable wet and MQL drilling.
High performance up to 3x drill diameter.

新商品



硬质合金钻头

LIST 9604

订货方式 商品编码

高速钢钻头


丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

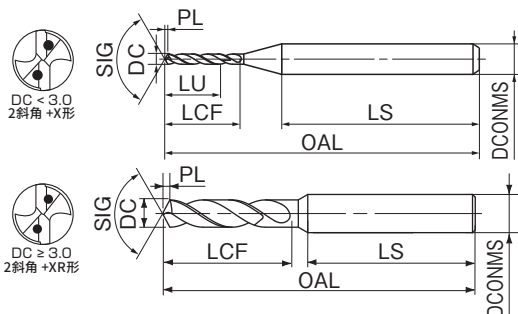技术资料
索引

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH3D0100	1.00	3.0	6.2	43.3	54.2			●
AQDEXOH3D0101	1.01							□
AQDEXOH3D0102	1.02	3.1		43.4	55.2	0.2		●
AQDEXOH3D0103	1.03							□
AQDEXOH3D0104	1.04	3.2	7.2	43.4	55.2	0.2		●
AQDEXOH3D0105	1.05							□
AQDEXOH3D0106	1.06	3.3		43.5	55.2	0.2		●
AQDEXOH3D0107	1.07							□
AQDEXOH3D0108	1.08	3.4		42.5	55.2	0.2		●
AQDEXOH3D0109	1.09							□
AQDEXOH3D0110	1.10	3.5	8.2	42.6	55.3	0.3		●
AQDEXOH3D0111	1.11							□
AQDEXOH3D0112	1.12	3.6		42.7	55.3	0.3		●
AQDEXOH3D0113	1.13							□
AQDEXOH3D0114	1.14	3.7		42.8	55.3	0.3		●
AQDEXOH3D0115	1.15							□
AQDEXOH3D0116	1.16	3.8	8.3	42.9	55.4	0.4		●
AQDEXOH3D0117	1.17							□
AQDEXOH3D0118	1.18	3.9		43.0	55.4	0.4		●
AQDEXOH3D0119	1.19							□
AQDEXOH3D0120	1.20	4.0	9.3	43.1	55.5	0.4		●
AQDEXOH3D0121	1.21							□
AQDEXOH3D0122	1.22	4.1		43.2	55.5	0.4		●
AQDEXOH3D0123	1.23							□
AQDEXOH3D0124	1.24	4.2		43.3	55.5	0.4		●
AQDEXOH3D0125	1.25							□
AQDEXOH3D0126	1.26	4.3	10.3	43.4	55.6	0.4		●
AQDEXOH3D0127	1.27							□
AQDEXOH3D0128	1.28	4.4		43.5	55.6	0.4		●
AQDEXOH3D0129	1.29							□
AQDEXOH3D0130	1.30	4.5		43.6	55.6	0.4		●
AQDEXOH3D0131	1.31							□
AQDEXOH3D0132	1.32	4.6		43.7	55.7	0.4		●
AQDEXOH3D0133	1.33							□
AQDEXOH3D0134	1.34	4.7		43.8	55.7	0.4		●
AQDEXOH3D0135	1.35							□
AQDEXOH3D0136	1.36	4.8		43.9	55.8	0.4		●
AQDEXOH3D0137	1.37							□
AQDEXOH3D0138	1.38	4.9		44.0	55.8	0.4		●
AQDEXOH3D0139	1.39							□
AQDEXOH3D0140	1.40	5.0		44.1	55.9	0.4		●
AQDEXOH3D0141	1.41							□
AQDEXOH3D0142	1.42	5.1		44.2	55.9	0.4		●
AQDEXOH3D0143	1.43							□
AQDEXOH3D0144	1.44	5.2		44.3	56.0	0.4		●
AQDEXOH3D0145	1.45							□
AQDEXOH3D0146	1.46	5.3		44.4	56.0	0.4		●
AQDEXOH3D0147	1.47							□
AQDEXOH3D0148	1.48	5.4		44.5	56.1	0.4		●
AQDEXOH3D0149	1.49							□
AQDEXOH3D0150	1.50	5.5		44.6	56.1	0.4		●
AQDEXOH3D0151	1.51							□
AQDEXOH3D0152	1.52	5.6		44.7	56.2	0.4		●
AQDEXOH3D0153	1.53							□
AQDEXOH3D0154	1.54	5.7		44.8	56.2	0.4		●
AQDEXOH3D0155	1.55							□
AQDEXOH3D0156	1.56	5.8		44.9	56.3	0.4		●
AQDEXOH3D0157	1.57							□

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	在庫 Stock
AQDEXOH3D0158	1.58	4.7	11.3	43.4	58.3	3	0.3	□
AQDEXOH3D0159	1.59	4.8						●
AQDEXOH3D0160	1.60							□
AQDEXOH3D0161	1.61	4.9						●
AQDEXOH3D0162	1.62		5.0	43.5	□			
AQDEXOH3D0163	1.63	●						
AQDEXOH3D0164	1.64	5.1			43.6	□		
AQDEXOH3D0165	1.65					●		
AQDEXOH3D0166	1.66	5.2	42.6	58.4	0.4	□		
AQDEXOH3D0167	1.67					5.3	42.7	●
AQDEXOH3D0168	1.68							5.4
AQDEXOH3D0169	1.69					5.5	42.9	
AQDEXOH3D0170	1.70	5.6	43.0	□				
AQDEXOH3D0171	1.71			5.7	43.1			●
AQDEXOH3D0172	1.72	5.8	43.2					□
AQDEXOH3D0173	1.73			5.9	43.3	●		
AQDEXOH3D0174	1.74					6.0	43.4	□
AQDEXOH3D0175	1.75			6.1	43.5			●
AQDEXOH3D0176	1.76	6.2	43.6			□		
AQDEXOH3D0177	1.77					6.3	43.7	●
AQDEXOH3D0178	1.78	6.4	43.8					□
AQDEXOH3D0179	1.79			6.5	43.9	●		
AQDEXOH3D0180	1.80					6.6	44.0	□
AQDEXOH3D0181	1.81			6.7	44.1			●
AQDEXOH3D0182	1.82	6.8	44.2			□		
AQDEXOH3D0183	1.83					6.9	44.3	●
AQDEXOH3D0184	1.84	7.0	44.4					□
AQDEXOH3D0185	1.85			7.1	44.5	●		
AQDEXOH3D0186	1.86					7.2	44.6	□
AQDEXOH3D0187	1.87			7.3	44.7			●
AQDEXOH3D0188	1.88	7.4	44.8			□		
AQDEXOH3D0189	1.89					7.5	44.9	●
AQDEXOH3D0190	1.90	7.6	45.0					□
AQDEXOH3D0191	1.91			7.7	45.1	●		
AQDEXOH3D0192	1.92					7.8	45.2	□
AQDEXOH3D0193	1.93			7.9	45.3			●
AQDEXOH3D0194	1.94	8.0	45.4			□		
AQDEXOH3D0195	1.95					8.1	45.5	●
AQDEXOH3D0196	1.96	8.2	45.6					□
AQDEXOH3D0197	1.97			8.3	45.7	●		
AQDEXOH3D0198	1.98					8.4	45.8	□
AQDEXOH3D0199	1.99			8.5	45.9			●
AQDEXOH3D0200	2.00	8.6	46.0			□		
AQDEXOH3D0201	2.01					8.7	46.1	●
AQDEXOH3D0202	2.02	8.8	46.2					□
AQDEXOH3D0203	2.03			8.9	46.3	●		
AQDEXOH3D0204	2.04					9.0	46.4	□
AQDEXOH3D0205	2.05			9.1	46.5			●
AQDEXOH3D0206	2.06	9.2	46.6			□		
AQDEXOH3D0207	2.07					9.3	46.7	●
AQDEXOH3D0208	2.08	9.4	46.8					□
AQDEXOH3D0209	2.09			9.5	46.9	●		
AQDEXOH3D0210	2.10					9.6	47.0	□
AQDEXOH3D0211	2.11			9.7	47.1			●
AQDEXOH3D0212	2.12	9.8	47.2			□		
AQDEXOH3D0213	2.13					9.9	47.3	●
AQDEXOH3D0214	2.14	10.0	47.4					□
AQDEXOH3D0215	2.15			10.1	47.5	●		

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONIS	先端 PL	在庫 Stock
AQDEXOH3D0216	2.16	6.5	13.4	47.4	63.4		0.4	
AQDEXOH3D0217	2.17			47.5				
AQDEXOH3D0218	2.18							
AQDEXOH3D0219	2.19	6.6	13.5		47.6	63.5		●
AQDEXOH3D0220	2.20			47.7				
AQDEXOH3D0221	2.21							
AQDEXOH3D0222	2.22	6.7	14.5		46.8	68.5		□
AQDEXOH3D0223	2.23			46.9				
AQDEXOH3D0224	2.24							
AQDEXOH3D0225	2.25	6.8	15.5		50.1	68.6		●
AQDEXOH3D0226	2.26			50.2				
AQDEXOH3D0227	2.27							
AQDEXOH3D0228	2.28	6.9	16.5		50.3	68.6		□
AQDEXOH3D0229	2.29			50.4				
AQDEXOH3D0230	2.30							
AQDEXOH3D0231	2.31	7.0	17.5		48.3	68.6		●
AQDEXOH3D0232	2.32			48.4				
AQDEXOH3D0233	2.33							
AQDEXOH3D0234	2.34	7.1	18.0		48.5	68.6		□
AQDEXOH3D0235	2.35			48.6				
AQDEXOH3D0236	2.36							
AQDEXOH3D0237	2.37	7.2	18.1		48.7	68.6		●
AQDEXOH3D0238	2.38			48.8				
AQDEXOH3D0239	2.39							
AQDEXOH3D0240	2.40	7.3	18.2		48.9	68.6		□
AQDEXOH3D0241	2.41			48.9				
AQDEXOH3D0242	2.42							
AQDEXOH3D0243	2.43	7.4	18.3		49.0	68.6		●
AQDEXOH3D0244	2.44			49.1				
AQDEXOH3D0245	2.45							
AQDEXOH3D0246	2.46	7.5	18.4		49.2	68.6		□
AQDEXOH3D0247	2.47			49.3				
AQDEXOH3D0248	2.48							
AQDEXOH3D0249	2.49	7.6	18.5		49.4	68.6		●
AQDEXOH3D0250	2.50			49.5				
AQDEXOH3D0251	2.51							
AQDEXOH3D0252	2.52	7.7	18.6		49.6	68.6		□
AQDEXOH3D0253	2.53			49.7				
AQDEXOH3D0254	2.54							
AQDEXOH3D0255	2.55	7.8	18.7		49.8	68.6		●
AQDEXOH3D0256	2.56			49.9				
AQDEXOH3D0257	2.57							
AQDEXOH3D0258	2.58	7.9	18.8		49.9	68.6		□
AQDEXOH3D0259	2.59			50.0				
AQDEXOH3D0260	2.60							
AQDEXOH3D0261	2.61	8.0	18.9		50.1	68.6		●
AQDEXOH3D0262	2.62			50.2				
AQDEXOH3D0263	2.63							
AQDEXOH3D0264	2.64	8.1	19.0		50.3	68.6		□
AQDEXOH3D0265	2.65			50.4				
AQDEXOH3D0266	2.66							
AQDEXOH3D0267	2.67	8.2	19.1		50.4	68.6		●
AQDEXOH3D0268	2.68			50.5				
AQDEXOH3D0269	2.69							
AQDEXOH3D0270	2.70	8.1	18.1		48.4	68.6	0.6	□
AQDEXOH3D0271	2.71			48.5				
AQDEXOH3D0272	2.72							
AQDEXOH3D0273	2.73	8.2	18.1		48.5	68.6		□
AQDEXOH3D0274	2.74			48.6				
AQDEXOH3D0275	2.75							

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 CONMS	先端 PL	在庫 Stock		
AQDEXOH3D0274	2.74	8.2	18.1	48.5	68.6	3	0.6			
AQDEXOH3D0275	2.75	8.3		48.6						
AQDEXOH3D0276	2.76									
AQDEXOH3D0277	2.77									
AQDEXOH3D0278	2.78									
AQDEXOH3D0279	2.79									
AQDEXOH3D0280	2.80									
AQDEXOH3D0281	2.81									
AQDEXOH3D0282	2.82									
AQDEXOH3D0283	2.83									
AQDEXOH3D0284	2.84									
AQDEXOH3D0285	2.85									
AQDEXOH3D0286	2.86									
AQDEXOH3D0287	2.87									
AQDEXOH3D0288	2.88									
AQDEXOH3D0289	2.89									
AQDEXOH3D0290	2.90									
AQDEXOH3D0291	2.91									
AQDEXOH3D0292	2.92									
AQDEXOH3D0293	2.93									
AQDEXOH3D0294	2.94									
AQDEXOH3D0295	2.95									
AQDEXOH3D0296	2.96									
AQDEXOH3D0297	2.97									
AQDEXOH3D0298	2.98									
AQDEXOH3D0299	2.99									
AQDEXOH3D0300	3.00									
AQDEXOH3D0310	3.10									
AQDEXOH3D0320	3.20									
AQDEXOH3D0330	3.30									
AQDEXOH3D0340	3.40									
AQDEXOH3D0350	3.50									
AQDEXOH3D0360	3.60									
AQDEXOH3D0370	3.70									
AQDEXOH3D0380	3.80									
AQDEXOH3D0390	3.90									
AQDEXOH3D0400	4.00									
AQDEXOH3D0410	4.10									
AQDEXOH3D0420	4.20									
AQDEXOH3D0430	4.30									
AQDEXOH3D0440	4.40									
AQDEXOH3D0450	4.50									
AQDEXOH3D0460	4.60									
AQDEXOH3D0470	4.70									
AQDEXOH3D0480	4.80									
AQDEXOH3D0490	4.90									
AQDEXOH3D0500	5.00									
AQDEXOH3D0510	5.10									
AQDEXOH3D0520	5.20									
AQDEXOH3D0530	5.30									
AQDEXOH3D0540	5.40									
AQDEXOH3D0550	5.50									
AQDEXOH3D0560	5.60									
AQDEXOH3D0570	5.70									
AQDEXOH3D0580	5.80									
AQDEXOH3D0590	5.90									
AQDEXOH3D0600	6.00									
AQDEXOH3D0610	6.10									
AQDEXOH3D0620	6.20									
AQDEXOH3D0630	6.30									
AQDEXOH3D0640	6.40									
AQDEXOH3D0650	6.50									
AQDEXOH3D0660	6.60									
AQDEXOH3D0670	6.70									
AQDEXOH3D0680	6.80									
AQDEXOH3D0690	6.90									
AQDEXOH3D0700	7.00									
AQDEXOH3D0710	7.10									
AQDEXOH3D0720	7.20									
AQDEXOH3D0730	7.30									
AQDEXOH3D0740	7.40									
AQDEXOH3D0750	7.50									
AQDEXOH3D0760	7.60									
AQDEXOH3D0770	7.70									
AQDEXOH3D0780	7.80									
AQDEXOH3D0790	7.90									
AQDEXOH3D0800	8.00									
AQDEXOH3D0810	8.10									
AQDEXOH3D0820	8.20									
AQDEXOH3D0830	8.30									
AQDEXOH3D0840	8.40									
AQDEXOH3D0850	8.50									
AQDEXOH3D0860	8.60									
AQDEXOH3D0870	8.70									
AQDEXOH3D0880	8.80									
AQDEXOH3D0890	8.90									
AQDEXOH3D0900	9.00									
AQDEXOH3D0910	9.10									
AQDEXOH3D0920	9.20									
AQDEXOH3D0930	9.30									
AQDEXOH3D0940	9.40									
AQDEXOH3D0950	9.50									
AQDEXOH3D0960	9.60									
AQDEXOH3D0970	9.70									
AQDEXOH3D0980	9.80									
AQDEXOH3D0990	9.90									
AQDEXOH3D1000	10.00									
AQDEXOH3D1010	10.10									
AQDEXOH3D1020	10.20									
AQDEXOH3D1030	10.30									
AQDEXOH3D1040	10.40									
AQDEXOH3D1050	10.50									
AQDEXOH3D1060	10.60									
AQDEXOH3D1070	10.70									
AQDEXOH3D1080	10.80									
AQDEXOH3D1090	10.90									
AQDEXOH3D1100	11.00									
AQDEXOH3D1110	11.10									
AQDEXOH3D1120	11.20									
AQDEXOH3D1130	11.30									
AQDEXOH3D1140	11.40									
AQDEXOH3D1150	11.50									
AQDEXOH3D1160	11.60									
AQDEXOH3D1170	11.70									
AQDEXOH3D1180	11.80									
AQDEXOH3D1190	11.90									
AQDEXOH3D1200	12.00									
AQDEXOH3D1210	12.10									
AQDEXOH3D1220	12.20									
AQDEXOH3D1230	12.30									
AQDEXOH3D1240	12.40									
AQDEXOH3D1250	12.50									
AQDEXOH3D1260	12.60									
AQDEXOH3D1270	12.70									
AQDEXOH3D1280	12.80									
AQDEXOH3D1290	12.90									
AQDEXOH3D1300	13.00									
AQDEXOH3D1310	13.10									
AQDEXOH3D1320	13.20									
AQDEXOH3D1330	13.30									
AQDEXOH3D1340	13.40									
AQDEXOH3D1350	13.50									
AQDEXOH3D1360	13.60									
AQDEXOH3D1370	13.70									
AQDEXOH3D1380	13.80									
AQDEXOH3D1390	13.90									
AQDEXOH3D1400	14.00									
AQDEXOH3D1410	14.10									
AQDEXOH3D1420	14.20									
AQDEXOH3D1430	14.30									
AQDEXOH3D1440	14.40									
AQDEXOH3D1450	14.50									
AQDEXOH3D1460	14.60									
AQDEXOH3D1470	14.70									
AQDEXOH3D1480	14.80									
AQDEXOH3D1490	14.90									
AQDEXOH3D1500	15.00									
AQDEXOH3D1510	15.10									
AQDEXOH3D1520	15.20									
AQDEXOH3D1530	15.30									
AQDEXOH3D1540	15.40									
AQDEXOH3D1550	15.50									
AQDEXOH3D1560	15.60									
AQDEXOH3D1570	15.70									
AQDEXOH3D1580	15.80									
AQDEXOH3D1590	15.90									
AQDEXOH3D1600	16.00									
AQDEXOH3D1610	16.10									
AQDEXOH3D1620	16.20									
AQDEXOH3D1630	16.30									
AQDEXOH3D1640	16.40									
AQDEXOH3D1650	16.50									
AQDEXOH3D1660	16.60									
AQDEXOH3D1670	16.70									
AQDEXOH3D1680	16.80									
AQDEXOH3D1690	16.90									
AQDEXOH3D1700	17.00									
AQDEXOH3D1710	17.10									
AQDEXOH3D1720	17.20									
AQDEXOH3D1730	17.30									
AQDEXOH3D1740	17.40									
AQDEXOH3D1750	17.50									
AQDEXOH3D1760	17.60									
AQDEXOH3D1770	17.70									
AQDEXOH3D1780	17.80									
AQDEXOH3D1790	17.90									
AQDEXOH3D1800	18.00									
AQDEXOH3D1810	18.10									
AQDEXOH3D1820	18.20									
AQDEXOH3D1830	18.30									
AQDEXOH3D1840	18.40									
AQDEXOH3D1850	18.50									
AQDEXOH3D1860	18.60									
AQDEXOH3D1870	18.70									
AQDEXOH3D1880	18.80									
AQDEXOH3D1890	18.90									
AQDEXOH3D1900	19.00									
AQDEXOH3D1910	19.10									
AQDEXOH3D1920	19.20									
AQDEXOH3D1930	19.30									
AQDEXOH3D1940	19.40									
AQDEXOH3D1950	19.50									
AQDEXOH3D1960	19.60									
AQDEXOH3D1970	19.70									
AQDEXOH3D1980	19.80									



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DOOMIS	先端 PL	在庫 Stock
AQDEXOH3D0620	6.20	18.6		52.3				
AQDEXOH3D0630	6.30	18.9		52.4	89.3		1.3	
AQDEXOH3D0640	6.40	19.2	33.8	52.5				
AQDEXOH3D0650	6.50	19.5		52.6				
AQDEXOH3D0660	6.60	19.8		52.7		7		
AQDEXOH3D0670	6.70	20.1		52.8	89.4		1.4	
AQDEXOH3D0680	6.80	20.4	36.4	52.9				
AQDEXOH3D0690	6.90	20.7		53.0				
AQDEXOH3D0700	7.00	21.0		53.1				
AQDEXOH3D0710	7.10	21.3		53.2				
AQDEXOH3D0720	7.20	21.6	39.0	53.3	95.5		1.5	
AQDEXOH3D0730	7.30	21.9		53.4				
AQDEXOH3D0740	7.40	22.2		53.5				
AQDEXOH3D0750	7.50	22.5	39.1	53.6		8		
AQDEXOH3D0760	7.60	22.8		53.7	95.6		1.6	
AQDEXOH3D0770	7.70	23.1	41.6	53.8				
AQDEXOH3D0780	7.80	23.4		53.9				
AQDEXOH3D0790	7.90	23.7		54.0				
AQDEXOH3D0800	8.00	24.0	41.7	54.1	95.7			
AQDEXOH3D0810	8.10	24.3		54.2				
AQDEXOH3D0820	8.20	24.6	44.2	54.3	101.7		1.7	
AQDEXOH3D0830	8.30	24.9		54.4				
AQDEXOH3D0840	8.40	25.2		54.5				
AQDEXOH3D0850	8.50	25.5	44.3	54.6		9		
AQDEXOH3D0860	8.60	25.8		54.7	101.8		1.8	
AQDEXOH3D0870	8.70	26.1	46.8	54.8				
AQDEXOH3D0880	8.80	26.4		54.9				
AQDEXOH3D0890	8.90	26.7		55.0	101.9			
AQDEXOH3D0900	9.00	27.0	46.9	55.1				
AQDEXOH3D0910	9.10	27.3		55.2				
AQDEXOH3D0920	9.20	27.6	49.4	55.3	107.9		1.9	
AQDEXOH3D0930	9.30	27.9		55.4				
AQDEXOH3D0940	9.40	28.2		55.5				
AQDEXOH3D0950	9.50	28.5	49.5	55.6		10		
AQDEXOH3D0960	9.60	28.8		55.7	108.0		2.0	
AQDEXOH3D0970	9.70	29.1	52.0	55.8				
AQDEXOH3D0980	9.80	29.4		55.9				
AQDEXOH3D0990	9.90	29.7		56.0	108.1			
AQDEXOH3D1000	10.00	30.0	52.1	60.2			2.1	
AQDEXOH3D1010	10.10	30.3		60.3	118.1			
AQDEXOH3D1020	10.20	30.6	54.6	60.4				
AQDEXOH3D1030	10.30	30.9		60.5				
AQDEXOH3D1040	10.40	31.2	54.7	60.6				
AQDEXOH3D1050	10.50	31.5		60.7	118.2		2.2	
AQDEXOH3D1060	10.60	31.8	57.2	60.8				
AQDEXOH3D1070	10.70	32.1		60.9				
AQDEXOH3D1080	10.80	32.4		61.0	118.3			
AQDEXOH3D1090	10.90	32.7	57.3	61.1				
AQDEXOH3D1100	11.00	33.0		61.2			2.3	
AQDEXOH3D1110	11.10	33.3		61.3	124.3			
AQDEXOH3D1120	11.20	33.6	59.8	61.4				
AQDEXOH3D1130	11.30	33.9		61.5				
AQDEXOH3D1140	11.40	34.2	59.9	61.6				
AQDEXOH3D1150	11.50	34.5		61.7	124.4		2.4	
AQDEXOH3D1160	11.60	34.8		61.8				
AQDEXOH3D1170	11.70	35.1	62.4	61.9				
AQDEXOH3D1180	11.80	35.4		62.5	124.5			
AQDEXOH3D1190	11.90	35.7	62.5	61.9			2.5	

单位 (Unit) : mm



商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DOOMIS	先端 PL	在庫 Stock
AQDEXOH3D1200	12.00	36.0	62.5	62.0	124.5	12		
AQDEXOH3D1210	12.10	36.3		62.2			2.5	
AQDEXOH3D1220	12.20	36.6	65.0	62.3	130.5			
AQDEXOH3D1230	12.30	36.9		62.4				
AQDEXOH3D1240	12.40	37.2	65.1	62.5				
AQDEXOH3D1250	12.50	37.5		62.6	130.6	13	2.6	
AQDEXOH3D1260	12.60	37.8	67.6	62.7				
AQDEXOH3D1270	12.70	38.1		62.8				
AQDEXOH3D1280	12.80	38.4		62.9	130.7		2.7	
AQDEXOH3D1290	12.90	38.7	67.7	63.0				
AQDEXOH3D1300	13.00	39.0		63.1	136.7			
AQDEXOH3D1310	13.10	39.3	70.2	63.2				
AQDEXOH3D1320	13.20	39.6		63.3				
AQDEXOH3D1330	13.30	39.9		63.4				
AQDEXOH3D1340	13.40	40.2	70.3	63.5				
AQDEXOH3D1350	13.50	40.5		63.6	136.8	14	2.8	
AQDEXOH3D1360	13.60	40.8	72.8	63.7				
AQDEXOH3D1370	13.70	41.1		63.8				
AQDEXOH3D1380	13.80	41.4		63.9	136.9		2.9	
AQDEXOH3D1390	13.90	41.7	72.9	64.0				
AQDEXOH3D1400	14.00	42.0		64.1				
AQDEXOH3D1410	14.10	42.3	75.4	64.2	142.9			
AQDEXOH3D1420	14.20	42.6		64.3				
AQDEXOH3D1430	14.30	42.9		64.4				
AQDEXOH3D1440	14.40	43.2	75.5	64.5				
AQDEXOH3D1450	14.50	43.5		64.6	143.0	15	3.0	
AQDEXOH3D1460	14.60	43.8	78.0	64.7				
AQDEXOH3D1470	14.70	44.1		64.8				
AQDEXOH3D1480	14.80	44.4		64.9				
AQDEXOH3D1490	14.90	44.7	78.1	65.0	143.1		3.1	
AQDEXOH3D1500	15.00	45.0		65.1				
AQDEXOH3D1510	15.10	45.3	80.6	65.2	149.1			
AQDEXOH3D1520	15.20	45.6		65.3				
AQDEXOH3D1530	15.30	45.9		65.4				
AQDEXOH3D1540	15.40	46.2	80.7	65.5				
AQDEXOH3D1550	15.50	46.5		65.6	149.2	16	3.2	
AQDEXOH3D1560	15.60	46.8	83.2	65.7				
AQDEXOH3D1570	15.70	47.1		65.8				
AQDEXOH3D1580	15.80	47.4	83.3	65.9	149.3		3.3	
AQDEXOH3D1590	15.90	47.7		66.0				
AQDEXOH3D1600	16.00	48.0						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	○	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 本钻头可以实现稳定的湿式加工、MQL 加工。
- 可以进行钻头直径 5D 用高效率孔加工。

This drill provides reliable wet and MQL drilling.
High performance up to 5x drill diameter.

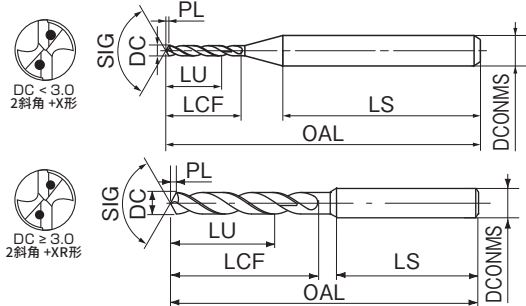

新商品

LIST 9606

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONIMS	先端 PL	在庫 Stock
AQDEXOH5D0100	1.00	5.0	8.2	43.3	56.2			●
AQDEXOH5D0101	1.01							
AQDEXOH5D0102	1.02	5.1		44.3				
AQDEXOH5D0103	1.03							
AQDEXOH5D0104	1.04	5.2						
AQDEXOH5D0105	1.05							□
AQDEXOH5D0106	1.06	5.3	9.2					
AQDEXOH5D0107	1.07			44.4				
AQDEXOH5D0108	1.08	5.4						
AQDEXOH5D0109	1.09	5.5		44.5		0.2	●	
AQDEXOH5D0110	1.10				58.2			
AQDEXOH5D0111	1.11	5.6						●
AQDEXOH5D0112	1.12			43.5				
AQDEXOH5D0113	1.13	5.7						□
AQDEXOH5D0114	1.14							
AQDEXOH5D0115	1.15	5.8	10.2					□
AQDEXOH5D0116	1.16			43.6				
AQDEXOH5D0117	1.17	5.9						
AQDEXOH5D0118	1.18							
AQDEXOH5D0119	1.19	6.0						●
AQDEXOH5D0120	1.20							
AQDEXOH5D0121	1.21							
AQDEXOH5D0122	1.22	6.1		42.7				□
AQDEXOH5D0123	1.23	6.2						
AQDEXOH5D0124	1.24							
AQDEXOH5D0125	1.25	6.3	11.3			3		□
AQDEXOH5D0126	1.26			42.8				
AQDEXOH5D0127	1.27	6.4						
AQDEXOH5D0128	1.28							●
AQDEXOH5D0129	1.29	6.5						
AQDEXOH5D0130	1.30							●
AQDEXOH5D0131	1.31	6.6		41.8				
AQDEXOH5D0132	1.32							□
AQDEXOH5D0133	1.33	6.7		41.9				
AQDEXOH5D0134	1.34							
AQDEXOH5D0135	1.35	6.8	12.3		58.3		0.3	□
AQDEXOH5D0136	1.36							
AQDEXOH5D0137	1.37	6.9		42.0				●
AQDEXOH5D0138	1.38							
AQDEXOH5D0139	1.39	7.0						●
AQDEXOH5D0140	1.40							
AQDEXOH5D0141	1.41	7.1		41.0				
AQDEXOH5D0142	1.42							
AQDEXOH5D0143	1.43	7.2						
AQDEXOH5D0144	1.44			41.1				□
AQDEXOH5D0145	1.45	7.3	13.3					
AQDEXOH5D0146	1.46							
AQDEXOH5D0147	1.47	7.4						
AQDEXOH5D0148	1.48			41.2				●
AQDEXOH5D0149	1.49	7.5						
AQDEXOH5D0150	1.50							●
AQDEXOH5D0151	1.51	7.6	14.3	45.2	62.3			□

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONIMS	先端 PL	在庫 Stock
AQDEXOH5D0152	1.52	7.6		45.2				
AQDEXOH5D0153	1.53							
AQDEXOH5D0154	1.54	7.7						
AQDEXOH5D0155	1.55			45.3				
AQDEXOH5D0156	1.56	7.8						□
AQDEXOH5D0157	1.57							
AQDEXOH5D0158	1.58	7.9						
AQDEXOH5D0159	1.59	8.0	14.3	45.4	62.3		0.3	●
AQDEXOH5D0160	1.60							
AQDEXOH5D0161	1.61	8.1		44.4				
AQDEXOH5D0162	1.62							
AQDEXOH5D0163	1.63	8.2						□
AQDEXOH5D0164	1.64							
AQDEXOH5D0165	1.65	8.3		44.5				
AQDEXOH5D0166	1.66							
AQDEXOH5D0167	1.67	8.4						
AQDEXOH5D0168	1.68							
AQDEXOH5D0169	1.69	8.5	14.4	44.6				●
AQDEXOH5D0170	1.70							
AQDEXOH5D0171	1.71	8.6		43.6				
AQDEXOH5D0172	1.72							
AQDEXOH5D0173	1.73	8.7						□
AQDEXOH5D0174	1.74							
AQDEXOH5D0175	1.75	8.8						
AQDEXOH5D0176	1.76							
AQDEXOH5D0177	1.77	8.9		43.7		3		
AQDEXOH5D0178	1.78							
AQDEXOH5D0179	1.79	9.0						
AQDEXOH5D0180	1.80		15.4	43.8				●
AQDEXOH5D0181	1.81	9.1						
AQDEXOH5D0182	1.82			42.8				
AQDEXOH5D0183	1.83	9.2			62.4			□
AQDEXOH5D0184	1.84							
AQDEXOH5D0185	1.85	9.3					0.4	
AQDEXOH5D0186	1.86							
AQDEXOH5D0187	1.87	9.4		42.9				
AQDEXOH5D0188	1.88							
AQDEXOH5D0189	1.89	9.5						●
AQDEXOH5D0190	1.90							
AQDEXOH5D0191	1.91	9.6						
AQDEXOH5D0192	1.92			42.0				
AQDEXOH5D0193	1.93	9.7						
AQDEXOH5D0194	1.94							
AQDEXOH5D0195	1.95	9.8	16.4					□
AQDEXOH5D0196	1.96							
AQDEXOH5D0197	1.97	9.9		42.1				
AQDEXOH5D0198	1.98							
AQDEXOH5D0199	1.99	10.0						●
AQDEXOH5D0200	2.00							
AQDEXOH5D0201	2.01	10.1						□
AQDEXOH5D0202	2.02		17.4	47.2	68.4			
AQDEXOH5D0203	2.03	10.2						

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



工具材料



涂层



直径公差




先端角



螺旋角



柄直径公差



直径范围

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D10MM	先端 PL	在庫 Stock
新商品	AQDEXOH5D0204	2.04	10.2					
	AQDEXOH5D0205	2.05		47.2				
	AQDEXOH5D0206	2.06	10.3					
	AQDEXOH5D0207	2.07						
	AQDEXOH5D0208	2.08	10.4	17.4				
	AQDEXOH5D0209	2.09		47.3				
	AQDEXOH5D0210	2.10	10.5		68.4	0.4	●	
硬质合金钻头	AQDEXOH5D0211	2.11	10.6	46.3				
	AQDEXOH5D0212	2.12						
	AQDEXOH5D0213	2.13	10.7	18.4	46.4			
	AQDEXOH5D0214	2.14						
	AQDEXOH5D0215	2.15	10.8					
高速钢钻头	AQDEXOH5D0216	2.16						
	AQDEXOH5D0217	2.17	10.9					
	AQDEXOH5D0218	2.18		46.5				
	AQDEXOH5D0219	2.19						
	AQDEXOH5D0220	2.20	11.0				●	
	AQDEXOH5D0221	2.21		45.5				
	AQDEXOH5D0222	2.22	11.1					
丝锥	AQDEXOH5D0223	2.23		18.5				
	AQDEXOH5D0224	2.24	11.2		45.6			
	AQDEXOH5D0225	2.25	11.3					
	AQDEXOH5D0226	2.26						
	AQDEXOH5D0227	2.27	11.4					
	AQDEXOH5D0228	2.28		45.7				
	AQDEXOH5D0229	2.29	11.5				●	
硬质合金立铣刀	AQDEXOH5D0230	2.30						
	AQDEXOH5D0231	2.31	11.6		44.7			
	AQDEXOH5D0232	2.32						
	AQDEXOH5D0233	2.33	11.7		68.5			
	AQDEXOH5D0234	2.34						
	AQDEXOH5D0235	2.35	11.8	19.5	44.8	3		
高速钢立铣刀	AQDEXOH5D0236	2.36						
	AQDEXOH5D0237	2.37	11.9		44.9			
	AQDEXOH5D0238	2.38						
	AQDEXOH5D0239	2.39	12.0				●	
	AQDEXOH5D0240	2.40						
切削工具	AQDEXOH5D0241	2.41	12.1		43.9	0.5		
	AQDEXOH5D0242	2.42						
	AQDEXOH5D0243	2.43	12.2					
	AQDEXOH5D0244	2.44		20.5	44.0			
	AQDEXOH5D0245	2.45	12.3					
	AQDEXOH5D0246	2.46						
	AQDEXOH5D0247	2.47	12.4					
套装商品	AQDEXOH5D0248	2.48						
其它	AQDEXOH5D0249	2.49	12.5		44.1			
	AQDEXOH5D0250	2.50					●	
	AQDEXOH5D0251	2.51	12.6		54.1			
	AQDEXOH5D0252	2.52						
	AQDEXOH5D0253	2.53	12.7					
	AQDEXOH5D0254	2.54						
精密工具	AQDEXOH5D0255	2.55	12.8	21.5				
	AQDEXOH5D0256	2.56						
	AQDEXOH5D0257	2.57	12.9		54.2			
	AQDEXOH5D0258	2.58						
	AQDEXOH5D0259	2.59	13.0		54.3			
	AQDEXOH5D0260	2.60					●	
	AQDEXOH5D0261	2.61	13.1					
技术资料索引	AQDEXOH5D0262	2.62		22.5	53.3			
	AQDEXOH5D0263	2.63	13.2					
	AQDEXOH5D0264	2.64						
	AQDEXOH5D0265	2.65	13.3					
	AQDEXOH5D0266	2.66		22.6	53.4	78.6		
	AQDEXOH5D0267	2.67	13.4			0.6		

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D10MM	先端 PL	在庫 Stock
AQDEXOH5D0268	2.68	13.4		53.4				□
AQDEXOH5D0269	2.69	13.5						●
AQDEXOH5D0270	2.70							
AQDEXOH5D0271	2.71	13.6						
AQDEXOH5D0272	2.72		22.6	52.5				□
AQDEXOH5D0273	2.73	13.7						
AQDEXOH5D0274	2.74							
AQDEXOH5D0275	2.75	13.8						
AQDEXOH5D0276	2.76			52.6				
AQDEXOH5D0277	2.77	13.9						
AQDEXOH5D0278	2.78							
AQDEXOH5D0279	2.79	14.0						●
AQDEXOH5D0280	2.80							
AQDEXOH5D0281	2.81	14.1		51.6				
AQDEXOH5D0282	2.82							
AQDEXOH5D0283	2.83	14.2						
AQDEXOH5D0284	2.84		23.6	51.7	78.6	3	0.6	□
AQDEXOH5D0285	2.85	14.3						
AQDEXOH5D0286	2.86							
AQDEXOH5D0287	2.87	14.4		51.8				
AQDEXOH5D0288	2.88							
AQDEXOH5D0289	2.89	14.5						●
AQDEXOH5D0290	2.90							
AQDEXOH5D0291	2.91	14.6		46.8				
AQDEXOH5D0292	2.92							
AQDEXOH5D0293	2.93	14.7						
AQDEXOH5D0294	2.94		28.6	46.9				□
AQDEXOH5D0295	2.95	14.8						
AQDEXOH5D0296	2.96							
AQDEXOH5D0297	2.97	14.9						
AQDEXOH5D0298	2.98			47.0				
AQDEXOH5D0299	2.99	15.0		48.0				
AQDEXOH5D0300	3.00							
AQDEXOH5D0310	3.10	15.5	32.6	47.2	86.6			
AQDEXOH5D0320	3.20	16.0		47.3				
AQDEXOH5D0330	3.30	16.5	32.7	47.4	86.7		0.7	
AQDEXOH5D0340	3.40	17.0		47.5				
AQDEXOH5D0350	3.50	17.5		47.6				
AQDEXOH5D0360	3.60	18.0	36.7	47.7		4		
AQDEXOH5D0370	3.70	18.5						
AQDEXOH5D0380	3.80	19.0		47.8	86.8		0.8	
AQDEXOH5D0390	3.90	19.5	36.8	47.9				
AQDEXOH5D0400	4.00	20.0		48.0				
AQDEXOH5D0410	4.10	20.5	40.8	49.2	98.8			
AQDEXOH5D0420	4.20	21.0		49.3				
AQDEXOH5D0430	4.30	21.5	40.9	49.4	98.9		0.9	
AQDEXOH5D0440	4.40	22.0		49.5				
AQDEXOH5D0450	4.50	22.5		49.6		5		●
AQDEXOH5D0460	4.60	23.0						
AQDEXOH5D0470	4.70	23.5		49.7				
AQDEXOH5D0480	4.80	24.0	45.0	49.8	99.0		1.0	
AQDEXOH5D0490	4.90	24.5		49.9				
AQDEXOH5D0500	5.00	25.0		50.0				
AQDEXOH5D0510	5.10	25.5		51.2				
AQDEXOH5D0520	5.20	26.0		51.3				
AQDEXOH5D0530	5.30	26.5	45.1	51.4	101.1		1.1	
AQDEXOH5D0540	5.40	27.0		51.5				
AQDEXOH5D0550	5.50	27.5		51.6		6		
AQDEXOH5D0560	5.60	28.0						
AQDEXOH5D0570	5.70	28.5		51.7				
AQDEXOH5D0580	5.80	29.0	49.2	51.8	101.2		1.2	
AQDEXOH5D0590	5.90	29.5		51.9				
AQDEXOH5D0600	6.00	30.0		52.0				
AQDEXOH5D0610	6.10	30.5	53.3	52.2	110.3	7	1.3	

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCCMS	先端 PL	在庫 Stock
AQDEXOH5D0620	6.20	31.0		52.3				
AQDEXOH5D0630	6.30	31.5		52.4	110.3		1.3	
AQDEXOH5D0640	6.40	32.0	53.3	52.5				
AQDEXOH5D0650	6.50	32.5		52.6				
AQDEXOH5D0660	6.60	33.0		52.7		7		
AQDEXOH5D0670	6.70	33.5						
AQDEXOH5D0680	6.80	34.0	57.4	52.8	110.4		1.4	
AQDEXOH5D0690	6.90	34.5		52.9				
AQDEXOH5D0700	7.00	35.0		53.0				
AQDEXOH5D0710	7.10	35.5		53.2				
AQDEXOH5D0720	7.20	36.0	61.5	53.3	119.5		1.5	
AQDEXOH5D0730	7.30	36.5		53.4				
AQDEXOH5D0740	7.40	37.0		53.5				
AQDEXOH5D0750	7.50	37.5	61.6	53.6		8		
AQDEXOH5D0760	7.60	38.0		53.7	119.6		1.6	
AQDEXOH5D0770	7.70	38.5	65.6	53.8				
AQDEXOH5D0780	7.80	39.0		53.9				
AQDEXOH5D0790	7.90	39.5		53.9				
AQDEXOH5D0800	8.00	40.0	65.7	54.0	119.7			
AQDEXOH5D0810	8.10	40.5		54.2				
AQDEXOH5D0820	8.20	41.0	69.7	54.3	128.7		1.7	
AQDEXOH5D0830	8.30	41.5		54.4				
AQDEXOH5D0840	8.40	42.0		54.5				
AQDEXOH5D0850	8.50	42.5	69.8	54.6		9		
AQDEXOH5D0860	8.60	43.0		54.7	128.8		1.8	
AQDEXOH5D0870	8.70	43.5	73.8	54.8				
AQDEXOH5D0880	8.80	44.0		54.9				
AQDEXOH5D0890	8.90	44.5						
AQDEXOH5D0900	9.00	45.0	73.9	55.0	128.9			
AQDEXOH5D0910	9.10	45.5		55.2				
AQDEXOH5D0920	9.20	46.0	77.9	55.3	137.9		1.9	
AQDEXOH5D0930	9.30	46.5		55.4				
AQDEXOH5D0940	9.40	47.0		55.5				
AQDEXOH5D0950	9.50	47.5	78.0	55.6		10		
AQDEXOH5D0960	9.60	48.0		55.7	138.0		2.0	
AQDEXOH5D0970	9.70	48.5	82.0	55.8				
AQDEXOH5D0980	9.80	49.0		55.9				
AQDEXOH5D0990	9.90	49.5	82.1	56.0	138.1			
AQDEXOH5D1000	10.00	50.0		60.2				
AQDEXOH5D1010	10.10	50.5		60.3	151.1		2.1	
AQDEXOH5D1020	10.20	51.0	86.1	60.4				
AQDEXOH5D1030	10.30	51.5		60.5				
AQDEXOH5D1040	10.40	52.0	86.2	60.6		11		
AQDEXOH5D1050	10.50	52.5		60.7	151.2		2.2	
AQDEXOH5D1060	10.60	53.0	90.2	60.8				
AQDEXOH5D1070	10.70	53.5		60.9	151.3			
AQDEXOH5D1080	10.80	54.0	90.3	61.0				
AQDEXOH5D1090	10.90	54.5		61.2				
AQDEXOH5D1100	11.00	55.0	94.3	61.3	160.3		2.3	
AQDEXOH5D1110	11.10	55.5		61.4				
AQDEXOH5D1120	11.20	56.0	94.4	61.5				
AQDEXOH5D1130	11.30	56.5		61.6		12		
AQDEXOH5D1140	11.40	57.0		61.7	160.4		2.4	
AQDEXOH5D1150	11.50	57.5	98.4	61.8				
AQDEXOH5D1160	11.60	58.0		61.9				
AQDEXOH5D1170	11.70	58.5		62.0	160.5			
AQDEXOH5D1180	11.80	59.0		62.2				
AQDEXOH5D1190	11.90	59.5	102.5	62.3	169.5		2.5	
AQDEXOH5D1200	12.00	60.0		62.4				
AQDEXOH5D1210	12.10	60.5		62.5		13		
AQDEXOH5D1220	12.20	61.0	102.6	62.6	169.6		2.6	
AQDEXOH5D1230	12.30	61.5						
AQDEXOH5D1240	12.40	62.0						
AQDEXOH5D1250	12.50	62.5						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCCMS	先端 PL	在庫 Stock
AQDEXOH5D1260	12.60	63.0	106.6	62.7	169.6		2.6	
AQDEXOH5D1270	12.70	63.5				13		
AQDEXOH5D1280	12.80	64.0		62.8				
AQDEXOH5D1290	12.90	64.5	106.7	62.9	169.7		2.7	
AQDEXOH5D1300	13.00	65.0		63.0				
AQDEXOH5D1310	13.10	65.5	110.7	63.2	178.7			
AQDEXOH5D1320	13.20	66.0		63.3				
AQDEXOH5D1330	13.30	66.5		63.4				
AQDEXOH5D1340	13.40	67.0	110.8	63.5		14	2.8	
AQDEXOH5D1350	13.50	67.5		63.6	178.8			
AQDEXOH5D1360	13.60	68.0		63.7				
AQDEXOH5D1370	13.70	68.5	114.8	63.8				
AQDEXOH5D1380	13.80	69.0		63.9				
AQDEXOH5D1390	13.90	69.5	114.9	64.0	178.9		2.9	
AQDEXOH5D1400	14.00	70.0		64.2				
AQDEXOH5D1410	14.10	70.5	118.9	64.3	187.9			
AQDEXOH5D1420	14.20	71.0		64.4				
AQDEXOH5D1430	14.30	71.5		64.5				
AQDEXOH5D1440	14.40	72.0	119.0	64.6		15	3.0	
AQDEXOH5D1450	14.50	72.5		64.7	188.0			
AQDEXOH5D1460	14.60	73.0	123.0	64.8				
AQDEXOH5D1470	14.70	73.5		64.9				
AQDEXOH5D1480	14.80	74.0		65.0	188.1		3.1	
AQDEXOH5D1490	14.90	74.5	123.1	65.2				
AQDEXOH5D1500	15.00	75.0		65.3				
AQDEXOH5D1510	15.10	75.5	127.1	65.4	197.1			
AQDEXOH5D1520	15.20	76.0		65.5				
AQDEXOH5D1530	15.30	76.5		65.6				
AQDEXOH5D1540	15.40	77.0	127.2	65.7	197.2		3.2	
AQDEXOH5D1550	15.50	77.5		65.8				
AQDEXOH5D1560	15.60	78.0	131.2	65.9				
AQDEXOH5D1570	15.70	78.5		66.0				
AQDEXOH5D1580	15.80	79.0	131.3	66.1	197.3		3.3	
AQDEXOH5D1590	15.90	79.5		66.2				
AQDEXOH5D1600	16.00	80.0		66.3				

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	○	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQDEXOH8D

AQUA EX 油孔钻 8D
AQUA Drills EX Oil-Hole 8D

切削条件 Cutting Condition ▶▶▶A-152

Carbide
工具材料

AQ
EX
涂层

h7
直径公差

135°
先端角


24°
~30°
螺旋角

h6
柄直径公差

3.0-16.0
直径范围

- 本钻头可以实现稳定的湿式加工、MQL 加工。
- 可以进行钻头直径 8D 用高效率孔加工。

This drill provides reliable wet and MQL drilling.
High performance up to 8x drill diameter.

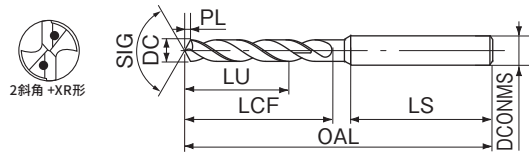

LIST 9608

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH8D0300	3.0	24.0	33.6	48.0	81.6	3	0.6	
AQDEXOH8D0310	3.1	24.8	39.1	47.2	92.6			
AQDEXOH8D0320	3.2	25.6		47.3				
AQDEXOH8D0330	3.3	26.4		47.4				
AQDEXOH8D0340	3.4	27.2	39.2	47.5	92.7		0.7	
AQDEXOH8D0350	3.5	28.0		47.6			4	
AQDEXOH8D0360	3.6	28.8	44.7	47.7				
AQDEXOH8D0370	3.7	29.6		47.9				
AQDEXOH8D0380	3.8	30.4		47.8	92.8		0.8	
AQDEXOH8D0390	3.9	31.2	44.8	47.9				
AQDEXOH8D0400	4.0	32.0		48.0				
AQDEXOH8D0410	4.1	32.8	50.3	49.2	105.8			
AQDEXOH8D0420	4.2	33.6		49.3				
AQDEXOH8D0430	4.3	34.4	50.4	49.4	105.9		0.9	
AQDEXOH8D0440	4.4	35.2		49.5				
AQDEXOH8D0450	4.5	36.0		49.6			5	
AQDEXOH8D0460	4.6	36.8		49.7				
AQDEXOH8D0470	4.7	37.6		49.8	106.0		1.0	
AQDEXOH8D0480	4.8	38.4	56.0	49.9				
AQDEXOH8D0490	4.9	39.2		50.0				
AQDEXOH8D0500	5.0	40.0		51.2				
AQDEXOH8D0510	5.1	40.8		51.3				
AQDEXOH8D0520	5.2	41.6		51.4	119.1		1.1	
AQDEXOH8D0530	5.3	42.4	61.6	51.5				
AQDEXOH8D0540	5.4	43.2		51.6			6	
AQDEXOH8D0550	5.5	44.0		51.7				
AQDEXOH8D0560	5.6	44.8		51.8	119.2		1.2	
AQDEXOH8D0570	5.7	45.6		51.9				
AQDEXOH8D0580	5.8	46.4	67.2	52.0				
AQDEXOH8D0590	5.9	47.2		52.1				
AQDEXOH8D0600	6.0	48.0		52.2				
AQDEXOH8D0610	6.1	48.8		52.3				
AQDEXOH8D0620	6.2	49.6		52.4	131.3		1.3	
AQDEXOH8D0630	6.3	50.4	72.8	52.5				
AQDEXOH8D0640	6.4	51.2		52.6			7	
AQDEXOH8D0650	6.5	52.0		52.7				
AQDEXOH8D0660	6.6	52.8		52.8				
AQDEXOH8D0670	6.7	53.6		52.9	131.4		1.4	
AQDEXOH8D0680	6.8	54.4	78.4	53.0				
AQDEXOH8D0690	6.9	55.2		53.1				
AQDEXOH8D0700	7.0	56.0		53.2				
AQDEXOH8D0710	7.1	56.8		53.3				
AQDEXOH8D0720	7.2	57.6		53.4	143.5		1.5	
AQDEXOH8D0730	7.3	58.4		53.5				
AQDEXOH8D0740	7.4	59.2		53.6				
AQDEXOH8D0750	7.5	60.0	84.1	53.7			8	
AQDEXOH8D0760	7.6	60.8		53.8				
AQDEXOH8D0770	7.7	61.6	89.6	53.9	143.6		1.6	
AQDEXOH8D0780	7.8	62.4		54.0				
AQDEXOH8D0790	7.9	63.2		54.1				
AQDEXOH8D0800	8.0	64.0	89.7	54.2	143.7			
AQDEXOH8D0810	8.1	64.8		54.3			1.7	
AQDEXOH8D0820	8.2	65.6	95.2	54.4				
AQDEXOH8D0830	8.3	66.4		54.5				
AQDEXOH8D0840	8.4	67.2		54.6				
AQDEXOH8D0850	8.5	68.0	95.3	54.7			9	
AQDEXOH8D0860	8.6	68.8		54.8	155.8		1.8	
AQDEXOH8D0870	8.7	69.6	100.8	54.9				
AQDEXOH8D0880	8.8	70.4						
AQDEXOH8D0890	8.9	71.2						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH8D0900	9.0	72.0	100.9	55.0	155.9	9		
AQDEXOH8D0910	9.1	72.8		55.2				
AQDEXOH8D0920	9.2	73.6	106.4	55.3	167.9		1.9	
AQDEXOH8D0930	9.3	74.4		55.4				
AQDEXOH8D0940	9.4	75.2		55.5				
AQDEXOH8D0950	9.5	76.0	106.5	55.6			10	
AQDEXOH8D0960	9.6	76.8		55.7	168.0		2.0	
AQDEXOH8D0970	9.7	77.6	112.0	55.8				
AQDEXOH8D0980	9.8	78.4		55.9				
AQDEXOH8D0990	9.9	79.2	112.1	56.0	168.1			
AQDEXOH8D1000	10.0	80.0		56.1				
AQDEXOH8D1010	10.1	80.8		56.2			2.1	
AQDEXOH8D1020	10.2	81.6	117.6	56.3	184.1			
AQDEXOH8D1030	10.3	82.4		56.4				
AQDEXOH8D1040	10.4	83.2		56.5				
AQDEXOH8D1050	10.5	84.0	117.7	56.6			11	
AQDEXOH8D1060	10.6	84.8		56.7	184.2		2.2	
AQDEXOH8D1070	10.7	85.6	123.2	56.8				
AQDEXOH8D1080	10.8	86.4		56.9				
AQDEXOH8D1090	10.9	87.2	123.3	57.0	184.3			
AQDEXOH8D1100	11.0	88.0		57.1				
AQDEXOH8D1110	11.1	88.8		57.2			2.3	
AQDEXOH8D1120	11.2	89.6	128.8	57.3	196.3			
AQDEXOH8D1130	11.3	90.4		57.4				
AQDEXOH8D1140	11.4	91.2	128.9	57.5			12	
AQDEXOH8D1150	11.5	92.0		57.6				
AQDEXOH8D1160	11.6	92.8		57.7	196.4		2.4	
AQDEXOH8D1170	11.7	93.6	134.4	57.8				
AQDEXOH8D1180	11.8	94.4		57.9				
AQDEXOH8D1190	11.9	95.2	134.5	58.0	196.5			
AQDEXOH8D1200	12.0	96.0		58.1				
AQDEXOH8D1210	12.1	96.8		58.2			2.5	
AQDEXOH8D1220	12.2	97.6	140.0	58.3	208.5			
AQDEXOH8D1230	12.3	98.4		58.4				
AQDEXOH8D1240	12.4	99.2		58.5				
AQDEXOH8D1250	12.5	100.0	140.1	58.6			13	
AQDEXOH8D1260	12.6	100.8		58.7	208.6		2.6	
AQDEXOH8D1270	12.7	101.6	145.6	58.8				
AQDEXOH8D1280	12.8	102.4		58.9				
AQDEXOH8D1290	12.9	103.2	145.7	59.0	208.7			
AQDEXOH8D1300	13.0	104.0		59.1			2.7	
AQDEXOH8D1310	13.1	104.8		59.2	220.7			
AQDEXOH8D1320	13.2	105.6		59.3				
AQDEXOH8D1330	13.3	106.4		59.4				
AQDEXOH8D1340	13.4	107.2	151.3	59.5				
AQDEXOH8D1350	13.5	108.0		59.6	220.8		14	
AQDEXOH8D1360	13.6	108.8		59.7				
AQDEXOH8D1370	13.7	109.6	156.8	59.8				
AQDEXOH8D1380	13.8	110.4		59.9				
AQDEXOH8D1390	13.9	111.2	156.9	60.0	220.9			
AQDEXOH8D1400	14.0	112.0		60.1			2.9	
AQDEXOH8D1410	14.1	112.8	162.4	60.2				
AQDEXOH8D1420	14.2	113.6		60.3				
AQDEXOH8D1430	14.3	114.4		60.4				
AQDEXOH8D1440	14.4	115.2	162.5	60.5				
AQDEXOH8D1450	14.5	116.0		60.6	233.0		15	
AQDEXOH8D1460	14.6	116.8		60.7				
AQDEXOH8D1470	14.7	117.6	168.0	60.8				
AQDEXOH8D1480	14.8	118.4		60.9				
AQDEXOH8D1490	14.9	119.2	168.1	61.0	233.1		3.1	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D22MM	先端 PL	在庫 Stock					
AQDEXOH8D1500	15.0	120.0	168.1	65.0	233.1	15	3.1	●					
AQDEXOH8D1510	15.1	120.8	173.6	65.2	245.1	16							
AQDEXOH8D1520	15.2	121.6		65.3									
AQDEXOH8D1530	15.3	122.4	173.7	65.4	245.2		3.2						
AQDEXOH8D1540	15.4	123.2		65.5									
AQDEXOH8D1550	15.5	124.0		65.6									
AQDEXOH8D1560	15.6	124.8	179.2	65.7	245.3		3.3						
AQDEXOH8D1570	15.7	125.6	179.3										
AQDEXOH8D1580	15.8	126.4	65.8										
AQDEXOH8D1590	15.9	127.2	65.9										
AQDEXOH8D1600	16.0	128.0	66.0										

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	○	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

AQDEXOH10D

AQUA EX 油孔钻 10D

AQUA Drills EX Oil-Hole 10D

切削条件 Cutting Condition ▶▶▶A-154



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

直径范围

- 本钻头可以进行湿式加工、MQL 加工。
- 可以进行钻头直径 10D 用高效率孔加工。

This drill provides reliable wet and MQL drilling.
High performance up to 10x drill diameter.

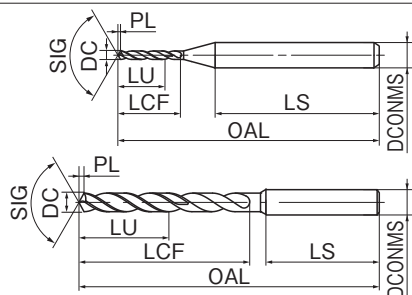

LIST 9612

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH10D0100	1.0	10.0	13.2	43.3	61.2	0.2	0.2	
AQDEXOH10D0110	1.1	11.0	14.2	44.5				
AQDEXOH10D0120	1.2	12.0	16.2	42.6	63.2			
AQDEXOH10D0130	1.3	13.0	17.2	41.8				
AQDEXOH10D0140	1.4	14.0	18.3	40.0				
AQDEXOH10D0150	1.5	15.0	20.3	39.2				
AQDEXOH10D0160	1.6	16.0	21.3	45.4				
AQDEXOH10D0170	1.7	17.0	22.3	43.6				
AQDEXOH10D0180	1.8	18.0	23.3	42.8				
AQDEXOH10D0190	1.9	19.0	25.3	40.9				
AQDEXOH10D0200	2.0	20.0	26.4	40.1	70.4	0.3	0.3	
AQDEXOH10D0210	2.1	21.0	27.4	49.3				
AQDEXOH10D0220	2.2	22.0	29.4	47.5				
AQDEXOH10D0230	2.3	23.0	30.4	46.7				
AQDEXOH10D0240	2.4	24.0	31.4	44.9				
AQDEXOH10D0250	2.5	25.0	33.5	44.1	80.5			
AQDEXOH10D0260	2.6	26.0	34.5	52.3				
AQDEXOH10D0270	2.7	27.0	35.5	50.4				
AQDEXOH10D0280	2.8	28.0	36.5	49.6				
AQDEXOH10D0290	2.9	29.0	38.5	47.8				
AQDEXOH10D0300	3.0	30.0	39.5	47.0		0.4	0.4	
AQDEXOH10D0310	3.1	31.0		46.5				
AQDEXOH10D0320	3.2	32.0		46.6				
AQDEXOH10D0330	3.3	33.0	46.6		96.6			
AQDEXOH10D0340	3.4	34.0		46.7				
AQDEXOH10D0350	3.5	35.0		46.8				
AQDEXOH10D0360	3.6	36.0		46.9	102.7			
AQDEXOH10D0370	3.7	37.0		47.0				
AQDEXOH10D0380	3.8	38.0	52.7	46.9				
AQDEXOH10D0390	3.9	39.0		47.0				
AQDEXOH10D0400	4.0	40.0		46.5	109.7	0.5	0.5	
AQDEXOH10D0410	4.1	41.0	59.7	46.6				
AQDEXOH10D0420	4.2	42.0		46.7				
AQDEXOH10D0430	4.3	43.0	59.8	46.7				
AQDEXOH10D0440	4.4	44.0		46.8				
AQDEXOH10D0450	4.5	45.0		46.9	115.9			
AQDEXOH10D0460	4.6	46.0	65.8	47.0				
AQDEXOH10D0470	4.7	47.0		46.5				
AQDEXOH10D0480	4.8	48.0		46.6				
AQDEXOH10D0490	4.9	49.0		46.7				
AQDEXOH10D0500	5.0	50.0		46.8		0.6	0.6	
AQDEXOH10D0510	5.1	51.0	72.9	46.9				
AQDEXOH10D0520	5.2	52.0		47.0				
AQDEXOH10D0530	5.3	53.0		47.1	122.9			
AQDEXOH10D0540	5.4	54.0	73.0	47.2				
AQDEXOH10D0550	5.5	55.0		47.3				
AQDEXOH10D0560	5.6	56.0		47.4				
AQDEXOH10D0570	5.7	57.0	79.0	47.5				
AQDEXOH10D0580	5.8	58.0		47.6				
AQDEXOH10D0590	5.9	59.0		47.7	129.1			
AQDEXOH10D0600	6.0	60.0		47.8		0.7	0.7	
AQDEXOH10D0610	6.1	61.0		47.9				
AQDEXOH10D0620	6.2	62.0	86.1	48.0				
AQDEXOH10D0630	6.3	63.0		48.1				
AQDEXOH10D0640	6.4	64.0		48.2				
AQDEXOH10D0650	6.5	65.0	86.2	48.3				
AQDEXOH10D0660	6.6	66.0		48.4				
AQDEXOH10D0670	6.7	67.0	92.2	48.5				
AQDEXOH10D0680	6.8	68.0		48.6				
AQDEXOH10D0690	6.9	69.0	92.3	48.7	142.3			

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH10D0700	7.0	70.0	92.3	47.0	142.3	0.8	0.8	
AQDEXOH10D0710	7.1	71.0		46.5				
AQDEXOH10D0720	7.2	72.0	99.3	46.6	149.3			
AQDEXOH10D0730	7.3	73.0		46.7				
AQDEXOH10D0740	7.4	74.0		46.8				
AQDEXOH10D0750	7.5	75.0	99.4	46.9	149.4			
AQDEXOH10D0760	7.6	76.0		47.0				
AQDEXOH10D0770	7.7	77.0	105.4	47.1	155.4			
AQDEXOH10D0780	7.8	78.0		47.2				
AQDEXOH10D0790	7.9	79.0		47.3				
AQDEXOH10D0800	8.0	80.0	105.5	47.4	155.5	0.9	0.9	
AQDEXOH10D0810	8.1	81.0		46.5				
AQDEXOH10D0820	8.2	82.0		46.6				
AQDEXOH10D0830	8.3	83.0	112.5	46.7	162.5			
AQDEXOH10D0840	8.4	84.0		46.8				
AQDEXOH10D0850	8.5	85.0		46.9				
AQDEXOH10D0860	8.6	86.0		47.0				
AQDEXOH10D0870	8.7	87.0	118.6	47.1	168.6			
AQDEXOH10D0880	8.8	88.0		47.2				
AQDEXOH10D0890	8.9	89.0		47.3				
AQDEXOH10D0900	9.0	90.0		46.5		1.0	1.0	
AQDEXOH10D0910	9.1	91.0		46.6				
AQDEXOH10D0920	9.2	92.0		46.7				
AQDEXOH10D0930	9.3	93.0	125.7	46.8	175.7			
AQDEXOH10D0940	9.4	94.0		46.9				
AQDEXOH10D0950	9.5	95.0		47.0				
AQDEXOH10D0960	9.6	96.0	131.7	47.1	181.7			
AQDEXOH10D0970	9.7	97.0		47.2				
AQDEXOH10D0980	9.8	98.0	131.8	47.3	181.8			
AQDEXOH10D0990	9.9	99.0		47.4				
AQDEXOH10D1000	10.0	100.0		46.5		1.1	1.1	
AQDEXOH10D1010	10.1	101.0	138.8	56.5	198.8			
AQDEXOH10D1020	10.2	102.0		56.6				
AQDEXOH10D1030	10.3	103.0	138.9	56.7	198.9			
AQDEXOH10D1040	10.4	104.0		56.8				
AQDEXOH10D1050	10.5	105.0		56.9				
AQDEXOH10D1060	10.6	106.0	144.9	57.0	204.9			
AQDEXOH10D1070	10.7	107.0		57.1				
AQDEXOH10D1080	10.8	108.0	145.0	57.2	205.0			
AQDEXOH10D1090	10.9	109.0		57.3				
AQDEXOH10D1100	11.0	110.0		56.5		1.2	1.2	
AQDEXOH10D1110	11.1	111.0	152.0	56.6	212.0			
AQDEXOH10D1120	11.2	112.0		56.7				
AQDEXOH10D1130	11.3	113.0		56.8				
AQDEXOH10D1140	11.4	114.0	152.1	56.9	212.1			
AQDEXOH10D1150	11.5	115.0		57.0				
AQDEXOH10D1160	11.6	116.0		57.1				
AQDEXOH10D1170	11.7	117.0	158.1	57.2	218.1			
AQDEXOH10D1180	11.8	118.0		57.3				
AQDEXOH10D1190	11.9	119.0	158.2	57.4	218.2			
AQDEXOH10D1200	12.0	120.0		57.5		1.3	1.3	

AQDEXOH15D

AQUA EX 油孔钻 15D

AQUA Drills EX Oil-Hole 15D

切削条件 Cutting Condition ▶ A-154



工具材料

涂层

直径公差

先端角



螺旋角

柄直径公差

直径范围

- 本钻头可以进行湿式加工、MQL 加工。
- 可以进行钻头直径 15D 用高效率孔加工。

This drill provides reliable wet and MQL drilling.
High performance up to 15x drill diameter.

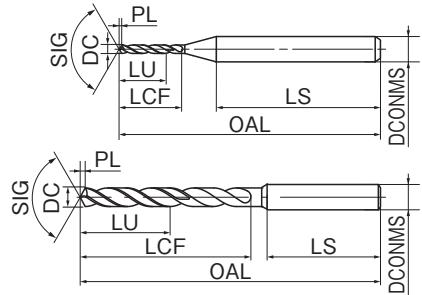

LIST 9614

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH15D0100	1.0	15.0	18.2	43.3	66.2	3	0.2	
AQDEXOH15D0110	1.1	16.5	20.2	46.5	71.2			
AQDEXOH15D0120	1.2	18.0	22.2	44.6				
AQDEXOH15D0130	1.3	19.5	23.2	42.8				
AQDEXOH15D0140	1.4	21.0	25.3	41.0				
AQDEXOH15D0150	1.5	22.5	27.3	39.2				
AQDEXOH15D0160	1.6	24.0	29.3	47.4				
AQDEXOH15D0170	1.7	25.5	31.3	45.6				
AQDEXOH15D0180	1.8	27.0	32.3	43.8				
AQDEXOH15D0190	1.9	28.5	34.3	41.9				
AQDEXOH15D0200	2.0	30.0	36.4	40.1	80.4	3	0.3	
AQDEXOH15D0210	2.1	31.5	38.4	51.3				
AQDEXOH15D0220	2.2	33.0	40.4	49.5				
AQDEXOH15D0230	2.3	34.5	41.4	47.7				
AQDEXOH15D0240	2.4	36.0	43.4	45.9				
AQDEXOH15D0250	2.5	37.5	45.5	44.1	93.5			
AQDEXOH15D0260	2.6	39.0	47.5	54.3				
AQDEXOH15D0270	2.7	40.5	49.5	52.4				
AQDEXOH15D0280	2.8	42.0	50.5	50.6	104.5			
AQDEXOH15D0290	2.9	43.5	52.5	48.8				
AQDEXOH15D0300	3.0	45.0	54.5	47.0		4	0.4	
AQDEXOH15D0310	3.1	46.5		46.5				
AQDEXOH15D0320	3.2	48.0		46.6	113.6			
AQDEXOH15D0330	3.3	49.5	63.6					
AQDEXOH15D0340	3.4	51.0		46.7				
AQDEXOH15D0350	3.5	52.5		46.8				
AQDEXOH15D0360	3.6	54.0		46.9	122.7			
AQDEXOH15D0370	3.7	55.5		47.0				
AQDEXOH15D0380	3.8	57.0	72.7					
AQDEXOH15D0390	3.9	58.5		46.9				
AQDEXOH15D0400	4.0	60.0		47.0		5	0.5	
AQDEXOH15D0410	4.1	61.5	81.7	46.5	131.7			
AQDEXOH15D0420	4.2	63.0		46.6				
AQDEXOH15D0430	4.3	64.5	81.8		131.8			
AQDEXOH15D0440	4.4	66.0		46.7				
AQDEXOH15D0450	4.5	67.5		46.8	140.8			
AQDEXOH15D0460	4.6	69.0	90.8					
AQDEXOH15D0470	4.7	70.5		46.9	140.9			
AQDEXOH15D0480	4.8	72.0	90.9					
AQDEXOH15D0490	4.9	73.5		47.0				
AQDEXOH15D0500	5.0	75.0		46.5	149.9	6	0.6	
AQDEXOH15D0510	5.1	76.5	99.9					
AQDEXOH15D0520	5.2	78.0		46.6				
AQDEXOH15D0530	5.3	79.5		46.7	150.0			
AQDEXOH15D0540	5.4	81.0	100.0					
AQDEXOH15D0550	5.5	82.5		46.8	159.0			
AQDEXOH15D0560	5.6	84.0		46.9				
AQDEXOH15D0570	5.7	85.5	109.1					
AQDEXOH15D0580	5.8	87.0		47.0				
AQDEXOH15D0590	5.9	88.5		46.5	168.1			
AQDEXOH15D0600	6.0	90.0		46.6		7	0.7	
AQDEXOH15D0610	6.1	91.5		46.7	168.2			
AQDEXOH15D0620	6.2	93.0	118.1					
AQDEXOH15D0630	6.3	94.5		46.8	177.2			
AQDEXOH15D0640	6.4	96.0		46.9				
AQDEXOH15D0650	6.5	97.5	127.2					
AQDEXOH15D0660	6.6	99.0		46.9	177.3			
AQDEXOH15D0670	6.7	100.5		46.9				
AQDEXOH15D0680	6.8	102.0		46.9				
AQDEXOH15D0690	6.9	103.5	127.3					

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH15D0700	7.0	105.0	127.3	47.0	177.3	7	1.3	
AQDEXOH15D0710	7.1	106.5		46.5				
AQDEXOH15D0720	7.2	108.0	136.3	46.6	186.3			
AQDEXOH15D0730	7.3	109.5		46.7		8		
AQDEXOH15D0740	7.4	111.0		46.8	186.4			
AQDEXOH15D0750	7.5	112.5	136.4					
AQDEXOH15D0760	7.6	114.0		46.9	195.4			
AQDEXOH15D0770	7.7	115.5	145.4			1.4		
AQDEXOH15D0780	7.8	117.0		46.9				
AQDEXOH15D0790	7.9	118.5		46.9				
AQDEXOH15D0800	8.0	120.0	145.5	47.0	195.5	9	1.5	
AQDEXOH15D0810	8.1	121.5		46.5				
AQDEXOH15D0820	8.2	123.0		46.6	204.5			
AQDEXOH15D0830	8.3	124.5	154.5					
AQDEXOH15D0840	8.4	126.0		46.7				
AQDEXOH15D0850	8.5	127.5		46.8	213.6			
AQDEXOH15D0860	8.6	129.0		46.9				
AQDEXOH15D0870	8.7	130.5	163.6					
AQDEXOH15D0880	8.8	132.0		47.0				
AQDEXOH15D0890	8.9	133.5		46.5				
AQDEXOH15D0900	9.0	135.0		46.6	222.7	10	1.7	
AQDEXOH15D0910	9.1	136.5		46.7				
AQDEXOH15D0920	9.2	138.0		46.8	231.7			
AQDEXOH15D0930	9.3	139.5	172.7					
AQDEXOH15D0940	9.4	141.0		46.9				
AQDEXOH15D0950	9.5	142.5		46.9	231.8			
AQDEXOH15D0960	9.6	144.0	181.7					
AQDEXOH15D0970	9.7	145.5		47.0				
AQDEXOH15D0980	9.8	147.0		46.5	250.8			
AQDEXOH15D0990	9.9	148.5	181.8					
AQDEXOH15D1000	10.0	150.0		47.0		11	1.9	
AQDEXOH15D1010	10.1	151.5	190.8		250.9			
AQDEXOH15D1020	10.2	153.0		56.6				
AQDEXOH15D1030	10.3	154.5	190.9					
AQDEXOH15D1040	10.4	156.0		56.7	260.0			
AQDEXOH15D1050	10.5	157.5		56.8				
AQDEXOH15D1060	10.6	159.0	199.9					
AQDEXOH15D1070	10.7	160.5		56.9	269.0			
AQDEXOH15D1080	10.8	162.0		56.6				
AQDEXOH15D1090	10.9	163.5	200.0					
AQDEXOH15D1100	11.0	165.0		56.7	269.1	12	2.1	
AQDEXOH15D1110	11.1	166.5	209.0					
AQDEXOH15D1120	11.2	168.0		56.8	278.2			
AQDEXOH15D1130	11.3	169.5		56.9				
AQDEXOH15D1140	11.4	171.0	218.2					
AQDEXOH15D1150	11.5	172.5		56.9				
AQDEXOH15D1160	11.6	174.0		56.9	278.2			
AQDEXOH15D1170	11.7	175.5	218.2					
AQDEXOH15D1180	11.8	177.0		56.9				
AQDEXOH15D1190	11.9	178.5		56.9				
AQDEXOH15D1200	12.0	180.0		57.0				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQDEXOH20D

AQUA EX 油孔钻 20D

AQUA Drills EX Oil-Hole 20D

切削条件 Cutting Condition ▶▶▶A-154



工具材料



涂层



直径公差



先端角



螺旋角



柄直径公差



直径范围

- 本钻头可以进行湿式加工、MQL 加工。
- 可以进行钻头直径 20D 用高效率孔加工。

This drill provides reliable wet and MQL drilling.
High performance up to 20x drill diameter.

新品



LIST 9616

订货方式 商品编码


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCNMS	先端 PL	在庫 Stock
AQDEXOH20D0100	1.0	20.0	23.2	43.3	71.2	0.2	0.2	
AQDEXOH20D0110	1.1	22.0	25.2	48.5				
AQDEXOH20D0120	1.2	24.0	28.2	45.6	78.2			
AQDEXOH20D0130	1.3	26.0	30.2	43.8		0.3	0.3	
AQDEXOH20D0140	1.4	28.0	32.3	41.0				
AQDEXOH20D0150	1.5	30.0	35.3	39.2	78.3			
AQDEXOH20D0160	1.6	32.0	37.3	49.4		0.4	0.4	
AQDEXOH20D0170	1.7	34.0	39.3	46.6				
AQDEXOH20D0180	1.8	36.0	41.3	44.8	90.3			
AQDEXOH20D0190	1.9	38.0	44.3	41.9		0.5	0.5	
AQDEXOH20D0200	2.0	40.0	46.4	40.1	90.4			
AQDEXOH20D0210	2.1	42.0	48.4	53.3				
AQDEXOH20D0220	2.2	44.0	51.4	50.5		0.6	0.6	
AQDEXOH20D0230	2.3	46.0	53.4	48.7	105.4			
AQDEXOH20D0240	2.4	48.0	55.4	45.9				
AQDEXOH20D0250	2.5	50.0	58.5	44.1	105.5	0.7	0.7	
AQDEXOH20D0260	2.6	52.0	60.5	56.3				
AQDEXOH20D0270	2.7	54.0	62.5	53.4				
AQDEXOH20D0280	2.8	56.0	64.5	51.6	119.5	0.8	0.8	
AQDEXOH20D0290	2.9	58.0	67.5	48.8				
AQDEXOH20D0300	3.0	60.0	69.5	47.0				
AQDEXOH20D0310	3.1	62.0		46.5		0.9	0.9	
AQDEXOH20D0320	3.2	64.0		46.6				
AQDEXOH20D0330	3.3	66.0	81.6		131.6			
AQDEXOH20D0340	3.4	68.0		46.7		1.0	1.0	
AQDEXOH20D0350	3.5	70.0		46.8				
AQDEXOH20D0360	3.6	72.0		46.9				
AQDEXOH20D0370	3.7	74.0		47.0		1.1	1.1	
AQDEXOH20D0380	3.8	76.0		46.5	154.7			
AQDEXOH20D0390	3.9	78.0		46.6				
AQDEXOH20D0400	4.0	80.0		46.7		1.2	1.2	
AQDEXOH20D0410	4.1	82.0	104.7	46.8	154.7			
AQDEXOH20D0420	4.2	84.0		46.9				
AQDEXOH20D0430	4.3	86.0		47.0		1.3	1.3	
AQDEXOH20D0440	4.4	88.0		47.1				
AQDEXOH20D0450	4.5	90.0		47.2				
AQDEXOH20D0460	4.6	92.0	115.8	46.8	165.8	1.4	1.4	
AQDEXOH20D0470	4.7	94.0		46.9				
AQDEXOH20D0480	4.8	96.0		47.0				
AQDEXOH20D0490	4.9	98.0		47.1		1.5	1.5	
AQDEXOH20D0500	5.0	100.0		47.2				
AQDEXOH20D0510	5.1	102.0		47.3				
AQDEXOH20D0520	5.2	104.0		47.4		1.6	1.6	
AQDEXOH20D0530	5.3	106.0		47.5				
AQDEXOH20D0540	5.4	108.0		47.6				
AQDEXOH20D0550	5.5	110.0		47.7		1.7	1.7	
AQDEXOH20D0560	5.6	112.0		47.8				
AQDEXOH20D0570	5.7	114.0		47.9				
AQDEXOH20D0580	5.8	116.0		48.0		1.8	1.8	
AQDEXOH20D0590	5.9	118.0		48.1				
AQDEXOH20D0600	6.0	120.0		48.2				
AQDEXOH20D0610	6.1	122.0		48.3		1.9	1.9	
AQDEXOH20D0620	6.2	124.0		48.4				
AQDEXOH20D0630	6.3	126.0		48.5				
AQDEXOH20D0640	6.4	128.0		48.6		2.0	2.0	
AQDEXOH20D0650	6.5	130.0		48.7				
AQDEXOH20D0660	6.6	132.0		48.8				
AQDEXOH20D0670	6.7	134.0		48.9		2.1	2.1	
AQDEXOH20D0680	6.8	136.0		49.0				
AQDEXOH20D0690	6.9	138.0		49.1				



DC < 3.0
2斜角 +X形



DC ≥ 3.0
2斜角 +XR形

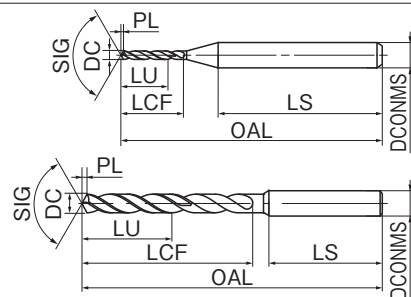

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCNMS	先端 PL	在庫 Stock
AQDEXOH20D0700	7.0	140.0	162.3	47.0	212.3	7		
AQDEXOH20D0710	7.1	142.0		46.5		1.3	1.3	
AQDEXOH20D0720	7.2	144.0		46.6				
AQDEXOH20D0730	7.3	146.0		46.7				
AQDEXOH20D0740	7.4	148.0		46.8		1.4	1.4	
AQDEXOH20D0750	7.5	150.0		46.9				
AQDEXOH20D0760	7.6	152.0		47.0				
AQDEXOH20D0770	7.7	154.0		47.1		1.5	1.5	
AQDEXOH20D0780	7.8	156.0		47.2				
AQDEXOH20D0790	7.9	158.0		47.3				
AQDEXOH20D0800	8.0	160.0		47.4		1.6	1.6	
AQDEXOH20D0810	8.1	162.0		47.5				
AQDEXOH20D0820	8.2	164.0		47.6				
AQDEXOH20D0830	8.3	166.0		47.7		1.7	1.7	
AQDEXOH20D0840	8.4	168.0		47.8				
AQDEXOH20D0850	8.5	170.0		47.9				
AQDEXOH20D0860	8.6	172.0		48.0		1.8	1.8	
AQDEXOH20D0870	8.7	174.0		48.1				
AQDEXOH20D0880	8.8	176.0		48.2				
AQDEXOH20D0890	8.9	178.0		48.3		1.9	1.9	
AQDEXOH20D0900	9.0	180.0		48.4				
AQDEXOH20D0910	9.1	182.0		48.5				
AQDEXOH20D0920	9.2	184.0		48.6		2.0	2.0	
AQDEXOH20D0930	9.3	186.0		48.7				
AQDEXOH20D0940	9.4	188.0		48.8				
AQDEXOH20D0950	9.5	190.0		48.9		2.1	2.1	
AQDEXOH20D0960	9.6	192.0		49.0				
AQDEXOH20D0970	9.7	194.0		49.1				
AQDEXOH20D0980	9.8	196.0		49.2		2.2	2.2	
AQDEXOH20D0990	9.9	198.0		49.3				
AQDEXOH20D1000	10.0	200.0		49.4				

AQDEXOH25D

AQUA EX 油孔钻 25D

AQUA Drills EX Oil-Hole 25D

切削条件 Cutting Condition ▶ A-154

Carbide
工具材料

AQ
EX
涂层

h7
直径公差

140°
先端角


24°
~30°
螺旋角

h6
柄直径公差

3.0-10.0
直径范围

- 本钻头可以进行湿式加工、MQL 加工。
- 可以进行钻头直径 25D 用高效率孔加工。

This drill provides reliable wet and MQL drilling.
High performance up to 25x drill diameter.

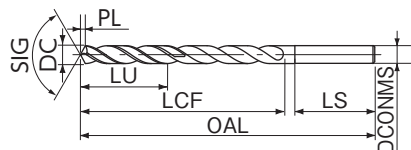

新商品

LIST 9618

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH25D0300	3.0	75.0	84.5	47.0	134.5	3	0.5	
AQDEXOH25D0310	3.1	77.5		46.5				
AQDEXOH25D0320	3.2	80.0		46.6				
AQDEXOH25D0330	3.3	82.5	98.6		148.6		0.6	
AQDEXOH25D0340	3.4	85.0		46.7				
AQDEXOH25D0350	3.5	87.5				4		
AQDEXOH25D0360	3.6	90.0		46.8				
AQDEXOH25D0370	3.7	92.5						
AQDEXOH25D0380	3.8	95.0	112.7	46.9	162.7		0.7	
AQDEXOH25D0390	3.9	97.5						
AQDEXOH25D0400	4.0	100.0		47.0				
AQDEXOH25D0410	4.1	102.5	126.7	46.5	176.7			
AQDEXOH25D0420	4.2	105.0		46.6				
AQDEXOH25D0430	4.3	107.5	126.8		176.8	5		
AQDEXOH25D0440	4.4	110.0		46.7			0.8	
AQDEXOH25D0450	4.5	112.5						
AQDEXOH25D0460	4.6	115.0	140.8	46.8	190.8			
AQDEXOH25D0470	4.7	117.5						
AQDEXOH25D0480	4.8	120.0	140.9	46.9	190.9		0.9	
AQDEXOH25D0490	4.9	122.5		47.0				
AQDEXOH25D0500	5.0	125.0		46.5				
AQDEXOH25D0510	5.1	127.5	154.9	46.6	204.9			
AQDEXOH25D0520	5.2	130.0						
AQDEXOH25D0530	5.3	132.5		46.7		6	1.0	
AQDEXOH25D0540	5.4	135.0	155.0	46.8	205.0			
AQDEXOH25D0550	5.5	137.5						
AQDEXOH25D0560	5.6	140.0	169.0	46.8	219.0			
AQDEXOH25D0570	5.7	142.5		46.9				
AQDEXOH25D0580	5.8	145.0	169.1	47.0	219.1		1.1	
AQDEXOH25D0590	5.9	147.5		46.5				
AQDEXOH25D0600	6.0	150.0	183.1	46.6	233.1			
AQDEXOH25D0610	6.1	152.5						
AQDEXOH25D0620	6.2	155.0		46.7		7	1.2	
AQDEXOH25D0630	6.3	157.5	183.2	46.8	233.2			
AQDEXOH25D0640	6.4	160.0		46.9				
AQDEXOH25D0650	6.5	162.5	197.2	47.0	247.2			
AQDEXOH25D0660	6.6	165.0		46.9				
AQDEXOH25D0670	6.7	167.5	197.3	47.0	247.3		1.3	
AQDEXOH25D0680	6.8	170.0		46.5				
AQDEXOH25D0690	6.9	172.5		46.6				
AQDEXOH25D0700	7.0	175.0	211.3	46.7	261.3			
AQDEXOH25D0710	7.1	177.5		46.8				
AQDEXOH25D0720	7.2	180.0		46.9		8	1.4	
AQDEXOH25D0730	7.3	182.5	211.4	47.0	261.4			
AQDEXOH25D0740	7.4	185.0		46.8				
AQDEXOH25D0750	7.5	187.5	225.4	46.9	275.4			
AQDEXOH25D0760	7.6	190.0		47.0				
AQDEXOH25D0770	7.7	192.5		46.5				
AQDEXOH25D0780	7.8	195.0		46.6				
AQDEXOH25D0790	7.9	197.5	225.5	46.7	275.5		1.5	
AQDEXOH25D0800	8.0	200.0		46.8				
AQDEXOH25D0810	8.1	202.5		46.9		9	1.6	
AQDEXOH25D0820	8.2	205.0	239.5	47.0	289.5			
AQDEXOH25D0830	8.3	207.5		46.5				
AQDEXOH25D0840	8.4	210.0		46.6				
AQDEXOH25D0850	8.5	212.5		46.7				
AQDEXOH25D0860	8.6	215.0		46.8				
AQDEXOH25D0870	8.7	217.5	253.6	46.9	303.6			
AQDEXOH25D0880	8.8	220.0						
AQDEXOH25D0890	8.9	222.5						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH25D0900	9.0	225.0	253.6	47.0	303.6	9	1.6	
AQDEXOH25D0910	9.1	227.5		46.5				
AQDEXOH25D0920	9.2	230.0		46.6				
AQDEXOH25D0930	9.3	232.5	267.7		317.7		1.7	
AQDEXOH25D0940	9.4	235.0		46.7				
AQDEXOH25D0950	9.5	237.5				10		
AQDEXOH25D0960	9.6	240.0	281.7	46.8	331.7			
AQDEXOH25D0970	9.7	242.5		46.9			1.8	
AQDEXOH25D0980	9.8	245.0	281.8	47.0	331.8			
AQDEXOH25D0990	9.9	247.5						
AQDEXOH25D1000	10.0	250.0						

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQDEXOH30D

AQUA EX 油孔钻 30D

AQUA Drills EX Oil-Hole 30D

切削条件 Cutting Condition ▶▶▶A-154

Carbide
工具材料

AQ
EX
涂层

h7
直径公差

140°
先端角


24°
~30°
螺旋角

h6
柄直径公差

3.0-10.0
直径范围

- 本钻头可以进行湿式加工、MQL 加工。
- 可以进行钻头直径 30D 用高效率孔加工。

This drill provides reliable wet and MQL drilling.
High performance up to 30x drill diameter.

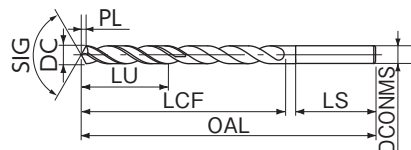

LIST 9620

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH30D0300	3.0	90.0	99.5	47.0	149.5	3	0.5	
AQDEXOH30D0310	3.1	93.0		46.5				
AQDEXOH30D0320	3.2	96.0		46.6			0.6	
AQDEXOH30D0330	3.3	99.0	116.6		166.6			
AQDEXOH30D0340	3.4	102.0		46.7				
AQDEXOH30D0350	3.5	105.0				4		
AQDEXOH30D0360	3.6	108.0		46.8				
AQDEXOH30D0370	3.7	111.0						
AQDEXOH30D0380	3.8	114.0	132.7	46.9	182.7		0.7	
AQDEXOH30D0390	3.9	117.0		47.0				
AQDEXOH30D0400	4.0	120.0		46.5	199.7			
AQDEXOH30D0410	4.1	123.0	149.7					
AQDEXOH30D0420	4.2	126.0		46.6				
AQDEXOH30D0430	4.3	129.0	149.8		199.8		0.8	
AQDEXOH30D0440	4.4	132.0		46.7				
AQDEXOH30D0450	4.5	135.0				5		
AQDEXOH30D0460	4.6	138.0	165.8	46.8	215.8			
AQDEXOH30D0470	4.7	141.0						
AQDEXOH30D0480	4.8	144.0	165.9	46.9	215.9		0.9	
AQDEXOH30D0490	4.9	147.0		47.0				
AQDEXOH30D0500	5.0	150.0		46.5	232.9			
AQDEXOH30D0510	5.1	153.0	182.9	46.6				
AQDEXOH30D0520	5.2	156.0						
AQDEXOH30D0530	5.3	159.0		46.7	233.0		1.0	
AQDEXOH30D0540	5.4	162.0	183.0			6		
AQDEXOH30D0550	5.5	165.0		46.8	249.0			
AQDEXOH30D0560	5.6	168.0	199.0					
AQDEXOH30D0570	5.7	171.0		46.9	249.1			
AQDEXOH30D0580	5.8	174.0		47.0			1.1	
AQDEXOH30D0590	5.9	177.0	199.1	46.5				
AQDEXOH30D0600	6.0	180.0		46.6	266.1			
AQDEXOH30D0610	6.1	183.0	216.1					
AQDEXOH30D0620	6.2	186.0		46.7	266.2		1.2	
AQDEXOH30D0630	6.3	189.0				7		
AQDEXOH30D0640	6.4	192.0	216.2	46.8	282.2			
AQDEXOH30D0650	6.5	195.0		46.9				
AQDEXOH30D0660	6.6	198.0		47.0	282.3			
AQDEXOH30D0670	6.7	201.0	232.2				1.3	
AQDEXOH30D0680	6.8	204.0		46.5				
AQDEXOH30D0690	6.9	207.0	232.3	46.6	299.3			
AQDEXOH30D0700	7.0	210.0		46.7				
AQDEXOH30D0710	7.1	213.0		46.8	299.4		1.4	
AQDEXOH30D0720	7.2	216.0	249.3			8		
AQDEXOH30D0730	7.3	219.0		46.9				
AQDEXOH30D0740	7.4	222.0		47.0				
AQDEXOH30D0750	7.5	225.0	249.4	46.5	315.4			
AQDEXOH30D0760	7.6	228.0		46.6			1.5	
AQDEXOH30D0770	7.7	231.0	265.4	46.7				
AQDEXOH30D0780	7.8	234.0		46.8				
AQDEXOH30D0790	7.9	237.0		46.9	332.5			
AQDEXOH30D0800	8.0	240.0	265.5	47.0	315.5			
AQDEXOH30D0810	8.1	243.0		46.5				
AQDEXOH30D0820	8.2	246.0	282.5	46.6			1.6	
AQDEXOH30D0830	8.3	249.0		46.7				
AQDEXOH30D0840	8.4	252.0				9		
AQDEXOH30D0850	8.5	255.0		46.8	348.6			
AQDEXOH30D0860	8.6	258.0		46.9				
AQDEXOH30D0870	8.7	261.0	298.6					
AQDEXOH30D0880	8.8	264.0						
AQDEXOH30D0890	8.9	267.0		46.9				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH30D0900	9.0	270.0	298.6	47.0	348.6	9	1.6	
AQDEXOH30D0910	9.1	273.0		46.5				
AQDEXOH30D0920	9.2	276.0		46.6				
AQDEXOH30D0930	9.3	279.0	315.7		365.7		1.7	
AQDEXOH30D0940	9.4	282.0		46.7				
AQDEXOH30D0950	9.5	285.0				10		
AQDEXOH30D0960	9.6	288.0	331.7	46.8	381.7			
AQDEXOH30D0970	9.7	291.0						
AQDEXOH30D0980	9.8	294.0	331.8	46.9	381.8		1.8	
AQDEXOH30D0990	9.9	297.0		47.0				
AQDEXOH30D1000	10.0	300.0						


AQDEXOH35D

AQUA EX 油孔钻 35D

AQUA Drills EX Oil-Hole 35D

●可以进行钻头直径 35D 用高效率孔加工。

High performance up to 35x drill diameter.

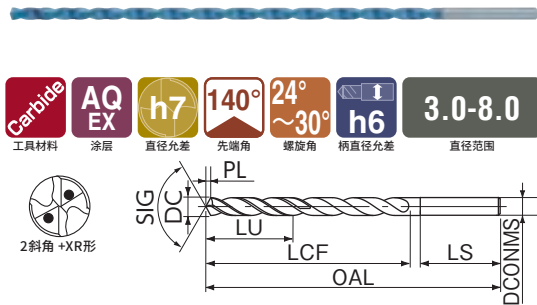

切削条件 Cutting Condition ▶▶A-156

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH35D0300	3.0	105.0	114.5	47.0	164.5	3	0.5	
AQDEXOH35D0310	3.1	108.5		46.5				
AQDEXOH35D0320	3.2	112.0		46.6				
AQDEXOH35D0330	3.3	115.5	133.6	46.7	183.6	4	0.6	
AQDEXOH35D0340	3.4	119.0		46.8				
AQDEXOH35D0350	3.5	122.5		46.9	202.7	4	0.7	
AQDEXOH35D0360	3.6	126.0		47.0				
AQDEXOH35D0370	3.7	129.5		46.5	221.7	5	0.8	
AQDEXOH35D0380	3.8	133.0	152.7	46.6				
AQDEXOH35D0390	3.9	136.5		46.7	221.8	5	0.9	
AQDEXOH35D0400	4.0	140.0		46.8	240.8	5	1.0	
AQDEXOH35D0410	4.1	143.5	171.7	46.9	240.9	5	1.1	
AQDEXOH35D0420	4.2	147.0		47.0				
AQDEXOH35D0430	4.3	150.5	171.8	46.5	259.9	6	1.2	
AQDEXOH35D0440	4.4	154.0		46.6	260.0	6	1.3	
AQDEXOH35D0450	4.5	157.5		46.7	279.0	6	1.4	
AQDEXOH35D0460	4.6	161.0	190.8	46.8	279.1	6	1.5	
AQDEXOH35D0470	4.7	164.5		46.9				
AQDEXOH35D0480	4.8	168.0	190.9	47.0				
AQDEXOH35D0490	4.9	171.5		46.5	298.1	7	1.6	
AQDEXOH35D0500	5.0	175.0		46.6	298.2	7	1.7	
AQDEXOH35D0510	5.1	178.5	209.9	46.7	317.2	7	1.8	
AQDEXOH35D0520	5.2	182.0		46.8	317.3	7	1.9	
AQDEXOH35D0530	5.3	185.5		46.9				
AQDEXOH35D0540	5.4	189.0	210.0	47.0				
AQDEXOH35D0550	5.5	192.5		46.5	336.3	8	2.0	
AQDEXOH35D0560	5.6	196.0		46.6	336.4	8	2.1	
AQDEXOH35D0570	5.7	199.5	229.0	46.7	355.4	8	2.2	
AQDEXOH35D0580	5.8	203.0		46.8				
AQDEXOH35D0590	5.9	206.5	229.1	46.9				
AQDEXOH35D0600	6.0	210.0		47.0				
AQDEXOH35D0610	6.1	213.5		46.5	355.5	8	2.3	
AQDEXOH35D0620	6.2	217.0	248.1	46.6				
AQDEXOH35D0630	6.3	220.5		46.7				
AQDEXOH35D0640	6.4	224.0	248.2	46.8				
AQDEXOH35D0650	6.5	227.5		46.9				
AQDEXOH35D0660	6.6	231.0		47.0				
AQDEXOH35D0670	6.7	234.5	267.2	46.5				
AQDEXOH35D0680	6.8	238.0		46.6	374.3	8	2.4	
AQDEXOH35D0690	6.9	241.5		46.7				
AQDEXOH35D0700	7.0	245.0	267.3	46.8				
AQDEXOH35D0710	7.1	248.5		46.9				
AQDEXOH35D0720	7.2	252.0	286.3	47.0				
AQDEXOH35D0730	7.3	255.5		46.5	374.4	8	2.5	
AQDEXOH35D0740	7.4	259.0		46.6				
AQDEXOH35D0750	7.5	262.5	286.4	46.7				
AQDEXOH35D0760	7.6	266.0		46.8				
AQDEXOH35D0770	7.7	269.5	305.4	46.9				
AQDEXOH35D0780	7.8	273.0		47.0				
AQDEXOH35D0790	7.9	276.5		46.5				
AQDEXOH35D0800	8.0	280.0	305.5	46.6				

也可参照推荐的导向孔加工用钻头 AQUA EX 油孔引导钻 AQDEXOHPLT (A-47)。


AQDEXOH40D

AQUA EX 油孔钻 40D

AQUA Drills EX Oil-Hole 40D

●可以进行钻头直径 40D 用高效率孔加工。

High performance up to 40x drill diameter.

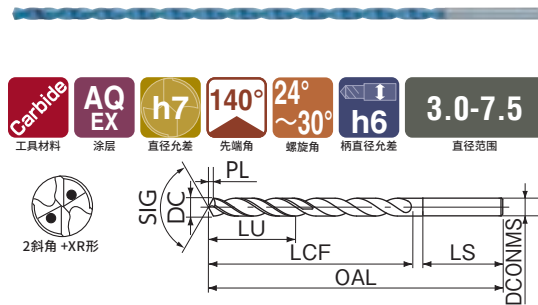

切削条件 Cutting Condition ▶▶A-156

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH40D0300	3.0	120.0	129.5	47.0	179.5	3	0.5	
AQDEXOH40D0310	3.1	124.0		46.5				
AQDEXOH40D0320	3.2	128.0		46.6				
AQDEXOH40D0330	3.3	132.0	151.6	46.7	201.6	4	0.6	
AQDEXOH40D0340	3.4	136.0		46.8				
AQDEXOH40D0350	3.5	140.0		46.9	222.7	4	0.7	
AQDEXOH40D0360	3.6	144.0		47.0				
AQDEXOH40D0370	3.7	148.0		46.5	244.7	5	0.8	
AQDEXOH40D0380	3.8	152.0	172.7	46.6				
AQDEXOH40D0390	3.9	156.0		46.7	244.8	5	0.9	
AQDEXOH40D0400	4.0	160.0		46.8	265.8	5	1.0	
AQDEXOH40D0410	4.1	164.0	194.7	46.9	265.9	5	1.1	
AQDEXOH40D0420	4.2	168.0		47.0				
AQDEXOH40D0430	4.3	172.0	194.8	46.5	287.9	6	1.2	
AQDEXOH40D0440	4.4	176.0		46.6				
AQDEXOH40D0450	4.5	180.0		46.7	309.0	6	1.3	
AQDEXOH40D0460	4.6	184.0	215.8	46.8				
AQDEXOH40D0470	4.7	188.0		46.9	317.1	6	1.4	
AQDEXOH40D0480	4.8	192.0	215.9	47.0				
AQDEXOH40D0490	4.9	196.0		46.5	331.1	7	1.5	
AQDEXOH40D0500	5.0	200.0		46.6				
AQDEXOH40D0510	5.1	204.0	237.9	46.7	352.3	7	1.6	
AQDEXOH40D0520	5.2	208.0		46.8				
AQDEXOH40D0530	5.3	212.0		46.9	374.4	7	1.7	
AQDEXOH40D0540	5.4	216.0	238.0	47.0				
AQDEXOH40D0550	5.5	220.0		46.5				
AQDEXOH40D0560	5.6	224.0	259.0	46.6				
AQDEXOH40D0570	5.7	228.0		46.7	374.4	7	1.8	
AQDEXOH40D0580	5.8	232.0		46.8				
AQDEXOH40D0590	5.9	236.0	259.1	46.9				
AQDEXOH40D0600	6.0	240.0		47.0				
AQDEXOH40D0610	6.1	244.0		46.5	374.4	7	1.9	
AQDEXOH40D0620	6.2	248.0	281.1	46.6				
AQDEXOH40D0630	6.3	252.0		46.7				
AQDEXOH40D0640	6.4	256.0	281.2	46.8	352.3	7	2.0	
AQDEXOH40D0650	6.5	260.0		46.9				
AQDEXOH40D0660	6.6	264.0	302.2	47.0				
AQDEXOH40D0670	6.7	268.0		46.5	374.4	7	2.1	
AQDEXOH40D0680	6.8	272.0		46.6				
AQDEXOH40D0690	6.9	276.0	302.3	46.7				
AQDEXOH40D0700	7.0	280.0		46.8				
AQDEXOH40D0710	7.1	284.0		46.9	374.4	7	2.2	
AQDEXOH40D0720	7.2	288.0	324.3	47.0				
AQDEXOH40D0730	7.3	292.0		46.5				
AQDEXOH40D0740	7.4	296.0		46.6				
AQDEXOH40D0750	7.5	300.0	324.4	46.7				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


AQDEXOH45D

AQUA EX 油孔钻 45D

AQUA Drills EX Oil-Hole 45D

●可以进行钻头直径 45D 用高效率孔加工。

High performance up to 45x drill diameter.

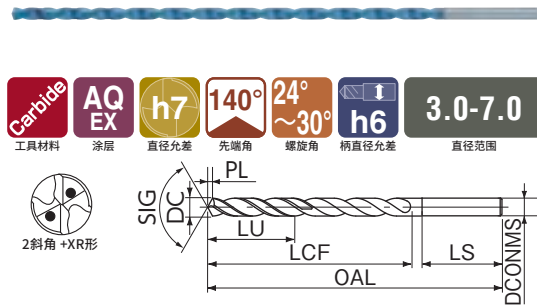

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH45D0300	3.0	135.0	144.5	47.0	194.5	3	0.5	□
AQDEXOH45D0310	3.1	139.5		46.5				
AQDEXOH45D0320	3.2	144.0		46.6				
AQDEXOH45D0330	3.3	148.5	168.6		218.6		0.6	
AQDEXOH45D0340	3.4	153.0		46.7		4		
AQDEXOH45D0350	3.5	157.5		46.8				
AQDEXOH45D0360	3.6	162.0		46.8				
AQDEXOH45D0370	3.7	166.5		46.9	242.7		0.7	
AQDEXOH45D0380	3.8	171.0	192.7	47.0				
AQDEXOH45D0390	3.9	175.5		46.6				
AQDEXOH45D0400	4.0	180.0		46.6	266.7		0.8	□
AQDEXOH45D0410	4.1	184.5	216.7	46.7		5		
AQDEXOH45D0420	4.2	189.0		46.8				
AQDEXOH45D0430	4.3	193.5	216.8	46.8	290.8		0.9	
AQDEXOH45D0440	4.4	198.0		46.9				
AQDEXOH45D0450	4.5	202.5		46.5	314.9		1.0	
AQDEXOH45D0460	4.6	207.0	240.8	46.6		6		
AQDEXOH45D0470	4.7	211.5		46.7				
AQDEXOH45D0480	4.8	216.0	240.9	46.8	339.0		1.1	
AQDEXOH45D0490	4.9	220.5		46.5				
AQDEXOH45D0500	5.0	225.0		46.6				□
AQDEXOH45D0510	5.1	229.5	264.9	46.7				
AQDEXOH45D0520	5.2	234.0		46.8				
AQDEXOH45D0530	5.3	238.5		46.9	363.1		1.2	
AQDEXOH45D0540	5.4	243.0	265.0	46.5		7		
AQDEXOH45D0550	5.5	247.5		46.6				
AQDEXOH45D0560	5.6	252.0		46.7				
AQDEXOH45D0570	5.7	256.5	289.0	46.8	387.2		1.3	
AQDEXOH45D0580	5.8	261.0		46.9				
AQDEXOH45D0590	5.9	265.5	289.1	47.0				
AQDEXOH45D0600	6.0	270.0		46.5				□
AQDEXOH45D0610	6.1	274.5		46.6				
AQDEXOH45D0620	6.2	279.0	313.1	46.7	363.2			
AQDEXOH45D0630	6.3	283.5		46.8				
AQDEXOH45D0640	6.4	288.0		46.9				
AQDEXOH45D0650	6.5	292.5	313.2	47.0				
AQDEXOH45D0660	6.6	297.0		46.5				
AQDEXOH45D0670	6.7	301.5	337.2	46.6				
AQDEXOH45D0680	6.8	306.0		46.7				
AQDEXOH45D0690	6.9	310.5		46.8				
AQDEXOH45D0700	7.0	315.0	337.3	46.9				


AQDEXOH50D

AQUA EX 油孔钻 50D

AQUA Drills EX Oil-Hole 50D

●可以进行钻头直径 50D 用高效率孔加工。

High performance up to 50x drill diameter.

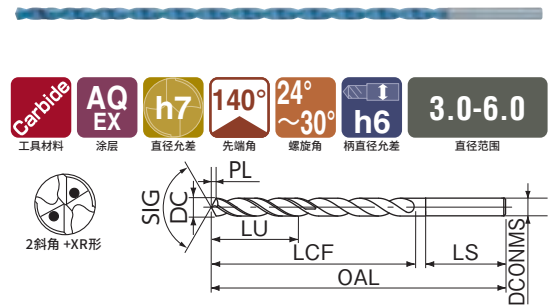

订货方式 商品编码 单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH50D0300	3.0	150.0	159.5	47.0	209.5	3	0.5	□
AQDEXOH50D0310	3.1	155.0		46.5				
AQDEXOH50D0320	3.2	160.0		46.6				
AQDEXOH50D0330	3.3	165.0	186.6		236.6		0.6	
AQDEXOH50D0340	3.4	170.0		46.7		4		
AQDEXOH50D0350	3.5	175.0		46.8				
AQDEXOH50D0360	3.6	180.0		46.8				
AQDEXOH50D0370	3.7	185.0		46.9	262.7		0.7	
AQDEXOH50D0380	3.8	190.0	212.7	47.0				
AQDEXOH50D0390	3.9	195.0		46.6				
AQDEXOH50D0400	4.0	200.0		46.6	289.7		0.8	□
AQDEXOH50D0410	4.1	205.0	239.7	46.7		5		
AQDEXOH50D0420	4.2	210.0		46.8				
AQDEXOH50D0430	4.3	215.0	239.8	46.8	315.8		0.9	
AQDEXOH50D0440	4.4	220.0		46.9				
AQDEXOH50D0450	4.5	225.0		46.5	342.9		1.0	
AQDEXOH50D0460	4.6	230.0	265.8	46.6		6		
AQDEXOH50D0470	4.7	235.0		46.7				
AQDEXOH50D0480	4.8	240.0	265.9	46.8	369.0		1.1	
AQDEXOH50D0490	4.9	245.0		46.9				
AQDEXOH50D0500	5.0	250.0		46.5				□
AQDEXOH50D0510	5.1	255.0	292.9	46.6				
AQDEXOH50D0520	5.2	260.0		46.7				
AQDEXOH50D0530	5.3	265.0		46.8				
AQDEXOH50D0540	5.4	270.0	293.0	46.9	387.1		1.2	
AQDEXOH50D0550	5.5	275.0		47.0				
AQDEXOH50D0560	5.6	280.0	319.0	46.5				
AQDEXOH50D0570	5.7	285.0		46.6				
AQDEXOH50D0580	5.8	290.0		46.7				
AQDEXOH50D0590	5.9	295.0	319.1	46.8				
AQDEXOH50D0600	6.0	300.0		46.9				

- 导向孔加工用钻头。
- 切入性高的导向孔提高了深孔加工的同心度，进而提高了开孔性能。

For guide hole drilling.

High precision positioning with special thinning.

Multifunction from centering, chamfering and V-grooving.

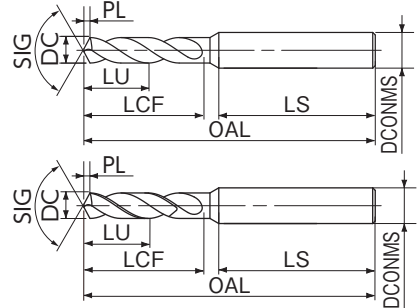

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

LIST 9622

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOHPLT01015	1.015	3.0	3.4	46.0	54.1		0.1	
AQDEXOHPLT01115	1.115	3.3	3.7	47.9	56.1			
AQDEXOHPLT01215	1.215	3.6	4.1	47.8				
AQDEXOHPLT01315	1.315	3.9	4.4	47.7		56.2		
AQDEXOHPLT01415	1.415	4.2	4.8	47.4				
AQDEXOHPLT01515	1.515	4.5	5.1	47.3			0.2	
AQDEXOHPLT01615	1.615	4.8	5.4	51.2				
AQDEXOHPLT01715	1.715	5.1	5.7	51.1		60.2		
AQDEXOHPLT01815	1.815	5.4	6.0	51.0				
AQDEXOHPLT01915	1.915	5.7	6.5	50.8		60.3		
AQDEXOHPLT02015	2.015	6.0	9.3	48.2			3	
AQDEXOHPLT02115	2.115	6.3		49.3				
AQDEXOHPLT02215	2.215	6.6	11.3	49.5			0.3	
AQDEXOHPLT02315	2.315	6.9		49.7		63.3		
AQDEXOHPLT02415	2.415	7.2		48.9				
AQDEXOHPLT02515	2.515	7.5		49.1				
AQDEXOHPLT02615	2.615	7.8	12.4	54.3				
AQDEXOHPLT02715	2.715	8.1		52.5		68.4		
AQDEXOHPLT02815	2.815	8.4		52.7			0.4	
AQDEXOHPLT02915	2.915	8.7		52.8				
AQDEXOHPLT03030	3.030	9.1		53.0				
AQDEXOHPLT03130	3.130	9.4		53.2		72.4		
AQDEXOHPLT03230	3.230	9.7	15.4	53.3				
AQDEXOHPLT03330	3.330	10.0		53.4				
AQDEXOHPLT03430	3.430	10.3		53.5				
AQDEXOHPLT03530	3.530	10.6	16.5	53.6			4	
AQDEXOHPLT03630	3.630	10.9		52.7				
AQDEXOHPLT03730	3.730	11.2		52.8		72.5	0.5	
AQDEXOHPLT03830	3.830	11.5		52.9				
AQDEXOHPLT03930	3.930	11.8	18.5	52.9				
AQDEXOHPLT04030	4.030	12.1		53.0				
AQDEXOHPLT04130	4.130	12.4		56.2				
AQDEXOHPLT04230	4.230	12.7	19.6	56.3				
AQDEXOHPLT04330	4.330	13.0		56.4				
AQDEXOHPLT04430	4.430	13.3		56.5		80.6	0.6	
AQDEXOHPLT04530	4.530	13.6	21.6	56.6				
AQDEXOHPLT04630	4.630	13.9		55.7				
AQDEXOHPLT04730	4.730	14.2		55.8				
AQDEXOHPLT04830	4.830	14.5	22.6	55.9				
AQDEXOHPLT04930	4.930	14.8	22.7	55.9		80.7		
AQDEXOHPLT05030	5.030	15.1	23.7	56.0				
AQDEXOHPLT05130	5.130	15.4		54.2				
AQDEXOHPLT05230	5.230	15.7	24.7	54.3			0.7	
AQDEXOHPLT05330	5.330	16.0		54.4		82.7		
AQDEXOHPLT05430	5.430	16.3		54.5				
AQDEXOHPLT05530	5.530	16.6	25.7	54.6				
AQDEXOHPLT05630	5.630	16.9	25.8	53.7				
AQDEXOHPLT05730	5.730	17.2		53.8				
AQDEXOHPLT05830	5.830	17.5		53.9		82.8		
AQDEXOHPLT05930	5.930	17.8	27.8	53.9			0.8	
AQDEXOHPLT06030	6.030	18.1		54.0				
AQDEXOHPLT06130	6.130	18.4		55.2				
AQDEXOHPLT06230	6.230	18.7	28.8	55.3		88.8		
AQDEXOHPLT06330	6.330	19.0		55.4				
AQDEXOHPLT06430	6.430	19.3		55.5				
AQDEXOHPLT06530	6.530	19.6	30.9	55.6			7	
AQDEXOHPLT06630	6.630	19.9		54.7		88.9		
AQDEXOHPLT06730	6.730	20.2		54.8			0.9	
AQDEXOHPLT06830	6.830	20.5	31.9	54.9				
AQDEXOHPLT06930	6.930	20.8						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOHPLT07030	7.030	21.1	32.9	55.0	88.9	7	0.9	
AQDEXOHPLT07130	7.130	21.4		57.2				
AQDEXOHPLT07230	7.230	21.7	34.0	57.3				
AQDEXOHPLT07330	7.330	22.0		57.4				
AQDEXOHPLT07430	7.430	22.3		57.5		95.0	1.0	
AQDEXOHPLT07530	7.530	22.6	35.0	57.6				
AQDEXOHPLT07630	7.630	22.9		56.7				
AQDEXOHPLT07730	7.730	23.2		56.8				
AQDEXOHPLT07830	7.830	23.5		56.9				
AQDEXOHPLT07930	7.930	23.8		57.0		95.1		
AQDEXOHPLT08030	8.030	24.1		57.0				
AQDEXOHPLT08130	8.130	24.4		58.2				
AQDEXOHPLT08230	8.230	24.7	38.1	58.3			1.1	
AQDEXOHPLT08330	8.330	25.0		58.4		101.1		
AQDEXOHPLT08430	8.430	25.3		58.5				
AQDEXOHPLT08530	8.530	25.6		58.6				
AQDEXOHPLT08630	8.630	25.9	40.2	57.7				
AQDEXOHPLT08730	8.730	26.2		57.8				
AQDEXOHPLT08830	8.830	26.5		57.9		101.2		
AQDEXOHPLT08930	8.930	26.8		57.9			1.2	
AQDEXOHPLT09030	9.030	27.1	42.2	58.0				
AQDEXOHPLT09130	9.130	27.4		60.2				
AQDEXOHPLT09230	9.230	27.7	43.2	60.3		107.2		
AQDEXOHPLT09330	9.330	28.0		60.4				
AQDEXOHPLT09430	9.430	28.3		60.5				
AQDEXOHPLT09530	9.530	28.6	44.3	60.6			10	
AQDEXOHPLT09630	9.630	28.9		59.7				
AQDEXOHPLT09730	9.730	29.2		59.8		107.3	1.3	
AQDEXOHPLT09830	9.830	29.5		59.9				
AQDEXOHPLT09930	9.930	29.8	46.3	59.9				
AQDEXOHPLT10030	10.030	30.1		60.0				
AQDEXOHPLT10130	10.130	30.4		65.2				
AQDEXOHPLT10230	10.230	30.7	47.4	65.3				
AQDEXOHPLT10330	10.330	31.0		65.4				
AQDEXOHPLT10430	10.430	31.3		65.5		117.4	1.4	
AQDEXOHPLT10530	10.530	31.6	49.4	65.6				
AQDEXOHPLT10630	10.630	31.9		64.7			11	
AQDEXOHPLT10730	10.730	32.2	50.4	64.8				
AQDEXOHPLT10830	10.830	32.5		64.9				
AQDEXOHPLT10930	10.930	32.8	50.5	64.9		117.5		
AQDEXOHPLT11030	11.030	33.1		65.0				
AQDEXOHPLT11130	11.130	33.4	51.5	67.2				
AQDEXOHPLT11230	11.230	33.7		67.3			1.5	
AQDEXOHPLT11330	11.330	34.0		67.4		123.5		
AQDEXOHPLT11430	11.430	34.3		67.5				
AQDEXOHPLT11530	11.530	34.6	53.5	67.6				
AQDEXOHPLT11630	11.630	34.9	53.6	66.7				
AQDEXOHPLT11730	11.730	35.2		66.8				
AQDEXOHPLT11830	11.830	35.5		66.9		123.6	1.6	
AQDEXOHPLT11930	11.930	35.8	55.6	66.9				
AQDEXOHPLT12030	12.030	36.1		67.0				

深孔的导向孔加工用钻头的选定

AQDEXOHPLT

平坦加工面上
切入性良好的 AQDEXOHPLT

对倾斜面进行导向孔加工时，推荐使用 AQDEXZOHPLT (A-48)。


●用于倾斜面的导向孔加工用钻头。

For guide hole drilling on sloped surfaces.

新商品



双刃带

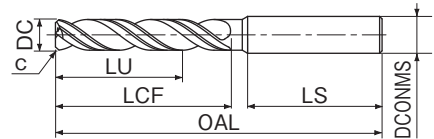

订货方式 商品编码

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZOHPLT0303	3.03	9.1	14	68	53	3	
AQDEXZOHPLT0313	3.13	9.4					
AQDEXZOHPLT0323	3.23	9.7	15		54		
AQDEXZOHPLT0333	3.33	10.0					
AQDEXZOHPLT0343	3.43	10.3					
AQDEXZOHPLT0353	3.53	10.6	16	72		4	
AQDEXZOHPLT0363	3.63	10.9					
AQDEXZOHPLT0373	3.73	11.2					
AQDEXZOHPLT0383	3.83	11.5	18		53		
AQDEXZOHPLT0393	3.93	11.8					
AQDEXZOHPLT0403	4.03	12.1					
AQDEXZOHPLT0413	4.13	12.4					
AQDEXZOHPLT0423	4.23	12.7	19				
AQDEXZOHPLT0433	4.33	13.0			57		
AQDEXZOHPLT0443	4.43	13.3					
AQDEXZOHPLT0453	4.53	13.6	21	80		5	
AQDEXZOHPLT0463	4.63	13.9					
AQDEXZOHPLT0473	4.73	14.2					
AQDEXZOHPLT0483	4.83	14.5	22		56		
AQDEXZOHPLT0493	4.93	14.8					
AQDEXZOHPLT0503	5.03	15.1	23				
AQDEXZOHPLT0513	5.13	15.4					
AQDEXZOHPLT0523	5.23	15.7	24				
AQDEXZOHPLT0533	5.33	16.0			55		
AQDEXZOHPLT0543	5.43	16.3					
AQDEXZOHPLT0553	5.53	16.6	25	82		6	
AQDEXZOHPLT0563	5.63	16.9					
AQDEXZOHPLT0573	5.73	17.2					
AQDEXZOHPLT0583	5.83	17.5	27		54		
AQDEXZOHPLT0593	5.93	17.8					
AQDEXZOHPLT0603	6.03	18.1					
AQDEXZOHPLT0613	6.13	18.4					
AQDEXZOHPLT0623	6.23	18.7	28				
AQDEXZOHPLT0633	6.33	19.0			56		
AQDEXZOHPLT0643	6.43	19.3					
AQDEXZOHPLT0653	6.53	19.6	30	88		7	
AQDEXZOHPLT0663	6.63	19.9					
AQDEXZOHPLT0673	6.73	20.2					
AQDEXZOHPLT0683	6.83	20.5	31		55		
AQDEXZOHPLT0693	6.93	20.8					
AQDEXZOHPLT0703	7.03	21.1	32				
AQDEXZOHPLT0713	7.13	21.4					
AQDEXZOHPLT0723	7.23	21.7	33				
AQDEXZOHPLT0733	7.33	22.0			58		
AQDEXZOHPLT0743	7.43	22.3					
AQDEXZOHPLT0753	7.53	22.6	34	94		8	
AQDEXZOHPLT0763	7.63	22.9					
AQDEXZOHPLT0773	7.73	23.2					
AQDEXZOHPLT0783	7.83	23.5	36		57		
AQDEXZOHPLT0793	7.93	23.8					
AQDEXZOHPLT0803	8.03	24.1					
AQDEXZOHPLT0813	8.13	24.4					
AQDEXZOHPLT0823	8.23	24.7	37				
AQDEXZOHPLT0833	8.33	25.0			59		
AQDEXZOHPLT0843	8.43	25.3					
AQDEXZOHPLT0853	8.53	25.6	39	100		9	
AQDEXZOHPLT0863	8.63	25.9					
AQDEXZOHPLT0873	8.73	26.2					
AQDEXZOHPLT0883	8.83	26.5	40		58		
AQDEXZOHPLT0893	8.93	26.8					

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZOHPLT0903	9.03	27.1	41	100	58	9	
AQDEXZOHPLT0913	9.13	27.4					
AQDEXZOHPLT0923	9.23	27.7	42		61		
AQDEXZOHPLT0933	9.33	28.0					
AQDEXZOHPLT0943	9.43	28.3					
AQDEXZOHPLT0953	9.53	28.6	43	106		10	
AQDEXZOHPLT0963	9.63	28.9					
AQDEXZOHPLT0973	9.73	29.2					
AQDEXZOHPLT0983	9.83	29.5	45		60		
AQDEXZOHPLT0993	9.93	29.8					
AQDEXZOHPLT1003	10.03	30.1					
AQDEXZOHPLT1013	10.13	30.4					
AQDEXZOHPLT1023	10.23	30.7	46		66		
AQDEXZOHPLT1033	10.33	31.0					
AQDEXZOHPLT1043	10.43	31.3					
AQDEXZOHPLT1053	10.53	31.6	48	116		11	
AQDEXZOHPLT1063	10.63	31.9					
AQDEXZOHPLT1073	10.73	32.2					
AQDEXZOHPLT1083	10.83	32.5	49		65		
AQDEXZOHPLT1093	10.93	32.8					
AQDEXZOHPLT1103	11.03	33.1					
AQDEXZOHPLT1113	11.13	33.4	50				
AQDEXZOHPLT1123	11.23	33.7					
AQDEXZOHPLT1133	11.33	34.0	51		68		
AQDEXZOHPLT1143	11.43	34.3					
AQDEXZOHPLT1153	11.53	34.6	52	122		12	
AQDEXZOHPLT1163	11.63	34.9					
AQDEXZOHPLT1173	11.73	35.2					
AQDEXZOHPLT1183	11.83	35.5	54		67		
AQDEXZOHPLT1193	11.93	35.8					
AQDEXZOHPLT1203	12.03	36.1					

直径 DC (mm)		倒角量 C (mm)
超过 Above	以下 Up to	
6.03	10.03	0.04
10.03		0.10
		0.20

深孔的导向孔加工用钻头的选定

AQDEXZOHPLT



加工倾斜面或有高低差的加工面时，推荐使用平头

AQDEXOH3F3D

AQUA EX 3 刃油孔钻 3D
AQUA Drills EX Oil-Hole 3 Flutes 3D

切削条件 Cutting Condition ▶ A-159



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

直径范围

- 切削平衡出色，使用 3 枚刃，适合于高精度加工。
- 可以进行钻头直径 3D 用高效率开孔加工。

Superior balance of three cutting edges is excellent for high-precision drilling.
High performance drilling up to 3x drill diameter is possible.

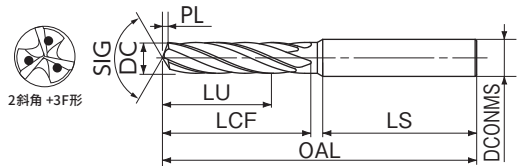

新商品

LIST 9826

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH3F3D0300	3.00	9.0	17.5	49	68.5	3	●	
AQDEXOH3F3D0301	3.01		20.5		72.5		0.5	
AQDEXOH3F3D0302	3.02	9.1					□	
AQDEXOH3F3D0303	3.03						●	
AQDEXOH3F3D0305	3.05	9.2					□	
AQDEXOH3F3D0310	3.10	9.3					●	
AQDEXOH3F3D0315	3.15	9.5					□	
AQDEXOH3F3D0320	3.20	9.6		50			●	
AQDEXOH3F3D0325	3.25	9.8					□	
AQDEXOH3F3D0330	3.30	9.9	20.6		72.6		0.6	
AQDEXOH3F3D0335	3.35	10.1					□	
AQDEXOH3F3D0340	3.40	10.2					●	
AQDEXOH3F3D0345	3.45	10.4					□	
AQDEXOH3F3D0350	3.50	10.5					●	
AQDEXOH3F3D0355	3.55	10.7	22.6				□	
AQDEXOH3F3D0360	3.60	10.8					●	
AQDEXOH3F3D0365	3.65	11.0					□	
AQDEXOH3F3D0370	3.70	11.1					●	
AQDEXOH3F3D0375	3.75	11.3					□	
AQDEXOH3F3D0380	3.80	11.4					●	
AQDEXOH3F3D0385	3.85	11.6	22.7	48	72.7		□	
AQDEXOH3F3D0390	3.90	11.7					●	
AQDEXOH3F3D0395	3.95	11.9					□	
AQDEXOH3F3D0398	3.98						0.7	
AQDEXOH3F3D0399	3.99						□	
AQDEXOH3F3D0400	4.00	12.0					●	
AQDEXOH3F3D0401	4.01						□	
AQDEXOH3F3D0402	4.02	12.1					□	
AQDEXOH3F3D0403	4.03		25.7		80.7		●	
AQDEXOH3F3D0405	4.05	12.2					□	
AQDEXOH3F3D0410	4.10	12.3					●	
AQDEXOH3F3D0415	4.15	12.5					□	
AQDEXOH3F3D0420	4.20	12.6		53			●	
AQDEXOH3F3D0425	4.25	12.8					□	
AQDEXOH3F3D0430	4.30	12.9					●	
AQDEXOH3F3D0435	4.35	13.1					□	
AQDEXOH3F3D0440	4.40	13.2			80.8		0.8	
AQDEXOH3F3D0445	4.45	13.4					□	
AQDEXOH3F3D0450	4.50	13.5					●	
AQDEXOH3F3D0455	4.55	13.7					□	
AQDEXOH3F3D0460	4.60	13.8					●	
AQDEXOH3F3D0465	4.65	14.0					□	
AQDEXOH3F3D0470	4.70	14.1					●	
AQDEXOH3F3D0475	4.75	14.3					□	
AQDEXOH3F3D0480	4.80	14.4					●	
AQDEXOH3F3D0485	4.85	14.6					□	
AQDEXOH3F3D0490	4.90	14.7		51	80.9		●	
AQDEXOH3F3D0495	4.95	14.9					□	
AQDEXOH3F3D0498	4.98						0.9	
AQDEXOH3F3D0499	4.99						□	
AQDEXOH3F3D0500	5.00	15.0					●	
AQDEXOH3F3D0501	5.01						□	
AQDEXOH3F3D0502	5.02	15.1					□	
AQDEXOH3F3D0503	5.03						●	
AQDEXOH3F3D0505	5.05	15.2					□	
AQDEXOH3F3D0510	5.10	15.3					●	
AQDEXOH3F3D0515	5.15	15.5					□	
AQDEXOH3F3D0520	5.20	15.6					●	
AQDEXOH3F3D0525	5.25	15.8	28.0		83.0		1.0	
AQDEXOH3F3D0530	5.30	15.9					●	

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH3F3D0535	5.35	16.1					□	
AQDEXOH3F3D0540	5.40	16.2					●	
AQDEXOH3F3D0545	5.45	16.4	28.0	53			□	
AQDEXOH3F3D0550	5.50	16.5					●	
AQDEXOH3F3D0555	5.55	16.7			83.0		□	
AQDEXOH3F3D0560	5.60	16.8					●	
AQDEXOH3F3D0565	5.65	17.0					□	
AQDEXOH3F3D0570	5.70	17.1		31.0			●	
AQDEXOH3F3D0575	5.75	17.3					□	
AQDEXOH3F3D0580	5.80	17.4					●	
AQDEXOH3F3D0585	5.85	17.6					□	
AQDEXOH3F3D0590	5.90	17.7					●	
AQDEXOH3F3D0595	5.95		31.1		83.1		□	
AQDEXOH3F3D0598	5.98	17.9					□	
AQDEXOH3F3D0599	5.99						1.1	
AQDEXOH3F3D0600	6.00	18.0					●	
AQDEXOH3F3D0601	6.01						□	
AQDEXOH3F3D0602	6.02	18.1					□	
AQDEXOH3F3D0603	6.03						●	
AQDEXOH3F3D0610	6.10	18.3	33.1	54	89.1		□	
AQDEXOH3F3D0620	6.20	18.6					●	
AQDEXOH3F3D0630	6.30	18.9					□	
AQDEXOH3F3D0640	6.40	19.2					●	
AQDEXOH3F3D0650	6.50	19.5					□	
AQDEXOH3F3D0660	6.60	19.8					1.2	
AQDEXOH3F3D0670	6.70	20.1					□	
AQDEXOH3F3D0680	6.80	20.4					●	
AQDEXOH3F3D0690	6.90	20.7					□	
AQDEXOH3F3D0698	6.98	20.9					1.3	
AQDEXOH3F3D0699	6.99		36.3		89.3		□	
AQDEXOH3F3D0700	7.00	21.0					●	
AQDEXOH3F3D0701	7.01						□	
AQDEXOH3F3D0702	7.02						1.3	
AQDEXOH3F3D0703	7.03	21.1					□	
AQDEXOH3F3D0710	7.10	21.3					●	
AQDEXOH3F3D0720	7.20	21.6					□	
AQDEXOH3F3D0730	7.30	21.9					●	
AQDEXOH3F3D0740	7.40	22.2					□	
AQDEXOH3F3D0750	7.50	22.5	38.4				1.4	
AQDEXOH3F3D0760	7.60	22.8					□	
AQDEXOH3F3D0770	7.70	23.1			95.4		●	
AQDEXOH3F3D0780	7.80	23.4					□	
AQDEXOH3F3D0790	7.90	23.7					1.5	
AQDEXOH3F3D0798	7.98	23.9					□	
AQDEXOH3F3D0799	7.99		41.5		95.5		□	
AQDEXOH3F3D0800	8.00	24.0					●	
AQDEXOH3F3D0801	8.01						□	
AQDEXOH3F3D0802	8.02	24.1					1.5	
AQDEXOH3F3D0803	8.03						□	
AQDEXOH3F3D0810	8.10	24.3					●	
AQDEXOH3F3D0820	8.20	24.6					□	
AQDEXOH3F3D0830	8.30	24.9					1.6	
AQDEXOH3F3D0840	8.40	25.2					□	
AQDEXOH3F3D0850	8.50	25.5					●	
AQDEXOH3F3D0860	8.60	25.8					□	
AQDEXOH3F3D0870	8.70	26.1					1.6	
AQDEXOH3F3D0880	8.80	26.4					□	
AQDEXOH3F3D0890	8.90	26.7					●	
AQDEXOH3F3D0898	8.98	26.9					□	
AQDEXOH3F3D0899	8.99	27.0					1.6	

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Next Page 下一页

AQDEXOH3F3D

AQUA EX 3 刃油孔钻 3D

AQUA Drills EX Oil-Hole 3 Flutes 3D

切削条件 Cutting Condition ▶▶▶A-159



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差

直径范围

新商品

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DO/NMS	先端 PL	在庫 Stock
AQDEXOH3F3D0900	9.00	27.0	46.6	53	101.6	9		●
AQDEXOH3F3D0901	9.01							
AQDEXOH3F3D0902	9.02		48.6		107.6		1.6	□
AQDEXOH3F3D0903	9.03	27.1						
AQDEXOH3F3D0910	9.10			57				
AQDEXOH3F3D0920	9.20	27.3						
AQDEXOH3F3D0930	9.30	27.6						
AQDEXOH3F3D0940	9.40	27.9	48.7		107.7		1.7	
AQDEXOH3F3D0950	9.50	28.2				10		●
AQDEXOH3F3D0960	9.60	28.5						
AQDEXOH3F3D0970	9.70	28.8	51.7					
AQDEXOH3F3D0980	9.80	29.1						
AQDEXOH3F3D0990	9.90	29.4		54	107.8			
AQDEXOH3F3D0998	9.98	29.7	51.8					
AQDEXOH3F3D0999	9.99	29.9						□
AQDEXOH3F3D1000	10.00						1.8	●
AQDEXOH3F3D1001	10.01	30.0						
AQDEXOH3F3D1002	10.02							□
AQDEXOH3F3D1003	10.03	30.1	53.8		117.8			
AQDEXOH3F3D1010	10.10	30.3						
AQDEXOH3F3D1020	10.20	30.6		62				
AQDEXOH3F3D1030	10.30	30.9						
AQDEXOH3F3D1040	10.40	31.2	53.9		117.9	11	1.9	●
AQDEXOH3F3D1050	10.50	31.5						
AQDEXOH3F3D1060	10.60	31.8						
AQDEXOH3F3D1070	10.70	32.1	56.9					
AQDEXOH3F3D1080	10.80	32.4						
AQDEXOH3F3D1090	10.90	32.7		59	118.0			
AQDEXOH3F3D1098	10.98	32.9						□
AQDEXOH3F3D1099	10.99		57.0					
AQDEXOH3F3D1100	11.00	33.0					2.0	●
AQDEXOH3F3D1101	11.01							□
AQDEXOH3F3D1102	11.02							
AQDEXOH3F3D1103	11.03	33.1	59.0		124.0			
AQDEXOH3F3D1110	11.10	33.3		63				
AQDEXOH3F3D1120	11.20	33.6						
AQDEXOH3F3D1130	11.30	33.9						
AQDEXOH3F3D1140	11.40	34.2	59.1		124.1	12	2.1	●
AQDEXOH3F3D1150	11.50	34.5						
AQDEXOH3F3D1160	11.60	34.8						
AQDEXOH3F3D1170	11.70	35.1	62.1					
AQDEXOH3F3D1180	11.80	35.4						
AQDEXOH3F3D1190	11.90	35.7		60				
AQDEXOH3F3D1198	11.98	35.9						□
AQDEXOH3F3D1199	11.99	36.0	62.2		124.2		2.2	
AQDEXOH3F3D1200	12.00							
AQDEXOH3F3D1210	12.10	36.3	64.2	64	130.2	13	2.3	
AQDEXOH3F3D1250	12.50	37.5	64.3		130.3		2.4	
AQDEXOH3F3D1300	13.00	39.0	67.4	61	130.4	14	2.5	
AQDEXOH3F3D1350	13.50	40.5	69.5	65				
AQDEXOH3F3D1400	14.00	42.0	72.5	62	136.5	14	2.5	●
AQDEXOH3F3D1410	14.10	42.3						
AQDEXOH3F3D1450	14.50	43.5	74.6	66	142.6	15	2.6	
AQDEXOH3F3D1500	15.00	45.0	77.7	63	142.7		2.7	
AQDEXOH3F3D1550	15.50	46.5	79.8	67				
AQDEXOH3F3D1560	15.60	46.8	82.8		148.8	16	2.8	
AQDEXOH3F3D1600	16.00	48.0	82.9	64	148.9		2.9	

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	—	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

AQDEXOH3F5D

AQUA EX 3 刃油孔钻 5D

AQUA Drills EX Oil-Hole 3 Flutes 5D

切削条件 Cutting Condition ▶ A-159

Carbide
工具材料

AQ
EX
涂层

js6
直径公差

140°
先端角


25°
~30°
螺旋角

h6
柄直径公差

3.0-16.0
直径范围

- 切削平衡出色，使用 3 枚刃，适合于高精度加工。
- 可以进行钻头直径 5D 用高效率开孔加工。

Superior balance of three cutting edges is excellent for high-precision drilling.
High performance drilling up to 5x drill diameter is possible.

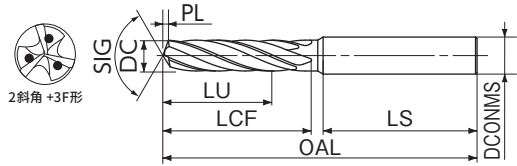

新商品

LIST 9820

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH3F5D0300	3.0	15.0	28.5	48	78.5	3	0.5	
AQDEXOH3F5D0310	3.1	15.5						
AQDEXOH3F5D0320	3.2	16.0						
AQDEXOH3F5D0330	3.3	16.5	32.6	52	86.6		0.6	
AQDEXOH3F5D0340	3.4	17.0						
AQDEXOH3F5D0350	3.5	17.5						
AQDEXOH3F5D0360	3.6	18.0					4	
AQDEXOH3F5D0370	3.7	18.5						
AQDEXOH3F5D0380	3.8	19.0	36.7	48	86.7		0.7	
AQDEXOH3F5D0390	3.9	19.5						
AQDEXOH3F5D0400	4.0	20.0						
AQDEXOH3F5D0410	4.1	20.5	40.7		98.7			
AQDEXOH3F5D0420	4.2	21.0						
AQDEXOH3F5D0430	4.3	21.5	40.8	56	98.8		0.8	
AQDEXOH3F5D0440	4.4	22.0						
AQDEXOH3F5D0450	4.5	22.5					5	
AQDEXOH3F5D0460	4.6	23.0	44.8					
AQDEXOH3F5D0470	4.7	23.5						
AQDEXOH3F5D0480	4.8	24.0		52	98.9		0.9	
AQDEXOH3F5D0490	4.9	24.5	44.9					
AQDEXOH3F5D0500	5.0	25.0						
AQDEXOH3F5D0510	5.1	25.5			100.9			
AQDEXOH3F5D0520	5.2	26.0						
AQDEXOH3F5D0530	5.3	26.5						
AQDEXOH3F5D0540	5.4	27.0	45.0	54	101.0		1.0	
AQDEXOH3F5D0550	5.5	27.5						
AQDEXOH3F5D0560	5.6	28.0	49.0					
AQDEXOH3F5D0570	5.7	28.5						
AQDEXOH3F5D0580	5.8	29.0						
AQDEXOH3F5D0590	5.9	29.5	49.1	50	101.1		1.1	
AQDEXOH3F5D0600	6.0	30.0						
AQDEXOH3F5D0610	6.1	30.5						
AQDEXOH3F5D0620	6.2	31.0	53.1		110.1			
AQDEXOH3F5D0630	6.3	31.5		55				
AQDEXOH3F5D0640	6.4	32.0						
AQDEXOH3F5D0650	6.5	32.5	53.2				7	
AQDEXOH3F5D0660	6.6	33.0			110.2			
AQDEXOH3F5D0670	6.7	33.5	57.2	51			1.2	
AQDEXOH3F5D0680	6.8	34.0						
AQDEXOH3F5D0690	6.9	34.5	57.3		110.3			
AQDEXOH3F5D0700	7.0	35.0						
AQDEXOH3F5D0710	7.1	35.5					1.3	
AQDEXOH3F5D0720	7.2	36.0						
AQDEXOH3F5D0730	7.3	36.5	61.3	56	119.3			
AQDEXOH3F5D0740	7.4	37.0						
AQDEXOH3F5D0750	7.5	37.5	61.4				8	
AQDEXOH3F5D0760	7.6	38.0						
AQDEXOH3F5D0770	7.7	38.5	65.4		119.4		1.4	
AQDEXOH3F5D0780	7.8	39.0						
AQDEXOH3F5D0790	7.9	39.5		52				
AQDEXOH3F5D0800	8.0	40.0	65.5		119.5			
AQDEXOH3F5D0810	8.1	40.5						
AQDEXOH3F5D0820	8.2	41.0						
AQDEXOH3F5D0830	8.3	41.5	69.5	57	128.5		1.5	
AQDEXOH3F5D0840	8.4	42.0						
AQDEXOH3F5D0850	8.5	42.5						
AQDEXOH3F5D0860	8.6	43.0						
AQDEXOH3F5D0870	8.7	43.5						
AQDEXOH3F5D0880	8.8	44.0	73.6	53	128.6		1.6	
AQDEXOH3F5D0890	8.9	44.5						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH3F5D0900	9.0	45.0	73.6	53	128.6	9	1.6	
AQDEXOH3F5D0910	9.1	45.5						
AQDEXOH3F5D0920	9.2	46.0						
AQDEXOH3F5D0930	9.3	46.5	77.7	58	137.7		1.7	
AQDEXOH3F5D0940	9.4	47.0						
AQDEXOH3F5D0950	9.5	47.5					10	
AQDEXOH3F5D0960	9.6	48.0	81.7					
AQDEXOH3F5D0970	9.7	48.5						
AQDEXOH3F5D0980	9.8	49.0	81.8	54	137.8		1.8	
AQDEXOH3F5D0990	9.9	49.5						
AQDEXOH3F5D1000	10.0	50.0						
AQDEXOH3F5D1010	10.1	50.5	85.8		150.8			
AQDEXOH3F5D1020	10.2	51.0						
AQDEXOH3F5D1030	10.3	51.5	85.9	63			1.9	
AQDEXOH3F5D1040	10.4	52.0			150.9			
AQDEXOH3F5D1050	10.5	52.5						
AQDEXOH3F5D1060	10.6	53.0	89.9				11	
AQDEXOH3F5D1070	10.7	53.5						
AQDEXOH3F5D1080	10.8	54.0	89.9	59	151.0		2.0	
AQDEXOH3F5D1090	10.9	54.5	90.0					
AQDEXOH3F5D1100	11.0	55.0						
AQDEXOH3F5D1110	11.1	55.5	94.0		160.0			
AQDEXOH3F5D1120	11.2	56.0						
AQDEXOH3F5D1130	11.3	56.5						
AQDEXOH3F5D1140	11.4	57.0	94.1	64				
AQDEXOH3F5D1150	11.5	57.5			160.1		12	
AQDEXOH3F5D1160	11.6	58.0						
AQDEXOH3F5D1170	11.7	58.5	98.1					
AQDEXOH3F5D1180	11.8	59.0						
AQDEXOH3F5D1190	11.9	59.5	98.2	60	160.2		2.2	
AQDEXOH3F5D1200	12.0	60.0						
AQDEXOH3F5D1210	12.1	60.5	102.2	65	169.2		13	
AQDEXOH3F5D1250	12.5	62.5	102.3		169.3		2.3	
AQDEXOH3F5D1300	13.0	65.0	106.4	61	169.4		2.4	
AQDEXOH3F5D1350	13.5	67.5	110.5	66				
AQDEXOH3F5D1400	14.0	70.0	114.5	62	178.5		14	
AQDEXOH3F5D1410	14.1	70.5	118.6	67	187.6		15	
AQDEXOH3F5D1450	14.5	72.5						
AQDEXOH3F5D1500	15.0	75.0	122.7	63	187.7		2.7	
AQDEXOH3F5D1550	15.5	77.5	126.8	68	196.8		16	
AQDEXOH3F5D1560	15.6	78.0	130.8					
AQDEXOH3F5D1600	16.0	80.0	130.9	64	196.9		2.9	

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	—	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

AQDEXOH3F10D

AQUA EX 3 刃油孔钻 10D

AQUA Drills EX Oil-Hole 3 Flutes 10D

切削条件 Cutting Condition ▶▶▶A-159



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

直径范围

- 切削平衡出色，使用 3 枚刃，适合于高精度加工。
- 可以进行钻头直径 10D 用高效率开孔加工。

Superior balance of three cutting edges is excellent for high-precision drilling.
High performance drilling up to 10x drill diameter is possible.

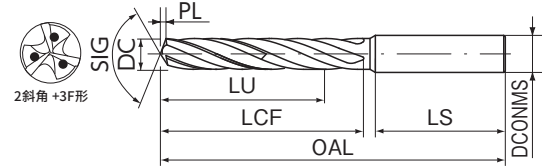

LIST 9834

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH3F10D0300	3.0	30.0	39.5	47.0	89.5	3	0.5	●
AQDEXOH3F10D0310	3.1	31.0		46.2				
AQDEXOH3F10D0320	3.2	32.0		46.3				
AQDEXOH3F10D0330	3.3	33.0	46.6	46.4	96.6		0.6	□
AQDEXOH3F10D0340	3.4	34.0		46.5				
AQDEXOH3F10D0350	3.5	35.0		46.6				●
AQDEXOH3F10D0360	3.6	36.0		46.7		4		
AQDEXOH3F10D0370	3.7	37.0		46.7				□
AQDEXOH3F10D0380	3.8	38.0	52.7	46.8	102.7		0.7	
AQDEXOH3F10D0390	3.9	39.0		46.9				●
AQDEXOH3F10D0400	4.0	40.0		47.0				
AQDEXOH3F10D0410	4.1	41.0	59.7	46.2	109.7			□
AQDEXOH3F10D0420	4.2	42.0		46.3				
AQDEXOH3F10D0430	4.3	43.0	59.8	46.4	109.8		0.8	
AQDEXOH3F10D0440	4.4	44.0		46.5				●
AQDEXOH3F10D0450	4.5	45.0		46.6		5		
AQDEXOH3F10D0460	4.6	46.0	65.8	46.7	115.8			□
AQDEXOH3F10D0470	4.7	47.0		46.8				
AQDEXOH3F10D0480	4.8	48.0	65.9	46.9	115.9		0.9	●
AQDEXOH3F10D0490	4.9	49.0		47.0				
AQDEXOH3F10D0500	5.0	50.0		46.2				□
AQDEXOH3F10D0510	5.1	51.0	72.9	46.3	122.9			
AQDEXOH3F10D0520	5.2	52.0		46.4				●
AQDEXOH3F10D0530	5.3	53.0		46.5		6		
AQDEXOH3F10D0540	5.4	54.0	73.0	46.6	123.0		1.0	□
AQDEXOH3F10D0550	5.5	55.0		46.6				●
AQDEXOH3F10D0560	5.6	56.0		46.7	129.0			□
AQDEXOH3F10D0570	5.7	57.0	79.0	46.8				
AQDEXOH3F10D0580	5.8	58.0		46.9				●
AQDEXOH3F10D0590	5.9	59.0	79.1	46.9	129.1		1.1	□
AQDEXOH3F10D0600	6.0	60.0		47.0				●
AQDEXOH3F10D0610	6.1	61.0		46.2				
AQDEXOH3F10D0620	6.2	62.0	86.1	46.3	136.1			□
AQDEXOH3F10D0630	6.3	63.0		46.4				●
AQDEXOH3F10D0640	6.4	64.0		46.5	136.2			
AQDEXOH3F10D0650	6.5	65.0	86.2	46.6		7		□
AQDEXOH3F10D0660	6.6	66.0		46.7	142.2		1.2	
AQDEXOH3F10D0670	6.7	67.0	92.2	46.8				●
AQDEXOH3F10D0680	6.8	68.0		46.9				
AQDEXOH3F10D0690	6.9	69.0	92.3	47.0	142.3			□
AQDEXOH3F10D0700	7.0	70.0		46.2				●
AQDEXOH3F10D0710	7.1	71.0		46.3				
AQDEXOH3F10D0720	7.2	72.0	99.3	46.4	149.3		1.3	□
AQDEXOH3F10D0730	7.3	73.0		46.5				●
AQDEXOH3F10D0740	7.4	74.0		46.6		8		
AQDEXOH3F10D0750	7.5	75.0	99.4	46.7	154.4		1.4	□
AQDEXOH3F10D0760	7.6	76.0		46.8				●
AQDEXOH3F10D0770	7.7	77.0	105.4	46.9				
AQDEXOH3F10D0780	7.8	78.0		46.9				□
AQDEXOH3F10D0790	7.9	79.0		46.9				●
AQDEXOH3F10D0800	8.0	80.0	105.5	47.0	155.5			
AQDEXOH3F10D0810	8.1	81.0		46.2				□
AQDEXOH3F10D0820	8.2	82.0		46.3				●
AQDEXOH3F10D0830	8.3	83.0	112.5	46.4	162.5		1.5	
AQDEXOH3F10D0840	8.4	84.0		46.5				□
AQDEXOH3F10D0850	8.5	85.0		46.6		9		●
AQDEXOH3F10D0860	8.6	86.0		46.7				
AQDEXOH3F10D0870	8.7	87.0		46.8	168.6		1.6	□
AQDEXOH3F10D0880	8.8	88.0	118.6	46.9				●
AQDEXOH3F10D0890	8.9	89.0		46.9				


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEXOH3F10D0900	9.0	90.0	118.6	47.0	168.6	9	1.6	●
AQDEXOH3F10D0910	9.1	91.0		46.2				
AQDEXOH3F10D0920	9.2	92.0		46.3				□
AQDEXOH3F10D0930	9.3	93.0	125.7	46.4	175.7		1.7	
AQDEXOH3F10D0940	9.4	94.0		46.5				●
AQDEXOH3F10D0950	9.5	95.0		46.6		10		
AQDEXOH3F10D0960	9.6	96.0	131.7	46.7	181.7			□
AQDEXOH3F10D0970	9.7	97.0		46.8				●
AQDEXOH3F10D0980	9.8	98.0	131.8	46.9	181.8		1.8	
AQDEXOH3F10D0990	9.9	99.0		47.0				□
AQDEXOH3F10D1000	10.0	100.0		56.3	198.8			●
AQDEXOH3F10D1010	10.1	101.0	138.8	56.2				□
AQDEXOH3F10D1020	10.2	102.0		56.3				●
AQDEXOH3F10D1030	10.3	103.0	138.9	56.4	198.9		1.9	
AQDEXOH3F10D1040	10.4	104.0		56.5				□
AQDEXOH3F10D1050	10.5	105.0		56.6		11		●
AQDEXOH3F10D1060	10.6	106.0	144.9	56.7	204.9			□
AQDEXOH3F10D1070	10.7	107.0		56.8				●
AQDEXOH3F10D1080	10.8	108.0		56.9	205.0		2.0	
AQDEXOH3F10D1090	10.9	109.0	145.0	57.0				□
AQDEXOH3F10D1100	11.0	110.0		56.2				●
AQDEXOH3F10D1110	11.1	111.0	152.0	56.3	212.0			□
AQDEXOH3F10D1120	11.2	112.0		56.4				●
AQDEXOH3F10D1130	11.3	113.0	152.1	56.5	212.1		2.1	
AQDEXOH3F10D1140	11.4	114.0		56.6				□
AQDEXOH3F10D1150	11.5	115.0		56.7		12		●
AQDEXOH3F10D1160	11.6	116.0	158.1	56.8	218.1			□
AQDEXOH3F10D1170	11.7	117.0		56.9				●
AQDEXOH3F10D1180	11.8	118.0	158.2	57.0	218.2		2.2	
AQDEXOH3F10D1190	11.9	119.0		56.2				□
AQDEXOH3F10D1200	12.0	120.0		56.3	225.3	13	2.3	
AQDEXOH3F10D1250	12.5	125.0	165.3	56.4	231.4		2.4	□
AQDEXOH3F10D1300	13.0	130.0	171.4	56.5	244.5	14	2.5	●
AQDEXOH3F10D1400	14.0	140.0	184.5	56.6	257.7	15	2.7	
AQDEXOH3F10D1500	15.0	150.0	197.7	56.7	270.9	16	2.9	
AQDEXOH3F10D1600	16.0	160.0	210.9					

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	—	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 切削平衡出色，使用 3 枚刃。
- 可实现无需铰刀的高精度孔加工。

This drill having balanced 3 flutes is suitable for precision drilling without reaming.

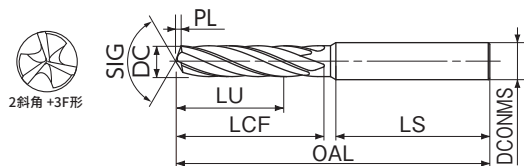

LIST 9836

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEX3FR0300	3.00	15.0	19.5	28	49.5	3	●	
AQDEX3FR0301	3.01						0.5	
AQDEX3FR0302	3.02	15.1	24.5		60.5			□
AQDEX3FR0303	3.03	15.2						●
AQDEX3FR0305	3.05	15.3						□
AQDEX3FR0310	3.10	15.5						●
AQDEX3FR0315	3.15	15.8						□
AQDEX3FR0320	3.20	16.0		34			0.6	●
AQDEX3FR0325	3.25	16.3	24.6		60.6			□
AQDEX3FR0330	3.30	16.5						●
AQDEX3FR0335	3.35	16.8						□
AQDEX3FR0340	3.40	17.0						●
AQDEX3FR0345	3.45	17.3						□
AQDEX3FR0350	3.50	17.5				4		●
AQDEX3FR0355	3.55	17.8	27.6					□
AQDEX3FR0360	3.60	18.0						●
AQDEX3FR0365	3.65	18.3						□
AQDEX3FR0370	3.70	18.5						●
AQDEX3FR0375	3.75	18.8						□
AQDEX3FR0380	3.80	19.0						●
AQDEX3FR0385	3.85	19.3	27.7	31	60.7			□
AQDEX3FR0390	3.90	19.5						●
AQDEX3FR0395	3.95	19.8					0.7	□
AQDEX3FR0398	3.98	19.9						●
AQDEX3FR0399	3.99							□
AQDEX3FR0400	4.00	20.0						●
AQDEX3FR0401	4.01							□
AQDEX3FR0402	4.02	20.1						●
AQDEX3FR0403	4.03	20.2	31.7		76.7			□
AQDEX3FR0405	4.05	20.3						●
AQDEX3FR0410	4.10	20.5						□
AQDEX3FR0415	4.15	20.8						●
AQDEX3FR0420	4.20	21.0		43				□
AQDEX3FR0425	4.25	21.3						●
AQDEX3FR0430	4.30	21.5						□
AQDEX3FR0435	4.35	21.8					0.8	●
AQDEX3FR0440	4.40	22.0			76.8			□
AQDEX3FR0445	4.45	22.3						●
AQDEX3FR0450	4.50	22.5				5		□
AQDEX3FR0455	4.55	22.8						●
AQDEX3FR0460	4.60	23.0	38.8					□
AQDEX3FR0465	4.65	23.3						●
AQDEX3FR0470	4.70	23.5						□
AQDEX3FR0475	4.75	23.8						●
AQDEX3FR0480	4.80	24.0						□
AQDEX3FR0485	4.85	24.3						●
AQDEX3FR0490	4.90	24.5	38.9	36	76.9			□
AQDEX3FR0495	4.95	24.8						●
AQDEX3FR0498	4.98	24.9						□
AQDEX3FR0499	4.99						0.9	●
AQDEX3FR0500	5.00	25.0						□
AQDEX3FR0501	5.01	25.1						●
AQDEX3FR0502	5.02							□
AQDEX3FR0503	5.03	25.2						●
AQDEX3FR0505	5.05	25.3	39.9	40	81.9	6		□
AQDEX3FR0510	5.10	25.5						●
AQDEX3FR0515	5.15	25.8						□
AQDEX3FR0520	5.20	26.0						●
AQDEX3FR0525	5.25	26.3	40.0		82.0		1.0	□
AQDEX3FR0530	5.30	26.5						●

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEX3FR0535	5.35	26.8						□
AQDEX3FR0540	5.40	27.0						●
AQDEX3FR0545	5.45	27.3	40.0	40				□
AQDEX3FR0550	5.50	27.5						●
AQDEX3FR0555	5.55	27.8			82.0		1.0	□
AQDEX3FR0560	5.60	28.0						●
AQDEX3FR0565	5.65	28.3						□
AQDEX3FR0570	5.70	28.5						●
AQDEX3FR0575	5.75	28.8				6		□
AQDEX3FR0580	5.80	29.0						●
AQDEX3FR0585	5.85	29.3		38				□
AQDEX3FR0590	5.90	29.5						●
AQDEX3FR0595	5.95	29.8	42.1		82.1			□
AQDEX3FR0598	5.98	29.9						●
AQDEX3FR0599	5.99							□
AQDEX3FR0600	6.00	30.0						●
AQDEX3FR0601	6.01							□
AQDEX3FR0602	6.02	30.1					1.1	●
AQDEX3FR0603	6.03	30.2						□
AQDEX3FR0605	6.05	30.3						●
AQDEX3FR0610	6.10	30.5	43.1		84.1			□
AQDEX3FR0615	6.15	30.8						●
AQDEX3FR0620	6.20	31.0		39				□
AQDEX3FR0625	6.25	31.3						●
AQDEX3FR0630	6.30	31.5						□
AQDEX3FR0635	6.35	31.8						●
AQDEX3FR0640	6.40	32.0						□
AQDEX3FR0645	6.45	32.3	43.2					●
AQDEX3FR0650	6.50	32.5						□
AQDEX3FR0655	6.55	32.8						●
AQDEX3FR0660	6.60	33.0			84.2		1.2	□
AQDEX3FR0665	6.65	33.3						●
AQDEX3FR0670	6.70	33.5	44.2					□
AQDEX3FR0675	6.75	33.8						●
AQDEX3FR0680	6.80	34.0						□
AQDEX3FR0685	6.85	34.3						●
AQDEX3FR0690	6.90	34.5						□
AQDEX3FR0695	6.95	34.8						●
AQDEX3FR0698	6.98	34.9	44.3		84.3			□
AQDEX3FR0699	6.99							●
AQDEX3FR0700	7.00	35.0						□
AQDEX3FR0701	7.01							●
AQDEX3FR0702	7.02	35.1						□
AQDEX3FR0703	7.03	35.2						●
AQDEX3FR0705	7.05	35.3						□
AQDEX3FR0710	7.10	35.5						●
AQDEX3FR0715	7.15	35.8	46.3		91.3		1.3	□
AQDEX3FR0720	7.20	36.0						●
AQDEX3FR0725	7.25	36.3						□
AQDEX3FR0730	7.30	36.5						●
AQDEX3FR0735	7.35	36.8						□
AQDEX3FR0740	7.40	37.0						●
AQDEX3FR0745	7.45	37.3	46.4					□
AQDEX3FR0750	7.50	37.5						●
AQDEX3FR0755	7.55	37.8						□
AQDEX3FR0760	7.60	38.0						●
AQDEX3FR0765	7.65	38.3						□
AQDEX3FR0770	7.70	38.5	49.4	40	91.4		1.4	●
AQDEX3FR0775	7.75	38.8						□
AQDEX3FR0780	7.80	39.0						●

Next 下一页



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差

直径范围

新品

← 上一页 Previous Page

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D20MM	先端 PL	在庫 Stock
AQDEX3FR0785	7.85	39.3	49.4	40	91.4	8	1.4	□
AQDEX3FR0790	7.90	39.5						●
AQDEX3FR0795	7.95	39.8	49.5	40	91.5	8	1.4	□
AQDEX3FR0798	7.98	39.9						●
AQDEX3FR0799	7.99	40.0	40.1	43	99.5	9	1.5	□
AQDEX3FR0800	8.00	40.0						●
AQDEX3FR0801	8.01	40.1	54.5	43	99.5	9	1.5	□
AQDEX3FR0802	8.02	40.1						●
AQDEX3FR0803	8.03	40.2	54.5	43	99.5	9	1.5	□
AQDEX3FR0805	8.05	40.3						●
AQDEX3FR0810	8.10	40.5	54.5	43	99.5	9	1.5	□
AQDEX3FR0815	8.15	40.8						●
AQDEX3FR0820	8.20	41.0	54.5	43	99.5	9	1.5	□
AQDEX3FR0825	8.25	41.3						●
AQDEX3FR0830	8.30	41.5	54.5	43	99.5	9	1.5	□
AQDEX3FR0835	8.35	41.8						●
AQDEX3FR0840	8.40	42.0	54.5	43	99.5	9	1.5	□
AQDEX3FR0845	8.45	42.3						●
AQDEX3FR0850	8.50	42.5	54.5	43	99.5	9	1.5	□
AQDEX3FR0855	8.55	42.8						●
AQDEX3FR0860	8.60	43.0	54.5	43	99.5	9	1.5	□
AQDEX3FR0865	8.65	43.3						●
AQDEX3FR0870	8.70	43.5	54.5	43	99.5	9	1.5	□
AQDEX3FR0875	8.75	43.8						●
AQDEX3FR0880	8.80	44.0	54.5	43	99.5	9	1.5	□
AQDEX3FR0885	8.85	44.3						●
AQDEX3FR0890	8.90	44.5	54.5	43	99.5	9	1.5	□
AQDEX3FR0895	8.95	44.8						●
AQDEX3FR0898	8.98	44.9	54.5	43	99.5	9	1.5	□
AQDEX3FR0899	8.99	45.0						●
AQDEX3FR0900	9.00	45.0	59.6	45	106.6	10	1.6	□
AQDEX3FR0901	9.01	45.1						●
AQDEX3FR0902	9.02	45.1	59.6	45	106.6	10	1.6	□
AQDEX3FR0903	9.03	45.2						●
AQDEX3FR0905	9.05	45.3	59.6	45	106.6	10	1.6	□
AQDEX3FR0910	9.10	45.5						●
AQDEX3FR0915	9.15	45.8	59.6	45	106.6	10	1.6	□
AQDEX3FR0920	9.20	46.0						●
AQDEX3FR0925	9.25	46.3	59.6	45	106.6	10	1.6	□
AQDEX3FR0930	9.30	46.5						●
AQDEX3FR0935	9.35	46.8	59.6	45	106.6	10	1.6	□
AQDEX3FR0940	9.40	47.0						●
AQDEX3FR0945	9.45	47.3	59.6	45	106.6	10	1.6	□
AQDEX3FR0950	9.50	47.5						●
AQDEX3FR0955	9.55	47.8	59.6	45	106.6	10	1.6	□
AQDEX3FR0960	9.60	48.0						●
AQDEX3FR0965	9.65	48.3	59.6	45	106.6	10	1.6	□
AQDEX3FR0970	9.70	48.5						●
AQDEX3FR0975	9.75	48.8	59.6	45	106.6	10	1.6	□
AQDEX3FR0980	9.80	49.0						●
AQDEX3FR0985	9.85	49.3	59.6	45	106.6	10	1.6	□
AQDEX3FR0990	9.90	49.5						●
AQDEX3FR0995	9.95	49.8	59.6	45	106.6	10	1.6	□
AQDEX3FR0998	9.98	49.9						●
AQDEX3FR0999	9.99	50.0	59.6	45	106.6	10	1.6	□
AQDEX3FR1000	10.00	50.0						●
AQDEX3FR1001	10.01	50.1	59.6	45	106.6	10	1.6	□
AQDEX3FR1002	10.02	50.1						●
AQDEX3FR1003	10.03	50.2	59.6	45	106.6	10	1.6	□
AQDEX3FR1005	10.05	50.3						●

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D20MM	先端 PL	在庫 Stock
AQDEX3FR1010	10.10	50.5	67.8	46	115.8	11	1.8	□
AQDEX3FR1015	10.15	50.8						●
AQDEX3FR1020	10.20	51.0	67.9	46	115.9	11	1.9	□
AQDEX3FR1025	10.25	51.3						●
AQDEX3FR1030	10.30	51.5	67.9	46	115.9	11	1.9	□
AQDEX3FR1035	10.35	51.8						●
AQDEX3FR1040	10.40	52.0	67.9	46	115.9	11	1.9	□
AQDEX3FR1045	10.45	52.3						●
AQDEX3FR1050	10.50	52.5	67.9	46	115.9	11	1.9	□
AQDEX3FR1055	10.55	52.8						●
AQDEX3FR1060	10.60	53.0	67.9	46	115.9	11	1.9	□
AQDEX3FR1065	10.65	53.3						●
AQDEX3FR1070	10.70	53.5	67.9	46	115.9	11	1.9	□
AQDEX3FR1075	10.75	53.8						●
AQDEX3FR1080	10.80	54.0	67.9	46	115.9	11	1.9	□
AQDEX3FR1085	10.85	54.3						●
AQDEX3FR1090	10.90	54.5	67.9	46	115.9	11	1.9	□
AQDEX3FR1095	10.95	54.8						●
AQDEX3FR1098	10.98	54.9	67.9	46	115.9	11	1.9	□
AQDEX3FR1099	10.99	55.0						●
AQDEX3FR1100	11.00	55.1	67.9	46	115.9	11	1.9	□
AQDEX3FR1101	11.01	55.1						●
AQDEX3FR1102	11.02	55.1	67.9	46	115.9	11	1.9	□
AQDEX3FR1103	11.03	55.2						●
AQDEX3FR1105	11.05	55.3	67.9	46	115.9	11	1.9	□
AQDEX3FR1110	11.10	55.5						●
AQDEX3FR1115	11.15	55.8	67.9	46	115.9	11	1.9	□
AQDEX3FR1120	11.20	56.0						●
AQDEX3FR1125	11.25	56.3	67.9	46	115.9	11	1.9	□
AQDEX3FR1130	11.30	56.5						●
AQDEX3FR1135	11.35	56.8	67.9	46	115.9	11	1.9	□
AQDEX3FR1140	11.40	57.0						●
AQDEX3FR1145	11.45	57.3	67.9	46	115.9	11	1.9	□
AQDEX3FR1150	11.50	57.5						●
AQDEX3FR1155	11.55	57.8	67.9	46	115.9	11	1.9	□
AQDEX3FR1160	11.60	58.0						●
AQDEX3FR1165	11.65	58.3	67.9	46	115.9	11	1.9	□
AQDEX3FR1170	11.70	58.5						●
AQDEX3FR1175	11.75	58.8	67.9	46	115.9	11	1.9	□
AQDEX3FR1180	11.80	59.0						●
AQDEX3FR1185	11.85	59.3	67.9	46	115.9	11	1.9	□
AQDEX3FR1190	11.90	59.5						●
AQDEX3FR1195	11.95	59.8	67.9	46	115.9	11	1.9	□
AQDEX3FR1198	11.98	59.9						●
AQDEX3FR1199	11.99	60.0	67.9	46	115.9	11	1.9	□
AQDEX3FR1200	12.00	60.1						●
AQDEX3FR1201	12.01	60.1	67.9	46	115.9	11	1.9	□

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D _{COIMS}	先端 PL	在庫 Stock
AQDEX3FR1260	12.60	63.0	80.3	57	139.3	13	2.3	□
AQDEX3FR1265	12.65	63.3						
AQDEX3FR1270	12.70	63.5						
AQDEX3FR1275	12.75	63.8						
AQDEX3FR1280	12.80	64.0	80.4	57	139.4	13	2.3	□
AQDEX3FR1285	12.85	64.3						
AQDEX3FR1290	12.90	64.5						
AQDEX3FR1295	12.95	64.8						
AQDEX3FR1298	12.98	64.9	80.4	57	139.4	13	2.3	□
AQDEX3FR1299	12.99	65.0						
AQDEX3FR1300	13.00	65.0						
AQDEX3FR1310	13.10	65.5						
AQDEX3FR1320	13.20	66.0	86.4	61	149.4	14	2.4	□
AQDEX3FR1330	13.30	66.5						
AQDEX3FR1340	13.40	67.0						
AQDEX3FR1350	13.50	67.5						
AQDEX3FR1360	13.60	68.0	86.5	59	149.5	14	2.5	□
AQDEX3FR1370	13.70	68.5						
AQDEX3FR1380	13.80	69.0						
AQDEX3FR1390	13.90	69.5						
AQDEX3FR1400	14.00	70.0	91.6	62	155.6	15	2.6	□
AQDEX3FR1410	14.10	70.5						
AQDEX3FR1420	14.20	71.0						
AQDEX3FR1430	14.30	71.5						
AQDEX3FR1440	14.40	72.0	93.7	60	155.7	15	2.7	□
AQDEX3FR1450	14.50	72.5						
AQDEX3FR1460	14.60	73.0						
AQDEX3FR1470	14.70	73.5						
AQDEX3FR1480	14.80	74.0	96.7	64	162.7	16	2.8	□
AQDEX3FR1490	14.90	74.5						
AQDEX3FR1500	15.00	75.0						
AQDEX3FR1510	15.10	75.5						
AQDEX3FR1520	15.20	76.0	96.8	62	162.8	16	2.9	□
AQDEX3FR1530	15.30	76.5						
AQDEX3FR1540	15.40	77.0						
AQDEX3FR1550	15.50	77.5						
AQDEX3FR1560	15.60	78.0	98.8	62	162.9	16	2.9	□
AQDEX3FR1570	15.70	78.5						
AQDEX3FR1580	15.80	79.0						
AQDEX3FR1590	15.90	79.5						
AQDEX3FR1600	16.00	80.0	98.9	62	162.9	16	2.9	□

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	○	×	○	×	×

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

AQDEX3FH

AQUA EX 高硬型 3 刃钻

AQUA Drills EX 3 Flutes Hard

切削条件 Cutting Condition ▶▶▶A-160

Carbide
工具材料

AQ
EX
涂层

js6
直径公差

140°/90°
先端角

15°
螺旋角

h6
柄直径公差


3.0-16.0
直径范围

●可实现对 50～68HRC 淬硬钢的高精度、高效率加工。

This drill is possible to high precision and high efficiency drilling of Hardened Steel (50～68HRC)



2 斜角 +3F 形

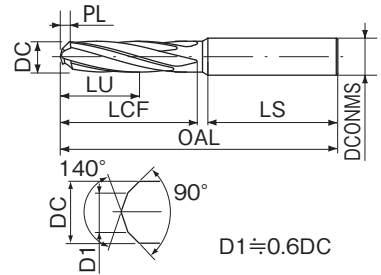

$$D1 \div 0.6DC$$

LIST 9838

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEX3FH0300	3.0	9.0	13.9	30	45.9	3		
AQDEX3FH0310	3.1	9.3						
AQDEX3FH0320	3.2	9.6	19.9		54.9		0.9	
AQDEX3FH0330	3.3	9.9		33				
AQDEX3FH0340	3.4	10.2	20.1					
AQDEX3FH0350	3.5	10.5			55.1	4	1.1	
AQDEX3FH0360	3.6	10.8						
AQDEX3FH0370	3.7	11.1	22.1					
AQDEX3FH0380	3.8	11.4		31				
AQDEX3FH0390	3.9	11.7	22.2		55.2		1.2	
AQDEX3FH0400	4.0	12.0						
AQDEX3FH0410	4.1	12.3	24.2		62.2		1.3	
AQDEX3FH0420	4.2	12.6	24.3		62.3			
AQDEX3FH0430	4.3	12.9		36				
AQDEX3FH0440	4.4	13.2	24.4					
AQDEX3FH0450	4.5	13.5			62.4	5	1.4	
AQDEX3FH0460	4.6	13.8						
AQDEX3FH0470	4.7	14.1	26.4					
AQDEX3FH0480	4.8	14.4		34				
AQDEX3FH0490	4.9	14.7	26.5		62.5		1.5	
AQDEX3FH0500	5.0	15.0						
AQDEX3FH0510	5.1	15.3			66.6		1.6	
AQDEX3FH0520	5.2	15.6	26.6					
AQDEX3FH0530	5.3	15.9		38				
AQDEX3FH0540	5.4	16.2	26.7					
AQDEX3FH0550	5.5	16.5			66.7	6	1.7	
AQDEX3FH0560	5.6	16.8						
AQDEX3FH0570	5.7	17.1	28.7					
AQDEX3FH0580	5.8	17.4		36	66.8		1.8	
AQDEX3FH0590	5.9	17.7						
AQDEX3FH0600	6.0	18.0	28.9		66.9		1.9	
AQDEX3FH0610	6.1	18.3			74.9			
AQDEX3FH0620	6.2	18.6	32.9					
AQDEX3FH0630	6.3	18.9		40				
AQDEX3FH0640	6.4	19.2	33.0					
AQDEX3FH0650	6.5	19.5			75.0	7	2.0	
AQDEX3FH0660	6.6	19.8						
AQDEX3FH0670	6.7	20.1	35.0					
AQDEX3FH0680	6.8	20.4	35.1	38	75.1		2.1	
AQDEX3FH0690	6.9	20.7			75.2			
AQDEX3FH0700	7.0	21.0						
AQDEX3FH0710	7.1	21.3	35.2		80.2		2.2	
AQDEX3FH0720	7.2	21.6						
AQDEX3FH0730	7.3	21.9		43				
AQDEX3FH0740	7.4	22.2	35.3					
AQDEX3FH0750	7.5	22.5			80.3	8	2.3	
AQDEX3FH0760	7.6	22.8						
AQDEX3FH0770	7.7	23.1	38.3					
AQDEX3FH0780	7.8	23.4		40				
AQDEX3FH0790	7.9	23.7			80.5			
AQDEX3FH0800	8.0	24.0					2.5	
AQDEX3FH0810	8.1	24.3	38.5					
AQDEX3FH0820	8.2	24.6			84.5			
AQDEX3FH0830	8.3	24.9		44				
AQDEX3FH0840	8.4	25.2	38.6					
AQDEX3FH0850	8.5	25.5			84.6	9	2.6	
AQDEX3FH0860	8.6	25.8						
AQDEX3FH0870	8.7	26.1	40.6					
AQDEX3FH0880	8.8	26.4		42				
AQDEX3FH0890	8.9	26.7	40.8		84.8		2.8	

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEX3FH0900	9.0	27.0		42	84.8	9		
AQDEX3FH0910	9.1	27.3	40.8				2.8	
AQDEX3FH0920	9.2	27.6			89.8			
AQDEX3FH0930	9.3	27.9		47				
AQDEX3FH0940	9.4	28.2	40.9		89.9	10	2.9	
AQDEX3FH0950	9.5	28.5						
AQDEX3FH0960	9.6	28.8	43.9					
AQDEX3FH0970	9.7	29.1	44.0		90.0		3.0	
AQDEX3FH0980	9.8	29.4		44				
AQDEX3FH0990	9.9	29.7			90.1			
AQDEX3FH1000	10.0	30.0	44.1				3.1	
AQDEX3FH1010	10.1	30.3			96.1			
AQDEX3FH1020	10.2	30.6						
AQDEX3FH1030	10.3	30.9		50				
AQDEX3FH1040	10.4	31.2	44.2		96.2		3.2	
AQDEX3FH1050	10.5	31.5						
AQDEX3FH1060	10.6	31.8						
AQDEX3FH1070	10.7	32.1	48.3		96.3	11	3.3	
AQDEX3FH1080	10.8	32.4		46				
AQDEX3FH1090	10.9	32.7			96.4			
AQDEX3FH1100	11.0	33.0	48.4				3.4	
AQDEX3FH1110	11.1	33.3			103.4			
AQDEX3FH1120	11.2	33.6						
AQDEX3FH1130	11.3	33.9	48.5	53				
AQDEX3FH1140	11.4	34.2			103.5		3.5	
AQDEX3FH1150	11.5	34.5	48.6					
AQDEX3FH1160	11.6	34.8	50.6		103.6	12	3.6	
AQDEX3FH1170	11.7	35.1						
AQDEX3FH1180	11.8	35.4		51				
AQDEX3FH1190	11.9	35.7	50.7		103.7		3.7	
AQDEX3FH1200	12.0	36.0						
AQDEX3FH1300	13.0	39.0	53.0	49	104.0	13	4.0	
AQDEX3FH1400	14.0	42.0	56.3	51	109.3	14	4.3	
AQDEX3FH1500	15.0	45.0	57.6	53	112.6	15	4.6	
AQDEX3FH1600	16.0	48.0	59.9	55	116.9	16	4.9	

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30～40 HRC	40～50 HRC	50～65HRC
×	×	×	×	—	◎
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	—	×	×

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 切削平衡出色，使用 3 枚刃。
- 可实现无需铰刀的高精度孔加工。

This drill having balanced 3 flutes is suitable for precision drilling without reaming.

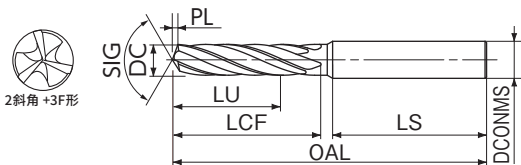

LIST 9546


订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQD3F3.0	3.00	9.0	16	28.0	48	3	●	
AQD3F3.01	3.01							
AQD3F3.02	3.02							
AQD3F3.03	3.03	9.1						
AQD3F3.04	3.04							
AQD3F3.05	3.05						□	
AQD3F3.06	3.06	9.2						
AQD3F3.07	3.07							
AQD3F3.08	3.08							
AQD3F3.09	3.09						●	
AQD3F3.1	3.10	9.3						
AQD3F3.11	3.11							
AQD3F3.12	3.12							
AQD3F3.13	3.13	9.4						
AQD3F3.14	3.14						□	
AQD3F3.15	3.15							
AQD3F3.16	3.16	9.5						
AQD3F3.17	3.17		18		50	0.4		
AQD3F3.18	3.18						●	
AQD3F3.19	3.19							
AQD3F3.2	3.20	9.6						
AQD3F3.21	3.21							
AQD3F3.22	3.22							
AQD3F3.23	3.23	9.7					□	
AQD3F3.24	3.24							
AQD3F3.25	3.25							
AQD3F3.26	3.26	9.8						
AQD3F3.27	3.27							
AQD3F3.28	3.28							
AQD3F3.29	3.29						●	
AQD3F3.3	3.30	9.9	30.0			4		
AQD3F3.31	3.31							
AQD3F3.32	3.32							
AQD3F3.33	3.33	10.0					□	
AQD3F3.34	3.34							
AQD3F3.35	3.35							
AQD3F3.36	3.36	10.1						
AQD3F3.37	3.37							
AQD3F3.38	3.38						●	
AQD3F3.39	3.39							
AQD3F3.4	3.40	10.2						
AQD3F3.41	3.41							
AQD3F3.42	3.42							
AQD3F3.43	3.43	10.3					□	
AQD3F3.44	3.44							
AQD3F3.45	3.45							
AQD3F3.46	3.46	10.4						
AQD3F3.47	3.47							
AQD3F3.48	3.48		20		52	0.5		
AQD3F3.49	3.49						●	
AQD3F3.5	3.50	10.5						
AQD3F3.51	3.51							
AQD3F3.52	3.52							
AQD3F3.53	3.53	10.6						
AQD3F3.54	3.54							
AQD3F3.55	3.55						□	
AQD3F3.56	3.56							
AQD3F3.57	3.57	10.7						
AQD3F3.58	3.58							
AQD3F3.59	3.59	10.8						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQD3F3.6	3.60	10.8					●	
AQD3F3.61	3.61							
AQD3F3.62	3.62							
AQD3F3.63	3.63	10.9						
AQD3F3.64	3.64							
AQD3F3.65	3.65						□	
AQD3F3.66	3.66							
AQD3F3.67	3.67	11.0	20		52			
AQD3F3.68	3.68							
AQD3F3.69	3.69						●	
AQD3F3.7	3.70	11.1						
AQD3F3.71	3.71							
AQD3F3.72	3.72							
AQD3F3.73	3.73	11.2						
AQD3F3.74	3.74						□	
AQD3F3.75	3.75							
AQD3F3.76	3.76	11.3						
AQD3F3.77	3.77							
AQD3F3.78	3.78							
AQD3F3.79	3.79						●	
AQD3F3.8	3.80	11.4	30.0			4		
AQD3F3.81	3.81							
AQD3F3.82	3.82							
AQD3F3.83	3.83	11.5						
AQD3F3.84	3.84						□	
AQD3F3.85	3.85							
AQD3F3.86	3.86	11.6					0.5	
AQD3F3.87	3.87							
AQD3F3.88	3.88				54			
AQD3F3.89	3.89						●	
AQD3F3.9	3.90	11.7						
AQD3F3.91	3.91							
AQD3F3.92	3.92							
AQD3F3.93	3.93	11.8					□	
AQD3F3.94	3.94							
AQD3F3.95	3.95							
AQD3F3.96	3.96	11.9	22					
AQD3F3.97	3.97							
AQD3F3.98	3.98						●	
AQD3F3.99	3.99							
AQD3F4.0	4.00	12.0						
AQD3F4.01	4.01							
AQD3F4.02	4.02							
AQD3F4.03	4.03	12.1					□	
AQD3F4.04	4.04							
AQD3F4.05	4.05							
AQD3F4.06	4.06	12.2						
AQD3F4.07	4.07							
AQD3F4.08	4.08						●	
AQD3F4.09	4.09							
AQD3F4.1	4.10	12.3	38.0		66	6		
AQD3F4.11	4.11							
AQD3F4.12	4.12							
AQD3F4.13	4.13	12.4						
AQD3F4.14	4.14						0.6	
AQD3F4.15	4.15							
AQD3F4.16	4.16							
AQD3F4.17	4.17	12.5						
AQD3F4.18	4.18							
AQD3F4.19	4.19	12.6						

Next Page 下一页 ➡



AQD3F的钻尖形状

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D10MS	先端 PL	在庫 Stock
AQD3F4.2	4.20	12.6	22		66			●
AQD3F4.21	4.21							
AQD3F4.22	4.22							
AQD3F4.23	4.23	12.7						
AQD3F4.24	4.24		22					
AQD3F4.25	4.25							
AQD3F4.26	4.26	12.8						□
AQD3F4.27	4.27							
AQD3F4.28	4.28		22					
AQD3F4.29	4.29	12.9						●
AQD3F4.3	4.30							
AQD3F4.31	4.31	13.0						
AQD3F4.32	4.32		22					
AQD3F4.33	4.33	13.1						□
AQD3F4.34	4.34							
AQD3F4.35	4.35	13.2						●
AQD3F4.36	4.36		22					
AQD3F4.37	4.37	13.3						
AQD3F4.38	4.38							□
AQD3F4.39	4.39	13.4						●
AQD3F4.4	4.40		24	38.0	68	6	0.6	
AQD3F4.41	4.41	13.5						●
AQD3F4.42	4.42							
AQD3F4.43	4.43	13.6						□
AQD3F4.44	4.44		24	38.0	68	6	0.6	
AQD3F4.45	4.45	13.7						□
AQD3F4.46	4.46							
AQD3F4.47	4.47	13.8						●
AQD3F4.48	4.48		24	38.0	68	6	0.6	
AQD3F4.49	4.49	13.9						□
AQD3F4.5	4.50							
AQD3F4.51	4.51	14.0						●
AQD3F4.52	4.52		26	70				
AQD3F4.53	4.53	14.1						□
AQD3F4.54	4.54							
AQD3F4.55	4.55	14.2						●
AQD3F4.56	4.56		26	70				
AQD3F4.57	4.57	14.3						□
AQD3F4.58	4.58							
AQD3F4.59	4.59	14.4						●
AQD3F4.6	4.60		26	70				
AQD3F4.61	4.61	14.5						□
AQD3F4.62	4.62							
AQD3F4.63	4.63	14.6						●
AQD3F4.64	4.64		26	70				
AQD3F4.65	4.65	14.7						□
AQD3F4.66	4.66							
AQD3F4.67	4.67	14.8						●
AQD3F4.68	4.68		26	70				
AQD3F4.69	4.69	14.9						□
AQD3F4.7	4.70							
AQD3F4.71	4.71	15.0						●
AQD3F4.72	4.72		26	70				
AQD3F4.73	4.73	15.1						□
AQD3F4.74	4.74							
AQD3F4.75	4.75	15.2						●
AQD3F4.76	4.76		26	70				
AQD3F4.77	4.77	15.3						□
AQD3F4.78	4.78							
AQD3F4.79	4.79	15.4						●

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D10MS	先端 PL	在庫 Stock
AQD3F4.8	4.80	14.4	26	70				●
AQD3F4.81	4.81							
AQD3F4.82	4.82	14.5						
AQD3F4.83	4.83							□
AQD3F4.84	4.84		26	70				
AQD3F4.85	4.85	14.6						□
AQD3F4.86	4.86							
AQD3F4.87	4.87	14.7						●
AQD3F4.88	4.88		26	70				
AQD3F4.89	4.89	14.8						□
AQD3F4.9	4.90							
AQD3F4.91	4.91	14.9						●
AQD3F4.92	4.92		26	70				
AQD3F4.93	4.93	15.0						□
AQD3F4.94	4.94							
AQD3F4.95	4.95	15.1						●
AQD3F4.96	4.96		26	70				
AQD3F4.97	4.97	15.2						□
AQD3F4.98	4.98							
AQD3F4.99	4.99	15.3						●
AQD3F5.0	5.00		26	70				
AQD3F5.01	5.01	15.4						□
AQD3F5.02	5.02							
AQD3F5.03	5.03	15.5						●
AQD3F5.04	5.04		26	70				
AQD3F5.05	5.05	15.6						□
AQD3F5.06	5.06							
AQD3F5.07	5.07	15.7						●
AQD3F5.08	5.08		26	70				
AQD3F5.09	5.09	15.8						□
AQD3F5.1	5.10							
AQD3F5.11	5.11	15.9						●
AQD3F5.12	5.12		26	70				
AQD3F5.13	5.13	16.0						□
AQD3F5.14	5.14							
AQD3F5.15	5.15	16.1						●
AQD3F5.16	5.16		26	70				
AQD3F5.17	5.17	16.2						□
AQD3F5.18	5.18							
AQD3F5.19	5.19	16.3						●
AQD3F5.2	5.20		26	70				
AQD3F5.21	5.21	16.4						□
AQD3F5.22	5.22							
AQD3F5.23	5.23	16.5						●
AQD3F5.24	5.24		26	70				
AQD3F5.25	5.25	16.6						□
AQD3F5.26	5.26							
AQD3F5.27	5.27	16.7						●
AQD3F5.28	5.28		26	70				
AQD3F5.29	5.29	16.8						□
AQD3F5.3	5.30							
AQD3F5.31	5.31	16.9						●
AQD3F5.32	5.32		26	70				
AQD3F5.33	5.33	17.0						□
AQD3F5.34	5.34							
AQD3F5.35	5.35	17.1						●
AQD3F5.36	5.36		26	70				
AQD3F5.37	5.37	17.2						□
AQD3F5.38	5.38							
AQD3F5.39	5.39	17.3						●

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DOCNMS	先端 PL	在庫 Stock
AQD3F5.4	5.40	16.2						●
AQD3F5.41	5.41							
AQD3F5.42	5.42							
AQD3F5.43	5.43	16.3						
AQD3F5.44	5.44							
AQD3F5.45	5.45							
AQD3F5.46	5.46	16.4						□
AQD3F5.47	5.47							
AQD3F5.48	5.48							
AQD3F5.49	5.49	16.5					0.7	●
AQD3F5.5	5.50							
AQD3F5.51	5.51							
AQD3F5.52	5.52	16.6						
AQD3F5.53	5.53							
AQD3F5.54	5.54							
AQD3F5.55	5.55	16.7						□
AQD3F5.56	5.56							
AQD3F5.57	5.57							
AQD3F5.58	5.58	16.8						
AQD3F5.59	5.59							
AQD3F5.6	5.60							
AQD3F5.61	5.61	16.9						●
AQD3F5.62	5.62							
AQD3F5.63	5.63							
AQD3F5.64	5.64	17.0						□
AQD3F5.65	5.65							
AQD3F5.66	5.66							
AQD3F5.67	5.67	17.1	28		72	6		●
AQD3F5.68	5.68							
AQD3F5.69	5.69							
AQD3F5.7	5.70	17.2						
AQD3F5.71	5.71							
AQD3F5.72	5.72							
AQD3F5.73	5.73	17.3		38.0				□
AQD3F5.74	5.74							
AQD3F5.75	5.75							
AQD3F5.76	5.76	17.4						
AQD3F5.77	5.77							
AQD3F5.78	5.78							
AQD3F5.79	5.79	17.5						●
AQD3F5.8	5.80							
AQD3F5.81	5.81							
AQD3F5.82	5.82	17.6						□
AQD3F5.83	5.83							
AQD3F5.84	5.84							
AQD3F5.85	5.85	17.7						
AQD3F5.86	5.86							
AQD3F5.87	5.87							
AQD3F5.88	5.88	17.8						●
AQD3F5.89	5.89							
AQD3F5.9	5.90							
AQD3F5.91	5.91	17.9						
AQD3F5.92	5.92							
AQD3F5.93	5.93							
AQD3F5.94	5.94	18.0						□
AQD3F5.95	5.95							
AQD3F5.96	5.96							
AQD3F5.97	5.97	18.1						●
AQD3F5.98	5.98							
AQD3F5.99	5.99							
AQD3F6.0	6.00	18.2						□
AQD3F6.01	6.01							
AQD3F6.02	6.02							
AQD3F6.05	6.05	18.3						●
AQD3F6.1	6.10							
AQD3F6.15	6.15							
AQD3F6.2	6.20	18.4	31		75	8		□
AQD3F6.25	6.25							
AQD3F6.3	6.30							
AQD3F6.35	6.35	18.5						●
		18.6						□
		18.7						●
		18.8						□
		18.9						●
		19.0					0.9	□

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DOCNMS	先端 PL	在庫 Stock			
AQD3F6.4	6.40	19.2	31	75		0.9	●	●			
AQD3F6.45	6.45	19.4						□			
AQD3F6.48	6.48							□			
AQD3F6.49	6.49	●									
AQD3F6.5	6.50	19.5						□			
AQD3F6.51	6.51	19.6						●			
AQD3F6.52	6.52	19.7						□			
AQD3F6.55	6.55	19.8						●			
AQD3F6.6	6.60	19.8						●			
AQD3F6.65	6.65	20.0						●			
AQD3F6.7	6.70	20.1						□			
AQD3F6.75	6.75	20.3						●			
AQD3F6.8	6.80	20.4						□			
AQD3F6.85	6.85	20.6						●			
AQD3F6.9	6.90	20.7						□			
AQD3F6.95	6.95	20.9						●			
AQD3F6.98	6.98		□								
AQD3F6.99	6.99	21.0	●								
AQD3F7.0	7.00	21.0	□								
AQD3F7.01	7.01	21.1	34	38.0	78	8	1.0	●			
AQD3F7.02	7.02	21.2						□			
AQD3F7.05	7.05	21.3						●			
AQD3F7.1	7.10	21.3						□			
AQD3F7.15	7.15	21.5						●			
AQD3F7.2	7.20	21.6						□			
AQD3F7.25	7.25	21.8						●			
AQD3F7.3	7.30	21.9						□			
AQD3F7.35	7.35	22.1						●			
AQD3F7.4	7.40	22.2						□			
AQD3F7.45	7.45	22.4						●			
AQD3F7.48	7.48							□			
AQD3F7.49	7.49	22.5						●			
AQD3F7.5	7.50	22.5						□			
AQD3F7.51	7.51	22.6						●			
AQD3F7.52	7.52	22.7						□			
AQD3F7.55	7.55	22.8	81				●				
AQD3F7.6	7.60	22.8					□				
AQD3F7.65	7.65	23.0					●				
AQD3F7.7	7.70	23.1					□				
AQD3F7.75	7.75	23.3					●				
AQD3F7.8	7.80	23.4					□				
AQD3F7.85	7.85	23.6					●				
AQD3F7.9	7.90	23.7					□				
AQD3F7.95	7.95	23.9					●				
AQD3F7.98	7.98						□				
AQD3F7.99	7.99	24.0					●				
AQD3F8.0	8.00	24.0					37				□
AQD3F8.01	8.01	24.1									●
AQD3F8.02	8.02	24.2									□
AQD3F8.05	8.05	24.3									●
AQD3F8.1	8.10	24.5									□
AQD3F8.15	8.15	24.6	●								
AQD3F8.2	8.20	24.8	□								
AQD3F8.25	8.25	24.9	●								
AQD3F8.3	8.30	25.1	□								
AQD3F8.35	8.35	25.2	●								
AQD3F8.4	8.40	25.4	43.5								□
AQD3F8.45	8.45	25.5									●
AQD3F8.48	8.48	25.5									□
AQD3F8.49	8.49	25.6									●
AQD3F8.5	8.50	25.6	40								□
AQD3F8.51	8.51	25.7									●
AQD3F8.52	8.52	25.8					□				
AQD3F8.55	8.55	26.0					●				
AQD3F8.6	8.60	26.1					□				
AQD3F8.65	8.65	26.3					●				
AQD3F8.7	8.70	26.4					□				
AQD3F8.75	8.75	26.6					●				
AQD3F8.8	8.80	26.6					□				
AQD3F8.85	8.85	26.6					●				

← 上一頁 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D20MM	先端 PL	在庫 Stock
AQD3F8.9	8.90	26.7						●
AQD3F8.95	8.95	26.9						□
AQD3F8.98	8.98							□
AQD3F8.99	8.99							●
AQD3F9.0	9.00	27.0						●
AQD3F9.01	9.01							□
AQD3F9.02	9.02	27.1					1.2	□
AQD3F9.05	9.05	27.2						●
AQD3F9.1	9.10	27.3						□
AQD3F9.15	9.15	27.5	40		90			□
AQD3F9.2	9.20	27.6						●
AQD3F9.25	9.25	27.8						□
AQD3F9.3	9.30	27.9						●
AQD3F9.35	9.35	28.1						□
AQD3F9.4	9.40	28.2						●
AQD3F9.45	9.45	28.4						□
AQD3F9.48	9.48			43.5		10		□
AQD3F9.49	9.49							●
AQD3F9.5	9.50	28.5						□
AQD3F9.51	9.51							●
AQD3F9.52	9.52	28.6						□
AQD3F9.55	9.55	28.7						●
AQD3F9.6	9.60	28.8						□
AQD3F9.65	9.65	29.0						●
AQD3F9.7	9.70	29.1					1.3	□
AQD3F9.75	9.75	29.3						□
AQD3F9.8	9.80	29.4						●
AQD3F9.85	9.85	29.6						□
AQD3F9.9	9.90	29.7						●
AQD3F9.95	9.95	29.9						□
AQD3F9.98	9.98							□
AQD3F9.99	9.99							●
AQD3F10.0	10.00	30.0						□
AQD3F10.01	10.01							●
AQD3F10.02	10.02	30.1						□
AQD3F10.05	10.05	30.2						●
AQD3F10.1	10.10	30.3						□
AQD3F10.15	10.15	30.5						●
AQD3F10.2	10.20	30.6						□
AQD3F10.25	10.25	30.8						●
AQD3F10.3	10.30	30.9						□
AQD3F10.35	10.35	31.1						●
AQD3F10.4	10.40	31.2						□
AQD3F10.45	10.45	31.4						●
AQD3F10.48	10.48							□
AQD3F10.49	10.49						1.4	□
AQD3F10.5	10.50	31.5						●
AQD3F10.51	10.51							□
AQD3F10.52	10.52	31.6						□
AQD3F10.55	10.55	31.7						●
AQD3F10.6	10.60	31.8						□
AQD3F10.65	10.65	32.0						●
AQD3F10.7	10.70	32.1						□
AQD3F10.75	10.75	32.3						●
AQD3F10.8	10.80	32.4						□
AQD3F10.85	10.85	32.6						●
AQD3F10.9	10.90	32.7						□
AQD3F10.95	10.95	32.9						●
AQD3F10.98	10.98							□
AQD3F10.99	10.99							●
AQD3F11.0	11.00	33.0						□
AQD3F11.01	11.01							●
AQD3F11.02	11.02	33.1						□
AQD3F11.05	11.05	33.2						●
AQD3F11.1	11.10	33.3						□
AQD3F11.15	11.15	33.5						●
AQD3F11.2	11.20	33.6						□
AQD3F11.25	11.25	33.8						●
AQD3F11.3	11.30	33.9						□
AQD3F11.35	11.35	34.1						●

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D20MM	先端 PL	在庫 Stock
AQD3F11.4	11.40	34.2						●
AQD3F11.45	11.45	34.4						□
AQD3F11.48	11.48							□
AQD3F11.49	11.49							●
AQD3F11.5	11.50	34.5						□
AQD3F11.51	11.51							●
AQD3F11.52	11.52	34.6	47		104			□
AQD3F11.55	11.55	34.7						●
AQD3F11.6	11.60	34.8						□
AQD3F11.65	11.65	35.0						●
AQD3F11.7	11.70	35.1						□
AQD3F11.75	11.75	35.3						●
AQD3F11.8	11.80	35.4						□
AQD3F11.85	11.85	35.6						●
AQD3F11.9	11.90	35.7						□
AQD3F11.95	11.95	35.9						●
AQD3F11.98	11.98							□
AQD3F11.99	11.99							●
AQD3F12.0	12.00	36.0						□
AQD3F12.01	12.01							●
AQD3F12.02	12.02	36.1						□
AQD3F12.05	12.05	36.2						●
AQD3F12.1	12.10	36.3						□
AQD3F12.15	12.15	36.5						●
AQD3F12.2	12.20	36.6						□
AQD3F12.25	12.25	36.8						●
AQD3F12.3	12.30	36.9						□
AQD3F12.35	12.35	37.1						●
AQD3F12.4	12.40	37.2						□
AQD3F12.45	12.45	37.4						●
AQD3F12.48	12.48							□
AQD3F12.49	12.49							●
AQD3F12.5	12.50	37.5						□
AQD3F12.51	12.51							●
AQD3F12.52	12.52	37.6						□
AQD3F12.55	12.55	37.7						●
AQD3F12.6	12.60	37.8						□
AQD3F12.65	12.65	38.0						●
AQD3F12.7	12.70	38.1						□
AQD3F12.75	12.75	38.3						●
AQD3F12.8	12.80	38.4						□
AQD3F12.85	12.85	38.6						●
AQD3F12.9	12.90	38.7						□
AQD3F12.95	12.95	38.9						●
AQD3F12.98	12.98							□
AQD3F12.99	12.99							●
AQD3F13.0	13.00	39.0						□
AQD3F14.0	14.00	42.0	72		130			●
AQD3F15.0	15.00	45.0	76	50.0	136			□
AQD3F16.0	16.00	48.0	80		144			●


直径 Drill Dia. (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	± 0.003
3	10	± 0.004
10		± 0.005

一般结构用钢	碳钢	合金钢调质钢	模具钢预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	◎	◎	◎	◎	—
不锈钢		钛合金耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	○	×	○	×	×

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 适合铸孔、镗孔的高精度加工。
- 位置矫正性能出色，可实现高效率加工。

Excellent position correction, high-grade work especially with cast holes and boring.

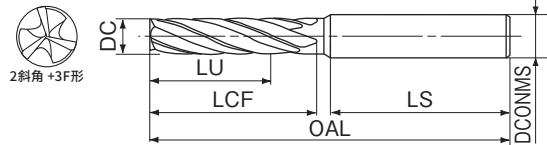

新商品

LIST 9542

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	在庫 Stock
AQDED3F3.0	3.0	9.0	16	28.0	48	3	●
AQDED3F3.1	3.1	9.3					
AQDED3F3.2	3.2	9.6	18		50		
AQDED3F3.3	3.3	9.9					
AQDED3F3.4	3.4	10.2					
AQDED3F3.5	3.5	10.5	20	30.0	52	4	□
AQDED3F3.6	3.6	10.8					
AQDED3F3.7	3.7	11.1					
AQDED3F3.8	3.8	11.4					
AQDED3F3.9	3.9	11.7			54		
AQDED3F4.0	4.0	12.0	22				●
AQDED3F4.1	4.1	12.3			66		
AQDED3F4.2	4.2	12.6					
AQDED3F4.3	4.3	12.9					
AQDED3F4.4	4.4	13.2	24		68		□
AQDED3F4.5	4.5	13.5					
AQDED3F4.6	4.6	13.8					
AQDED3F4.7	4.7	14.1					
AQDED3F4.8	4.8	14.4					
AQDED3F4.9	4.9	14.7					
AQDED3F5.0	5.0	15.0	26		70	6	●
AQDED3F5.1	5.1	15.3					
AQDED3F5.2	5.2	15.6					
AQDED3F5.3	5.3	15.9					
AQDED3F5.4	5.4	16.2					
AQDED3F5.5	5.5	16.5					□
AQDED3F5.6	5.6	16.8					
AQDED3F5.7	5.7	17.1	28		72		
AQDED3F5.8	5.8	17.4					
AQDED3F5.9	5.9	17.7					
AQDED3F6.0	6.0	18.0					●
AQDED3F6.1	6.1	18.3					
AQDED3F6.2	6.2	18.6					
AQDED3F6.3	6.3	18.9					
AQDED3F6.4	6.4	19.2	31		75		□
AQDED3F6.5	6.5	19.5					
AQDED3F6.6	6.6	19.8					
AQDED3F6.7	6.7	20.1					
AQDED3F6.8	6.8	20.4					
AQDED3F6.9	6.9	20.7					
AQDED3F7.0	7.0	21.0				8	●
AQDED3F7.1	7.1	21.3					
AQDED3F7.2	7.2	21.6	34		78		
AQDED3F7.3	7.3	21.9					
AQDED3F7.4	7.4	22.2					
AQDED3F7.5	7.5	22.5					□
AQDED3F7.6	7.6	22.8					
AQDED3F7.7	7.7	23.1					
AQDED3F7.8	7.8	23.4				81	
AQDED3F7.9	7.9	23.7					
AQDED3F8.0	8.0	24.0					●
AQDED3F8.1	8.1	24.3					
AQDED3F8.2	8.2	24.6					
AQDED3F8.3	8.3	24.9					
AQDED3F8.4	8.4	25.2					
AQDED3F8.5	8.5	25.5					
AQDED3F8.6	8.6	25.8					□
AQDED3F8.7	8.7	26.1					
AQDED3F8.8	8.8	26.4					
AQDED3F8.9	8.9	26.7	40		90		●
AQDED3F9.0	9.0	27.0					
AQDED3F9.1	9.1	27.3					□


单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	在庫 Stock
AQDED3F9.2	9.2	27.6					
AQDED3F9.3	9.3	27.9					
AQDED3F9.4	9.4	28.2	40		90		
AQDED3F9.5	9.5	28.5					
AQDED3F9.6	9.6	28.8					
AQDED3F9.7	9.7	29.1					
AQDED3F9.8	9.8	29.4					
AQDED3F9.9	9.9	29.7			93		
AQDED3F10.0	10.0	30.0					●
AQDED3F10.1	10.1	30.3	43				
AQDED3F10.2	10.2	30.6					
AQDED3F10.3	10.3	30.9			100		
AQDED3F10.4	10.4	31.2					
AQDED3F10.5	10.5	31.5					□
AQDED3F10.6	10.6	31.8					
AQDED3F10.7	10.7	32.1					
AQDED3F10.8	10.8	32.4					
AQDED3F10.9	10.9	32.7					
AQDED3F11.0	11.0	33.0					●
AQDED3F11.1	11.1	33.3					
AQDED3F11.2	11.2	33.6					
AQDED3F11.3	11.3	33.9			104		
AQDED3F11.4	11.4	34.2					
AQDED3F11.5	11.5	34.5					□
AQDED3F11.6	11.6	34.8					
AQDED3F11.7	11.7	35.1					
AQDED3F11.8	11.8	35.4					
AQDED3F11.9	11.9	35.7	51		108		●
AQDED3F12.0	12.0	36.0					

直径 Drill Dia. (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	± 0.003
3	10	± 0.004
10		± 0.005

一般结构用钢	碳钢	合金钢调质钢	模具钢预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65 HRC
◎	○	—	—	×	×
不锈钢		钛合金耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	—	×	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

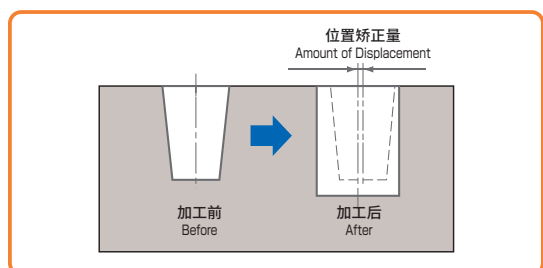

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品

其它



精密工具

技术资料

索引

●适合用于沉孔、薄板、不足 1D 的孔加工。

Suitable for counter boring, drilling thin plates, and drilling hole less than 1D.



LIST 9628

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZS0200	2.0	2.0	7	50	40.5	4	
AQDEXZS0210	2.1	2.1					
AQDEXZS0220	2.2	2.2	8		40.0		
AQDEXZS0230	2.3	2.3					
AQDEXZS0240	2.4	2.4					
AQDEXZS0250	2.5	2.5	9		39.0		
AQDEXZS0260	2.6	2.6					
AQDEXZS0270	2.7	2.7	10		38.0		
AQDEXZS0280	2.8	2.8					
AQDEXZS0290	2.9	2.9	11		36.0		
AQDEXZS0300	3.0	3.0		50		8	
AQDEXZS0310	3.1	3.1					
AQDEXZS0320	3.2	3.2	12		35.0		
AQDEXZS0330	3.3	3.3					
AQDEXZS0340	3.4	3.4					
AQDEXZS0350	3.5	3.5	13		34.5		
AQDEXZS0360	3.6	3.6					
AQDEXZS0370	3.7	3.7					
AQDEXZS0380	3.8	3.8	14		34.0		
AQDEXZS0390	3.9	3.9					
AQDEXZS0400	4.0	4.0		60		6	
AQDEXZS0410	4.1	4.1					
AQDEXZS0420	4.2	4.2	15		42.0		
AQDEXZS0430	4.3	4.3					
AQDEXZS0440	4.4	4.4					
AQDEXZS0450	4.5	4.5	16		41.0		
AQDEXZS0460	4.6	4.6					
AQDEXZS0470	4.7	4.7					
AQDEXZS0480	4.8	4.8	18		40.0		
AQDEXZS0490	4.9	4.9					
AQDEXZS0500	5.0	5.0		60		10	
AQDEXZS0510	5.1	5.1					
AQDEXZS0520	5.2	5.2	19		38.0		
AQDEXZS0530	5.3	5.3					
AQDEXZS0540	5.4	5.4					
AQDEXZS0550	5.5	5.5	20		37.0		
AQDEXZS0560	5.6	5.6					
AQDEXZS0570	5.7	5.7					
AQDEXZS0580	5.8	5.8	21		36.0		
AQDEXZS0590	5.9	5.9					
AQDEXZS0600	6.0	6.0		70		12	
AQDEXZS0610	6.1	6.1					
AQDEXZS0620	6.2	6.2	22		45.0		
AQDEXZS0630	6.3	6.3					
AQDEXZS0640	6.4	6.4					
AQDEXZS0650	6.5	6.5	23		44.0		
AQDEXZS0660	6.6	6.6					
AQDEXZS0670	6.7	6.7					
AQDEXZS0680	6.8	6.8	24		41.0		
AQDEXZS0690	6.9	6.9					
AQDEXZS0700	7.0	7.0		70		12	
AQDEXZS0710	7.1	7.1					
AQDEXZS0720	7.2	7.2	26		39.0		
AQDEXZS0730	7.3	7.3					
AQDEXZS0740	7.4	7.4					
AQDEXZS0750	7.5	7.5	27				
AQDEXZS0760	7.6	7.6					
AQDEXZS0770	7.7	7.7					
AQDEXZS0780	7.8	7.8	28				
AQDEXZS0790	7.9	7.9					

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZS0800	8.0	8.0	28	70	39.0	8	
AQDEXZS0810	8.1	8.1					
AQDEXZS0820	8.2	8.2	29		48.0		
AQDEXZS0830	8.3	8.3					
AQDEXZS0840	8.4	8.4					
AQDEXZS0850	8.5	8.5	30		47.0		
AQDEXZS0860	8.6	8.6					
AQDEXZS0870	8.7	8.7					
AQDEXZS0880	8.8	8.8	32		46.0		
AQDEXZS0890	8.9	8.9					
AQDEXZS0900	9.0	9.0		80		10	
AQDEXZS0910	9.1	9.1					
AQDEXZS0920	9.2	9.2	33		44.0		
AQDEXZS0930	9.3	9.3					
AQDEXZS0940	9.4	9.4					
AQDEXZS0950	9.5	9.5	34		42.0		
AQDEXZS0960	9.6	9.6					
AQDEXZS0970	9.7	9.7					
AQDEXZS0980	9.8	9.8	35		40.0		
AQDEXZS0990	9.9	9.9					
AQDEXZS1000	10.0	10.0		90		10	
AQDEXZS1010	10.1	10.1					
AQDEXZS1020	10.2	10.2	36		51.0		
AQDEXZS1030	10.3	10.3					
AQDEXZS1040	10.4	10.4					
AQDEXZS1050	10.5	10.5	37		50.0		
AQDEXZS1060	10.6	10.6					
AQDEXZS1070	10.7	10.7					
AQDEXZS1080	10.8	10.8	38		47.0		
AQDEXZS1090	10.9	10.9					
AQDEXZS1100	11.0	11.0		90		12	
AQDEXZS1110	11.1	11.1					
AQDEXZS1120	11.2	11.2	40		45.0		
AQDEXZS1130	11.3	11.3					
AQDEXZS1140	11.4	11.4					
AQDEXZS1150	11.5	11.5	41		53.0		
AQDEXZS1160	11.6	11.6					
AQDEXZS1170	11.7	11.7					
AQDEXZS1180	11.8	11.8	42		50.0		
AQDEXZS1190	11.9	11.9					
AQDEXZS1200	12.0	12.0		100		12	
AQDEXZS1210	12.1	12.1					
AQDEXZS1220	12.2	12.2	43		54.0		
AQDEXZS1230	12.3	12.3					
AQDEXZS1240	12.4	12.4					
AQDEXZS1250	12.5	12.5	44		53.0		
AQDEXZS1260	12.6	12.6					
AQDEXZS1270	12.7	12.7					
AQDEXZS1280	12.8	12.8	45		50.0		
AQDEXZS1290	12.9	12.9					
AQDEXZS1300	13.0	13.0		100		12	
AQDEXZS1310	13.1	13.1					
AQDEXZS1320	13.2	13.2	47		48.0		
AQDEXZS1330	13.3	13.3					
AQDEXZS1340	13.4	13.4					
AQDEXZS1350	13.5	13.5	48		50.0		
AQDEXZS1360	13.6	13.6					
AQDEXZS1370	13.7	13.7					
AQDEXZS1380	13.8	13.8	49		48.0		
AQDEXZS1390	13.9	13.9					

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 D20MS	在庫 Stock	
AQDEXZS1400	14.0	14.0	49	100	48.0	12	●	
AQDEXZS1410	14.1	14.1	50	105	52.0			
AQDEXZS1420	14.2	14.2						
AQDEXZS1430	14.3	14.3						
AQDEXZS1440	14.4	14.4	51		51.0			
AQDEXZS1450	14.5	14.5						
AQDEXZS1460	14.6	14.6						
AQDEXZS1470	14.7	14.7	52					
AQDEXZS1480	14.8	14.8						
AQDEXZS1490	14.9	14.9						
AQDEXZS1500	15.0	15.0	54					
AQDEXZS1510	15.1	15.1						
AQDEXZS1520	15.2	15.2						
AQDEXZS1530	15.3	15.3	55	115	58.0			
AQDEXZS1540	15.4	15.4						
AQDEXZS1550	15.5	15.5						
AQDEXZS1560	15.6	15.6	56		56.0			
AQDEXZS1570	15.7	15.7						
AQDEXZS1580	15.8	15.8						
AQDEXZS1590	15.9	15.9	58		54.0			
AQDEXZS1600	16.0	16.0						
AQDEXZS1650	16.5	16.5						
AQDEXZS1700	17.0	17.0	59		125	63.0		16
AQDEXZS1750	17.5	17.5	61			62.0		
AQDEXZS1800	18.0	18.0	63			59.0		
AQDEXZS1850	18.5	18.5	65	135	67.0			
AQDEXZS1900	19.0	19.0	66					
AQDEXZS1950	19.5	19.5	68					
AQDEXZS2000	20.0	20.0	70	145	74.0	20		
					72.0			

- 开孔性能良好的沉孔用钻头。
- 适合倾斜面或丝锥底孔加工。

Drill for counter boring has excellent performance.
Superior for drilling on angled surfaces and tap drill holes.



LIST 9610

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZ0020	0.20	0.4	0.66	40.8	40.8		●
AQDEXZ0021	0.21						
AQDEXZ0022	0.22	0.5	0.82	40.7	40.7		□
AQDEXZ0023	0.23						
AQDEXZ0024	0.24	0.6	0.99	40.6	40.6		●
AQDEXZ0025	0.25						
AQDEXZ0026	0.26	0.7	1.16	40.5	40.5		●
AQDEXZ0027	0.27						
AQDEXZ0028	0.28	0.8	1.32	40.4	40.4		●
AQDEXZ0029	0.29						
AQDEXZ0030	0.30	0.9	1.48	40.3	40.3	3	●
AQDEXZ0031	0.31						
AQDEXZ0032	0.32	1.0	1.65	40.2	40.2		●
AQDEXZ0033	0.33						
AQDEXZ0034	0.34	1.1	1.81	40.1	40.1		●
AQDEXZ0035	0.35						
AQDEXZ0036	0.36	1.2	1.98	40.0	40.0		●
AQDEXZ0037	0.37						
AQDEXZ0038	0.38	1.3	2.14	39.9	39.9		□
AQDEXZ0039	0.39						
AQDEXZ0040	0.40	1.4	2.31	39.8	39.8		●
AQDEXZ0041	0.41						
AQDEXZ0042	0.42	1.5	2.47	39.7	39.7		●
AQDEXZ0043	0.43						
AQDEXZ0044	0.44	1.6	2.64	39.6	39.6		□
AQDEXZ0045	0.45						
AQDEXZ0046	0.46	1.7	2.80	39.5	39.5		●
AQDEXZ0047	0.47						
AQDEXZ0048	0.48	1.8	2.97	39.4	39.4		●
AQDEXZ0049	0.49						
AQDEXZ0050	0.50	1.9	3.13	39.3	39.3		□
AQDEXZ0051	0.51						
AQDEXZ0052	0.52	2.0	3.30	39.2	39.2		●
AQDEXZ0053	0.53						
AQDEXZ0054	0.54	2.1	3.46	39.1	39.1		□
AQDEXZ0055	0.55						
AQDEXZ0056	0.56	2.2	3.60	39.0	39.0		●
AQDEXZ0057	0.57						
AQDEXZ0058	0.58	2.3	3.70	38.9	38.9		□
AQDEXZ0059	0.59						
AQDEXZ0060	0.60	2.4	3.80	38.8	38.8		●
AQDEXZ0061	0.61						
AQDEXZ0062	0.62	2.5	3.90	38.7	38.7		□
AQDEXZ0063	0.63						
AQDEXZ0064	0.64	2.6	4.00	38.6	38.6		●
AQDEXZ0065	0.65						
AQDEXZ0066	0.66	2.7	4.10	38.5	38.5		□
AQDEXZ0067	0.67						
AQDEXZ0068	0.68	2.8	4.20	38.4	38.4		●
AQDEXZ0069	0.69						
AQDEXZ0070	0.70	2.9	4.30	38.3	38.3		□
AQDEXZ0071	0.71						
AQDEXZ0072	0.72	3.0	4.40	38.2	38.2		●
AQDEXZ0073	0.73						
AQDEXZ0074	0.74	3.1	4.50	38.1	38.1		□
AQDEXZ0075	0.75						
AQDEXZ0076	0.76	3.2	4.60	38.0	38.0		●
AQDEXZ0077	0.77						
AQDEXZ0078	0.78	3.3	4.70	37.9	37.9		□
AQDEXZ0079	0.79						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZ0080	0.80	1.6	2.64	39.9	39.9		●
AQDEXZ0081	0.81						
AQDEXZ0082	0.82	1.7	2.80	39.8	39.8		□
AQDEXZ0083	0.83						
AQDEXZ0084	0.84	1.8	2.97	39.7	39.7		●
AQDEXZ0085	0.85						
AQDEXZ0086	0.86	1.9	3.13	39.6	39.6		□
AQDEXZ0087	0.87						
AQDEXZ0088	0.88	2.0	3.30	39.5	39.5		●
AQDEXZ0089	0.89						
AQDEXZ0090	0.90	2.1	3.46	39.4	39.4		□
AQDEXZ0091	0.91						
AQDEXZ0092	0.92	2.2	3.60	39.3	39.3		●
AQDEXZ0093	0.93						
AQDEXZ0094	0.94	2.3	3.70	39.2	39.2		□
AQDEXZ0095	0.95						
AQDEXZ0096	0.96	2.4	3.80	39.1	39.1		●
AQDEXZ0097	0.97						
AQDEXZ0098	0.98	2.5	3.90	39.0	39.0		□
AQDEXZ0099	0.99						
AQDEXZ0100	1.00	2.6	4.00	38.9	38.9		●
AQDEXZ0101	1.01						
AQDEXZ0102	1.02	2.7	4.10	38.8	38.8		□
AQDEXZ0103	1.03						
AQDEXZ0104	1.04	2.8	4.20	38.7	38.7		●
AQDEXZ0105	1.05						
AQDEXZ0106	1.06	2.9	4.30	38.6	38.6		□
AQDEXZ0107	1.07						
AQDEXZ0108	1.08	3.0	4.40	38.5	38.5		●
AQDEXZ0109	1.09						
AQDEXZ0110	1.10	3.1	4.50	38.4	38.4		□
AQDEXZ0111	1.11						
AQDEXZ0112	1.12	3.2	4.60	38.3	38.3		●
AQDEXZ0113	1.13						
AQDEXZ0114	1.14	3.3	4.70	38.2	38.2		□
AQDEXZ0115	1.15						
AQDEXZ0116	1.16	3.4	4.80	38.1	38.1		●
AQDEXZ0117	1.17						
AQDEXZ0118	1.18	3.5	4.90	38.0	38.0		□
AQDEXZ0119	1.19						
AQDEXZ0120	1.20	3.6	5.00	37.9	37.9		●
AQDEXZ0121	1.21						
AQDEXZ0122	1.22	3.7	5.10	37.8	37.8		□
AQDEXZ0123	1.23						
AQDEXZ0124	1.24	3.8	5.20	37.7	37.7		●
AQDEXZ0125	1.25						
AQDEXZ0126	1.26	3.9	5.30	37.6	37.6		□
AQDEXZ0127	1.27						
AQDEXZ0128	1.28	4.0	5.40	37.5	37.5		●
AQDEXZ0129	1.29						
AQDEXZ0130	1.30	4.1	5.50	37.4	37.4		□
AQDEXZ0131	1.31						
AQDEXZ0132	1.32	4.2	5.60	37.3	37.3		●
AQDEXZ0133	1.33						
AQDEXZ0134	1.34	4.3	5.70	37.2	37.2		□
AQDEXZ0135	1.35						
AQDEXZ0136	1.36	4.4	5.80	37.1	37.1		●
AQDEXZ0137	1.37						
AQDEXZ0138	1.38	4.5	5.90	37.0	37.0		□
AQDEXZ0139	1.39						

0.01mm 尺寸的直径公差：0 ~ -0.009mm

Tolerance of diameter is 0 to -0.009mm for 0.01mm size

加工不锈钢 (SUS304 等) 时, 只能使用直径 1.99mm 以下的钻头。2.0mm 以上推荐使用 AQDEXZOH3D(A-74)。
到 L1 为止是倒锥范围。

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 D20M5	在庫 Stock
AQDEXZ0140	1.40		4.60				●
AQDEXZ0141	1.41	2.8					
AQDEXZ0142	1.42		4.70		39.1		
AQDEXZ0143	1.43						
AQDEXZ0144	1.44	2.9				□	
AQDEXZ0145	1.45		4.90		39.0		
AQDEXZ0146	1.46						
AQDEXZ0147	1.47	3.0				●	
AQDEXZ0148	1.48		5.10				
AQDEXZ0149	1.49						
AQDEXZ0150	1.50	3.1				□	
AQDEXZ0151	1.51		5.20		38.8		
AQDEXZ0152	1.52						
AQDEXZ0153	1.53	3.2				●	
AQDEXZ0154	1.54		5.30				
AQDEXZ0155	1.55					□	
AQDEXZ0156	1.56	3.3					
AQDEXZ0157	1.57		5.50		38.7		
AQDEXZ0158	1.58						
AQDEXZ0159	1.59	3.4		47	3	●	
AQDEXZ0160	1.60		5.70				
AQDEXZ0161	1.61						
AQDEXZ0162	1.62	3.5			38.6	□	
AQDEXZ0163	1.63		5.80				
AQDEXZ0164	1.64						
AQDEXZ0165	1.65	3.6				●	
AQDEXZ0166	1.66		6.00		38.5		
AQDEXZ0167	1.67					□	
AQDEXZ0168	1.68	3.7					
AQDEXZ0169	1.69		6.20				
AQDEXZ0170	1.70				38.4	●	
AQDEXZ0171	1.71	3.8					
AQDEXZ0172	1.72		6.30				
AQDEXZ0173	1.73						
AQDEXZ0174	1.74	3.9				□	
AQDEXZ0175	1.75		6.50		38.3		
AQDEXZ0176	1.76						
AQDEXZ0177	1.77	4.0		9.00	38.5	●	
AQDEXZ0178	1.78						
AQDEXZ0179	1.79		11.00	50	37.0	4	□
AQDEXZ0180	1.80	4.1					
AQDEXZ0181	1.81						
AQDEXZ0182	1.82						
AQDEXZ0183	1.83	4.2					
AQDEXZ0184	1.84						
AQDEXZ0185	1.85						
AQDEXZ0186	1.86						
AQDEXZ0187	1.87						
AQDEXZ0188	1.88						
AQDEXZ0189	1.89						
AQDEXZ0190	1.90						
AQDEXZ0191	1.91						
AQDEXZ0192	1.92						
AQDEXZ0193	1.93						
AQDEXZ0194	1.94						
AQDEXZ0195	1.95						
AQDEXZ0196	1.96						
AQDEXZ0197	1.97						
AQDEXZ0198	1.98						
AQDEXZ0199	1.99						
AQDEXZ0200	2.00						
AQDEXZ0201	2.01						
AQDEXZ0202	2.02						
AQDEXZ0203	2.03						
AQDEXZ0204	2.04						
AQDEXZ0205	2.05						
AQDEXZ0206	2.06						
AQDEXZ0207	2.07						
AQDEXZ0208	2.08						
AQDEXZ0209	2.09						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 D20M5	在庫 Stock
AQDEXZ0210	2.10						●
AQDEXZ0211	2.11	4.2					
AQDEXZ0212	2.12						
AQDEXZ0213	2.13						
AQDEXZ0214	2.14	4.3				□	
AQDEXZ0215	2.15						
AQDEXZ0216	2.16						
AQDEXZ0217	2.17	4.4	11.00		37.0	●	
AQDEXZ0218	2.18						
AQDEXZ0219	2.19						
AQDEXZ0220	2.20	4.5				□	
AQDEXZ0221	2.21						
AQDEXZ0222	2.22	4.6				●	
AQDEXZ0223	2.23						
AQDEXZ0224	2.24						
AQDEXZ0225	2.25	4.7				□	
AQDEXZ0226	2.26						
AQDEXZ0227	2.27						
AQDEXZ0228	2.28	4.8				●	
AQDEXZ0229	2.29						
AQDEXZ0230	2.30						
AQDEXZ0231	2.31	4.9	12.00	50	36.0	4	□
AQDEXZ0232	2.32						
AQDEXZ0233	2.33						
AQDEXZ0234	2.34	5.0				●	
AQDEXZ0235	2.35						
AQDEXZ0236	2.36						
AQDEXZ0237	2.37	5.1				□	
AQDEXZ0238	2.38						
AQDEXZ0239	2.39	5.2				●	
AQDEXZ0240	2.40						
AQDEXZ0241	2.41						
AQDEXZ0242	2.42	5.3				□	
AQDEXZ0243	2.43						
AQDEXZ0244	2.44						
AQDEXZ0245	2.45	5.4	14.00		34.0	●	
AQDEXZ0246	2.46						
AQDEXZ0247	2.47						
AQDEXZ0248	2.48	5.5				□	
AQDEXZ0249	2.49						
AQDEXZ0250	2.50						
AQDEXZ0251	2.51	5.6				●	
AQDEXZ0252	2.52						
AQDEXZ0253	2.53						
AQDEXZ0254	2.54						
AQDEXZ0255	2.55						
AQDEXZ0256	2.56						
AQDEXZ0257	2.57						
AQDEXZ0258	2.58						
AQDEXZ0259	2.59						
AQDEXZ0260	2.60						
AQDEXZ0261	2.61						
AQDEXZ0262	2.62						
AQDEXZ0263	2.63						
AQDEXZ0264	2.64						
AQDEXZ0265	2.65						
AQDEXZ0266	2.66						
AQDEXZ0267	2.67						
AQDEXZ0268	2.68						
AQDEXZ0269	2.69						
AQDEXZ0270	2.70						
AQDEXZ0271	2.71						
AQDEXZ0272	2.72						
AQDEXZ0273	2.73						
AQDEXZ0274	2.74						
AQDEXZ0275	2.75						
AQDEXZ0276	2.76						
AQDEXZ0277	2.77						
AQDEXZ0278	2.78						
AQDEXZ0279	2.79						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Next 下一页 ➡

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock					
AQDEXZ0280	2.80	5.6	14.00	50	34.0	4	●					
AQDEXZ0281	2.81											
AQDEXZ0282	2.82											
AQDEXZ0283	2.83	5.7										
AQDEXZ0284	2.84											
AQDEXZ0285	2.85						□					
AQDEXZ0286	2.86	5.8										
AQDEXZ0287	2.87											
AQDEXZ0288	2.88						●					
AQDEXZ0289	2.89	5.9										
AQDEXZ0290	2.90											
AQDEXZ0291	2.91											
AQDEXZ0292	2.92	6.0	15.00		33.0	6						
AQDEXZ0293	2.93											
AQDEXZ0294	2.94											
AQDEXZ0295	2.95	6.1					□					
AQDEXZ0296	2.96											
AQDEXZ0297	2.97											
AQDEXZ0298	2.98	6.2										
AQDEXZ0299	2.99											
AQDEXZ0300	3.00											
AQDEXZ0301	3.01	6.3					●					
AQDEXZ0302	3.02											
AQDEXZ0303	3.03											
AQDEXZ0304	3.04	6.4					□					
AQDEXZ0305	3.05											
AQDEXZ0306	3.06											
AQDEXZ0307	3.07	6.5										
AQDEXZ0308	3.08											
AQDEXZ0309	3.09											
AQDEXZ0310	3.10	6.6					●					
AQDEXZ0311	3.11											
AQDEXZ0312	3.12											
AQDEXZ0313	3.13	6.7					□					
AQDEXZ0314	3.14											
AQDEXZ0315	3.15											
AQDEXZ0316	3.16	6.8					●					
AQDEXZ0317	3.17											
AQDEXZ0318	3.18											
AQDEXZ0319	3.19	6.9					□					
AQDEXZ0320	3.20											
AQDEXZ0321	3.21											
AQDEXZ0322	3.22	7.0					●					
AQDEXZ0323	3.23											
AQDEXZ0324	3.24											
AQDEXZ0325	3.25	7.1					□					
AQDEXZ0326	3.26											
AQDEXZ0327	3.27											
AQDEXZ0328	3.28	7.2					●					
AQDEXZ0329	3.29											
AQDEXZ0330	3.30											
AQDEXZ0331	3.31	7.3					□					
AQDEXZ0332	3.32											
AQDEXZ0333	3.33											
AQDEXZ0334	3.34	7.4					●					
AQDEXZ0335	3.35											
AQDEXZ0336	3.36											
AQDEXZ0337	3.37	7.5					□					
AQDEXZ0338	3.38											
AQDEXZ0339	3.39											
AQDEXZ0340	3.40	7.6					●					
AQDEXZ0341	3.41											
AQDEXZ0342	3.42											
AQDEXZ0343	3.43	7.7					□					
AQDEXZ0344	3.44											
AQDEXZ0345	3.45											
AQDEXZ0346	3.46	7.8					●					
AQDEXZ0347	3.47											
AQDEXZ0348	3.48											
AQDEXZ0349	3.49	7.9					□					

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCOMMS	在庫 Stock
AQDEXZ0350	3.50	7.0	16.00	50	31.5	6	●
AQDEXZ0351	3.51						
AQDEXZ0352	3.52						
AQDEXZ0353	3.53	7.1					
AQDEXZ0354	3.54						
AQDEXZ0355	3.55						
AQDEXZ0356	3.56	7.2					
AQDEXZ0357	3.57						
AQDEXZ0358	3.58						
AQDEXZ0359	3.59	7.3					
AQDEXZ0360	3.60						
AQDEXZ0361	3.61						
AQDEXZ0362	3.62	7.4					
AQDEXZ0363	3.63						
AQDEXZ0364	3.64						
AQDEXZ0365	3.65	7.5					
AQDEXZ0366	3.66						
AQDEXZ0367	3.67						
AQDEXZ0368	3.68	7.6					
AQDEXZ0369	3.69						
AQDEXZ0370	3.70						
AQDEXZ0371	3.71	7.7					
AQDEXZ0372	3.72						
AQDEXZ0373	3.73						
AQDEXZ0374	3.74	7.8					
AQDEXZ0375	3.75						
AQDEXZ0376	3.76						
AQDEXZ0377	3.77	7.9					
AQDEXZ0378	3.78						
AQDEXZ0379	3.79						
AQDEXZ0380	3.80	8.0					
AQDEXZ0381	3.81						
AQDEXZ0382	3.82						
AQDEXZ0383	3.83	8.1					
AQDEXZ0384	3.84						
AQDEXZ0385	3.85						
AQDEXZ0386	3.86	8.2					
AQDEXZ0387	3.87						
AQDEXZ0388	3.88						
AQDEXZ0389	3.89	8.3					
AQDEXZ0390	3.90						
AQDEXZ0391	3.91						
AQDEXZ0392	3.92	8.4					
AQDEXZ0393	3.93						
AQDEXZ0394	3.94						
AQDEXZ0395	3.95	8.5					
AQDEXZ0396	3.96						
AQDEXZ0397	3.97						
AQDEXZ0398	3.98	8.6					
AQDEXZ0399	3.99						
AQDEXZ0400	4.00						
AQDEXZ0401	4.01	8.7					
AQDEXZ0402	4.02						
AQDEXZ0403	4.03						
AQDEXZ0404	4.04	8.8					
AQDEXZ0405	4.05						
AQDEXZ0406	4.06						
AQDEXZ0407	4.07	8.9					
AQDEXZ0408	4.08						
AQDEXZ0409	4.09						
AQDEXZ0410	4.10	9.0					
AQDEXZ0411	4.11						
AQDEXZ0412	4.12						
AQDEXZ0413	4.13	9.1					
AQDEXZ0414	4.14						
AQDEXZ0415	4.15						
AQDEXZ0416	4.16	9.2					
AQDEXZ0417	4.17						
AQDEXZ0418	4.18						
AQDEXZ0419	4.19	9.3					

0.01mm 尺寸的直径公差 : 0 ~ -0.009mm

Tolerance of diameter is 0 to -0.009mm for 0.01mm size

推荐用于 2DC 倍径 (直径的 2 倍) 以下的孔深。最大可进行 3DC 倍径的开孔, 但请采用分级加工等方式, 注意排出切屑。到 L1 为止是倒锥范围。

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCOMIS	在庫 Stock
AQDEXZ0420	4.20	8.4	19.00		38.0		●
AQDEXZ0421	4.21						
AQDEXZ0422	4.22						
AQDEXZ0423	4.23	8.5	19.00		38.0		
AQDEXZ0424	4.24						□
AQDEXZ0425	4.25						
AQDEXZ0426	4.26	8.6	19.00		38.0		●
AQDEXZ0427	4.27						
AQDEXZ0428	4.28						
AQDEXZ0429	4.29	8.7	21.00		60	6	□
AQDEXZ0430	4.30						
AQDEXZ0431	4.31						
AQDEXZ0432	4.32	8.8	21.00		36.0		●
AQDEXZ0433	4.33						
AQDEXZ0434	4.34						
AQDEXZ0435	4.35	8.9	21.00		36.0		□
AQDEXZ0436	4.36						
AQDEXZ0437	4.37						
AQDEXZ0438	4.38	9.0	22.00		32.0		●
AQDEXZ0439	4.39						
AQDEXZ0440	4.40						
AQDEXZ0441	4.41	9.1	22.00		32.0		□
AQDEXZ0442	4.42						
AQDEXZ0443	4.43						
AQDEXZ0444	4.44	9.2	22.00		32.0		●
AQDEXZ0445	4.45						
AQDEXZ0446	4.46						
AQDEXZ0447	4.47	9.3	22.00		32.0		□
AQDEXZ0448	4.48						
AQDEXZ0449	4.49						
AQDEXZ0450	4.50	9.4	22.00		32.0		●
AQDEXZ0451	4.51						
AQDEXZ0452	4.52						
AQDEXZ0453	4.53	9.5	22.00		32.0		□
AQDEXZ0454	4.54						
AQDEXZ0455	4.55						
AQDEXZ0456	4.56	9.6	22.00		32.0		●
AQDEXZ0457	4.57						
AQDEXZ0458	4.58						
AQDEXZ0459	4.59	9.7	22.00		32.0		□
AQDEXZ0460	4.60						
AQDEXZ0461	4.61						
AQDEXZ0462	4.62	9.8	22.00		32.0		●
AQDEXZ0463	4.63						
AQDEXZ0464	4.64						
AQDEXZ0465	4.65	9.9	22.00		32.0		□
AQDEXZ0466	4.66						
AQDEXZ0467	4.67						
AQDEXZ0468	4.68	10.0	22.00		32.0		●
AQDEXZ0469	4.69						
AQDEXZ0470	4.70						
AQDEXZ0471	4.71	10.1	22.00		32.0		□
AQDEXZ0472	4.72						
AQDEXZ0473	4.73						
AQDEXZ0474	4.74	10.2	22.00		32.0		●
AQDEXZ0475	4.75						
AQDEXZ0476	4.76						
AQDEXZ0477	4.77	10.3	22.00		32.0		□
AQDEXZ0478	4.78						
AQDEXZ0479	4.79						
AQDEXZ0480	4.80	10.4	22.00		32.0		●
AQDEXZ0481	4.81						
AQDEXZ0482	4.82						
AQDEXZ0483	4.83	10.5	22.00		32.0		□
AQDEXZ0484	4.84						
AQDEXZ0485	4.85						
AQDEXZ0486	4.86	10.6	22.00		32.0		●
AQDEXZ0487	4.87						
AQDEXZ0488	4.88						
AQDEXZ0489	4.89	10.7	22.00		32.0		□

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCOMIS	在庫 Stock
AQDEXZ0490	4.90	9.8	22.00		36.0		●
AQDEXZ0491	4.91						
AQDEXZ0492	4.92						
AQDEXZ0493	4.93	9.9	23.00		36.0		□
AQDEXZ0494	4.94						
AQDEXZ0495	4.95						
AQDEXZ0496	4.96	10.0	23.00		36.0		●
AQDEXZ0497	4.97						
AQDEXZ0498	4.98						
AQDEXZ0499	4.99	10.1	24.00		33.0		□
AQDEXZ0500	5.00						
AQDEXZ0501	5.01						
AQDEXZ0502	5.02	10.2	24.00		33.0		●
AQDEXZ0503	5.03						
AQDEXZ0504	5.04						
AQDEXZ0505	5.05	10.3	24.00		33.0		□
AQDEXZ0506	5.06						
AQDEXZ0507	5.07						
AQDEXZ0508	5.08	10.4	24.00		33.0		●
AQDEXZ0509	5.09						
AQDEXZ0510	5.10						
AQDEXZ0511	5.11	10.5	24.00		33.0		□
AQDEXZ0512	5.12						
AQDEXZ0513	5.13						
AQDEXZ0514	5.14	10.6	24.00		33.0		●
AQDEXZ0515	5.15						
AQDEXZ0516	5.16						
AQDEXZ0517	5.17	10.7	25.00		32.0		□
AQDEXZ0518	5.18						
AQDEXZ0519	5.19						
AQDEXZ0520	5.20	10.8	25.00		32.0		●
AQDEXZ0521	5.21						
AQDEXZ0522	5.22						
AQDEXZ0523	5.23	10.9	25.00		32.0		□
AQDEXZ0524	5.24						
AQDEXZ0525	5.25						
AQDEXZ0526	5.26	11.0	25.00		32.0		●
AQDEXZ0527	5.27						
AQDEXZ0528	5.28						
AQDEXZ0529	5.29	11.1	25.00		32.0		□
AQDEXZ0530	5.30						
AQDEXZ0531	5.31						
AQDEXZ0532	5.32	11.2	25.00		32.0		●
AQDEXZ0533	5.33						
AQDEXZ0534	5.34						
AQDEXZ0535	5.35	11.3	25.00		32.0		□
AQDEXZ0536	5.36						
AQDEXZ0537	5.37						
AQDEXZ0538	5.38	11.4	25.00		32.0		●
AQDEXZ0539	5.39						
AQDEXZ0540	5.40						
AQDEXZ0541	5.41	11.5	25.00		32.0		□
AQDEXZ0542	5.42						
AQDEXZ0543	5.43						
AQDEXZ0544	5.44	11.6	25.00		32.0		●
AQDEXZ0545	5.45						
AQDEXZ0546	5.46						
AQDEXZ0547	5.47	11.7	25.00		32.0		□
AQDEXZ0548	5.48						
AQDEXZ0549	5.49						
AQDEXZ0550	5.50	11.8	25.00		32.0		●
AQDEXZ0551	5.51						
AQDEXZ0552	5.52						
AQDEXZ0553	5.53	11.9	25.00		32.0		□
AQDEXZ0554	5.54						
AQDEXZ0555	5.55						
AQDEXZ0556	5.56	12.0	25.00		32.0		●
AQDEXZ0557	5.57						
AQDEXZ0558	5.58						
AQDEXZ0559	5.59	12.1	25.00		32.0		□

← 上一页 Previous Page

单位 (Unit) : mm

新商品

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock																	
AQDEXZ0560	5.60	11.2	25.00	60	32.0	6	●																	
AQDEXZ0561	5.61		11.3		30.0		□																	
AQDEXZ0562	5.62							11.4	●															
AQDEXZ0563	5.63	11.5								□														
AQDEXZ0564	5.64		11.6								●													
AQDEXZ0565	5.65							11.7				□												
AQDEXZ0566	5.66	11.8											●											
AQDEXZ0567	5.67		11.9											□										
AQDEXZ0568	5.68							12.0							●									
AQDEXZ0569	5.69	12.1														□								
AQDEXZ0570	5.70		12.2														●							
AQDEXZ0571	5.71							12.3										□						
AQDEXZ0572	5.72	12.4			●																			
AQDEXZ0573	5.73		12.5			□																		
AQDEXZ0574	5.74						12.6	●																
AQDEXZ0575	5.75	12.7							□															
AQDEXZ0576	5.76		12.8							●														
AQDEXZ0577	5.77						12.9				□													
AQDEXZ0578	5.78	13.0										●												
AQDEXZ0579	5.79		13.1										□											
AQDEXZ0580	5.80						13.2							●										
AQDEXZ0581	5.81	13.3													□									
AQDEXZ0582	5.82		13.4													●								
AQDEXZ0583	5.83				13.5		□																	
AQDEXZ0584	5.84	13.6				●																		
AQDEXZ0585	5.85		13.7					□																
AQDEXZ0586	5.86				13.8				●															
AQDEXZ0587	5.87	13.9								□														
AQDEXZ0588	5.88		14.0								●													
AQDEXZ0589	5.89				14.1							□												
AQDEXZ0590	5.90	33.00											34.0				□							
AQDEXZ0591	5.91		32.00											34.0				□						
AQDEXZ0592	5.92				32.00										34.0				□					
AQDEXZ0593	5.93	32.00														34.0				□				
AQDEXZ0594	5.94		32.00				34.0														□			
AQDEXZ0595	5.95				32.00	34.0																□		
AQDEXZ0596	5.96	32.00						34.0															□	
AQDEXZ0597	5.97		32.00						34.0															□
AQDEXZ0598	5.98				32.00					34.0														
AQDEXZ0599	5.99	32.00									34.0													
AQDEXZ0600	6.00		32.00									34.0												
AQDEXZ0601	6.01				32.00								34.0				□							
AQDEXZ0602	6.02	32.00												34.0				□						
AQDEXZ0603	6.03		32.00												34.0				□					
AQDEXZ0604	6.04				32.00											34.0				□				
AQDEXZ0605	6.05	32.00					34.0														□			
AQDEXZ0610	6.10		32.00			34.0																□		
AQDEXZ0615	6.15				32.00			34.0															□	
AQDEXZ0620	6.20	32.00							34.0															□
AQDEXZ0625	6.25		32.00							34.0														
AQDEXZ0630	6.30				32.00						34.0													
AQDEXZ0635	6.35	32.00										34.0												
AQDEXZ0640	6.40		32.00										34.0				□							
AQDEXZ0645	6.45				32.00									34.0				□						
AQDEXZ0650	6.50	32.00													34.0				□					
AQDEXZ0655	6.55		32.00													34.0				□				
AQDEXZ0660	6.60				32.00		34.0														□			
AQDEXZ0665	6.65	32.00				34.0																□		
AQDEXZ0670	6.70		32.00					34.0															□	
AQDEXZ0675	6.75				32.00				34.0															□
AQDEXZ0680	6.80	32.00								34.0														
AQDEXZ0685	6.85		32.00								34.0													
AQDEXZ0690	6.90				32.00							34.0												
AQDEXZ0695	6.95	32.00											34.0				□							
AQDEXZ0700	7.00		32.00											34.0				□						
AQDEXZ0701	7.01				32.00										34.0				□					
AQDEXZ0702	7.02	32.00														34.0				□				
AQDEXZ0703	7.03		32.00				34.0														□			
AQDEXZ0704	7.04				32.00	34.0																□		
AQDEXZ0705	7.05	32.00						34.0															□	

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock									
AQDEXZ0710	7.10	14.2	33.00	70	34.0	6	●									
AQDEXZ0715	7.15	14.3					□									
AQDEXZ0720	7.20	14.4					●									
AQDEXZ0725	7.25	14.5					□									
AQDEXZ0730	7.30	14.6					●									
AQDEXZ0735	7.35	14.7					□									
AQDEXZ0740	7.40	14.8	34.00				31.0	6	●							
AQDEXZ0745	7.45	14.9							□							
AQDEXZ0750	7.50	15.0							●							
AQDEXZ0755	7.55	15.1							□							
AQDEXZ0760	7.60	15.2							●							
AQDEXZ0765	7.65	15.3							□							
AQDEXZ0770	7.70	15.4	36.00		31.0	6			●							
AQDEXZ0775	7.75	15.5							□							
AQDEXZ0780	7.80	15.6							●							
AQDEXZ0785	7.85	15.7							□							
AQDEXZ0790	7.90	15.8							●							
AQDEXZ0795	7.95	15.9							□							
AQDEXZ0800	8.00	16.0	37.00				40.0	8	●							
AQDEXZ0801	8.01								□							
AQDEXZ0802	8.02								●							
AQDEXZ0803	8.03	16.1							39.00	38.0	8	□				
AQDEXZ0804	8.04											●				
AQDEXZ0805	8.05											□				
AQDEXZ0810	8.10	16.2			40.00	35.0						8	●			
AQDEXZ0815	8.15	16.3											□			
AQDEXZ0820	8.20	16.4											●			
AQDEXZ0825	8.25	16.5											□			
AQDEXZ0830	8.30	16.6											●			
AQDEXZ0835	8.35	16.7											□			
AQDEXZ0840	8.40	16.8	41.00				32.0	10					●			
AQDEXZ0845	8.45	16.9											□			
AQDEXZ0850	8.50	17.0											●			
AQDEXZ0855	8.55	17.1							□							
AQDEXZ0860	8.60	17.2							●							
AQDEXZ0865	8.65	17.3							□							
AQDEXZ0870	8.70	17.4	42.00		32.0	10			●							
AQDEXZ0875	8.75	17.5							□							
AQDEXZ0880	8.80	17.6							●							
AQDEXZ0885	8.85	17.7							□							
AQDEXZ0890	8.90	17.8							43.00	32.0	10	●				
AQDEXZ0895	8.95	17.9										□				
AQDEXZ0900	9.00	18.0	90				41.0	10				●				
AQDEXZ0901	9.01											□				
AQDEXZ0902	9.02											●				
AQDEXZ0903	9.03	18.1										46.00	90	41.0	10	□
AQDEXZ0904	9.04								●							
AQDEXZ0905	9.05								□							
AQDEXZ0910	9.10	18.2			44.00	32.0			10							●
AQDEXZ0915	9.15	18.3														□
AQDEXZ0920	9.20	18.4														●
AQDEXZ0925	9.25	18.5														□
AQDEXZ0930	9.30	18.6								●						
AQDEXZ0935	9.35	18.7								□						
AQDEXZ0940	9.40	18.8	45.00		32.0		10	●								
AQDEXZ0945	9.45	18.9						□								
AQDEXZ0950	9.50	19.0						●								
AQDEXZ0955	9.55	19.1						□								
AQDEXZ0960	9.60	19.2						●								
AQDEXZ0965	9.65	19.3						□								
AQDEXZ0970	9.70	19.4	46.00			32.0		10	●							
AQDEXZ0975	9.75	19.5							□							
AQDEXZ0980	9.80	19.6							●							
AQDEXZ0985	9.85	19.7							□							
AQDEXZ0990	9.90	19.8							●							
AQDEXZ0995	9.95	19.9							□							
AQDEXZ1000	10.00	20.0	46.00		90		41.0		10	●						
AQDEXZ1001	10.01									□						
AQDEXZ1002	10.02									●						
AQDEXZ1003	10.03	20.1								46.00	90	41.0	10	□		

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DOAMS	在庫 Stock	
AQDEXZ1004	10.04	20.1	46.00	90	41.0	10	☐	
AQDEXZ1005	10.05							
AQDEXZ1010	10.10	20.2						
AQDEXZ1020	10.20	20.4						
AQDEXZ1030	10.30	20.6	48.00		39.0		10	
AQDEXZ1040	10.40	20.8						
AQDEXZ1050	10.50	21.0						
AQDEXZ1060	10.60	21.2						
AQDEXZ1070	10.70	21.4	49.00					
AQDEXZ1080	10.80	21.6						
AQDEXZ1090	10.90	21.8	50.00					
AQDEXZ1100	11.00	22.0						
AQDEXZ1110	11.10	22.2	51.00	36.0				
AQDEXZ1120	11.20	22.4						
AQDEXZ1130	11.30	22.6	52.00					
AQDEXZ1140	11.40	22.8						
AQDEXZ1150	11.50	23.0	54.00	33.0				
AQDEXZ1160	11.60	23.2						
AQDEXZ1170	11.70	23.4						
AQDEXZ1180	11.80	23.6						
AQDEXZ1190	11.90	23.8	100	42.0				
AQDEXZ1200	12.00	24.0						
AQDEXZ1210	12.10	24.2	55.00		40.0			
AQDEXZ1220	12.20	24.4						
AQDEXZ1230	12.30	24.6		57.00				
AQDEXZ1240	12.40	24.8						
AQDEXZ1250	12.50	25.0	58.00					
AQDEXZ1260	12.60	25.2						
AQDEXZ1270	12.70	25.4		59.00				
AQDEXZ1280	12.80	25.6						
AQDEXZ1290	12.90	25.8	60.00					
AQDEXZ1300	13.00	26.0						
AQDEXZ1310	13.10	26.2		61.00				
AQDEXZ1320	13.20	26.4						
AQDEXZ1330	13.30	26.6	63.00					
AQDEXZ1340	13.40	26.8						
AQDEXZ1350	13.50	27.0		64.00				
AQDEXZ1360	13.60	27.2						
AQDEXZ1370	13.70	27.4	66.00					
AQDEXZ1380	13.80	27.6						
AQDEXZ1390	13.90	27.8		67.00				
AQDEXZ1400	14.00	28.0						
AQDEXZ1410	14.10	28.2	68.00					
AQDEXZ1420	14.20	28.4						
AQDEXZ1430	14.30	28.6		69.00				
AQDEXZ1440	14.40	28.8						
AQDEXZ1450	14.50	29.0	70.00					
AQDEXZ1460	14.60	29.2						
AQDEXZ1470	14.70	29.4		72.00				
AQDEXZ1480	14.80	29.6						
AQDEXZ1490	14.90	29.8	75.00					
AQDEXZ1500	15.00	30.0						
AQDEXZ1510	15.10	30.2		77.00				
AQDEXZ1520	15.20	30.4						
AQDEXZ1530	15.30	30.6	79.00					
AQDEXZ1540	15.40	30.8						
AQDEXZ1550	15.50	31.0		81.00				
AQDEXZ1560	15.60	31.2						
AQDEXZ1570	15.70	31.4	84.00					
AQDEXZ1580	15.80	31.6						
AQDEXZ1590	15.90	31.8		86.00				
AQDEXZ1600	16.00	32.0						
AQDEXZ1650	16.50	33.0	88.00					
AQDEXZ1700	17.00	34.0						
AQDEXZ1750	17.50	35.0		90.00				
AQDEXZ1800	18.00	36.0						
AQDEXZ1850	18.50	37.0	92.00					
AQDEXZ1900	19.00	38.0						
AQDEXZ1950	19.50	39.0		94.00				
AQDEXZ2000	20.00	40.0						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○*	◎	—	◎	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended
※仅直径 1.99mm 以下 SUS304 为○

- 开孔性能良好的沉孔用钻头。
- 适合倾斜面或丝锥底孔加工。

Drill for counter boring has excellent performance.
Superior for drilling on angled surfaces and tap drill holes.



LIST 9830

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	R角 RE	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZ0300-R03	3.0	0.3	6.0	14	50	33.0	6	●
AQDEXZ0330-R03	3.3		6.6	15		32.0		
AQDEXZ0350-R03	3.5		7.0	16		31.5		
AQDEXZ0400-R03	4.0		8.0	18	30.0			
AQDEXZ0420-R03	4.2		8.4	19	38.0			
AQDEXZ0450-R03	4.5		9.0	21	36.0			
AQDEXZ0500-R03	5.0	0.4	10.0	23	60	33.0	8	
AQDEXZ0530-R03	5.3		10.6	24		32.0		
AQDEXZ0550-R03	5.5		11.0	25		30.0		
AQDEXZ0600-R04	6.0		12.0	27	37.0			
AQDEXZ0650-R04	6.5		13.0	30	34.0			
AQDEXZ0680-R04	6.8		13.6	31	31.0			
AQDEXZ0700-R04	7.0	0.4	14.0	32	70	38.0	10	
AQDEXZ0750-R04	7.5		15.0	34		35.0		
AQDEXZ0800-R04	8.0		16.0	36		32.0		
AQDEXZ0850-R04	8.5		17.0	39	41.0			
AQDEXZ0880-R04	8.8		17.6	40	39.0			
AQDEXZ0900-R04	9.0		18.0	41	36.0			
AQDEXZ0950-R04	9.5	0.5	19.0	43	80	33.0	12	
AQDEXZ1000-R05	10.0		20.0	45		41.0		
AQDEXZ1030-R05	10.3		20.6	46		39.0		
AQDEXZ1050-R05	10.5		21.0	48	36.0			
AQDEXZ1080-R05	10.8		21.6	49	33.0			
AQDEXZ1100-R05	11.0		22.0	50	30.0			
AQDEXZ1150-R05	11.5	0.5	23.0	52	90	33.0	12	
AQDEXZ1200-R05	12.0		24.0	54		30.0		


一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	○	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	○	—	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

- 可一次完成带角 R 的沉孔加工

Radius blind hole, one operation drilling with no prepared hole

传统 Conventional

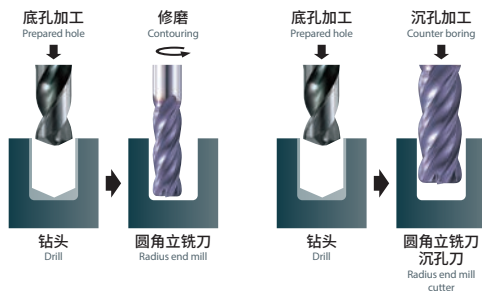

AQDEXZ-R



机械零部件上,为缓和应力集中,通常会在盲孔或沉孔中设置角R。过去,用钻头进行预加工后,会再用圆角立铣刀或特殊的带R角的沉孔刀加工,但AQUA EX 平头钻 带R角 可一次完成这一加工。


●开孔性能出色，可加工 4D 孔深的平头钻。

●必须有定心孔或导向孔。

Flat type drill bits have great performance drilling holes to 4 x diameter.
A centering hole or guide hole is necessary.



双刃带

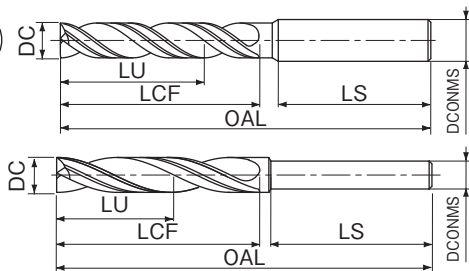

LIST 9818

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZR0300	3.00	12.0	19		37		●
AQDEXZR0305	3.05	12.2					□
AQDEXZR0310	3.10	12.4			35		●
AQDEXZR0315	3.15	12.6	21				□
AQDEXZR0320	3.20	12.8					●
AQDEXZR0325	3.25	13.0					□
AQDEXZR0330	3.30	13.2			34		●
AQDEXZR0335	3.35	13.4					□
AQDEXZR0340	3.40	13.6					●
AQDEXZR0345	3.45	13.8	23				□
AQDEXZR0350	3.50	14.0		60			●
AQDEXZR0355	3.55	14.2			32		□
AQDEXZR0360	3.60	14.4					●
AQDEXZR0365	3.65	14.6					□
AQDEXZR0370	3.70	14.8					●
AQDEXZR0375	3.75	15.0					□
AQDEXZR0380	3.80	15.2	25		33		●
AQDEXZR0385	3.85	15.4					□
AQDEXZR0390	3.90	15.6					●
AQDEXZR0395	3.95	15.8					□
AQDEXZR0400	4.00	16.0					●
AQDEXZR0405	4.05	16.2					□
AQDEXZR0410	4.10	16.4					●
AQDEXZR0415	4.15	16.6	27		39		□
AQDEXZR0420	4.20	16.8					●
AQDEXZR0425	4.25	17.0					□
AQDEXZR0430	4.30	17.2					●
AQDEXZR0435	4.35	17.4					□
AQDEXZR0440	4.40	17.6					●
AQDEXZR0445	4.45	17.8	29		37	6	□
AQDEXZR0450	4.50	18.0					●
AQDEXZR0455	4.55	18.2					□
AQDEXZR0460	4.60	18.4					●
AQDEXZR0465	4.65	18.6					□
AQDEXZR0470	4.70	18.8					●
AQDEXZR0475	4.75	19.0	31		36		□
AQDEXZR0480	4.80	19.2					●
AQDEXZR0485	4.85	19.4					□
AQDEXZR0490	4.90	19.6					●
AQDEXZR0495	4.95	19.8					□
AQDEXZR0500	5.00	20.0	32	70			●
AQDEXZR0505	5.05	20.2					□
AQDEXZR0510	5.10	20.4					●
AQDEXZR0515	5.15	20.6	34				□
AQDEXZR0520	5.20	20.8					●
AQDEXZR0525	5.25	21.0					□
AQDEXZR0530	5.30	21.2			33		●
AQDEXZR0535	5.35	21.4					□
AQDEXZR0540	5.40	21.6					●
AQDEXZR0545	5.45	21.8					□
AQDEXZR0550	5.50	22.0	36				●
AQDEXZR0555	5.55	22.2					□
AQDEXZR0560	5.60	22.4					●
AQDEXZR0565	5.65	22.6					□
AQDEXZR0570	5.70	22.8					●
AQDEXZR0575	5.75	23.0	38		31		□
AQDEXZR0580	5.80	23.2					●
AQDEXZR0585	5.85	23.4					□
AQDEXZR0590	5.90	23.6					●
AQDEXZR0595	5.95	23.8					□

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZR0600	6.00	24.0	38	70	31		●
AQDEXZR0605	6.05	24.2					□
AQDEXZR0610	6.10	24.4					●
AQDEXZR0615	6.15	24.6	40		44		□
AQDEXZR0620	6.20	24.8					●
AQDEXZR0625	6.25	25.0					□
AQDEXZR0630	6.30	25.2					●
AQDEXZR0635	6.35	25.4					□
AQDEXZR0640	6.40	25.6					●
AQDEXZR0645	6.45	25.8	42	85	42		□
AQDEXZR0650	6.50	26.0					●
AQDEXZR0655	6.55	26.2					□
AQDEXZR0660	6.60	26.4					●
AQDEXZR0665	6.65	26.6					□
AQDEXZR0670	6.70	26.8	44		40		●
AQDEXZR0675	6.75	27.0					□
AQDEXZR0680	6.80	27.2					●
AQDEXZR0685	6.85	27.4					□
AQDEXZR0690	6.90	27.6					●
AQDEXZR0695	6.95	27.8					□
AQDEXZR0700	7.00	28.0				6	●
AQDEXZR0705	7.05	28.2					□
AQDEXZR0710	7.10	28.4	46		43		●
AQDEXZR0715	7.15	28.6					□
AQDEXZR0720	7.20	28.8					●
AQDEXZR0725	7.25	29.0					□
AQDEXZR0730	7.30	29.2					●
AQDEXZR0735	7.35	29.4					□
AQDEXZR0740	7.40	29.6					●
AQDEXZR0745	7.45	29.8	48	90	41		□
AQDEXZR0750	7.50	30.0					●
AQDEXZR0755	7.55	30.2					□
AQDEXZR0760	7.60	30.4					●
AQDEXZR0765	7.65	30.6					□
AQDEXZR0770	7.70	30.8					●
AQDEXZR0775	7.75	31.0					□
AQDEXZR0780	7.80	31.2	51		38		●
AQDEXZR0785	7.85	31.4					□
AQDEXZR0790	7.90	31.6					●
AQDEXZR0795	7.95	31.8					□
AQDEXZR0800	8.00	32.0					●
AQDEXZR0805	8.05	32.2					□
AQDEXZR0810	8.10	32.4					●
AQDEXZR0815	8.15	32.6	52		47		□
AQDEXZR0820	8.20	32.8					●
AQDEXZR0825	8.25	33.0					□
AQDEXZR0830	8.30	33.2					●
AQDEXZR0835	8.35	33.4					□
AQDEXZR0840	8.40	33.6					●
AQDEXZR0845	8.45	33.8					□
AQDEXZR0850	8.50	34.0	54	100	45	8	●
AQDEXZR0855	8.55	34.2					□
AQDEXZR0860	8.60	34.4					●
AQDEXZR0865	8.65	34.6					□
AQDEXZR0870	8.70	34.8					●
AQDEXZR0875	8.75	35.0	56		43		□
AQDEXZR0880	8.80	35.2					●
AQDEXZR0885	8.85	35.4					□
AQDEXZR0890	8.90	35.6					●
AQDEXZR0895	8.95	35.8	58		41		□

Next Page 下一页 ➡

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DO/MMS	在庫 Stock
AQDEXZR0900	9.00	36.0	58		41	8	●
AQDEXZR0905	9.05	36.2	59		40		□
AQDEXZR0910	9.10	36.4					●
AQDEXZR0915	9.15	36.6					□
AQDEXZR0920	9.20	36.8		61		100	38
AQDEXZR0925	9.25	37.0	□				
AQDEXZR0930	9.30	37.2	●				
AQDEXZR0935	9.35	37.4	□				
AQDEXZR0940	9.40	37.6	63	100	36	●	
AQDEXZR0945	9.45	37.8				□	
AQDEXZR0950	9.50	38.0				●	
AQDEXZR0955	9.55	38.2				□	
AQDEXZR0960	9.60	38.4	63	100	36	●	
AQDEXZR0965	9.65	38.6				□	
AQDEXZR0970	9.70	38.8				●	
AQDEXZR0975	9.75	39.0				□	
AQDEXZR0980	9.80	39.2	63	100	36	●	
AQDEXZR0985	9.85	39.4				□	
AQDEXZR0990	9.90	39.6				●	
AQDEXZR0995	9.95	39.8				□	
AQDEXZR1000	10.00	40.0	65	110	45	10	●
AQDEXZR1010	10.10	40.4			44		
AQDEXZR1020	10.20	40.8					
AQDEXZR1030	10.30	41.2					
AQDEXZR1040	10.40	41.6	67	110		42	10
AQDEXZR1050	10.50	42.0					
AQDEXZR1060	10.60	42.4					
AQDEXZR1070	10.70	42.8					
AQDEXZR1080	10.80	43.2	69	110	40	10	●
AQDEXZR1090	10.90	43.6					
AQDEXZR1100	11.00	44.0					
AQDEXZR1110	11.10	44.4					
AQDEXZR1120	11.20	44.8	71	115	43	10	●
AQDEXZR1130	11.30	45.2					
AQDEXZR1140	11.40	45.6					
AQDEXZR1150	11.50	46.0					
AQDEXZR1160	11.60	46.4	73	115	41	10	●
AQDEXZR1170	11.70	46.8					
AQDEXZR1180	11.80	47.2					
AQDEXZR1190	11.90	47.6					
AQDEXZR1200	12.00	48.0	76	115	38	10	●
AQDEXZR1210	12.10	48.4					
AQDEXZR1220	12.20	48.8					
AQDEXZR1230	12.30	49.2					
AQDEXZR1240	12.40	49.6	78	125	46	12	●
AQDEXZR1250	12.50	50.0					
AQDEXZR1260	12.60	50.4					
AQDEXZR1270	12.70	50.8					
AQDEXZR1280	12.80	51.2	80	125	44	12	●
AQDEXZR1290	12.90	51.6					
AQDEXZR1300	13.00	52.0					
AQDEXZR1310	13.10	52.4					
AQDEXZR1320	13.20	52.8	82	130	47	12	●
AQDEXZR1330	13.30	53.2					
AQDEXZR1340	13.40	53.6					
AQDEXZR1350	13.50	54.0					
AQDEXZR1360	13.60	54.4	84	130	43	12	●
AQDEXZR1370	13.70	54.8					
AQDEXZR1380	13.80	55.2					
AQDEXZR1390	13.90	55.6					


单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DO/MMS	在庫 Stock
AQDEXZR1400	14.00	56.0	88	135	46	12	●
AQDEXZR1410	14.10	56.4	90		44		
AQDEXZR1420	14.20	56.8					
AQDEXZR1430	14.30	57.2					
AQDEXZR1440	14.40	57.6					
AQDEXZR1450	14.50	58.0	92		42		
AQDEXZR1460	14.60	58.4					
AQDEXZR1470	14.70	58.8					
AQDEXZR1480	14.80	59.2					
AQDEXZR1490	14.90	59.6	94	40			
AQDEXZR1500	15.00	60.0					
AQDEXZR1510	15.10	60.4	95	49			
AQDEXZR1520	15.20	60.8					
AQDEXZR1530	15.30	61.2	97	47			
AQDEXZR1540	15.40	61.6					
AQDEXZR1550	15.50	62.0	98	46			
AQDEXZR1560	15.60	62.4					
AQDEXZR1570	15.70	62.8	101	43			
AQDEXZR1580	15.80	63.2					
AQDEXZR1590	15.90	63.6					
AQDEXZR1600	16.00	64.0					
AQDEXZR1650	16.50	66.0	105	160	56	16	
AQDEXZR1700	17.00	68.0	108	54			
AQDEXZR1750	17.50	70.0	111	56			
AQDEXZR1800	18.00	72.0	113	53			
AQDEXZR1850	18.50	74.0	118	61			
AQDEXZR1900	19.00	76.0	120	56			
AQDEXZR1950	19.50	78.0	124	64			
AQDEXZR2000	20.00	80.0	126	185	60		
				195	66	20	

必须有定心孔或导向孔。



定心孔
定心孔径应比钻头直径大
0.5mm 以上。




导向孔
导向孔也应比钻头直径
大 0.1mm 左右。

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	◎	—	◎	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 开孔性能良好，可加工钻颈长的 10D 孔深的平头钻。
- 推荐预先进行定心孔加工。

Flat type drill bits have great performance drilling holes to 10 x diameter under head length. We recommend drilling a centering hole in advance.

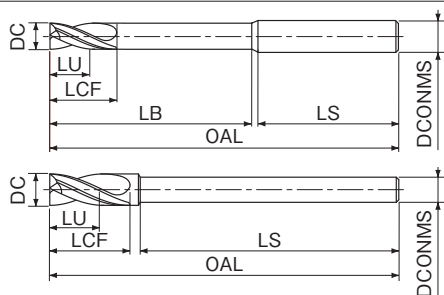


LIST 9816

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	径长 LB	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZLS0300	3.0	6.0	14		29	68		
AQDEXZLS0310	3.1	6.2			31			
AQDEXZLS0320	3.2	6.4	15		32	66		
AQDEXZLS0330	3.3	6.6			34	64		
AQDEXZLS0340	3.4	6.8						
AQDEXZLS0350	3.5	7.0	16		36	62		
AQDEXZLS0360	3.6	7.2						
AQDEXZLS0370	3.7	7.4			37	61		
AQDEXZLS0380	3.8	7.6						
AQDEXZLS0390	3.9	7.8	18		39	59		
AQDEXZLS0400	4.0	8.0						
AQDEXZLS0410	4.1	8.2			41	57		
AQDEXZLS0420	4.2	8.4	19					
AQDEXZLS0430	4.3	8.6			43	55		
AQDEXZLS0440	4.4	8.8			44			
AQDEXZLS0450	4.5	9.0	21		46	53		
AQDEXZLS0460	4.6	9.2						
AQDEXZLS0470	4.7	9.4			49	50		
AQDEXZLS0480	4.8	9.6	22		48	51		
AQDEXZLS0490	4.9	9.8						
AQDEXZLS0500	5.0	10.0	23		49	60		
AQDEXZLS0510	5.1	10.2						
AQDEXZLS0520	5.2	10.4	24		52	57		
AQDEXZLS0530	5.3	10.6						
AQDEXZLS0540	5.4	10.8			55	54		
AQDEXZLS0550	5.5	11.0	25		56			
AQDEXZLS0560	5.6	11.2						
AQDEXZLS0570	5.7	11.4			59	51		
AQDEXZLS0580	5.8	11.6	27					
AQDEXZLS0590	5.9	11.8			60	60		
AQDEXZLS0600	6.0	12.0						
AQDEXZLS0610	6.1	12.2						
AQDEXZLS0620	6.2	12.4	28			90		
AQDEXZLS0630	6.3	12.6						
AQDEXZLS0640	6.4	12.8				88		
AQDEXZLS0650	6.5	13.0	30					
AQDEXZLS0660	6.6	13.2						
AQDEXZLS0670	6.7	13.4				87		
AQDEXZLS0680	6.8	13.6	31					
AQDEXZLS0690	6.9	13.8						
AQDEXZLS0700	7.0	14.0	32			86		
AQDEXZLS0710	7.1	14.2						
AQDEXZLS0720	7.2	14.4				85		
AQDEXZLS0730	7.3	14.6	33					
AQDEXZLS0740	7.4	14.8						
AQDEXZLS0750	7.5	15.0				84		
AQDEXZLS0760	7.6	15.2	34					
AQDEXZLS0770	7.7	15.4						
AQDEXZLS0780	7.8	15.6				82		
AQDEXZLS0790	7.9	15.8	36					
AQDEXZLS0800	8.0	16.0						
AQDEXZLS0810	8.1	16.2			80	50		
AQDEXZLS0820	8.2	16.4	37			91		
AQDEXZLS0830	8.3	16.6						
AQDEXZLS0840	8.4	16.8						
AQDEXZLS0850	8.5	17.0	39			89		
AQDEXZLS0860	8.6	17.2						
AQDEXZLS0870	8.7	17.4						
AQDEXZLS0880	8.8	17.6	40			88		
AQDEXZLS0890	8.9	17.8						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	径长 LB	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZLS0900	9.0	18.0	41			87		
AQDEXZLS0910	9.1	18.2						
AQDEXZLS0920	9.2	18.4	42			86		
AQDEXZLS0930	9.3	18.6						
AQDEXZLS0940	9.4	18.8						
AQDEXZLS0950	9.5	19.0	43	130	—	85	8	
AQDEXZLS0960	9.6	19.2						
AQDEXZLS0970	9.7	19.4						
AQDEXZLS0980	9.8	19.6	45			83		
AQDEXZLS0990	9.9	19.8						
AQDEXZLS1000	10.0	20.0			100	50		
AQDEXZLS1010	10.1	20.2						
AQDEXZLS1020	10.2	20.4	46			102		
AQDEXZLS1030	10.3	20.6						
AQDEXZLS1040	10.4	20.8				100		
AQDEXZLS1050	10.5	21.0	48					
AQDEXZLS1060	10.6	21.2						
AQDEXZLS1070	10.7	21.4				99		
AQDEXZLS1080	10.8	21.6	49					
AQDEXZLS1090	10.9	21.8						
AQDEXZLS1100	11.0	22.0	50	150	—	98	10	
AQDEXZLS1110	11.1	22.2						
AQDEXZLS1120	11.2	22.4	51			97		
AQDEXZLS1130	11.3	22.6						
AQDEXZLS1140	11.4	22.8						
AQDEXZLS1150	11.5	23.0	52			96		
AQDEXZLS1160	11.6	23.2						
AQDEXZLS1170	11.7	23.4				94		
AQDEXZLS1180	11.8	23.6	54					
AQDEXZLS1190	11.9	23.8						
AQDEXZLS1200	12.0	24.0						
AQDEXZLS1250	12.5	25.0	57	170	120	50		
AQDEXZLS1300	13.0	26.0	59			111		
AQDEXZLS1350	13.5	27.0	61	180		119		
AQDEXZLS1400	14.0	28.0	63			117		
AQDEXZLS1450	14.5	29.0	66	190	—	125	12	
AQDEXZLS1500	15.0	30.0	67			122		
AQDEXZLS1550	15.5	31.0	70	200		131		
AQDEXZLS1600	16.0	32.0	72			128		
AQDEXZLS1650	16.5	33.0	75			60		
AQDEXZLS1700	17.0	34.0	77	220	160	143		
AQDEXZLS1750	17.5	35.0	79			141		
AQDEXZLS1800	18.0	36.0	81			139		
AQDEXZLS1850	18.5	37.0	84	240	—	157	16	
AQDEXZLS1900	19.0	38.0	86			154		
AQDEXZLS1950	19.5	39.0	88	250		162		
AQDEXZLS2000	20.0	40.0	90			160		



定心孔直径应比钻头直径大 0.5mm 以上。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQDEXZOH3D

AQUA EX 油孔平头钻 3D

AQUA Drills EX FLAT Oil-Hole 3D

切削条件 Cutting Condition ▶ A-165

Carbide
工具材料

AQ
EX
涂层

h7
直径公差

180°
先端角

24°
~30°
螺旋角


h6
柄直径公差

1.0-16.0
直径范围

●可进行孔深达 3D 的高效率平孔加工。

●本钻头可用于不锈钢加工。

High performance flat drilling up to 3 x drill diameter is possible.
Drill bit with oil hole for drilling Stainless Steel.

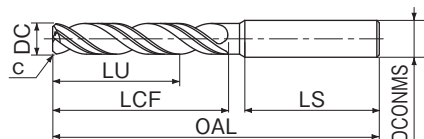

LIST 9812

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZOH3D0100	1.0	3.0	4.3	55	46.7		
AQDEXZOH3D0110	1.1	3.3	4.7		49.5		
AQDEXZOH3D0120	1.2	3.6	5.2		49.1		
AQDEXZOH3D0130	1.3	3.9	5.6		48.9		
AQDEXZOH3D0140	1.4	4.2	6.0		48.7		
AQDEXZOH3D0150	1.5	4.5	6.5		48.4		
AQDEXZOH3D0160	1.6	4.8	6.9	58	48.2		
AQDEXZOH3D0170	1.7	5.1	7.3		48.0		
AQDEXZOH3D0180	1.8	5.4	7.7		47.8		
AQDEXZOH3D0190	1.9	5.7	8.2		47.4		
AQDEXZOH3D0200	2.0	6.0	8.6		47.2	3	
AQDEXZOH3D0210	2.1	6.3	9.0		51.0		
AQDEXZOH3D0220	2.2	6.6	9.5		50.7		
AQDEXZOH3D0230	2.3	6.9	9.9	62	50.5		
AQDEXZOH3D0240	2.4	7.2	10.3		50.3		
AQDEXZOH3D0250	2.5	7.5	10.8		50.0		
AQDEXZOH3D0260	2.6	7.8	11.2		55.8		
AQDEXZOH3D0270	2.7	8.1	11.6		55.5		
AQDEXZOH3D0280	2.8	8.4	12.0	68	55.3		
AQDEXZOH3D0290	2.9	8.7	12.5		54.9		
AQDEXZOH3D0300	3.0	9.0	14.0		53.0		
AQDEXZOH3D0310	3.1	9.3					
AQDEXZOH3D0320	3.2	9.6	15.0				
AQDEXZOH3D0330	3.3	9.9			54.0		
AQDEXZOH3D0340	3.4	10.2					
AQDEXZOH3D0350	3.5	10.5		72		4	
AQDEXZOH3D0360	3.6	10.8					
AQDEXZOH3D0370	3.7	11.1			53.0		
AQDEXZOH3D0380	3.8	11.4					
AQDEXZOH3D0390	3.9	11.7	18.0				
AQDEXZOH3D0400	4.0	12.0					
AQDEXZOH3D0410	4.1	12.3					
AQDEXZOH3D0420	4.2	12.6	19.0				
AQDEXZOH3D0430	4.3	12.9			57.0		
AQDEXZOH3D0440	4.4	13.2					
AQDEXZOH3D0450	4.5	13.5					
AQDEXZOH3D0460	4.6	13.8		80		5	
AQDEXZOH3D0470	4.7	14.1					
AQDEXZOH3D0480	4.8	14.4	22.0		56.0		
AQDEXZOH3D0490	4.9	14.7					
AQDEXZOH3D0500	5.0	15.0	23.0				
AQDEXZOH3D0510	5.1	15.3					
AQDEXZOH3D0520	5.2	15.6	24.0				
AQDEXZOH3D0530	5.3	15.9			55.0		
AQDEXZOH3D0540	5.4	16.2					
AQDEXZOH3D0550	5.5	16.5		82		6	
AQDEXZOH3D0560	5.6	16.8					
AQDEXZOH3D0570	5.7	17.1					
AQDEXZOH3D0580	5.8	17.4			54.0		
AQDEXZOH3D0590	5.9	17.7	27.0				
AQDEXZOH3D0600	6.0	18.0					
AQDEXZOH3D0610	6.1	18.3					
AQDEXZOH3D0620	6.2	18.6					
AQDEXZOH3D0630	6.3	18.9	28.0		56.0		
AQDEXZOH3D0640	6.4	19.2					
AQDEXZOH3D0650	6.5	19.5		88		7	
AQDEXZOH3D0660	6.6	19.8					
AQDEXZOH3D0670	6.7	20.1					
AQDEXZOH3D0680	6.8	20.4	31.0		55.0		
AQDEXZOH3D0690	6.9	20.7					
AQDEXZOH3D0700	7.0	21.0	32.0				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZOH3D0710	7.1	21.3					
AQDEXZOH3D0720	7.2	21.6	33.0				
AQDEXZOH3D0730	7.3	21.9			58.0	8	
AQDEXZOH3D0740	7.4	22.2					
AQDEXZOH3D0750	7.5	22.5	34.0				
AQDEXZOH3D0760	7.6	22.8					
AQDEXZOH3D0770	7.7	23.1			57.0		
AQDEXZOH3D0780	7.8	23.4					
AQDEXZOH3D0790	7.9	23.7	36.0				
AQDEXZOH3D0800	8.0	24.0					
AQDEXZOH3D0810	8.1	24.3					
AQDEXZOH3D0820	8.2	24.6	37.0				
AQDEXZOH3D0830	8.3	24.9			59.0	9	
AQDEXZOH3D0840	8.4	25.2					
AQDEXZOH3D0850	8.5	25.5					
AQDEXZOH3D0860	8.6	25.8	39.0				
AQDEXZOH3D0870	8.7	26.1			58.0		
AQDEXZOH3D0880	8.8	26.4	40.0				
AQDEXZOH3D0890	8.9	26.7					
AQDEXZOH3D0900	9.0	27.0	41.0				
AQDEXZOH3D0910	9.1	27.3					
AQDEXZOH3D0920	9.2	27.6	42.0				
AQDEXZOH3D0930	9.3	27.9			61.0	10	
AQDEXZOH3D0940	9.4	28.2					
AQDEXZOH3D0950	9.5	28.5	43.0				
AQDEXZOH3D0960	9.6	28.8					
AQDEXZOH3D0970	9.7	29.1					
AQDEXZOH3D0980	9.8	29.4			60.0		
AQDEXZOH3D0990	9.9	29.7	45.0				
AQDEXZOH3D1000	10.0	30.0					
AQDEXZOH3D1010	10.1	30.3					
AQDEXZOH3D1020	10.2	30.6	46.0				
AQDEXZOH3D1030	10.3	30.9			66.0	11	
AQDEXZOH3D1040	10.4	31.2					
AQDEXZOH3D1050	10.5	31.5					
AQDEXZOH3D1060	10.6	31.8	48.0				
AQDEXZOH3D1070	10.7	32.1					
AQDEXZOH3D1080	10.8	32.4			65.0		
AQDEXZOH3D1090	10.9	32.7	49.0				
AQDEXZOH3D1100	11.0	33.0	50.0				
AQDEXZOH3D1110	11.1	33.3					
AQDEXZOH3D1120	11.2	33.6	51.0				
AQDEXZOH3D1130	11.3	33.9			68.0	12	
AQDEXZOH3D1140	11.4	34.2					
AQDEXZOH3D1150	11.5	34.5	52.0				
AQDEXZOH3D1160	11.6	34.8					
AQDEXZOH3D1170	11.7	35.1			67.0		
AQDEXZOH3D1180	11.8	35.4					
AQDEXZOH3D1190	11.9	35.7	54.0				
AQDEXZOH3D1200	12.0	36.0					
AQDEXZOH3D1250	12.5	37.5	57.0		69.0	13	
AQDEXZOH3D1300	13.0	39.0	59.0		68.0		
AQDEXZOH3D1350	13.5	40.5	61.0		71.0	14	
AQDEXZOH3D1400	14.0	42.0	63.0		70.0		
AQDEXZOH3D1450	14.5	43.5	66.0		72.0	15	
AQDEXZOH3D1500	15.0	45.0	68.0		71.0		
AQDEXZOH3D1550	15.5	46.5	70.0		74.0	16	
AQDEXZOH3D1600	16.0	48.0	72.0		73.0		

直径 DC (mm)	倒角量 C (mm)
超过 Above	以下 Up to
6.0	0.04
6.0	10.0
10.0	0.10
	0.20

AQDEXZOH5D

AQUA EX 油孔平头钻 5D

AQUA Drills EX FLAT Oil-Hole 5D

切削条件 Cutting Condition ▶ A-166



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差


直径范围

直径范围

直径范围

- 可进行孔深达 5D 的高效率平孔加工。
- 必须有定心孔或导向孔。

High performance flat drilling up to 5x drill diameter is possible.
A centering hole or guide hole is necessary.

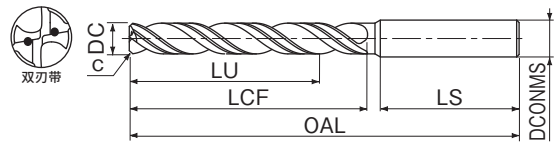

新商品

LIST 9814

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZOH5D0100	1.0	5.0	6.3	57	46.7		
AQDEXZOH5D0110	1.1	5.5	6.9		49.2		
AQDEXZOH5D0120	1.2	6.0	7.6		48.8		
AQDEXZOH5D0130	1.3	6.5	8.2		48.3		
AQDEXZOH5D0140	1.4	7.0	8.8		47.9		
AQDEXZOH5D0150	1.5	7.5	9.5		47.5		
AQDEXZOH5D0160	1.6	8.0	10.1		47.0		
AQDEXZOH5D0170	1.7	8.5	10.7		46.6		
AQDEXZOH5D0180	1.8	9.0	11.3		46.1		
AQDEXZOH5D0190	1.9	9.5	12.0		45.7		
AQDEXZOH5D0200	2.0	10.0	12.6		45.2	3	
AQDEXZOH5D0210	2.1	10.5	13.2		44.8		
AQDEXZOH5D0220	2.2	11.0	13.9		44.3		
AQDEXZOH5D0230	2.3	11.5	14.5		43.9		
AQDEXZOH5D0240	2.4	12.0	15.1		43.5		
AQDEXZOH5D0250	2.5	12.5	15.8		43.0		
AQDEXZOH5D0260	2.6	13.0	16.4		56.6		
AQDEXZOH5D0270	2.7	13.5	17.0		56.1		
AQDEXZOH5D0280	2.8	14.0	17.6		55.7		
AQDEXZOH5D0290	2.9	14.5	18.3		55.2		
AQDEXZOH5D0300	3.0	15.0	20.0		53.0		
AQDEXZOH5D0310	3.1	15.5					
AQDEXZOH5D0320	3.2	16.0					
AQDEXZOH5D0330	3.3	16.5					
AQDEXZOH5D0340	3.4	17.0					
AQDEXZOH5D0350	3.5	17.5					
AQDEXZOH5D0360	3.6	18.0					
AQDEXZOH5D0370	3.7	18.5					
AQDEXZOH5D0380	3.8	19.0					
AQDEXZOH5D0390	3.9	19.5					
AQDEXZOH5D0400	4.0	20.0					
AQDEXZOH5D0410	4.1	20.5					
AQDEXZOH5D0420	4.2	21.0					
AQDEXZOH5D0430	4.3	21.5					
AQDEXZOH5D0440	4.4	22.0					
AQDEXZOH5D0450	4.5	22.5					
AQDEXZOH5D0460	4.6	23.0					
AQDEXZOH5D0470	4.7	23.5					
AQDEXZOH5D0480	4.8	24.0					
AQDEXZOH5D0490	4.9	24.5					
AQDEXZOH5D0500	5.0	25.0					
AQDEXZOH5D0510	5.1	25.5					
AQDEXZOH5D0520	5.2	26.0					
AQDEXZOH5D0530	5.3	26.5					
AQDEXZOH5D0540	5.4	27.0					
AQDEXZOH5D0550	5.5	27.5					
AQDEXZOH5D0560	5.6	28.0					
AQDEXZOH5D0570	5.7	28.5					
AQDEXZOH5D0580	5.8	29.0					
AQDEXZOH5D0590	5.9	29.5					
AQDEXZOH5D0600	6.0	30.0					
AQDEXZOH5D0610	6.1	30.5					
AQDEXZOH5D0620	6.2	31.0					
AQDEXZOH5D0630	6.3	31.5					
AQDEXZOH5D0640	6.4	32.0					
AQDEXZOH5D0650	6.5	32.5					
AQDEXZOH5D0660	6.6	33.0					
AQDEXZOH5D0670	6.7	33.5					
AQDEXZOH5D0680	6.8	34.0					
AQDEXZOH5D0690	6.9	34.5					
AQDEXZOH5D0700	7.0	35.0					

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
AQDEXZOH5D0710	7.1	35.5					
AQDEXZOH5D0720	7.2	36.0					
AQDEXZOH5D0730	7.3	36.5					
AQDEXZOH5D0740	7.4	37.0					
AQDEXZOH5D0750	7.5	37.5					
AQDEXZOH5D0760	7.6	38.0					
AQDEXZOH5D0770	7.7	38.5					
AQDEXZOH5D0780	7.8	39.0					
AQDEXZOH5D0790	7.9	39.5					
AQDEXZOH5D0800	8.0	40.0					
AQDEXZOH5D0810	8.1	40.5					
AQDEXZOH5D0820	8.2	41.0					
AQDEXZOH5D0830	8.3	41.5					
AQDEXZOH5D0840	8.4	42.0					
AQDEXZOH5D0850	8.5	42.5					
AQDEXZOH5D0860	8.6	43.0					
AQDEXZOH5D0870	8.7	43.5					
AQDEXZOH5D0880	8.8	44.0					
AQDEXZOH5D0890	8.9	44.5					
AQDEXZOH5D0900	9.0	45.0					
AQDEXZOH5D0910	9.1	45.5					
AQDEXZOH5D0920	9.2	46.0					
AQDEXZOH5D0930	9.3	46.5					
AQDEXZOH5D0940	9.4	47.0					
AQDEXZOH5D0950	9.5	47.5					
AQDEXZOH5D0960	9.6	48.0					
AQDEXZOH5D0970	9.7	48.5					
AQDEXZOH5D0980	9.8	49.0					
AQDEXZOH5D0990	9.9	49.5					
AQDEXZOH5D1000	10.0	50.0					
AQDEXZOH5D1010	10.1	50.5					
AQDEXZOH5D1020	10.2	51.0					
AQDEXZOH5D1030	10.3	51.5					
AQDEXZOH5D1040	10.4	52.0					
AQDEXZOH5D1050	10.5	52.5					
AQDEXZOH5D1060	10.6	53.0					
AQDEXZOH5D1070	10.7	53.5					
AQDEXZOH5D1080	10.8	54.0					
AQDEXZOH5D1090	10.9	54.5					
AQDEXZOH5D1100	11.0	55.0					
AQDEXZOH5D1110	11.1	55.5					
AQDEXZOH5D1120	11.2	56.0					
AQDEXZOH5D1130	11.3	56.5					
AQDEXZOH5D1140	11.4	57.0					
AQDEXZOH5D1150	11.5	57.5					
AQDEXZOH5D1160	11.6	58.0					
AQDEXZOH5D1170	11.7	58.5					
AQDEXZOH5D1180	11.8	59.0					
AQDEXZOH5D1190	11.9	59.5					
AQDEXZOH5D1200	12.0	60.0					
AQDEXZOH5D1250	12.5	62.5					
AQDEXZOH5D1300	13.0	65.0					
AQDEXZOH5D1350	13.5	67.5					
AQDEXZOH5D1400	14.0	70.0					
AQDEXZOH5D1450	14.5	72.5					
AQDEXZOH5D1500	15.0	75.0					
AQDEXZOH5D1550	15.5	77.5					
AQDEXZOH5D1600	16.0	80.0					

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQDEXZ3FR

AQUA EX 3 刃标准型平头钻

AQUA Drills EX FLAT 3 Flutes Regular

切削条件 Cutting Condition ▶▶▶A-166

Carbide
工具材料

AQ
EX
涂层

js6
直径公差

180°
先端角


30°
螺旋角

h6
柄直径公差

3.0-12.0
直径范围

- 适合铸孔、沉孔的高精度加工。
- 位置矫正性能出色，可以进行钻头直径 5D 用加工。

For highly accurate cored opening and counter boring.
Realize under 5D drilling by accurate alignment.

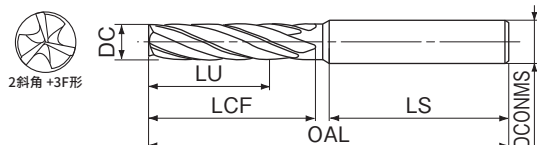

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	在庫 Stock
AQDEXZ3FR0300	3.0	15.0	19	28	49	3	
AQDEXZ3FR0310	3.1	15.5					
AQDEXZ3FR0320	3.2	16.0					
AQDEXZ3FR0330	3.3	16.5	24	34			
AQDEXZ3FR0340	3.4	17.0					
AQDEXZ3FR0350	3.5	17.5			60	4	
AQDEXZ3FR0360	3.6	18.0					
AQDEXZ3FR0370	3.7	18.5					
AQDEXZ3FR0380	3.8	19.0	27	31			
AQDEXZ3FR0390	3.9	19.5					
AQDEXZ3FR0400	4.0	20.0					
AQDEXZ3FR0410	4.1	20.5					
AQDEXZ3FR0420	4.2	21.0					
AQDEXZ3FR0430	4.3	21.5	31	43			
AQDEXZ3FR0440	4.4	22.0					
AQDEXZ3FR0450	4.5	22.5			76	5	
AQDEXZ3FR0460	4.6	23.0					
AQDEXZ3FR0470	4.7	23.5					
AQDEXZ3FR0480	4.8	24.0	38	36			
AQDEXZ3FR0490	4.9	24.5					
AQDEXZ3FR0500	5.0	25.0					
AQDEXZ3FR0510	5.1	25.5					
AQDEXZ3FR0520	5.2	26.0					
AQDEXZ3FR0530	5.3	26.5	39	40			
AQDEXZ3FR0540	5.4	27.0					
AQDEXZ3FR0550	5.5	27.5			81	6	
AQDEXZ3FR0560	5.6	28.0					
AQDEXZ3FR0570	5.7	28.5					
AQDEXZ3FR0580	5.8	29.0	41	38			
AQDEXZ3FR0590	5.9	29.5					
AQDEXZ3FR0600	6.0	30.0					
AQDEXZ3FR0610	6.1	30.5					
AQDEXZ3FR0620	6.2	31.0					
AQDEXZ3FR0630	6.3	31.5	42	39			
AQDEXZ3FR0640	6.4	32.0					
AQDEXZ3FR0650	6.5	32.5			83	7	
AQDEXZ3FR0660	6.6	33.0					
AQDEXZ3FR0670	6.7	33.5					
AQDEXZ3FR0680	6.8	34.0	43	38			
AQDEXZ3FR0690	6.9	34.5					
AQDEXZ3FR0700	7.0	35.0					
AQDEXZ3FR0710	7.1	35.5					
AQDEXZ3FR0720	7.2	36.0					
AQDEXZ3FR0730	7.3	36.5	45	43			
AQDEXZ3FR0740	7.4	37.0					
AQDEXZ3FR0750	7.5	37.5			90	8	
AQDEXZ3FR0760	7.6	38.0					
AQDEXZ3FR0770	7.7	38.5					
AQDEXZ3FR0780	7.8	39.0	48	40			
AQDEXZ3FR0790	7.9	39.5					
AQDEXZ3FR0800	8.0	40.0					
AQDEXZ3FR0810	8.1	40.5					
AQDEXZ3FR0820	8.2	41.0					
AQDEXZ3FR0830	8.3	41.5	53	43			
AQDEXZ3FR0840	8.4	42.0					
AQDEXZ3FR0850	8.5	42.5			98	9	
AQDEXZ3FR0860	8.6	43.0					
AQDEXZ3FR0870	8.7	43.5					
AQDEXZ3FR0880	8.8	44.0	55	41			
AQDEXZ3FR0890	8.9	44.5					

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	在庫 Stock
AQDEXZ3FR0900	9.0	45.0	55	41	98	9	
AQDEXZ3FR0910	9.1	45.5					
AQDEXZ3FR0920	9.2	46.0					
AQDEXZ3FR0930	9.3	46.5	58	45			
AQDEXZ3FR0940	9.4	47.0					
AQDEXZ3FR0950	9.5	47.5			105	10	
AQDEXZ3FR0960	9.6	48.0					
AQDEXZ3FR0970	9.7	48.5					
AQDEXZ3FR0980	9.8	49.0	60	43			
AQDEXZ3FR0990	9.9	49.5					
AQDEXZ3FR1000	10.0	50.0					
AQDEXZ3FR1010	10.1	50.5					
AQDEXZ3FR1020	10.2	51.0					
AQDEXZ3FR1030	10.3	51.5	66	46			
AQDEXZ3FR1040	10.4	52.0					
AQDEXZ3FR1050	10.5	52.5			114	11	
AQDEXZ3FR1060	10.6	53.0					
AQDEXZ3FR1070	10.7	53.5					
AQDEXZ3FR1080	10.8	54.0	68	44			
AQDEXZ3FR1090	10.9	54.5					
AQDEXZ3FR1100	11.0	55.0					
AQDEXZ3FR1110	11.1	55.5					
AQDEXZ3FR1120	11.2	56.0					
AQDEXZ3FR1130	11.3	56.5	71	48			
AQDEXZ3FR1140	11.4	57.0					
AQDEXZ3FR1150	11.5	57.5			121	12	
AQDEXZ3FR1160	11.6	58.0					
AQDEXZ3FR1170	11.7	58.5					
AQDEXZ3FR1180	11.8	59.0	73	46			
AQDEXZ3FR1190	11.9	59.5					
AQDEXZ3FR1200	12.0	60.0					

- 切入性良好，可进行高精度定位。
- 从定心到倒角、V 槽加工，功能多样。

High precision positioning with special thinning.
Multifunction from centering, chamfering and V-grooving.



LIST 9624

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	直径 DC	先端角 SIG	槽长 LCF	全长 OAL	先端径 D1	先端 PL	在庫 Stock
AQDEXST0300-60	3.0	60°	9	48	0.75	2.2	●
AQDEXST0400-60	4.0		12	52	1.00	2.9	
AQDEXST0500-60	5.0		14	60	1.25	3.6	
AQDEXST0600-60	6.0		15	66	1.50	4.3	
AQDEXST0800-60	8.0		20	79	2.00	5.8	
AQDEXST1000-60	10.0		25	89	2.50	7.2	
AQDEXST1200-60	12.0	90°	30	102	3.00	8.7	●
AQDEXST0300-90	3.0		9	48		1.5	
AQDEXST0400-90	4.0		12	52		2.0	
AQDEXST0500-90	5.0		14	60		2.5	
AQDEXST0600-90	6.0		15	66		3.0	
AQDEXST0700-90	7.0		17	72		3.5	
AQDEXST0800-90	8.0		20	79		4.0	
AQDEXST0900-90	9.0		22	84		4.5	
AQDEXST1000-90	10.0		25	89		5.0	
AQDEXST1100-90	11.0		27	95		5.5	
AQDEXST1200-90	12.0		30	102		6.0	
AQDEXST1300-90	13.0		32	105		6.5	
AQDEXST1400-90	14.0		33	108		7.0	
AQDEXST1500-90	15.0		34	111		7.5	
AQDEXST1600-90	16.0	120°	35	115		8.0	●
AQDEXST2000-90	20.0		40	131		10.0	
AQDEXST0300-120	3.0		9	48		0.9	
AQDEXST0400-120	4.0		12	52		1.2	
AQDEXST0500-120	5.0		14	60		1.4	
AQDEXST0600-120	6.0		15	66		1.7	
AQDEXST0800-120	8.0		20	79		2.3	
AQDEXST1000-120	10.0		25	89		2.9	
AQDEXST1200-120	12.0		30	102		3.5	
AQDEXST0300-140	3.0	140°	9	48		0.5	●
AQDEXST0400-140	4.0		12	52		0.7	
AQDEXST0500-140	5.0		14	60		0.9	
AQDEXST0600-140	6.0		15	66		1.1	
AQDEXST0800-140	8.0		20	79		1.5	
AQDEXST1000-140	10.0		25	89		1.8	
AQDEXST1200-140	12.0		30	102		2.2	


- 1) 先端角的公差为 ±2°。(先端角 90°的公差为 ±1°.)
2) 钻头直径与柄直径相同。
1) Tolerance of the centering angle is ±2° .
(Tolerance of the centering angle 90° is ±1° .)
2) Drill diameter and shank diameter is same size.



圆锥 +X形




圆锥 +X形



先端角90°、120°、140°时，
定心及V槽加工中将出现不完全倒角范围。


When centering, V-grooving at 90°,120°,140°, angle of tip is different from chamfer angle.




不完全倒角范围
DF

直径	DF
3.0	0.36Dc
4.0	0.32Dc
5.0以上	0.30Dc

定心的倒角角度选定 Selecting centering angle



先端角 ≤ 倒角角度
Drill point angle ≤ Centering angle



先端角 > 倒角角度
Drill point angle > Centering angle

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	○	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	—	◎	○	○


◎:优选 Excellent ○:适用 Good X:不适用 Not Used —:不推荐 Not recommended

AQDEXXOH5D

AQUA EX X 型油孔钻 铸铁用 5D

AQUA Drills EX Oil-Hole Cross for cast metal 5D


切削条件 Cutting Condition ▶▶▶A-151



●适合于铸铁和铝铸件等的孔与孔交叉的交叉孔加工。

Excellent for intersecting holes in cast metal, such as Aluminum Alloy Casting.

新商品

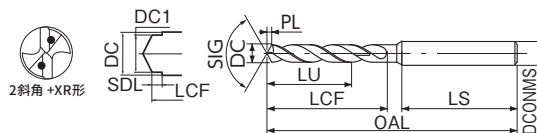

订货方式 商品编码

商品编码 Code	直径 DC	小直径 DC1	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	槽径公差 SD	柄径公差 DCONMS	先端 PL	在庫 Stock
AQDEXXOH5D0300	3.0	2.7	15.0	28.6	48.0	78.6		3		
AQDEXXOH5D0310	3.1	2.8	15.5	47.2						
AQDEXXOH5D0320	3.2	2.9	16.0	47.3		86.6	2.1	0.6		
AQDEXXOH5D0330	3.3	3.0	16.5	47.4						
AQDEXXOH5D0340	3.4	3.1	17.0	47.5						
AQDEXXOH5D0350	3.5	3.2	17.5	32.7	47.6			4		
AQDEXXOH5D0360	3.6	3.3	18.0		47.7					
AQDEXXOH5D0370	3.7	3.4	18.5	36.7	47.8	86.7	2.2	0.7		
AQDEXXOH5D0380	3.8	3.5	19.0		47.9					
AQDEXXOH5D0390	3.9	3.6	19.5		48.0	86.8				
AQDEXXOH5D0400	4.0	3.7	20.0	36.8	48.1					
AQDEXXOH5D0410	4.1	3.8	20.5		49.2					
AQDEXXOH5D0420	4.2	3.9	21.0		49.3	98.8	2.3	0.8		
AQDEXXOH5D0430	4.3	4.0	21.5	40.8	49.4					
AQDEXXOH5D0440	4.4	4.1	22.0		49.5					
AQDEXXOH5D0450	4.5	4.2	22.5	40.9	49.6					
AQDEXXOH5D0460	4.6	4.3	23.0		49.7	98.9	2.4	0.9		
AQDEXXOH5D0470	4.7	4.4	23.5	44.9	49.8					
AQDEXXOH5D0480	4.8	4.5	24.0		49.9					
AQDEXXOH5D0490	4.9	4.6	24.5		50.0	99.0	2.5			
AQDEXXOH5D0500	5.0	4.7	25.0		51.2					
AQDEXXOH5D0510	5.1		25.5		51.3	101.0	3.0	1.0		
AQDEXXOH5D0520	5.2	4.8	26.0		51.4					
AQDEXXOH5D0530	5.3	4.9	26.5		51.5					
AQDEXXOH5D0540	5.4	5.0	27.0		51.6					
AQDEXXOH5D0550	5.5	5.1	27.5	45.1	51.7	101.1	3.1	1.1		
AQDEXXOH5D0560	5.6	5.2	28.0		51.8					
AQDEXXOH5D0570	5.7	5.3	28.5	49.1	51.9					
AQDEXXOH5D0580	5.8	5.4	29.0		52.0	101.2				
AQDEXXOH5D0590	5.9	5.5	29.5		52.1					
AQDEXXOH5D0600	6.0	5.6	30.0	49.2	52.2					
AQDEXXOH5D0610	6.1	5.7	30.5		52.3	110.2	3.2	1.2		
AQDEXXOH5D0620	6.2	5.8	31.0	53.2	52.4					
AQDEXXOH5D0630	6.3	5.9	31.5		52.5					
AQDEXXOH5D0640	6.4	6.0	32.0		52.6					
AQDEXXOH5D0650	6.5	6.1	32.5	53.3	52.7					
AQDEXXOH5D0660	6.6	6.2	33.0		52.8	110.3	3.3	1.3		
AQDEXXOH5D0670	6.7	6.3	33.5	57.3	52.9					
AQDEXXOH5D0680	6.8	6.4	34.0		53.0	110.4				
AQDEXXOH5D0690	6.9	6.5	34.5		53.1					
AQDEXXOH5D0700	7.0	6.6	35.0	57.4	53.2					
AQDEXXOH5D0710	7.1	6.7	35.5		53.3					
AQDEXXOH5D0720	7.2	6.8	36.0		53.4	119.4	3.4	1.4		
AQDEXXOH5D0730	7.3	6.9	36.5	61.4	53.5					
AQDEXXOH5D0740	7.4	7.0	37.0		53.6					
AQDEXXOH5D0750	7.5	7.1	37.5	61.5	53.7					
AQDEXXOH5D0760	7.6	7.2	38.0		53.8	119.5	3.5	1.5		
AQDEXXOH5D0770	7.7	7.3	38.5	65.5	53.9					
AQDEXXOH5D0780	7.8	7.4	39.0		54.0					
AQDEXXOH5D0790	7.9	7.5	39.5		54.1	119.6	3.6			
AQDEXXOH5D0800	8.0	7.6	40.0	65.6	54.2					
AQDEXXOH5D0810	8.1		40.5		54.3					
AQDEXXOH5D0820	8.2	7.7	41.0		54.4	128.6	4.1	1.6		
AQDEXXOH5D0830	8.3	7.8	41.5	69.6	54.5					
AQDEXXOH5D0840	8.4	7.9	42.0		54.6					
AQDEXXOH5D0850	8.5	8.0	42.5	69.7	54.7					
AQDEXXOH5D0860	8.6	8.1	43.0		54.8	128.7	4.2	1.7		
AQDEXXOH5D0870	8.7	8.2	43.5	73.7	54.9					
AQDEXXOH5D0880	8.8	8.3	44.0							
AQDEXXOH5D0890	8.9	8.4	44.5							

单位 (Unit) : mm

商品编码 Code	直径 DC	小直径 DC1	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	槽径公差 SD	柄径公差 DCONMS	先端 PL	在庫 Stock
AQDEXXOH5D0900	9.0	8.5	45.0	73.8	55.0	128.8	4.3	9		
AQDEXXOH5D0910	9.1	8.6	45.5		55.2					
AQDEXXOH5D0920	9.2	8.7	46.0	77.8	55.3	137.8	4.3	1.8		
AQDEXXOH5D0930	9.3	8.8	46.5		55.4					
AQDEXXOH5D0940	9.4	8.9	47.0		55.5					
AQDEXXOH5D0950	9.5	9.0	47.5	77.9	55.6			10		
AQDEXXOH5D0960	9.6	9.1	48.0		55.7	137.9	4.4	1.9		
AQDEXXOH5D0970	9.7	9.2	48.5		55.8					
AQDEXXOH5D0980	9.8	9.3	49.0	81.9	55.9					
AQDEXXOH5D0990	9.9	9.4	49.5		56.0	138.0				
AQDEXXOH5D1000	10.0	9.5	50.0	82.0	56.1	151.0	4.5	2.0		
AQDEXXOH5D1010	10.1	9.6	50.5		56.2					
AQDEXXOH5D1020	10.2	9.7	51.0	86.0	56.3					
AQDEXXOH5D1030	10.3	9.8	51.5		56.4					
AQDEXXOH5D1040	10.4	9.9	52.0		56.5	151.1	4.6	2.1		
AQDEXXOH5D1050	10.5	10.0	52.5	86.1	56.6			11		
AQDEXXOH5D1060	10.6	10.1	53.0		56.7					
AQDEXXOH5D1070	10.7	10.2	53.5	90.1	56.8					
AQDEXXOH5D1080	10.8	10.3	54.0		56.9	151.2				
AQDEXXOH5D1090	10.9	10.4	54.5	90.2	57.0					
AQDEXXOH5D1100	11.0	10.5	55.0		57.1					
AQDEXXOH5D1110	11.1	10.6	55.5		57.2	160.2	4.7	2.2		
AQDEXXOH5D1120	11.2	10.7	56.0	94.2	57.3					
AQDEXXOH5D1130	11.3	10.8	56.5		57.4					
AQDEXXOH5D1140	11.4	10.9	57.0	94.3	57.5	160.3	4.8	2.3		
AQDEXXOH5D1150	11.5	11.0	57.5		57.6					
AQDEXXOH5D1160	11.6	11.1	58.0		57.7	160.4	4.9	2.4		
AQDEXXOH5D1170	11.7	11.2	58.5	98.3	57.8					
AQDEXXOH5D1180	11.8	11.3	59.0		57.9					
AQDEXXOH5D1190	11.9	11.4	59.5	98.4	58.0					
AQDEXXOH5D1200	12.0	11.5	60.0		58.1					

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65 HRC
—	—	—	—	—	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	◎	◎*	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

*仅限铝合金铸件 Only for Aluminum Alloy Casting



抑制交叉孔毛刺的二段切入形状

AQDEXXOH10D

AQUA EX X 型油孔钻 铸铁用 10D

AQUA Drills EX Oil-Hole Cross for cast metal 10D

切削条件 Cutting Condition ▶▶A-151

Carbide
工具材料

AQ
EX
涂层

h7
直径公差

135°
先端角


24°
~30°
螺旋角

h6
柄直径公差

3.0-12.0
直径范围

●适合于铸铁和铝铸件等的孔与孔交叉的交叉孔加工。

Excellent for intersecting holes in cast metal, such as Aluminum Alloy Casting.

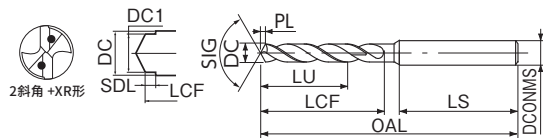

新商品

订货方式 商品编码

商品编码 Code	直径 DC	小直径 DC1	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	槽深 SDL	槽宽 CONMS	先端 PL	在庫 Stock
AQDEXXOH10D0300	3.0	2.7	30.0	39.6	48.0	90.6		3		
AQDEXXOH10D0310	3.1	2.8	31.0	44.6	47.2		2.1	0.6		
AQDEXXOH10D0320	3.2	2.9	32.0	47.4	47.3	100.6				
AQDEXXOH10D0330	3.3	3.0	33.0	47.4	47.5					
AQDEXXOH10D0340	3.4	3.1	34.0	45.6	47.5					
AQDEXXOH10D0350	3.5	3.2	35.0	45.7	47.6			4		
AQDEXXOH10D0360	3.6	3.3	36.0	51.7	47.7	100.7	2.2	0.7		
AQDEXXOH10D0370	3.7	3.4	37.0	52.7	47.8					
AQDEXXOH10D0380	3.8	3.5	38.0	52.7	47.9					
AQDEXXOH10D0390	3.9	3.6	39.0	52.8	48.0	100.8				
AQDEXXOH10D0400	4.0	3.7	40.0	52.8	48.0					
AQDEXXOH10D0410	4.1	3.8	41.0	57.8	49.2		2.3	0.8		
AQDEXXOH10D0420	4.2	3.9	42.0	57.8	49.3	115.8				
AQDEXXOH10D0430	4.3	4.0	43.0	58.8	49.4					
AQDEXXOH10D0440	4.4	4.1	44.0	58.9	49.5					
AQDEXXOH10D0450	4.5	4.2	45.0	58.9	49.6					
AQDEXXOH10D0460	4.6	4.3	46.0	64.9	49.7	115.9	2.4	0.9		
AQDEXXOH10D0470	4.7	4.4	47.0	65.9	49.8					
AQDEXXOH10D0480	4.8	4.5	48.0	66.0	49.9	116.0	2.5			
AQDEXXOH10D0490	4.9	4.6	49.0	66.0	50.0					
AQDEXXOH10D0500	5.0	4.7	50.0	71.0	51.2					
AQDEXXOH10D0510	5.1	4.8	51.0	71.0	51.3	131.0	3.0	1.0		
AQDEXXOH10D0520	5.2	4.8	52.0	72.0	51.4					
AQDEXXOH10D0530	5.3	4.9	53.0	72.0	51.5					
AQDEXXOH10D0540	5.4	5.0	54.0	72.1	51.6			6		
AQDEXXOH10D0550	5.5	5.1	55.0	78.1	51.7	131.1	3.1	1.1		
AQDEXXOH10D0560	5.6	5.2	56.0	79.1	51.8					
AQDEXXOH10D0570	5.7	5.3	57.0	79.1	51.9					
AQDEXXOH10D0580	5.8	5.4	58.0	79.2	52.0	131.2				
AQDEXXOH10D0590	5.9	5.5	59.0	84.2	52.3		3.2	1.2		
AQDEXXOH10D0600	6.0	5.6	60.0	85.2	52.4	146.2				
AQDEXXOH10D0610	6.1	5.7	61.0	85.2	52.5					
AQDEXXOH10D0620	6.2	5.8	62.0	85.3	52.6					
AQDEXXOH10D0630	6.3	5.9	63.0	91.3	52.7	146.3	3.3	1.3		
AQDEXXOH10D0640	6.4	6.0	64.0	92.3	52.8					
AQDEXXOH10D0650	6.5	6.1	65.0	92.3	52.9					
AQDEXXOH10D0660	6.6	6.2	66.0	92.4	53.0	146.4				
AQDEXXOH10D0670	6.7	6.3	67.0	97.4	53.2					
AQDEXXOH10D0680	6.8	6.4	68.0	97.4	53.3	161.4	3.4	1.4		
AQDEXXOH10D0690	6.9	6.5	69.0	98.4	53.4					
AQDEXXOH10D0700	7.0	6.6	70.0	98.5	53.6					
AQDEXXOH10D0710	7.1	6.7	71.0	104.5	53.7	161.5	3.5	1.5		
AQDEXXOH10D0720	7.2	6.8	72.0	105.5	53.8					
AQDEXXOH10D0730	7.3	6.9	73.0	105.6	53.9					
AQDEXXOH10D0740	7.4	7.0	74.0	110.6	54.2					
AQDEXXOH10D0750	7.5	7.1	75.0	111.6	54.4	175.6	4.1	1.6		
AQDEXXOH10D0760	7.6	7.2	76.0	111.7	54.5					
AQDEXXOH10D0770	7.7	7.3	77.0	111.7	54.6					
AQDEXXOH10D0780	7.8	7.4	78.0	117.7	54.7	175.7	4.2	1.7		
AQDEXXOH10D0790	7.9	7.5	79.0	118.7	54.8					
AQDEXXOH10D0800	8.0	7.6	80.0	118.7	54.9					
AQDEXXOH10D0810	8.1	7.7	81.0							
AQDEXXOH10D0820	8.2	7.8	82.0							
AQDEXXOH10D0830	8.3	7.9	83.0							
AQDEXXOH10D0840	8.4	8.0	84.0							
AQDEXXOH10D0850	8.5	8.1	85.0							
AQDEXXOH10D0860	8.6	8.2	86.0							
AQDEXXOH10D0870	8.7	8.3	87.0							
AQDEXXOH10D0880	8.8	8.4	88.0							
AQDEXXOH10D0890	8.9	8.5	89.0							

单位 (Unit) : mm

商品编码 Code	直径 DC	小直径 DC1	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	槽深 SDL	槽宽 CONMS	先端 PL	在庫 Stock
AQDEXXOH10D0900	9.0	8.5	90.0	118.8	55.0	175.8		9		
AQDEXXOH10D0910	9.1	8.6	91.0	123.8	55.2		4.3	1.8		
AQDEXXOH10D0920	9.2	8.7	92.0	124.8	55.3	189.8				
AQDEXXOH10D0930	9.3	8.8	93.0	124.8	55.4					
AQDEXXOH10D0940	9.4	8.9	94.0	124.9	55.5					
AQDEXXOH10D0950	9.5	9.0	95.0	124.9	55.6			10		
AQDEXXOH10D0960	9.6	9.1	96.0	130.9	55.7	189.9	4.4	1.9		
AQDEXXOH10D0970	9.7	9.2	97.0	131.9	55.8					
AQDEXXOH10D0980	9.8	9.3	98.0	131.9	55.9					
AQDEXXOH10D0990	9.9	9.4	99.0	132.0	56.0	190.0				
AQDEXXOH10D1000	10.0	9.5	100.0	132.0	56.0					
AQDEXXOH10D1010	10.1	9.6	101.0	137.0	60.2	208.0	4.5	2.0		
AQDEXXOH10D1020	10.2	9.7	102.0	137.0	60.3					
AQDEXXOH10D1030	10.3	9.8	103.0	138.0	60.4					
AQDEXXOH10D1040	10.4	9.9	104.0	138.1	60.5					
AQDEXXOH10D1050	10.5	10.0	105.0	144.1	60.6	208.1	4.6	11	2.1	
AQDEXXOH10D1060	10.6	10.1	106.0	145.1	60.8					
AQDEXXOH10D1070	10.7	10.2	107.0	145.2	60.9	208.2				
AQDEXXOH10D1080	10.8	10.3	108.0	150.2	61.0		4.7	2.2		
AQDEXXOH10D1090	10.9	10.4	109.0	150.2	61.2	222.2				
AQDEXXOH10D1100	11.0	10.5	110.0	151.2	61.3					
AQDEXXOH10D1110	11.1	10.6	111.0	151.3	61.4					
AQDEXXOH10D1120	11.2	10.7	112.0	157.3	61.5	222.3	4.8	12	2.3	
AQDEXXOH10D1130	11.3	10.8	113.0	158.3	61.6					
AQDEXXOH10D1140	11.4	10.9	114.0	158.3	61.7					
AQDEXXOH10D1150	11.5	11.0	115.0	158.3	61.8	222.4	4.9	2.4		
AQDEXXOH10D1160	11.6	11.1	116.0	158.4	61.9					
AQDEXXOH10D1170	11.7	11.2	117.0	158.4	62.0					
AQDEXXOH10D1180	11.8	11.3	118.0							
AQDEXXOH10D1190	11.9	11.4	119.0							
AQDEXXOH10D1200	12.0	11.5	120.0							

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used 一:不推荐 Not recommended
※仅限铝合金铸件 Only for Aluminum Alloy Casting


AQDEX-HCD

AQUA EX 平头小螺丝钻 沉孔用


AQUA Drills EX Machine screw counter bore

●用于平头小螺丝沉孔加工的阶梯钻。

Step drill for drilling countersunk fillister screw holes



X形横刃

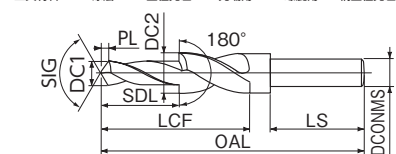

小直径、大直径的公差:0~0.04mm

切削条件 Cutting Condition: A-168

单位 (Unit): mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小直径长度 SDL	大径 DC2	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEX-HCDM3	M3	3.4	13.7	5.9	25.7	30	65.7	6	0.7	
AQDEX-HCDM4	M4	4.5	18.9	7.4	35.9	35	75.9	8	0.9	
AQDEX-HCDM5	M5	5.5	23.1	9.4	41.1	35	86.1	8	1.1	
AQDEX-HCDM6	M6	6.6	26.4	11.0	46.4	35	91.4	10	1.4	
AQDEX-HCDM8	M8	9.0	29.9	14.5	56.9	40	101.9	12	1.9	


AQDEX-SCD

AQUA EX 盘头小螺丝平头钻 沉孔用


AQUA Drills EX Machine screw counter sink

●用于盘头小螺丝沉孔加工的阶梯钻。

Step drill for drilling countersunk flat screw holes



X形横刃

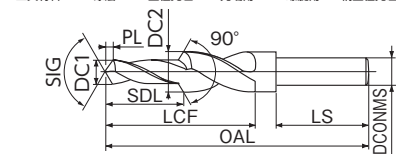

小直径、大直径的公差:0~0.04mm

切削条件 Cutting Condition: A-168

单位 (Unit): mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小直径长度 SDL	大径 DC2	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEX-SCDM3	M3	3.4	13.7	6.4	25.7	30	65.7	6	0.7	
AQDEX-SCDM4	M4	4.5	18.9	8.4	30.9	35	70.9	8	0.9	
AQDEX-SCDM5	M5	5.5	23.1	10.4	36.1	35	81.1	10	1.1	
AQDEX-SCDM6	M6	6.6	26.4	12.5	41.4	35	86.4	12	1.4	
AQDEX-SCDM8	M8	9.0	29.9	16.5	46.9	40	91.9	16	1.9	


AQDEX-RCD

AQUA EX 六角螺栓钻 沉孔用


AQUA Drills EX Counter bore for hexagon socket head bolts

●用于六角螺栓沉孔加工的阶梯钻。

Step drill for drilling countersunk slotted hex bolt holes



X形横刃

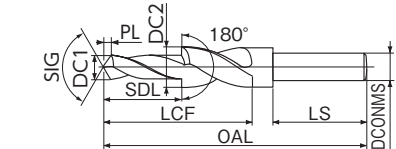

小直径、大直径的公差:0~0.04mm

切削条件 Cutting Condition: A-168

单位 (Unit): mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小直径长度 SDL	大径 DC2	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDEX-RCDM3	M3	3.4	13.7	7.0	25.7	30	65.7	6	0.7	
AQDEX-RCDM4	M4	4.5	18.9	8.0	35.9	35	75.9	8	0.9	
AQDEX-RCDM5	M5	5.5	23.1	10.0	41.1	35	86.1	8	1.1	
AQDEX-RCDM6	M6	6.6	26.4	11.0	46.4	35	91.4	10	1.4	
AQDEX-RCDM8	M8	9.0	29.9	14.0	56.9	40	101.9	12	1.9	
AQDEX-RCDM10	M10	11.0	32.3	18.0	62.3	40	112.3	16	2.3	
AQDEX-RCDM12	M12	14.0	34.9	20.0	67.9	40	117.9	16	2.9	


AQDEXZ-HCD

AQUA EX 平头小螺丝平头钻 沉孔用

AQUA Drills EX FLAT Machine screw counter bore

●用于平头小螺丝沉孔加工的阶梯钻。

Step drill for drilling countersunk fillister screw holes

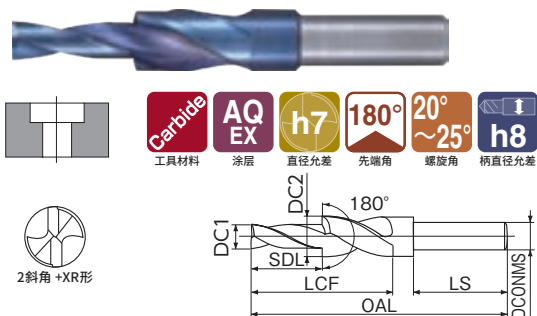

小直径、大直径的公差:0~0.04mm

切削条件 Cutting Condition: A-168

订货方式 商品编码

单位 (Unit): mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小直径长度 SDL	大径 DC2	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	在庫 Stock
AQDEXZ-HCDM3	M3	3.4	13	5.9	25	30	65	6	
AQDEXZ-HCDM4	M4	4.5	18	7.4	35		75	8	
AQDEXZ-HCDM5	M5	5.5	22	9.4	40	35	85	8	
AQDEXZ-HCDM6	M6	6.6	25	11.0	45		90	10	
AQDEXZ-HCDM8	M8	9.0	28	14.5	55		100	12	


AQDEXZ-SCD

AQUA EX 盘头小螺丝平头钻 沉孔用

AQUA Drills EX FLAT Machine screw counter sink

●用于盘头小螺丝沉孔加工的阶梯钻。

Step drill for drilling countersunk flat screw holes

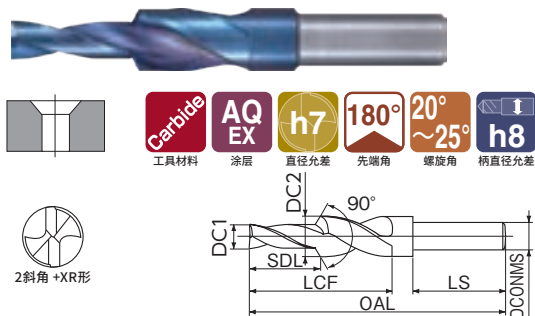

小直径、大直径的公差:0~0.04mm

切削条件 Cutting Condition: A-168

订货方式 商品编码

单位 (Unit): mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小直径长度 SDL	大径 DC2	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	在庫 Stock
AQDEXZ-SCDM3	M3	3.4	13	6.4	25	30	65	6	
AQDEXZ-SCDM4	M4	4.5	18	8.4	30		70	8	
AQDEXZ-SCDM5	M5	5.5	22	10.4	35	35	80	10	
AQDEXZ-SCDM6	M6	6.6	25	12.5	40		85	12	
AQDEXZ-SCDM8	M8	9.0	28	16.5	45		90	16	


AQDEXZ-RCD

AQUA EX 六角螺栓平头钻 沉孔用

AQUA Drills EX FLAT Counter bore for hexagon socket head bolts

●用于六角螺栓沉孔加工的阶梯钻。

Step drill for drilling countersunk slotted hex bolt holes

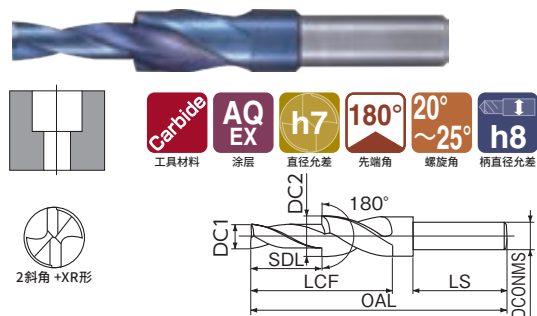

小直径、大直径的公差:0~0.04mm

切削条件 Cutting Condition: A-168

订货方式 商品编码

单位 (Unit): mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小直径长度 SDL	大径 DC2	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	在庫 Stock
AQDEXZ-RCDM3	M3	3.4	13	7.0	25	30	65	6	
AQDEXZ-RCDM4	M4	4.5	18	8.0	35		75	8	
AQDEXZ-RCDM5	M5	5.5	22	10.0	40	35	85	8	
AQDEXZ-RCDM6	M6	6.6	25	11.0	45		90	10	
AQDEXZ-RCDM8	M8	9.0	28	14.0	55		100	12	
AQDEXZ-RCDM10	M10	11.0	30	18.0	60	40	110	16	
AQDEXZ-RCDM12	M12	14.0	32	20.0	65		115	16	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 小直径孔也能稳定加工。
- 适合用于新材到高硬度钢的加工。

This drill is suitable for stable drilling in small diameter on most workpiece materials from Unhardened Steel to Hardened Steel.

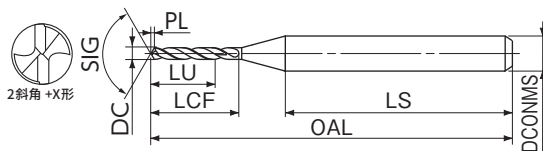

LIST 9544

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQMD0.2	0.20	1.4						
AQMD0.21	0.21	1.5						
AQMD0.22	0.22	1.6						
AQMD0.23	0.23	1.7						
AQMD0.24	0.24	1.8						
AQMD0.25	0.25	1.9						
AQMD0.26	0.26	2.0						
AQMD0.27	0.27	2.1						
AQMD0.28	0.28	2.2						
AQMD0.29	0.29	2.3						
AQMD0.3	0.30	2.4						
AQMD0.31	0.31	2.5						
AQMD0.32	0.32	2.6						
AQMD0.33	0.33	2.7						
AQMD0.34	0.34	2.8						
AQMD0.35	0.35	2.9						
AQMD0.36	0.36	3.0						
AQMD0.37	0.37	3.1						
AQMD0.38	0.38	3.2						
AQMD0.39	0.39	3.3						
AQMD0.4	0.40	3.4						
AQMD0.41	0.41	3.5						
AQMD0.42	0.42	3.6						
AQMD0.43	0.43	3.7						
AQMD0.44	0.44	3.8						
AQMD0.45	0.45	3.9						
AQMD0.46	0.46	4.0						
AQMD0.47	0.47	4.1						
AQMD0.48	0.48	4.2						
AQMD0.49	0.49	4.3						
AQMD0.5	0.50	4.4						
AQMD0.51	0.51	4.5						
AQMD0.52	0.52	4.6						
AQMD0.53	0.53	4.7						
AQMD0.54	0.54	4.8						
AQMD0.55	0.55	4.9						
AQMD0.56	0.56	5.0						
AQMD0.57	0.57	5.1						
AQMD0.58	0.58	5.2						
AQMD0.59	0.59	5.3						
AQMD0.6	0.60	5.4						
AQMD0.61	0.61	5.5						
AQMD0.62	0.62	5.6						
AQMD0.63	0.63	5.7						
AQMD0.64	0.64	5.8						
AQMD0.65	0.65	5.9						
AQMD0.66	0.66	6.0						
AQMD0.67	0.67	6.1						
AQMD0.68	0.68	6.2						
AQMD0.69	0.69	6.3						
AQMD0.7	0.70	6.4						
AQMD0.71	0.71	6.5						
AQMD0.72	0.72	6.6						
AQMD0.73	0.73	6.7						
AQMD0.74	0.74	6.8						
AQMD0.75	0.75	6.9						
AQMD0.76	0.76	7.0						
AQMD0.77	0.77	7.1						
AQMD0.78	0.78	7.2						
AQMD0.79	0.79	7.3						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQMD0.8	0.80	5.6						
AQMD0.81	0.81	5.7						
AQMD0.82	0.82	5.8						
AQMD0.83	0.83	5.9						
AQMD0.84	0.84	6.0						
AQMD0.85	0.85	6.1						
AQMD0.86	0.86	6.2						
AQMD0.87	0.87	6.3						
AQMD0.88	0.88	6.4						
AQMD0.89	0.89	6.5						
AQMD0.9	0.90	6.6						
AQMD0.91	0.91	6.7						
AQMD0.92	0.92	6.8						
AQMD0.93	0.93	6.9						
AQMD0.94	0.94	7.0						
AQMD0.95	0.95	7.1						
AQMD0.96	0.96	7.2						
AQMD0.97	0.97	7.3						
AQMD0.98	0.98	7.4						
AQMD0.99	0.99	7.5						
AQMD1.0	1.00	7.6						
AQMD1.01	1.01	7.7						
AQMD1.02	1.02	7.8						
AQMD1.03	1.03	7.9						
AQMD1.04	1.04	8.0						
AQMD1.05	1.05	8.1						
AQMD1.06	1.06	8.2						
AQMD1.07	1.07	8.3						
AQMD1.08	1.08	8.4						
AQMD1.09	1.09	8.5						
AQMD1.1	1.10	8.6						
AQMD1.11	1.11	8.7						
AQMD1.12	1.12	8.8						
AQMD1.13	1.13	8.9						
AQMD1.14	1.14	9.0						
AQMD1.15	1.15	9.1						
AQMD1.16	1.16	9.2						
AQMD1.17	1.17	9.3						
AQMD1.18	1.18	9.4						
AQMD1.19	1.19	9.5						
AQMD1.2	1.20	9.6						
AQMD1.21	1.21	9.7						
AQMD1.22	1.22	9.8						
AQMD1.23	1.23	9.9						
AQMD1.24	1.24	10.0						
AQMD1.25	1.25	10.1						
AQMD1.26	1.26	10.2						
AQMD1.27	1.27	10.3						
AQMD1.28	1.28	10.4						
AQMD1.29	1.29	10.5						
AQMD1.3	1.30	10.6						
AQMD1.31	1.31	10.7						
AQMD1.32	1.32	10.8						
AQMD1.33	1.33	10.9						
AQMD1.34	1.34	11.0						
AQMD1.35	1.35	11.1						
AQMD1.36	1.36	11.2						
AQMD1.37	1.37	11.3						
AQMD1.38	1.38	11.4						
AQMD1.39	1.39	11.5						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQMD1.4	1.40	9.8	28.0	28.0	47	3	0.3	●
AQMD1.41	1.41	9.9						
AQMD1.42	1.42	10.0						
AQMD1.43	1.43	10.1						
AQMD1.44	1.44	10.2						
AQMD1.45	1.45	10.3						
AQMD1.46	1.46	10.4						
AQMD1.47	1.47	10.5						
AQMD1.48	1.48	10.6						
AQMD1.49	1.49	10.7						
AQMD1.5	1.50	10.8	28.2	28.2	47	3	0.3	●
AQMD1.51	1.51	10.9						
AQMD1.52	1.52	11.0						
AQMD1.53	1.53	11.1						
AQMD1.54	1.54	11.2						
AQMD1.55	1.55	11.3						
AQMD1.56	1.56	11.4						
AQMD1.57	1.57	11.5						
AQMD1.58	1.58	11.6						
AQMD1.59	1.59	11.7						
AQMD1.6	1.60	11.8	28.4	28.4	47	3	0.3	●
AQMD1.61	1.61	11.9						
AQMD1.62	1.62	12.0						
AQMD1.63	1.63	12.1						
AQMD1.64	1.64	12.2						
AQMD1.65	1.65	12.3						
AQMD1.66	1.66	12.4						
AQMD1.67	1.67	12.5						
AQMD1.68	1.68	12.6						
AQMD1.69	1.69	12.7						
AQMD1.7	1.70	12.8	28.6	28.6	47	3	0.3	●
AQMD1.71	1.71	12.9						
AQMD1.72	1.72	13.0						
AQMD1.73	1.73	13.1						
AQMD1.74	1.74	13.2						
AQMD1.75	1.75	13.3						
AQMD1.76	1.76	13.4						
AQMD1.77	1.77	13.5						
AQMD1.78	1.78	13.6						
AQMD1.79	1.79	13.7						
AQMD1.8	1.80	13.8	28.8	28.8	47	3	0.3	●
AQMD1.81	1.81	13.9						
AQMD1.82	1.82	14.0						
AQMD1.83	1.83	14.1						
AQMD1.84	1.84	14.2						
AQMD1.85	1.85	14.3						
AQMD1.86	1.86	14.4						
AQMD1.87	1.87	14.5						
AQMD1.88	1.88	14.6						
AQMD1.89	1.89	14.7						
AQMD1.9	1.90	14.8	28.9	28.9	47	3	0.3	●
AQMD1.91	1.91	14.9						
AQMD1.92	1.92	15.0						
AQMD1.93	1.93	15.1						
AQMD1.94	1.94	15.2						
AQMD1.95	1.95	15.3						
AQMD1.96	1.96	15.4						
AQMD1.97	1.97	15.5						
AQMD1.98	1.98	15.6						
AQMD1.99	1.99	15.7						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	◎	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	○	○	×	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●可实现对 50 ~ 68HRC 淬硬钢的高效率加工。

This drill meets high efficiency drilling of Hardened Material.
(50~68HRC)

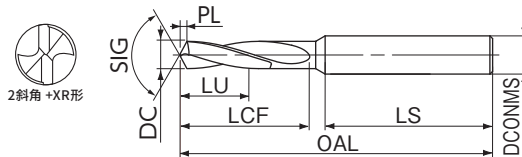

LIST 9548

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDH2.0	2.0	6.0	12		44			●
AQDH2.1	2.1	6.3						
AQDH2.2	2.2	6.6	13		45		0.4	□
AQDH2.3	2.3	6.9						
AQDH2.4	2.4	7.2						
AQDH2.5	2.5	7.5	14	28	46	3		●
AQDH2.6	2.6	7.8						
AQDH2.7	2.7	8.1						
AQDH2.8	2.8	8.4					0.5	□
AQDH2.9	2.9	8.7						●
AQDH3.0	3.0	9.0						
AQDH3.1	3.1	9.3						
AQDH3.2	3.2	9.6	18		50		0.6	□
AQDH3.3	3.3	9.9						●
AQDH3.4	3.4	10.2						
AQDH3.5	3.5	10.5						
AQDH3.6	3.6	10.8	20	30	52	4		□
AQDH3.7	3.7	11.1						●
AQDH3.8	3.8	11.4					0.7	□
AQDH3.9	3.9	11.7						●
AQDH4.0	4.0	12.0						
AQDH4.1	4.1	12.3						□
AQDH4.2	4.2	12.6						●
AQDH4.3	4.3	12.9						□
AQDH4.4	4.4	13.2					0.8	●
AQDH4.5	4.5	13.5						
AQDH4.6	4.6	13.8						
AQDH4.7	4.7	14.1						□
AQDH4.8	4.8	14.4						
AQDH4.9	4.9	14.7					0.9	●
AQDH5.0	5.0	15.0						□
AQDH5.1	5.1	15.3						
AQDH5.2	5.2	15.6						
AQDH5.3	5.3	15.9						
AQDH5.4	5.4	16.2					1.0	●
AQDH5.5	5.5	16.5						
AQDH5.6	5.6	16.8						
AQDH5.7	5.7	17.1						□
AQDH5.8	5.8	17.4						
AQDH5.9	5.9	17.7						
AQDH6.0	6.0	18.0					1.1	●
AQDH6.1	6.1	18.3						□
AQDH6.2	6.2	18.6						
AQDH6.3	6.3	18.9						
AQDH6.4	6.4	19.2						
AQDH6.5	6.5	19.5					1.2	●
AQDH6.6	6.6	19.8						□
AQDH6.7	6.7	20.1						
AQDH6.8	6.8	20.4						
AQDH6.9	6.9	20.7						
AQDH7.0	7.0	21.0						●
AQDH7.1	7.1	21.3						
AQDH7.2	7.2	21.6					1.3	□
AQDH7.3	7.3	21.9						
AQDH7.4	7.4	22.2						
AQDH7.5	7.5	22.5						●
AQDH7.6	7.6	22.8						
AQDH7.7	7.7	23.1						
AQDH7.8	7.8	23.4					1.4	□
AQDH7.9	7.9	23.7						

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDH8.0	8.0	24.0		38	81	8		●
AQDH8.1	8.1	24.3						
AQDH8.2	8.2	24.6						
AQDH8.3	8.3	24.9					1.5	□
AQDH8.4	8.4	25.2						
AQDH8.5	8.5	25.5						●
AQDH8.6	8.6	25.8						
AQDH8.7	8.7	26.1					1.6	□
AQDH8.8	8.8	26.4						
AQDH8.9	8.9	26.7						●
AQDH9.0	9.0	27.0						
AQDH9.1	9.1	27.3						
AQDH9.2	9.2	27.6					1.7	□
AQDH9.3	9.3	27.9						●
AQDH9.4	9.4	28.2						
AQDH9.5	9.5	28.5						□
AQDH9.6	9.6	28.8					1.8	●
AQDH9.7	9.7	29.1						□
AQDH9.8	9.8	29.4						
AQDH9.9	9.9	29.7						●
AQDH10.0	10.0	30.0						□
AQDH10.1	10.1	30.3						
AQDH10.2	10.2	30.6						●
AQDH10.3	10.3	30.9					1.9	□
AQDH10.4	10.4	31.2						●
AQDH10.5	10.5	31.5						
AQDH10.6	10.6	31.8						
AQDH10.7	10.7	32.1						□
AQDH10.8	10.8	32.4						
AQDH10.9	10.9	32.7					2.0	●
AQDH11.0	11.0	33.0						□
AQDH11.1	11.1	33.3						
AQDH11.2	11.2	33.6						
AQDH11.3	11.3	33.9					2.1	●
AQDH11.4	11.4	34.2						□
AQDH11.5	11.5	34.5						
AQDH11.6	11.6	34.8						
AQDH11.7	11.7	35.1						□
AQDH11.8	11.8	35.4						
AQDH11.9	11.9	35.7					2.2	●
AQDH12.0	12.0	36.0						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
×	×	×	×	—	◎
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	—	×	×

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

● 适用于 FC、FCD、低碳钢的长寿命加工。

This drill is suited for long life drilling of FC, FCD, and Low Carbon Steel.

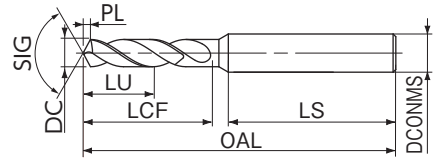

新商品

LIST 9540

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDFC2.0	2.0	10.0	15		47		●	
AQDFC2.1	2.1	10.5						
AQDFC2.2	2.2	11.0	16		48	0.4	△	
AQDFC2.3	2.3	11.5						
AQDFC2.4	2.4	12.0						
AQDFC2.5	2.5	12.5	17	28.0	49	3	●	
AQDFC2.6	2.6	13.0						
AQDFC2.7	2.7	13.5						
AQDFC2.8	2.8	14.0	19		51	0.5	△	
AQDFC2.9	2.9	14.5						
AQDFC3.0	3.0	15.0					●	
AQDFC3.1	3.1	15.5					△	
AQDFC3.2	3.2	16.0	21		53		●	
AQDFC3.3	3.3	16.5				0.6	△	
AQDFC3.4	3.4	17.0						
AQDFC3.5	3.5	17.5	24	30.0	56	4	●	
AQDFC3.6	3.6	18.0						
AQDFC3.7	3.7	18.5					△	
AQDFC3.8	3.8	19.0						
AQDFC3.9	3.9	19.5			59	0.7	△	
AQDFC4.0	4.0	20.0	27				●	
AQDFC4.1	4.1	20.5			71		△	
AQDFC4.2	4.2	21.0					●	
AQDFC4.3	4.3	21.5						
AQDFC4.4	4.4	22.0	31		75	0.8	△	
AQDFC4.5	4.5	22.5					●	
AQDFC4.6	4.6	23.0						
AQDFC4.7	4.7	23.5					△	
AQDFC4.8	4.8	24.0	33		77			
AQDFC4.9	4.9	24.5						
AQDFC5.0	5.0	25.0	38		82	0.9	●	
AQDFC5.1	5.1	25.5					△	
AQDFC5.2	5.2	26.0						
AQDFC5.3	5.3	26.5						
AQDFC5.4	5.4	27.0						
AQDFC5.5	5.5	27.5				1.0	●	
AQDFC5.6	5.6	28.0						
AQDFC5.7	5.7	28.5					△	
AQDFC5.8	5.8	29.0						
AQDFC5.9	5.9	29.5						
AQDFC6.0	6.0	30.0	41	38.0	85	1.1	●	
AQDFC6.1	6.1	30.5						
AQDFC6.2	6.2	31.0					△	
AQDFC6.3	6.3	31.5						
AQDFC6.4	6.4	32.0					●	
AQDFC6.5	6.5	32.5						
AQDFC6.6	6.6	33.0				1.2	△	
AQDFC6.7	6.7	33.5						
AQDFC6.8	6.8	34.0	43		87		●	
AQDFC6.9	6.9	34.5					△	
AQDFC7.0	7.0	35.0				8	●	
AQDFC7.1	7.1	35.5						
AQDFC7.2	7.2	36.0						
AQDFC7.3	7.3	36.5	45		89	1.3	△	
AQDFC7.4	7.4	37.0						
AQDFC7.5	7.5	37.5					●	
AQDFC7.6	7.6	38.0						
AQDFC7.7	7.7	38.5						
AQDFC7.8	7.8	39.0	48		92	1.4	△	
AQDFC7.9	7.9	39.5						
AQDFC8.0	8.0	40.0					●	
AQDFC8.1	8.1	40.5	53	43.5	103	10	△	

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
AQDFC8.2	8.2	41.0						
AQDFC8.3	8.3	41.5						
AQDFC8.4	8.4	42.0	53		103		1.5	△
AQDFC8.5	8.5	42.5					●	
AQDFC8.6	8.6	43.0						
AQDFC8.7	8.7	43.5						
AQDFC8.8	8.8	44.0	55		105		1.6	△
AQDFC8.9	8.9	44.5						
AQDFC9.0	9.0	45.0					●	
AQDFC9.1	9.1	45.5						
AQDFC9.2	9.2	46.0					△	
AQDFC9.3	9.3	46.5	58		108		1.7	△
AQDFC9.4	9.4	47.0					●	
AQDFC9.5	9.5	47.5						
AQDFC9.6	9.6	48.0					△	
AQDFC9.7	9.7	48.5						
AQDFC9.8	9.8	49.0	60		110		1.8	△
AQDFC9.9	9.9	49.5					●	
AQDFC10.0	10.0	50.0					△	
AQDFC10.1	10.1	50.5						
AQDFC10.2	10.2	51.0					●	
AQDFC10.3	10.3	51.5	66		123		1.9	△
AQDFC10.4	10.4	52.0					●	
AQDFC10.5	10.5	52.5						
AQDFC10.6	10.6	53.0					△	
AQDFC10.7	10.7	53.5					●	
AQDFC10.8	10.8	54.0	68		125		2.0	△
AQDFC10.9	10.9	54.5						
AQDFC11.0	11.0	55.0					●	
AQDFC11.1	11.1	55.5						
AQDFC11.2	11.2	56.0					△	
AQDFC11.3	11.3	56.5	71		128		2.1	●
AQDFC11.4	11.4	57.0						
AQDFC11.5	11.5	57.5						
AQDFC11.6	11.6	58.0					△	
AQDFC11.7	11.7	58.5						
AQDFC11.8	11.8	59.0	73		130		2.2	●
AQDFC11.9	11.9	59.5						
AQDFC12.0	12.0	60.0						

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65 HRC
◎	○	—	—	—	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	○	×	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended




大刃宽
Wide flute width

●凭借喷雾油孔，可实现 L/D25 的深孔加工。

●适合用于新材到型钢的深孔加工。

This drill having mist-hole is suitable for L/D25 deep holes.

This drill is suited for drilling of deep holes, from Unhardened Steel to Die Steel.



LIST 9538

订货方式 商品编码

10D用

单位 (Unit) : mm

商品编码 Code	直径 DC	全长 OAL	有效长 LU	槽长 LCF	柄长 LS	柄径 DCONMS	先端 PL	在庫 Stock
MQLPLD3.0 × 95	3.0	95.5	30.0	45.5	47.0	3	0.5	
MQLPLD3.1 × 95	3.1	95.6	31.0		46.5			
MQLPLD3.2 × 95	3.2	95.6	32.0		46.6		0.6	
MQLPLD3.3 × 95	3.3	95.6	33.0	45.6	46.7			
MQLPLD3.4 × 95	3.4	95.6	34.0		46.7			
MQLPLD3.5 × 105	3.5	105.6	35.0	55.6	46.8		0.7	
MQLPLD3.6 × 105	3.6	105.7	36.0		47.0			
MQLPLD3.7 × 105	3.7	105.7	37.0	55.7	46.6			
MQLPLD3.8 × 105	3.8	105.7	38.0		46.7		0.8	
MQLPLD3.9 × 105	3.9	105.7	39.0		46.8			
MQLPLD4.0 × 110	4.0	110.7	40.0	60.7	46.6			
MQLPLD4.1 × 110	4.1	110.7	41.0		46.7			
MQLPLD4.2 × 110	4.2	110.8	42.0	60.8	46.9		0.9	
MQLPLD4.3 × 110	4.3	110.8	43.0		47.0			
MQLPLD4.4 × 110	4.4	110.8	44.0		46.5			
MQLPLD4.5 × 120	4.5	120.8	45.0	70.8	46.6		1.0	
MQLPLD4.6 × 120	4.6	120.8	46.0		46.7			
MQLPLD4.7 × 120	4.7	120.9	47.0	70.9	46.8			
MQLPLD4.8 × 120	4.8	120.9	48.0		46.9		1.1	
MQLPLD4.9 × 120	4.9	120.9	49.0		47.0			
MQLPLD5.0 × 125	5.0	125.9	50.0	75.9	46.6			
MQLPLD5.1 × 125	5.1	125.9	51.0		46.7			
MQLPLD5.2 × 125	5.2	125.9	52.0	76.0	46.8		1.2	
MQLPLD5.3 × 125	5.3	126.0	53.0		46.9			
MQLPLD5.4 × 125	5.4	126.0	54.0	86.0	47.0			
MQLPLD5.5 × 135	5.5	136.0	55.0		46.5			
MQLPLD5.6 × 135	5.6	136.0	56.0	86.1	46.6		1.3	
MQLPLD5.7 × 135	5.7	136.0	57.0		46.7			
MQLPLD5.8 × 135	5.8	136.1	58.0	91.1	46.8			
MQLPLD5.9 × 135	5.9	136.1	59.0		46.9		1.4	
MQLPLD6.0 × 140	6.0	141.1	60.0	91.2	47.0			
MQLPLD6.1 × 140	6.1	141.1	61.0		46.5			
MQLPLD6.2 × 140	6.2	141.1	62.0		46.6			
MQLPLD6.3 × 140	6.3	141.1	63.0	101.2	46.7		1.5	
MQLPLD6.4 × 140	6.4	141.2	64.0		46.8			
MQLPLD6.5 × 150	6.5	151.2	65.0		46.9			
MQLPLD6.6 × 150	6.6	151.2	66.0	101.3	47.0		1.6	
MQLPLD6.7 × 150	6.7	151.2	67.0		46.5			
MQLPLD6.8 × 150	6.8	151.2	68.0		46.6			
MQLPLD6.9 × 150	6.9	151.3	69.0	106.3	46.7			
MQLPLD7.0 × 155	7.0	156.3	70.0		46.8			
MQLPLD7.1 × 155	7.1	156.3	71.0		46.9			
MQLPLD7.2 × 155	7.2	156.3	72.0	116.4	47.0		1.7	
MQLPLD7.3 × 155	7.3	156.3	73.0		46.5			
MQLPLD7.4 × 155	7.4	156.3	74.0		46.6			
MQLPLD7.5 × 165	7.5	166.4	75.0		46.7			
MQLPLD7.6 × 165	7.6	166.4	76.0		46.8			
MQLPLD7.7 × 165	7.7	166.4	77.0		46.9			
MQLPLD7.8 × 165	7.8	166.4	78.0	121.5	47.0		1.8	
MQLPLD7.9 × 165	7.9	166.4	79.0		46.5			
MQLPLD8.0 × 170	8.0	171.5	80.0		46.6			
MQLPLD8.1 × 170	8.1	171.5	81.0		46.7			
MQLPLD8.2 × 170	8.2	171.5	82.0	131.5	46.8			
MQLPLD8.3 × 170	8.3	171.5	83.0					
MQLPLD8.4 × 170	8.4	171.5	84.0					
MQLPLD8.5 × 180	8.5	181.5	85.0					
MQLPLD8.6 × 180	8.6	181.6	86.0					
MQLPLD8.7 × 180	8.7	181.6	87.0					

商品编码 Code	直径 DC	全长 OAL	有效长 LU	槽长 LCF	柄长 LS	柄径 DCONMS	先端 PL	在庫 Stock
MQLPLD8.8 × 180	8.8	181.6	88.0	131.6	46.9		9	1.6
MQLPLD8.9 × 180	8.9	181.6	89.0		47.0			
MQLPLD9.0 × 185	9.0	186.6	90.0	136.6	46.5		1.7	
MQLPLD9.1 × 185	9.1	186.7	91.0		46.6			
MQLPLD9.2 × 185	9.2	186.7	92.0		46.7			
MQLPLD9.3 × 185	9.3	186.7	93.0		46.8			
MQLPLD9.4 × 185	9.4	186.7	94.0		46.9			
MQLPLD9.5 × 195	9.5	196.7	95.0	146.7	47.0		1.8	
MQLPLD9.6 × 195	9.6	196.7	96.0					
MQLPLD9.7 × 195	9.7	196.8	97.0					
MQLPLD9.8 × 195	9.8	196.8	98.0					
MQLPLD9.9 × 195	9.9	196.8	99.0					
MQLPLD10.0 × 200	10.0	201.8	100.0	151.8				

15D用

单位 (Unit) : mm

商品编码 Code	直径 DC	全长 OAL	有效长 LU	槽长 LCF	柄长 LS	柄径 D10MM	先端 PL	在庫 Stock
MQPLPD3.0 × 110	3.0	110.5	45.0	60.5	47.0	3	0.5	
MQPLPD3.1 × 110	3.1	110.6	46.5		46.5			
MQPLPD3.2 × 110	3.2	110.6	48.0					
MQPLPD3.3 × 110	3.3	110.6	49.5	60.6	46.6		0.6	
MQPLPD3.4 × 110	3.4	110.6	51.0					
MQPLPD3.5 × 120	3.5	120.6	52.5	70.6	46.7	4		
MQPLPD3.6 × 120	3.6	120.7	54.0					
MQPLPD3.7 × 120	3.7	120.7	55.5	70.7	46.8		0.7	
MQPLPD3.8 × 120	3.8	120.7	57.0					
MQPLPD3.9 × 120	3.9	120.7	58.5					
MQPLPD4.0 × 130	4.0	130.7	60.0	80.7	47.0			
MQPLPD4.1 × 130	4.1	130.7	61.5		46.5			
MQPLPD4.2 × 130	4.2	130.8	63.0					
MQPLPD4.3 × 130	4.3	130.8	64.5	80.8	46.6		0.8	
MQPLPD4.4 × 130	4.4	130.8	66.0					
MQPLPD4.5 × 140	4.5	140.8	67.5	90.8	46.7	5		
MQPLPD4.6 × 140	4.6	140.8	69.0					
MQPLPD4.7 × 140	4.7	140.9	70.5					
MQPLPD4.8 × 140	4.8	140.9	72.0	90.9	46.9		0.9	
MQPLPD4.9 × 140	4.9	140.9	73.5					
MQPLPD5.0 × 150	5.0	150.9	75.0					
MQPLPD5.1 × 150	5.1	150.9	76.5	100.9	46.5			
MQPLPD5.2 × 150	5.2	150.9	78.0					
MQPLPD5.3 × 150	5.3	151.0	79.5	101.0	46.6		1.0	
MQPLPD5.4 × 150	5.4	151.0	81.0					
MQPLPD5.5 × 160	5.5	161.0	82.5					
MQPLPD5.6 × 160	5.6	161.0	84.0	111.0	46.7	6		
MQPLPD5.7 × 160	5.7	161.0	85.5					
MQPLPD5.8 × 160	5.8	161.1	87.0	111.1	46.8		1.1	
MQPLPD5.9 × 160	5.9	161.1	88.5					
MQPLPD6.0 × 170	6.0	171.1	90.0					
MQPLPD6.1 × 170	6.1	171.1	91.5	121.1	46.9			
MQPLPD6.2 × 170	6.2	171.1	93.0					
MQPLPD6.3 × 170	6.3	171.1	94.5					
MQPLPD6.4 × 170	6.4	171.2	96.0	121.2	46.6		1.2	
MQPLPD6.5 × 180	6.5	181.2	97.5					
MQPLPD6.6 × 180	6.6	181.2	99.0	131.2	46.7	7		
MQPLPD6.7 × 180	6.7	181.2	100.5					
MQPLPD6.8 × 180	6.8	181.2	102.0					
MQPLPD6.9 × 180	6.9	181.3	103.5	131.3	46.8		1.3	
MQPLPD7.0 × 190	7.0	191.3	105.0					
MQPLPD7.1 × 190	7.1	191.3	106.5					
MQPLPD7.2 × 190	7.2	191.3	108.0	141.3	46.5			
MQPLPD7.3 × 190	7.3	191.3	109.5					
MQPLPD7.4 × 190	7.4	191.3	111.0					
MQPLPD7.5 × 200	7.5	201.4	112.5					
MQPLPD7.6 × 200	7.6	201.4	114.0					
MQPLPD7.7 × 200	7.7	201.4	115.5	151.4	46.6	8		
MQPLPD7.8 × 200	7.8	201.4	117.0					
MQPLPD7.9 × 200	7.9	201.4	118.5					
MQPLPD8.0 × 210	8.0	211.5	120.0					
MQPLPD8.1 × 210	8.1	211.5	121.5					
MQPLPD8.2 × 210	8.2	211.5	123.0	161.5	46.7		1.4	
MQPLPD8.3 × 210	8.3	211.5	124.5					
MQPLPD8.4 × 210	8.4	211.5	126.0					
MQPLPD8.5 × 220	8.5	221.5	127.5	171.5	46.8	9		
MQPLPD8.6 × 220	8.6	221.6	129.0					
MQPLPD8.7 × 220	8.7	221.6	130.5	171.6			1.6	

商品编码 Code	直径 DC	全长 OAL	有效长 LU	槽长 LCF	柄长 LS	柄径 D10MM	先端 PL	在庫 Stock
MQPLPD8.8 × 220	8.8	221.6	132.0	171.6	46.9			
MQPLPD8.9 × 220	8.9	221.6	133.5					
MQPLPD9.0 × 230	9.0	231.6	135.0	181.6	47.0	9	1.6	
MQPLPD9.1 × 230	9.1	231.7	136.5					
MQPLPD9.2 × 230	9.2	231.7	138.0					
MQPLPD9.3 × 230	9.3	231.7	139.5	181.7	46.5		1.7	
MQPLPD9.4 × 230	9.4	231.7	141.0					
MQPLPD9.5 × 240	9.5	241.7	142.5					
MQPLPD9.6 × 240	9.6	241.7	144.0	191.7	46.6	10		
MQPLPD9.7 × 240	9.7	241.8	145.5					
MQPLPD9.8 × 240	9.8	241.8	147.0					
MQPLPD9.9 × 240	9.9	241.8	148.5	191.8	46.7		1.8	
MQPLPD10.0 × 250	10.0	251.8	150.0	201.8	47.0			

20D用

单位 (Unit) : mm

商品编码 Code	直径 DC	全长 OAL	有效长 LU	槽长 LCF	柄长 LS	柄径 D00MM	先端 PL	在庫 Stock
新商品	MQLPLD3.0 × 125	3.0	125.5	60.0	75.5	47.0	3	0.5
	MQLPLD3.1 × 125	3.1	125.6	62.0	75.6	46.5		
	MQLPLD3.2 × 125	3.2	125.6	64.0	75.6	46.6		
	MQLPLD3.3 × 125	3.3	125.6	66.0	75.6	46.7		
	MQLPLD3.4 × 125	3.4	125.6	68.0	75.6	46.7		
	MQLPLD3.5 × 140	3.5	140.6	70.0	90.6	46.7		
	MQLPLD3.6 × 140	3.6	140.7	72.0	90.7	46.8		
	MQLPLD3.7 × 140	3.7	140.7	74.0	90.7	46.9		
	MQLPLD3.8 × 140	3.8	140.7	76.0	90.7	46.9		
	MQLPLD3.9 × 140	3.9	140.7	78.0	90.7	47.0		
	MQLPLD4.0 × 150	4.0	150.7	80.0	100.7	46.5		
	MQLPLD4.1 × 150	4.1	150.7	82.0	100.7	46.6		
	MQLPLD4.2 × 150	4.2	150.8	84.0	100.8	46.7		
	MQLPLD4.3 × 150	4.3	150.8	86.0	100.8	46.8		
	MQLPLD4.4 × 150	4.4	150.8	88.0	100.8	46.9		
	MQLPLD4.5 × 165	4.5	165.8	90.0	115.8	46.9		
	MQLPLD4.6 × 165	4.6	165.8	92.0	115.9	47.0		
	MQLPLD4.7 × 165	4.7	165.9	94.0	115.9	47.0		
	MQLPLD4.8 × 165	4.8	165.9	96.0	115.9	47.0		
	MQLPLD4.9 × 165	4.9	165.9	98.0	115.9	47.0		
	MQLPLD5.0 × 175	5.0	175.9	100.0	125.9	46.5		
	MQLPLD5.1 × 175	5.1	175.9	102.0	125.9	46.6		
	MQLPLD5.2 × 175	5.2	175.9	104.0	126.0	46.7		
	MQLPLD5.3 × 175	5.3	176.0	106.0	126.0	46.8		
	MQLPLD5.4 × 175	5.4	176.0	108.0	126.0	46.9		
	MQLPLD5.5 × 190	5.5	191.0	110.0	141.0	46.8		
	MQLPLD5.6 × 190	5.6	191.0	112.0	141.0	46.9		
	MQLPLD5.7 × 190	5.7	191.0	114.0	141.1	47.0		
	MQLPLD5.8 × 190	5.8	191.1	116.0	141.1	46.5		
	MQLPLD5.9 × 190	5.9	191.1	118.0	141.1	46.6		
	MQLPLD6.0 × 200	6.0	201.1	120.0	151.1	46.7		
	MQLPLD6.1 × 200	6.1	201.1	122.0	151.1	46.8		
	MQLPLD6.2 × 200	6.2	201.1	124.0	151.2	46.9		
	MQLPLD6.3 × 200	6.3	201.1	126.0	151.2	46.8		
	MQLPLD6.4 × 200	6.4	201.2	128.0	151.2	46.9		
	MQLPLD6.5 × 215	6.5	216.2	130.0	166.2	47.0		
	MQLPLD6.6 × 215	6.6	216.2	132.0	166.3	46.5		
	MQLPLD6.7 × 215	6.7	216.2	134.0	166.3	46.6		
	MQLPLD6.8 × 215	6.8	216.2	136.0	166.3	46.7		
	MQLPLD6.9 × 215	6.9	216.3	138.0	166.3	46.8		
	MQLPLD7.0 × 225	7.0	226.3	140.0	176.3	46.7		
	MQLPLD7.1 × 225	7.1	226.3	142.0	176.3	46.8		
	MQLPLD7.2 × 225	7.2	226.3	144.0	176.3	46.9		
	MQLPLD7.3 × 225	7.3	226.3	146.0	176.3	46.7		
	MQLPLD7.4 × 225	7.4	226.3	148.0	176.3	46.8		
	MQLPLD7.5 × 240	7.5	241.4	150.0	191.4	46.9		
	MQLPLD7.6 × 240	7.6	241.4	152.0	191.4	47.0		
	MQLPLD7.7 × 240	7.7	241.4	154.0	191.4	46.5		
	MQLPLD7.8 × 240	7.8	241.4	156.0	191.4	46.6		
	MQLPLD7.9 × 240	7.9	241.4	158.0	191.4	46.7		
	MQLPLD8.0 × 250	8.0	251.5	160.0	201.5	46.8		
	MQLPLD8.1 × 250	8.1	251.5	162.0	201.5	46.9		
	MQLPLD8.2 × 250	8.2	251.5	164.0	201.5	46.5		
	MQLPLD8.3 × 250	8.3	251.5	166.0	201.5	46.6		
	MQLPLD8.4 × 250	8.4	251.5	168.0	201.5	46.7		
	MQLPLD8.5 × 265	8.5	266.5	170.0	216.5	46.8		
	MQLPLD8.6 × 265	8.6	266.6	172.0	216.6	46.9		
	MQLPLD8.7 × 265	8.7	266.6	174.0	216.6	47.0		
	MQLPLD8.8 × 265	8.8	266.6	176.0	216.6	46.5		
	MQLPLD8.9 × 265	8.9	266.6	178.0	216.6	46.6		
	MQLPLD9.0 × 275	9.0	276.6	180.0	226.6	46.7		
	MQLPLD9.1 × 275	9.1	276.7	182.0	226.7	46.8		
	MQLPLD9.2 × 275	9.2	276.7	184.0	226.7	46.9		
	MQLPLD9.3 × 275	9.3	276.7	186.0	226.7	46.5		
	MQLPLD9.4 × 275	9.4	276.7	188.0	226.7	46.6		
	MQLPLD9.5 × 290	9.5	291.7	190.0	241.7	46.7		
	MQLPLD9.6 × 290	9.6	291.7	192.0	241.7	46.8		
	MQLPLD9.7 × 290	9.7	291.8	194.0	241.7	46.9		
	MQLPLD9.8 × 290	9.8	291.8	196.0	241.8	47.0		
	MQLPLD9.9 × 290	9.9	291.8	198.0	241.8	47.0		
	MQLPLD10 × 300	10.0	301.8	200.0	251.8	47.0		

25D用

单位 (Unit) : mm

商品编码 Code	直径 DC	全长 OAL	有效长 LU	槽长 LCF	柄长 LS	柄径 D00MM	先端 PL	在庫 Stock
MQLPLD3.0 × 140	3.0	140.5	75.0	90.5	47.0	3	0.5	
MQLPLD3.1 × 140	3.1	140.6	77.5	90.6	46.5			
MQLPLD3.2 × 140	3.2	140.6	80.0	90.6	46.6			
MQLPLD3.3 × 140	3.3	140.6	82.5	90.6	46.7			
MQLPLD3.4 × 140	3.4	140.6	85.0	90.6	46.8			
MQLPLD3.5 × 155	3.5	155.6	87.5	105.6	46.9			
MQLPLD3.6 × 155	3.6	155.7	90.0	105.7	46.8			
MQLPLD3.7 × 155	3.7	155.7	92.5	105.7	46.9			
MQLPLD3.8 × 155	3.8	155.7	95.0	105.7	46.9			
MQLPLD3.9 × 155	3.9	155.7	97.5	105.7	46.9			
MQLPLD4.0 × 170	4.0	170.7	100.0	120.7	47.0			
MQLPLD4.1 × 170	4.1	170.7	102.5	120.7	46.5			
MQLPLD4.2 × 170	4.2	170.8	105.0	120.8	46.6			
MQLPLD4.3 × 170	4.3	170.8	107.5	120.8	46.7			
MQLPLD4.4 × 170	4.4	170.8	110.0	120.8	46.8			
MQLPLD4.5 × 185	4.5	185.8	112.5	135.8	46.9			
MQLPLD4.6 × 185	4.6	185.8	115.0	135.9	47.0			
MQLPLD4.7 × 185	4.7	185.9	117.5	135.9	46.5			
MQLPLD4.8 × 185	4.8	185.9	120.0	135.9	46.6			
MQLPLD4.9 × 185	4.9	185.9	122.5	135.9	46.7			
MQLPLD5.0 × 200	5.0	200.9	125.0	150.9	46.8			
MQLPLD5.1 × 200	5.1	200.9	127.5	151.0	46.9			
MQLPLD5.2 × 200	5.2	200.9	130.0	151.0	46.7			
MQLPLD5.3 × 200	5.3	201.0	132.5	151.0	46.8			
MQLPLD5.4 × 200	5.4	201.0	135.0	151.0	46.9			
MQLPLD5.5 × 215	5.5	216.0	137.5	166.0	46.5			
MQLPLD5.6 × 215	5.6	216.0	140.0	166.0	46.6			
MQLPLD5.7 × 215	5.7	216.0	142.5	166.1	46.7			
MQLPLD5.8 × 215	5.8	216.1	145.0	166.1	46.8			
MQLPLD5.9 × 215	5.9	216.1	147.5	166.1	46.9			
MQLPLD6.0 × 230	6.0	231.1	150.0	181.1	46.5			
MQLPLD6.1 × 230	6.1	231.1	152.5	181.1	46.6			
MQLPLD6.2 × 230	6.2	231.1	155.0	181.1	46.7			
MQLPLD6.3 × 230	6.3	231.1	157.5	181.2	46.8			
MQLPLD6.4 × 230	6.4	231.2	160.0	181.2	46.9			
MQLPLD6.5 × 245	6.5	246.2	162.5	196.2	47.0			
MQLPLD6.6 × 245	6.6	246.2	165.0	196.2	46.5			
MQLPLD6.7 × 245	6.7	246.2	167.5	196.3	46.6			
MQLPLD6.8 × 245	6.8	246.2	170.0	196.3	46.7			
MQLPLD6.9 × 245	6.9	246.3	172.5	196.3	46.8			
MQLPLD7.0 × 260	7.0	261.3	175.0	211.3	46.9			
MQLPLD7.1 × 260	7.1	261.3	177.5	211.3	46.5			
MQLPLD7.2 × 260	7.2	261.3	180.0	211.3	46.6			
MQLPLD7.3 × 260	7.3	261.3	182.5	211.3	46.7			
MQLPLD7.4 × 260	7.4	261.3	185.0	211.3	46.8			
MQLPLD7.5 × 275	7.5	276.4	187.5	226.4	46.9			
MQLPLD7.6 × 275	7.6	276.4	190.0	226.4	47.0			
MQLPLD7.7 × 275	7.7	276.4	192.5	226.4	46.5			
MQLPLD7.8 × 275	7.8	276.4	195.0	226.4	46.6			
MQLPLD7.9 × 275	7.9	276.4	197.5	226.4	46.7			
MQLPLD8.0 × 290	8.0	291.5	200.0	241.5	47.0			

30D用

单位 (Unit) : mm

商品编码 Code	直径 DC	全长 OAL	有效长 LU	槽长 LCF	柄长 LS	柄径 DOWNS	先端 PL	在庫 Stock
MQLPD3.0 × 155	3.0	155.5	90.0	105.5	47.0	3	0.5	4
MQLPD3.1 × 155	3.1	155.6	93.0	105.6	46.5			
MQLPD3.2 × 155	3.2	155.6	96.0		46.6			
MQLPD3.3 × 155	3.3	155.6	99.0	110.6	42.6		0.6	
MQLPD3.4 × 155	3.4	155.6	102.0		42.7			4
MQLPD3.5 × 175	3.5	175.6	105.0	125.6	46.7			
MQLPD3.6 × 175	3.6	175.7	108.0	125.7	46.8			
MQLPD3.7 × 175	3.7	175.7	111.0					
MQLPD3.8 × 175	3.8	175.7	114.0	130.7	42.9		0.7	5
MQLPD3.9 × 175	3.9	175.7	117.0					
MQLPD4.0 × 190	4.0	190.7	120.0	140.7	47.0			
MQLPD4.1 × 190	4.1	190.7	123.0		46.5			
MQLPD4.2 × 190	4.2	190.8	126.0	140.8	46.6		0.8	5
MQLPD4.3 × 190	4.3	190.8	129.0	145.8	42.6			
MQLPD4.4 × 190	4.4	190.8	132.0		42.7			
MQLPD4.5 × 210	4.5	210.8	135.0	160.8	46.7			
MQLPD4.6 × 210	4.6	210.8	138.0		46.8			6
MQLPD4.7 × 210	4.7	210.9	141.0	160.9	42.9		0.9	
MQLPD4.8 × 210	4.8	210.9	144.0	165.9	43.0			
MQLPD4.9 × 210	4.9	210.9	147.0		47.0			
MQLPD5.0 × 225	5.0	225.9	150.0	175.9	46.5		1.0	6
MQLPD5.1 × 225	5.1	225.9	153.0		46.6			
MQLPD5.2 × 225	5.2	225.9	156.0	176.0	46.7			
MQLPD5.3 × 225	5.3	226.0	159.0		46.8			
MQLPD5.4 × 225	5.4	226.0	162.0	196.0	46.9		1.1	7
MQLPD5.5 × 245	5.5	246.0	165.0		47.0			
MQLPD5.6 × 245	5.6	246.0	168.0	211.1	46.5			
MQLPD5.7 × 245	5.7	246.0	171.0		46.6			
MQLPD5.8 × 245	5.8	246.1	174.0	211.2	46.7		1.2	7
MQLPD5.9 × 245	5.9	246.1	177.0		46.8			
MQLPD6.0 × 260	6.0	261.1	180.0	231.2	46.9			
MQLPD6.1 × 260	6.1	261.1	183.0		47.0			
MQLPD6.2 × 260	6.2	261.1	186.0	231.3	46.5		1.3	8
MQLPD6.3 × 260	6.3	261.1	189.0		46.6			
MQLPD6.4 × 260	6.4	261.2	192.0	246.3	46.7			
MQLPD6.5 × 280	6.5	281.2	195.0		46.8			
MQLPD6.6 × 280	6.6	281.2	198.0		46.9			8
MQLPD6.7 × 280	6.7	281.2	201.0	266.4	47.0		1.4	
MQLPD6.8 × 280	6.8	281.2	204.0		46.5			
MQLPD6.9 × 280	6.9	281.3	207.0		46.6			
MQLPD7.0 × 295	7.0	296.3	210.0		46.7		1.5	8
MQLPD7.1 × 295	7.1	296.3	213.0		46.8			
MQLPD7.2 × 295	7.2	296.3	216.0		46.9			
MQLPD7.3 × 295	7.3	296.3	219.0	281.5	47.0			
MQLPD7.4 × 295	7.4	296.3	222.0					8
MQLPD7.5 × 315	7.5	316.4	225.0					
MQLPD7.6 × 315	7.6	316.4	228.0					
MQLPD7.7 × 315	7.7	316.4	231.0					
MQLPD7.8 × 315	7.8	316.4	234.0					8
MQLPD7.9 × 315	7.9	316.4	237.0					
MQLPD8.0 × 330	8.0	331.5	240.0					

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切割工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	◎	◎	◎	—	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	×	◎	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

- 适合用于新材到高硬度钢的油孔钻。
- 可以进行钻头直径 3D 用高效率开孔加工。

This oil-hole drill is suitable for most workpiece materials from Unhardened Steel to Hardened Steel.

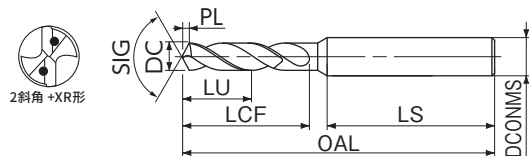

LIST 9580

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PLOH3D5.0	5.0	15.0						
PLOH3D5.1	5.1	15.3	28.9	49.5	82.9		0.9	
PLOH3D5.2	5.2	15.6		49.6				
PLOH3D5.3	5.3	15.9						
PLOH3D5.4	5.4	16.2	29.0	49.7	83.0	6	1.0	
PLOH3D5.5	5.5	16.5						
PLOH3D5.6	5.6	16.8						
PLOH3D5.7	5.7	17.1	31.0	49.8				
PLOH3D5.8	5.8	17.4		49.9				
PLOH3D5.9	5.9	17.7	31.1	50.0	83.1		1.1	
PLOH3D6.0	6.0	18.0						
PLOH3D6.1	6.1	18.3		50.5				
PLOH3D6.2	6.2	18.6	34.1	50.6	89.1			
PLOH3D6.3	6.3	18.9						
PLOH3D6.4	6.4	19.2		50.7				
PLOH3D6.5	6.5	19.5	34.2	50.8	89.2	7	1.2	
PLOH3D6.6	6.6	19.8		50.9				
PLOH3D6.7	6.7	20.1	36.2	51.0	89.3			
PLOH3D6.8	6.8	20.4		51.5				
PLOH3D6.9	6.9	20.7	36.3	51.6	95.3		1.3	
PLOH3D7.0	7.0	21.0		51.7				
PLOH3D7.1	7.1	21.3		51.8				
PLOH3D7.2	7.2	21.6	39.3	51.9	95.4		1.4	
PLOH3D7.3	7.3	21.9		52.0	95.5			
PLOH3D7.4	7.4	22.2		52.5				
PLOH3D7.5	7.5	22.5	39.4	52.6	101.5		1.5	
PLOH3D7.6	7.6	22.8		52.7				
PLOH3D7.7	7.7	23.1	41.4	52.8				
PLOH3D7.8	7.8	23.4		52.9				
PLOH3D7.9	7.9	23.7		53.0				
PLOH3D8.0	8.0	24.0	41.5	53.5	101.6		1.6	
PLOH3D8.1	8.1	24.3		53.6				
PLOH3D8.2	8.2	24.6		53.7				
PLOH3D8.3	8.3	24.9	44.5	53.8				
PLOH3D8.4	8.4	25.2		53.9				
PLOH3D8.5	8.5	25.5		54.0				
PLOH3D8.6	8.6	25.8		54.5				
PLOH3D8.7	8.7	26.1		54.6				
PLOH3D8.8	8.8	26.4	46.6	54.7	107.7		1.7	
PLOH3D8.9	8.9	26.7		54.8				
PLOH3D9.0	9.0	27.0		54.9				
PLOH3D9.1	9.1	27.3		55.0				
PLOH3D9.2	9.2	27.6		55.1				
PLOH3D9.3	9.3	27.9	49.7	55.2	107.8		1.8	
PLOH3D9.4	9.4	28.2		55.3				
PLOH3D9.5	9.5	28.5		55.4				
PLOH3D9.6	9.6	28.8	51.7	55.5	117.8		1.9	
PLOH3D9.7	9.7	29.1		55.6				
PLOH3D9.8	9.8	29.4		55.7				
PLOH3D9.9	9.9	29.7	51.8	55.8	117.9		2.0	
PLOH3D10.0	10.0	30.0		55.9				
PLOH3D10.1	10.1	30.3	54.8	56.0				
PLOH3D10.2	10.2	30.6		56.1				
PLOH3D10.3	10.3	30.9		56.2				
PLOH3D10.4	10.4	31.2	54.9	56.3				
PLOH3D10.5	10.5	31.5		56.4				
PLOH3D10.6	10.6	31.8		56.5				
PLOH3D10.7	10.7	32.1	56.9	56.6				
PLOH3D10.8	10.8	32.4		56.7				
PLOH3D10.9	10.9	32.7	57.0	56.8	118.0			

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PLOH3D11.0	11.0	33.0	57.0	60.0	118.0	11		
PLOH3D11.1	11.1	33.3		59.5			2.0	
PLOH3D11.2	11.2	33.6	60.0		124.0			
PLOH3D11.3	11.3	33.9		59.6				
PLOH3D11.4	11.4	34.2	60.1					
PLOH3D11.5	11.5	34.5		59.7	124.1	12	2.1	
PLOH3D11.6	11.6	34.8		59.8				
PLOH3D11.7	11.7	35.1	62.1					
PLOH3D11.8	11.8	35.4		59.9				
PLOH3D11.9	11.9	35.7	62.2	60.0	124.2			
PLOH3D12.0	12.0	36.0		60.5			2.2	
PLOH3D12.1	12.1	36.3		60.6	130.2			
PLOH3D12.2	12.2	36.6	65.2					
PLOH3D12.3	12.3	36.9		60.7				
PLOH3D12.4	12.4	37.2	65.3					
PLOH3D12.5	12.5	37.5		60.8	130.3	13	2.3	
PLOH3D12.6	12.6	37.8		61.0				
PLOH3D12.7	12.7	38.1	67.3		130.4			
PLOH3D12.8	12.8	38.4		61.5				
PLOH3D12.9	12.9	38.7		61.6	136.4		2.4	
PLOH3D13.0	13.0	39.0	67.4					
PLOH3D13.1	13.1	39.3		61.7				
PLOH3D13.2	13.2	39.6	70.4					
PLOH3D13.3	13.3	39.9		61.8	136.5	14	2.5	
PLOH3D13.4	13.4	40.2		61.9				
PLOH3D13.5	13.5	40.5	70.5					
PLOH3D13.6	13.6	40.8		62.0				
PLOH3D13.7	13.7	41.1		62.5				
PLOH3D13.8	13.8	41.4	72.5					
PLOH3D13.9	13.9	41.7		62.6	142.6		2.6	
PLOH3D14.0	14.0	42.0		62.7				
PLOH3D14.1	14.1	42.3		62.8				
PLOH3D14.2	14.2	42.6	75.6					
PLOH3D14.3	14.3	42.9		62.9	142.7	15	2.7	
PLOH3D14.4	14.4	43.2		63.0				
PLOH3D14.5	14.5	43.5		63.5				
PLOH3D14.6	14.6	43.8		63.6	148.7			
PLOH3D14.7	14.7	44.1		63.7				
PLOH3D14.8	14.8	44.4	77.7					
PLOH3D14.9	14.9	44.7		63.8				
PLOH3D15.0	15.0	45.0		63.9	148.8		2.8	
PLOH3D15.1	15.1	45.3	80.7					
PLOH3D15.2	15.2	45.6		64.0				
PLOH3D15.3	15.3	45.9	80.8					
PLOH3D15.4	15.4	46.2		64.5				
PLOH3D15.5	15.5	46.5		64.6	148.9	16	2.9	
PLOH3D15.6	15.6	46.8	82.8					
PLOH3D15.7	15.7	47.1		64.7				
PLOH3D15.8	15.8	47.4		64.8				
PLOH3D15.9	15.9	47.7	82.9					
PLOH3D16.0	16.0	48.0		64.9				
PLOH3D16.1	16.1	48.3	85.9		158.9			
PLOH3D16.2	16.2	48.6		65.0				
PLOH3D16.3	16.3	48.9		65.1				
PLOH3D16.4	16.4	49.2	86.0		159.0	17	3.0	
PLOH3D16.5	16.5	49.5		65.2				
PLOH3D16.6	16.6	49.8		65.3				
PLOH3D16.7	16.7	50.1	88.0					
PLOH3D16.8	16.8	50.4		65.4	159.1		3.1	
PLOH3D16.9	16.9	50.7	88.1					

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PLOH3D17.0	17.0	51.0	88.1	70.0	159.1	17		
PLOH3D17.1	17.1	51.3		69.5			3.1	
PLOH3D17.2	17.2	51.6	91.1	69.6	165.1			
PLOH3D17.3	17.3	51.9						
PLOH3D17.4	17.4	52.2	91.2	69.7		18	3.2	
PLOH3D17.5	17.5	52.5			165.2			
PLOH3D17.6	17.6	52.8	93.2	69.8				
PLOH3D17.7	17.7	53.1		69.9	165.3			
PLOH3D17.8	17.8	53.4					3.3	
PLOH3D17.9	17.9	53.7	93.3	70.0				
PLOH3D18.0	18.0	54.0		69.5		19	3.4	
PLOH3D18.1	18.1	54.3			171.3			
PLOH3D18.2	18.2	54.6	96.3	69.6				
PLOH3D18.3	18.3	54.9		69.7				
PLOH3D18.4	18.4	55.2	96.4		171.4			
PLOH3D18.5	18.5	55.5		69.8				
PLOH3D18.6	18.6	55.8	98.4		171.5			
PLOH3D18.7	18.7	56.1		69.9				
PLOH3D18.8	18.8	56.4					3.5	
PLOH3D18.9	18.9	56.7						
PLOH3D19.0	19.0	57.0	98.5	70.0		20	3.6	
PLOH3D19.1	19.1	57.3		69.5				
PLOH3D19.2	19.2	57.6		69.6	177.5			
PLOH3D19.3	19.3	57.9	101.5					
PLOH3D19.4	19.4	58.2		69.7				
PLOH3D19.5	19.5	58.5						
PLOH3D19.6	19.6	58.8		69.8				
PLOH3D19.7	19.7	59.1	103.6		177.6			
PLOH3D19.8	19.8	59.4		69.9				
PLOH3D19.9	19.9	59.7						
PLOH3D20.0	20.0	60.0		70.0				

※ 仅限特定代理店库存品。
This product is for sale while stock lasts.

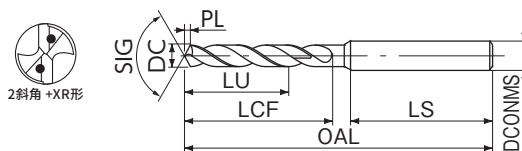

単位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PLOH5D5.0	5.0	25.0						
PLOH5D5.1	5.1	25.5	39.9	49.5	95.9		0.9	
PLOH5D5.2	5.2	26.0		49.6				
PLOH5D5.3	5.3	26.5	40.0	49.7	96.0	6	1.0	
PLOH5D5.4	5.4	27.0						
PLOH5D5.5	5.5	27.5						
PLOH5D5.6	5.6	28.0	43.0	49.8				
PLOH5D5.7	5.7	28.5						
PLOH5D5.8	5.8	29.0		49.9				
PLOH5D5.9	5.9	29.5	43.1	50.0	96.1			
PLOH5D6.0	6.0	30.0						
PLOH5D6.1	6.1	30.5		50.5			1.1	
PLOH5D6.2	6.2	31.0	47.1	50.6	104.1			
PLOH5D6.3	6.3	31.5						
PLOH5D6.4	6.4	32.0	47.2	50.7		7		
PLOH5D6.5	6.5	32.5						
PLOH5D6.6	6.6	33.0			104.2		1.2	
PLOH5D6.7	6.7	33.5	50.2	50.8				
PLOH5D6.8	6.8	34.0		50.9				
PLOH5D6.9	6.9	34.5	50.3	51.0	104.3			
PLOH5D7.0	7.0	35.0						
PLOH5D7.1	7.1	35.5		51.5				
PLOH5D7.2	7.2	36.0	54.3	51.6	112.3		1.3	
PLOH5D7.3	7.3	36.5						
PLOH5D7.4	7.4	37.0		51.7		8		
PLOH5D7.5	7.5	37.5	54.4					
PLOH5D7.6	7.6	38.0		51.8	112.4		1.4	
PLOH5D7.7	7.7	38.5	57.4	51.9				
PLOH5D7.8	7.8	39.0						
PLOH5D7.9	7.9	39.5		52.0	112.5			
PLOH5D8.0	8.0	40.0	57.5					
PLOH5D8.1	8.1	40.5		52.5				
PLOH5D8.2	8.2	41.0		52.6	120.5		1.5	
PLOH5D8.3	8.3	41.5	61.5			9		
PLOH5D8.4	8.4	42.0		52.7				
PLOH5D8.5	8.5	42.5						
PLOH5D8.6	8.6	43.0		52.8				
PLOH5D8.7	8.7	43.5			120.6		1.6	
PLOH5D8.8	8.8	44.0	64.6	52.9				
PLOH5D8.9	8.9	44.5		53.0				
PLOH5D9.0	9.0	45.0						
PLOH5D9.1	9.1	45.5		53.5				
PLOH5D9.2	9.2	46.0			128.7		1.7	
PLOH5D9.3	9.3	46.5	68.7	53.6				
PLOH5D9.4	9.4	47.0		53.7		10		
PLOH5D9.5	9.5	47.5						
PLOH5D9.6	9.6	48.0	71.7	53.8				
PLOH5D9.7	9.7	48.5			128.8		1.8	
PLOH5D9.8	9.8	49.0		53.9				
PLOH5D9.9	9.9	49.5	71.8	54.0				
PLOH5D10.0	10.0	50.0						
PLOH5D10.1	10.1	50.5	75.8	59.5	141.8			
PLOH5D10.2	10.2	51.0		59.6				
PLOH5D10.3	10.3	51.5	75.9		141.9		1.9	
PLOH5D10.4	10.4	52.0		59.7		11		
PLOH5D10.5	10.5	52.5						
PLOH5D10.6	10.6	53.0	78.9	59.8				
PLOH5D10.7	10.7	53.5						
PLOH5D10.8	10.8	54.0		59.9				
PLOH5D10.9	10.9	54.5	79.0	60.0	142.0		2.0	

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
POH5D11.0	11.0	55.0	79.0	60.0	142.0	11		
POH5D11.1	11.1	55.5		59.5			2.0	
POH5D11.2	11.2	56.0	83.0		150.0			
POH5D11.3	11.3	56.5		59.6				
POH5D11.4	11.4	57.0	83.1					
POH5D11.5	11.5	57.5		59.7		150.1	2.1	
POH5D11.6	11.6	58.0						
POH5D11.7	11.7	58.5	86.1	59.8				
POH5D11.8	11.8	59.0		59.9				
POH5D11.9	11.9	59.5	86.2	60.0	150.2			
POH5D12.0	12.0	60.0						
POH5D12.1	12.1	60.5		60.5			2.2	
POH5D12.2	12.2	61.0	90.2	60.6	158.2			
POH5D12.3	12.3	61.5						
POH5D12.4	12.4	62.0	90.3	60.7				
POH5D12.5	12.5	62.5						
POH5D12.6	12.6	63.0						
POH5D12.7	12.7	63.5		60.8	158.3		2.3	
POH5D12.8	12.8	64.0	93.3	60.9				
POH5D12.9	12.9	64.5						
POH5D13.0	13.0	65.0	93.4	61.0	158.4			
POH5D13.1	13.1	65.5		61.5				
POH5D13.2	13.2	66.0						
POH5D13.3	13.3	66.5	97.4	61.6	166.4		2.4	
POH5D13.4	13.4	67.0						
POH5D13.5	13.5	67.5	97.5	61.7				
POH5D13.6	13.6	68.0		61.8				
POH5D13.7	13.7	68.5						
POH5D13.8	13.8	69.0	100.5	61.9	166.5		2.5	
POH5D13.9	13.9	69.5		62.0				
POH5D14.0	14.0	70.0						
POH5D14.1	14.1	70.5		62.5				
POH5D14.2	14.2	71.0						
POH5D14.3	14.3	71.5	104.6	62.6	174.6		2.6	
POH5D14.4	14.4	72.0		62.7				
POH5D14.5	14.5	72.5						
POH5D14.6	14.6	73.0						
POH5D14.7	14.7	73.5		62.8				
POH5D14.8	14.8	74.0	107.7	62.9	174.7		2.7	
POH5D14.9	14.9	74.5		63.0				
POH5D15.0	15.0	75.0						
POH5D15.1	15.1	75.5	111.7	63.5	182.7			
POH5D15.2	15.2	76.0						
POH5D15.3	15.3	76.5	111.8	63.6				
POH5D15.4	15.4	77.0		63.7	182.8		2.8	
POH5D15.5	15.5	77.5						
POH5D15.6	15.6	78.0	114.8	63.8				
POH5D15.7	15.7	78.5						
POH5D15.8	15.8	79.0		63.9				
POH5D15.9	15.9	79.5	114.9	64.0	182.9		2.9	
POH5D16.0	16.0	80.0						
POH5D16.1	16.1	80.5		69.5				
POH5D16.2	16.2	81.0		69.6	195.9			
POH5D16.3	16.3	81.5						
POH5D16.4	16.4	82.0	119.0					
POH5D16.5	16.5	82.5		69.7	196.0		3.0	
POH5D16.6	16.6	83.0						
POH5D16.7	16.7	83.5	122.0	69.8				
POH5D16.8	16.8	84.0						
POH5D16.9	16.9	84.5	122.1	69.9	196.1		3.1	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PLOH5D17.0	17.0	85.0	122.1	70.0	196.1	17		
PLOH5D17.1	17.1	85.5		69.5			3.1	
PLOH5D17.2	17.2	86.0	126.1	69.6	204.1			
PLOH5D17.3	17.3	86.5						
PLOH5D17.4	17.4	87.0	126.2	69.7		18	3.2	
PLOH5D17.5	17.5	87.5						
PLOH5D17.6	17.6	88.0		69.8	204.2			
PLOH5D17.7	17.7	88.5	129.2					
PLOH5D17.8	17.8	89.0		69.9				
PLOH5D17.9	17.9	89.5	129.3		204.3			
PLOH5D18.0	18.0	90.0		70.0			3.3	
PLOH5D18.1	18.1	90.5		69.5				
PLOH5D18.2	18.2	91.0		69.6	212.3			
PLOH5D18.3	18.3	91.5	133.3			19		
PLOH5D18.4	18.4	92.0		69.7				
PLOH5D18.5	18.5	92.5	133.4				3.4	
PLOH5D18.6	18.6	93.0		69.8				
PLOH5D18.7	18.7	93.5	136.4		212.4			
PLOH5D18.8	18.8	94.0		69.9				
PLOH5D18.9	18.9	94.5						
PLOH5D19.0	19.0	95.0	136.5	70.0	212.5			
PLOH5D19.1	19.1	95.5		69.5			3.5	
PLOH5D19.2	19.2	96.0		69.6				
PLOH5D19.3	19.3	96.5	140.5		220.5			
PLOH5D19.4	19.4	97.0		69.7		20		
PLOH5D19.5	19.5	97.5						
PLOH5D19.6	19.6	98.0		69.8				
PLOH5D19.7	19.7	98.5	143.6		220.6		3.6	
PLOH5D19.8	19.8	99.0		69.9				
PLOH5D19.9	19.9	99.5						
PLOH5D20.0	20.0	100.0		70.0				

※ 仅限特定代理店库存品。

This product is for sale while stock lasts.

- 适用于新材到高硬度钢的油孔钻。
- 可以进行钻头直径 7D 用高效率开孔加工。

This oil-hole drill is suitable for most workpiece materials from Unhardened Steel to Hardened Steel.

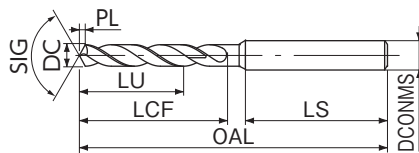

LIST 9584

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PLOH7D5.0	5.0	35.0	50.9	49.5	110.9	6	0.9	
PLOH7D5.1	5.1	35.7		49.6	111.0			
PLOH7D5.2	5.2	36.4	51.0				49.7	
PLOH7D5.3	5.3	37.1		55.0	49.8			
PLOH7D5.4	5.4	37.8	55.1				49.9	
PLOH7D5.5	5.5	38.5		60.1	50.0			
PLOH7D5.6	5.6	39.2	60.2			50.1		
PLOH7D5.7	5.7	39.9		64.2	50.2			
PLOH7D5.8	5.8	40.6	64.3			50.3		
PLOH7D5.9	5.9	41.3		69.3	50.4			
PLOH7D6.0	6.0	42.0	73.4			50.5		
PLOH7D6.1	6.1	42.7		73.5	50.6			
PLOH7D6.2	6.2	43.4	73.6			50.7		
PLOH7D6.3	6.3	44.1		73.7	50.8			
PLOH7D6.4	6.4	44.8	73.8			50.9		
PLOH7D6.5	6.5	45.5		73.9	51.0			
PLOH7D6.6	6.6	46.2	74.0			51.1		
PLOH7D6.7	6.7	46.9		74.1	51.2			
PLOH7D6.8	6.8	47.6	74.2			51.3		
PLOH7D6.9	6.9	48.3		74.3	51.4			
PLOH7D7.0	7.0	49.0	74.4			51.5		
PLOH7D7.1	7.1	49.7		74.5	51.6			
PLOH7D7.2	7.2	50.4	74.6			51.7		
PLOH7D7.3	7.3	51.1		74.7	51.8			
PLOH7D7.4	7.4	51.8	74.8			51.9		
PLOH7D7.5	7.5	52.5		74.9	52.0			
PLOH7D7.6	7.6	53.2	75.0			52.1		
PLOH7D7.7	7.7	53.9		75.1	52.2			
PLOH7D7.8	7.8	54.6	75.2			52.3		
PLOH7D7.9	7.9	55.3		75.3	52.4			
PLOH7D8.0	8.0	56.0	75.4			52.5		
PLOH7D8.1	8.1	56.7		75.5	52.6			
PLOH7D8.2	8.2	57.4	75.6			52.7		
PLOH7D8.3	8.3	58.1		75.7	52.8			
PLOH7D8.4	8.4	58.8	75.8			52.9		
PLOH7D8.5	8.5	59.5		75.9	53.0			
PLOH7D8.6	8.6	60.2	76.0			53.1		
PLOH7D8.7	8.7	60.9		76.1	53.2			
PLOH7D8.8	8.8	61.6	76.2			53.3		
PLOH7D8.9	8.9	62.3		76.3	53.4			
PLOH7D9.0	9.0	63.0	76.4			53.5		
PLOH7D9.1	9.1	63.7		76.5	53.6			
PLOH7D9.2	9.2	64.4	76.6			53.7		
PLOH7D9.3	9.3	65.1		76.7	53.8			
PLOH7D9.4	9.4	65.8	76.8			53.9		
PLOH7D9.5	9.5	66.5		76.9	54.0			
PLOH7D9.6	9.6	67.2	77.0			54.1		
PLOH7D9.7	9.7	67.9		77.1	54.2			
PLOH7D9.8	9.8	68.6	77.2			54.3		
PLOH7D9.9	9.9	69.3		77.3	54.4			
PLOH7D10.0	10.0	70.0	77.4			54.5		
PLOH7D10.1	10.1	70.7		77.5	54.6			
PLOH7D10.2	10.2	71.4	77.6			54.7		
PLOH7D10.3	10.3	72.1		77.7	54.8			
PLOH7D10.4	10.4	72.8	77.8			54.9		
PLOH7D10.5	10.5	73.5		77.9	55.0			
PLOH7D10.6	10.6	74.2	78.0			55.1		
PLOH7D10.7	10.7	74.9		78.1	55.2			
PLOH7D10.8	10.8	75.6	78.2			55.3		
PLOH7D10.9	10.9	76.3		78.3	55.4			

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PLOH7D11.0	11.0	77.0	101.0	60.0	172.0	11		
PLOH7D11.1	11.1	77.7		59.5			2.0	
PLOH7D11.2	11.2	78.4	106.0		182.0			
PLOH7D11.3	11.3	79.1		59.6				
PLOH7D11.4	11.4	79.8						
PLOH7D11.5	11.5	80.5	106.1	59.7		12	2.1	
PLOH7D11.6	11.6	81.2			182.1			
PLOH7D11.7	11.7	81.9	110.1	59.8				
PLOH7D11.8	11.8	82.6		59.9				
PLOH7D11.9	11.9	83.3						
PLOH7D12.0	12.0	84.0	110.2	60.0	182.2			
PLOH7D12.1	12.1	84.7		60.5			2.2	
PLOH7D12.2	12.2	85.4	115.2	60.6	192.2			
PLOH7D12.3	12.3	86.1						
PLOH7D12.4	12.4	86.8	115.3	60.7				
PLOH7D12.5	12.5	87.5				13		
PLOH7D12.6	12.6	88.2		60.8	192.3		2.3	
PLOH7D12.7	12.7	88.9						
PLOH7D12.8	12.8	89.6		60.9				
PLOH7D12.9	12.9	90.3	119.3					
PLOH7D13.0	13.0	91.0	119.4	61.0	192.4			
PLOH7D13.1	13.1	91.7		61.5				
PLOH7D13.2	13.2	92.4					2.4	
PLOH7D13.3	13.3	93.1	124.4	61.6	202.4			
PLOH7D13.4	13.4	93.8						
PLOH7D13.5	13.5	94.5	124.5	61.7		14		
PLOH7D13.6	13.6	95.2		61.8				
PLOH7D13.7	13.7	95.9			202.5		2.5	
PLOH7D13.8	13.8	96.6	128.5	61.9				
PLOH7D13.9	13.9	97.3		62.0				
PLOH7D14.0	14.0	98.0						
PLOH7D14.1	14.1	98.7		62.5				
PLOH7D14.2	14.2	99.4						
PLOH7D14.3	14.3	100.1	133.6	62.6	212.6		2.6	
PLOH7D14.4	14.4	100.8		62.7		15		
PLOH7D14.5	14.5	101.5						
PLOH7D14.6	14.6	102.2		62.8				
PLOH7D14.7	14.7	102.9			212.7		2.7	
PLOH7D14.8	14.8	103.6	137.7	62.9				
PLOH7D14.9	14.9	104.3		63.0				
PLOH7D15.0	15.0	105.0						
PLOH7D15.1	15.1	105.7	142.7	63.5	222.7			
PLOH7D15.2	15.2	106.4						
PLOH7D15.3	15.3	107.1		63.6			2.8	
PLOH7D15.4	15.4	107.8	142.8	63.7	222.8			
PLOH7D15.5	15.5	108.5				16		
PLOH7D15.6	15.6	109.2	147.8	63.8				
PLOH7D15.7	15.7	109.9						
PLOH7D15.8	15.8	110.6		63.9	222.9			
PLOH7D15.9	15.9	111.3	147.9	64.0			2.9	
PLOH7D16.0	16.0	112.0						
PLOH7D16.1	16.1	112.7		69.5	247.9			
PLOH7D16.2	16.2	113.4		69.6				
PLOH7D16.3	16.3	114.1						
PLOH7D16.4	16.4	114.8	152.0	69.7		17	3.0	
PLOH7D16.5	16.5	115.5			248.0			
PLOH7D16.6	16.6	116.2	156.0	69.8				
PLOH7D16.7	16.7	116.9						
PLOH7D16.8	16.8	117.6						
PLOH7D16.9	16.9	118.3	156.1	69.9	248.1		3.1	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
PLOH7D17.0	17.0	119.0	156.1	70.0	248.1	17		
PLOH7D17.1	17.1	119.7		69.5			3.1	
PLOH7D17.2	17.2	120.4	161.1	69.6	258.1			
PLOH7D17.3	17.3	121.1						
PLOH7D17.4	17.4	121.8	161.2	69.7		18	3.2	
PLOH7D17.5	17.5	122.5						
PLOH7D17.6	17.6	123.2		69.8	258.2			
PLOH7D17.7	17.7	123.9	165.2					
PLOH7D17.8	17.8	124.6		69.9				
PLOH7D17.9	17.9	125.3	165.3		258.3			
PLOH7D18.0	18.0	126.0		70.0			3.3	
PLOH7D18.1	18.1	126.7		69.5				
PLOH7D18.2	18.2	127.4		69.6	268.3			
PLOH7D18.3	18.3	128.1	170.3			19		
PLOH7D18.4	18.4	128.8		69.7				
PLOH7D18.5	18.5	129.5	170.4				3.4	
PLOH7D18.6	18.6	130.2		69.8				
PLOH7D18.7	18.7	130.9	174.4		268.4			
PLOH7D18.8	18.8	131.6		69.9				
PLOH7D18.9	18.9	132.3						
PLOH7D19.0	19.0	133.0	174.5	70.0	268.5			
PLOH7D19.1	19.1	133.7		69.5			3.5	
PLOH7D19.2	19.2	134.4		69.6				
PLOH7D19.3	19.3	135.1	179.5		278.5			
PLOH7D19.4	19.4	135.8		69.7		20		
PLOH7D19.5	19.5	136.5						
PLOH7D19.6	19.6	137.2		69.8				
PLOH7D19.7	19.7	137.9						
PLOH7D19.8	19.8	138.6	183.6	69.9	278.6		3.6	
PLOH7D19.9	19.9	139.3						
PLOH7D20.0	20.0	140.0		70.0				

※ 仅限特定代理店库存品。
This product is for sale while stock lasts.

- 可以实现铝合金高速湿式加工和干式加工。
- 加工小直径孔的铝专用钻头。

High-speed wet processing and dry processing of Aluminum Alloy are available in small diameter.

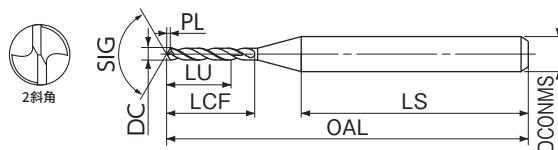

LIST 9524

订货方式 商品编码



单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCMD0.5	0.5	3.5	6	28	44	3	0.1	●
DLCMD0.6	0.6	4.2	7				0.2	
DLCMD0.7	0.7	4.9	9				0.3	
DLCMD0.8	0.8	5.6	10				0.4	
DLCMD0.9	0.9	6.3	11	15	47	3	0.5	
DLCMD1.0	1.0	7.0	12				0.6	
DLCMD1.1	1.1	7.7	14					
DLCMD1.2	1.2	8.4						
DLCMD1.3	1.3	9.1						
DLCMD1.4	1.4	9.8						
DLCMD1.5	1.5	10.5						
DLCMD1.6	1.6	11.2						
DLCMD1.7	1.7	11.9						
DLCMD1.8	1.8	12.6						
DLCMD1.9	1.9	13.3						

DLC 涂层的特长

- DLC是“Diamond Like Carbon”的缩写，具有摩擦系数小、表面平滑性出色、铝材等难以附着的特点


Low frictional coefficient, and smooth chip flow by DLC coat.

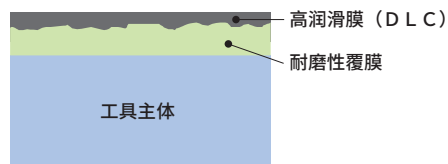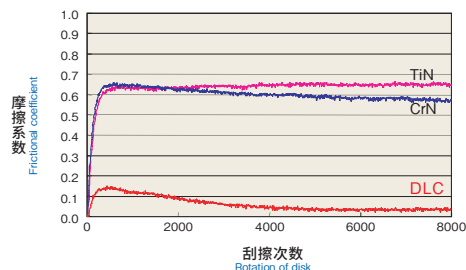


DLC 涂层的效果

- 高润滑膜上铝难以凝结

Prevent adhesion of Aluminum Alloy.



加工 3,000 个孔后凝结微




加工 26 个孔折断后钻刃上凝结明显

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	—	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	×	◎	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●可以实现铝合金高速湿式加工和干式加工。

High-speed wet processing and dry processing of Aluminum Alloy are available.

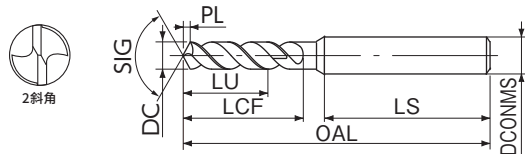

新商品

LIST 9520

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDR2.0	2.0	10.0	15		47		0.6	
DLCDR2.1	2.1	10.5						
DLCDR2.2	2.2	11.0	16		48		0.7	
DLCDR2.3	2.3	11.5						
DLCDR2.4	2.4	12.0						
DLCDR2.5	2.5	12.5	17	28.0	49	3		
DLCDR2.6	2.6	13.0					0.8	
DLCDR2.7	2.7	13.5						
DLCDR2.8	2.8	14.0			51			
DLCDR2.9	2.9	14.5	19				0.9	
DLCDR3.0	3.0	15.0						
DLCDR3.1	3.1	15.5						
DLCDR3.2	3.2	16.0	21		53		1.0	
DLCDR3.3	3.3	16.5						
DLCDR3.4	3.4	17.0						
DLCDR3.5	3.5	17.5						
DLCDR3.6	3.6	18.0	24	30.0	56	4	1.1	
DLCDR3.7	3.7	18.5						
DLCDR3.8	3.8	19.0						
DLCDR3.9	3.9	19.5			59			
DLCDR4.0	4.0	20.0	27				1.2	
DLCDR4.1	4.1	20.5			71			
DLCDR4.2	4.2	21.0						
DLCDR4.3	4.3	21.5					1.3	
DLCDR4.4	4.4	22.0						
DLCDR4.5	4.5	22.5	31		75		1.4	
DLCDR4.6	4.6	23.0						
DLCDR4.7	4.7	23.5						
DLCDR4.8	4.8	24.0			77			
DLCDR4.9	4.9	24.5	33				1.5	
DLCDR5.0	5.0	25.0				6		
DLCDR5.1	5.1	25.5						
DLCDR5.2	5.2	26.0						
DLCDR5.3	5.3	26.5	38		82		1.6	
DLCDR5.4	5.4	27.0						
DLCDR5.5	5.5	27.5					1.7	
DLCDR5.6	5.6	28.0						
DLCDR5.7	5.7	28.5						
DLCDR5.8	5.8	29.0						
DLCDR5.9	5.9	29.5						
DLCDR6.0	6.0	30.0					1.8	
DLCDR6.1	6.1	30.5	41	38.0	85			
DLCDR6.2	6.2	31.0					1.9	
DLCDR6.3	6.3	31.5						
DLCDR6.4	6.4	32.0						
DLCDR6.5	6.5	32.5					2.0	
DLCDR6.6	6.6	33.0						
DLCDR6.7	6.7	33.5						
DLCDR6.8	6.8	34.0	43		87			
DLCDR6.9	6.9	34.5					2.1	
DLCDR7.0	7.0	35.0				8		
DLCDR7.1	7.1	35.5						
DLCDR7.2	7.2	36.0					2.2	
DLCDR7.3	7.3	36.5	45		89			
DLCDR7.4	7.4	37.0						
DLCDR7.5	7.5	37.5						
DLCDR7.6	7.6	38.0					2.3	
DLCDR7.7	7.7	38.5						
DLCDR7.8	7.8	39.0	48		92			
DLCDR7.9	7.9	39.5					2.4	

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDR8.0	8.0	40.0	48	38.0	92	8	2.4	
DLCDR8.1	8.1	40.5						
DLCDR8.2	8.2	41.0						
DLCDR8.3	8.3	41.5	53		103		2.5	
DLCDR8.4	8.4	42.0						
DLCDR8.5	8.5	42.5						
DLCDR8.6	8.6	43.0					2.6	
DLCDR8.7	8.7	43.5						
DLCDR8.8	8.8	44.0	55		105			
DLCDR8.9	8.9	44.5						
DLCDR9.0	9.0	45.0					2.7	
DLCDR9.1	9.1	45.5						
DLCDR9.2	9.2	46.0						
DLCDR9.3	9.3	46.5	58		108		2.8	
DLCDR9.4	9.4	47.0						
DLCDR9.5	9.5	47.5						
DLCDR9.6	9.6	48.0					2.9	
DLCDR9.7	9.7	48.5						
DLCDR9.8	9.8	49.0	60		110			
DLCDR9.9	9.9	49.5						
DLCDR10.0	10.0	50.0					3.0	
DLCDR10.1	10.1	50.5						
DLCDR10.2	10.2	51.0						
DLCDR10.3	10.3	51.5	66		123		3.1	
DLCDR10.4	10.4	52.0						
DLCDR10.5	10.5	52.5						
DLCDR10.6	10.6	53.0					3.2	
DLCDR10.7	10.7	53.5						
DLCDR10.8	10.8	54.0	68		125			
DLCDR10.9	10.9	54.5						
DLCDR11.0	11.0	55.0					3.3	
DLCDR11.1	11.1	55.5						
DLCDR11.2	11.2	56.0						
DLCDR11.3	11.3	56.5	71		128		3.4	
DLCDR11.4	11.4	57.0						
DLCDR11.5	11.5	57.5						
DLCDR11.6	11.6	58.0					3.5	
DLCDR11.7	11.7	58.5						
DLCDR11.8	11.8	59.0	73		130			
DLCDR11.9	11.9	59.5					3.6	
DLCDR12.0	12.0	60.0						

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	—	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	×	◎	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●在车床或加工中心加工时基本无铁屑缠绕，可实现4D 以内高速、高精度、长寿命的加工。

Realize high accuracy and longer tool life in ultra high speed drilling in machining center or turning machine where chip jamming is easy to occur (4D)

新品

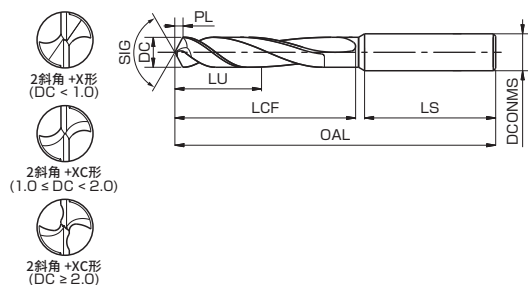

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDLM-4D0050	0.50	2.0	3.6	29.3	38.1	0.1		
DLCDLM-4D0051	0.51							
DLCDLM-4D0052	0.52	2.1	4.0	29.0				
DLCDLM-4D0053	0.53							
DLCDLM-4D0054	0.54	2.2						
DLCDLM-4D0055	0.55							
DLCDLM-4D0056	0.56							
DLCDLM-4D0057	0.57	2.3	4.3	28.8				
DLCDLM-4D0058	0.58							
DLCDLM-4D0059	0.59	2.4						
DLCDLM-4D0060	0.60				38.1	0.1		
DLCDLM-4D0061	0.61							
DLCDLM-4D0062	0.62	2.5	4.7	28.5				
DLCDLM-4D0063	0.63							
DLCDLM-4D0064	0.64	2.6						
DLCDLM-4D0065	0.65							
DLCDLM-4D0066	0.66	2.7	5.0	28.3				
DLCDLM-4D0067	0.67							
DLCDLM-4D0068	0.68	2.8						
DLCDLM-4D0069	0.69							
DLCDLM-4D0070	0.70	2.9	5.4	28.0	38.1	0.1		
DLCDLM-4D0071	0.71							
DLCDLM-4D0072	0.72	3.0	5.5	27.8				
DLCDLM-4D0073	0.73							
DLCDLM-4D0074	0.74	3.1	5.8	27.8				
DLCDLM-4D0075	0.75							
DLCDLM-4D0076	0.76	3.2						
DLCDLM-4D0077	0.77							
DLCDLM-4D0078	0.78	3.3	6.2	27.5				
DLCDLM-4D0079	0.79							
DLCDLM-4D0080	0.80	3.4			38.2	0.2		
DLCDLM-4D0081	0.81							
DLCDLM-4D0082	0.82	3.5	6.5	27.3				
DLCDLM-4D0083	0.83							
DLCDLM-4D0084	0.84	3.6						
DLCDLM-4D0085	0.85							
DLCDLM-4D0086	0.86	3.7	6.8	27.1				
DLCDLM-4D0087	0.87							
DLCDLM-4D0088	0.88	3.8						
DLCDLM-4D0089	0.89							
DLCDLM-4D0090	0.90	3.9	7.2	26.7	50.3	0.4		
DLCDLM-4D0091	0.91							
DLCDLM-4D0092	0.92	4.0		26.8				
DLCDLM-4D0093	0.93							
DLCDLM-4D0094	0.94	4.1	7.9	26.2				
DLCDLM-4D0095	0.95							
DLCDLM-4D0096	0.96	4.2						
DLCDLM-4D0097	0.97							
DLCDLM-4D0098	0.98	4.3		26.3				
DLCDLM-4D0099	0.99							
DLCDLM-4D0100	1.00	4.4			50.4	0.4		
DLCDLM-4D0101	1.01							
DLCDLM-4D0102	1.02							
DLCDLM-4D0103	1.03	4.1						
DLCDLM-4D0104	1.04							
DLCDLM-4D0105	1.05	4.2	7.9					
DLCDLM-4D0106	1.06							
DLCDLM-4D0107	1.07	4.3		26.3				
DLCDLM-4D0108	1.08							
DLCDLM-4D0109	1.09	4.4						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDLM-4D0110	1.10	4.4	7.9	26.3	38.2	0.2		
DLCDLM-4D0111	1.11							
DLCDLM-4D0112	1.12	4.5		25.6				
DLCDLM-4D0113	1.13							
DLCDLM-4D0114	1.14	4.6	8.6	25.7				
DLCDLM-4D0115	1.15							
DLCDLM-4D0116	1.16	4.7						
DLCDLM-4D0117	1.17							
DLCDLM-4D0118	1.18	4.8						
DLCDLM-4D0119	1.19							
DLCDLM-4D0120	1.20	4.9		25.1	38.3	3		
DLCDLM-4D0121	1.21							
DLCDLM-4D0122	1.22	5.0	9.4	25.2				
DLCDLM-4D0123	1.23							
DLCDLM-4D0124	1.24	5.1						
DLCDLM-4D0125	1.25							
DLCDLM-4D0126	1.26	5.2						
DLCDLM-4D0127	1.27							
DLCDLM-4D0128	1.28	5.3		24.6				
DLCDLM-4D0129	1.29							
DLCDLM-4D0130	1.30	5.4	10.1	24.7	38.3	3		
DLCDLM-4D0131	1.31							
DLCDLM-4D0132	1.32	5.5						
DLCDLM-4D0133	1.33							
DLCDLM-4D0134	1.34	5.6						
DLCDLM-4D0135	1.35							
DLCDLM-4D0136	1.36	5.7		24.1				
DLCDLM-4D0137	1.37							
DLCDLM-4D0138	1.38	5.8	10.8	24.2				
DLCDLM-4D0139	1.39							
DLCDLM-4D0140	1.40	5.9			50.3	0.4		
DLCDLM-4D0141	1.41							
DLCDLM-4D0142	1.42	6.0						
DLCDLM-4D0143	1.43							
DLCDLM-4D0144	1.44	6.1						
DLCDLM-4D0145	1.45							
DLCDLM-4D0146	1.46	6.2	11.5	35.6				
DLCDLM-4D0147	1.47							
DLCDLM-4D0148	1.48	6.3		35.7				
DLCDLM-4D0149	1.49							
DLCDLM-4D0150	1.50	6.4			50.4	0.4		
DLCDLM-4D0151	1.51							
DLCDLM-4D0152	1.52	6.5						
DLCDLM-4D0153	1.53							
DLCDLM-4D0154	1.54	6.6	12.2	35.1				
DLCDLM-4D0155	1.55							
DLCDLM-4D0156	1.56	6.7		35.2				
DLCDLM-4D0157	1.57							
DLCDLM-4D0158	1.58	6.8						
DLCDLM-4D0159	1.59							
DLCDLM-4D0160	1.60				50.4	0.4		
DLCDLM-4D0161	1.61							
DLCDLM-4D0162	1.62	6.5						
DLCDLM-4D0163	1.63							
DLCDLM-4D0164	1.64	6.6						
DLCDLM-4D0165	1.65							
DLCDLM-4D0166	1.66	6.7						
DLCDLM-4D0167	1.67							
DLCDLM-4D0168	1.68	6.8	12.3					
DLCDLM-4D0169	1.69							

新商品

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DOCNMS	先端 PL	在庫 Stock
DLCDLM-4D0170	1.70	6.8	12.3	35.2	50.4	0.4	□	
DLCDLM-4D0171	1.71							
DLCDLM-4D0172	1.72	6.9		34.6				
DLCDLM-4D0173	1.73							
DLCDLM-4D0174	1.74	7.0	13.0					
DLCDLM-4D0175	1.75							
DLCDLM-4D0176	1.76	7.1		34.7				
DLCDLM-4D0177	1.77							
DLCDLM-4D0178	1.78	7.2						
DLCDLM-4D0179	1.79	7.3						
DLCDLM-4D0180	1.80	7.4	13.7	34.1	50.4	0.4	□	
DLCDLM-4D0181	1.81							
DLCDLM-4D0182	1.82	7.5						
DLCDLM-4D0183	1.83	7.6						
DLCDLM-4D0184	1.84	7.7						
DLCDLM-4D0185	1.85	7.8	14.1					
DLCDLM-4D0186	1.86	7.9		33.9				
DLCDLM-4D0187	1.87							
DLCDLM-4D0188	1.88	8.0	15.4	31.0				
DLCDLM-4D0189	1.89	8.1						
DLCDLM-4D0190	1.90	8.2			50.5	0.5		
DLCDLM-4D0191	1.91	8.3						
DLCDLM-4D0192	1.92	8.4	17.4					
DLCDLM-4D0193	1.93	8.5						
DLCDLM-4D0194	1.94	8.6		29.0				
DLCDLM-4D0195	1.95	8.7						
DLCDLM-4D0196	1.96	8.8						
DLCDLM-4D0197	1.97	8.9						
DLCDLM-4D0198	1.98	9.0						
DLCDLM-4D0199	1.99	9.1						
DLCDLM-4D0200	2.00	9.2			50.5	0.5		
DLCDLM-4D0201	2.01							
DLCDLM-4D0202	2.02							
DLCDLM-4D0203	2.03							
DLCDLM-4D0204	2.04							
DLCDLM-4D0205	2.05							
DLCDLM-4D0206	2.06							
DLCDLM-4D0207	2.07							
DLCDLM-4D0208	2.08							
DLCDLM-4D0209	2.09							
DLCDLM-4D0210	2.10				50.6	0.6		
DLCDLM-4D0211	2.11							
DLCDLM-4D0212	2.12							
DLCDLM-4D0213	2.13							
DLCDLM-4D0214	2.14							
DLCDLM-4D0215	2.15							
DLCDLM-4D0216	2.16							
DLCDLM-4D0217	2.17							
DLCDLM-4D0218	2.18							
DLCDLM-4D0219	2.19							
DLCDLM-4D0220	2.20				50.6	0.6		
DLCDLM-4D0221	2.21							
DLCDLM-4D0222	2.22							
DLCDLM-4D0223	2.23							
DLCDLM-4D0224	2.24							
DLCDLM-4D0225	2.25							
DLCDLM-4D0226	2.26							
DLCDLM-4D0227	2.27							
DLCDLM-4D0228	2.28							
DLCDLM-4D0229	2.29							

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DOCNMS	先端 PL	在庫 Stock
DLCDLM-4D0230	2.30	9.2			50.5	0.5		
DLCDLM-4D0231	2.31							
DLCDLM-4D0232	2.32	9.3						
DLCDLM-4D0233	2.33							
DLCDLM-4D0234	2.34	9.4						
DLCDLM-4D0235	2.35							
DLCDLM-4D0236	2.36	9.5						
DLCDLM-4D0237	2.37							
DLCDLM-4D0238	2.38	9.6	17.5	29.0				
DLCDLM-4D0239	2.39							
DLCDLM-4D0240	2.40				50.5	0.5		
DLCDLM-4D0241	2.41							
DLCDLM-4D0242	2.42	9.7						
DLCDLM-4D0243	2.43							
DLCDLM-4D0244	2.44	9.8						
DLCDLM-4D0245	2.45							
DLCDLM-4D0246	2.46	9.9						
DLCDLM-4D0247	2.47	10.0						
DLCDLM-4D0248	2.48							
DLCDLM-4D0249	2.49	10.1						
DLCDLM-4D0250	2.50				50.6	0.6		
DLCDLM-4D0251	2.51							
DLCDLM-4D0252	2.52	10.2						
DLCDLM-4D0253	2.53							
DLCDLM-4D0254	2.54	10.3						
DLCDLM-4D0255	2.55							
DLCDLM-4D0256	2.56	10.4						
DLCDLM-4D0257	2.57							
DLCDLM-4D0258	2.58	10.5						
DLCDLM-4D0259	2.59							
DLCDLM-4D0260	2.60	10.6			50.6	0.6		
DLCDLM-4D0261	2.61							
DLCDLM-4D0262	2.62	10.7						
DLCDLM-4D0263	2.63							
DLCDLM-4D0264	2.64	10.8						
DLCDLM-4D0265	2.65							
DLCDLM-4D0266	2.66	10.9						
DLCDLM-4D0267	2.67							
DLCDLM-4D0268	2.68	11.0						
DLCDLM-4D0269	2.69							
DLCDLM-4D0270	2.70	11.1			50.6	0.6		
DLCDLM-4D0271	2.71							
DLCDLM-4D0272	2.72	11.2						
DLCDLM-4D0273	2.73							
DLCDLM-4D0274	2.74	11.3						
DLCDLM-4D0275	2.75							
DLCDLM-4D0276	2.76	11.4						
DLCDLM-4D0277	2.77							
DLCDLM-4D0278	2.78	11.5						
DLCDLM-4D0279	2.79							
DLCDLM-4D0280	2.80	11.6			50.6	0.6		
DLCDLM-4D0281	2.81							
DLCDLM-4D0282	2.82							
DLCDLM-4D0283	2.83							
DLCDLM-4D0284	2.84							
DLCDLM-4D0285	2.85							
DLCDLM-4D0286	2.86							
DLCDLM-4D0287	2.87							
DLCDLM-4D0288	2.88							
DLCDLM-4D0289	2.89							

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Next 下一页 →
Page

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页

Previous Page

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 ODDNIS	先端 PL	在庫 Stock
DLCDLM-4D0290	2.90	11.6	19.6	28.0	50.6	3	0.6	☐
DLCDLM-4D0291	2.91							
DLCDLM-4D0292	2.92	11.7						
DLCDLM-4D0293	2.93							
DLCDLM-4D0294	2.94	11.8						
DLCDLM-4D0295	2.95							
DLCDLM-4D0296	2.96	11.9						
DLCDLM-4D0297	2.97							
DLCDLM-4D0298	2.98	12.0						
DLCDLM-4D0299	2.99							
DLCDLM-4D0300	3.00							

●在车床或加工中心加工时基本无铁屑缠绕，可实现4D 以内高速、高精度、长寿命的加工。

Realize high accuracy and longer tool life in ultra high speed drilling in machining center or turning machine where chip jamming is easy to occur.(4D)



2斜角+X形



新商品

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDL-4D0310	3.1	12.4	24.6		60.6		0.6	
DLCDL-4D0320	3.2	12.8						
DLCDL-4D0330	3.3	13.2	24.7	32	60.7	4	0.7	
DLCDL-4D0340	3.4	13.6						
DLCDL-4D0350	3.5	14.0						
DLCDL-4D0360	3.6	14.4	27.7					
DLCDL-4D0370	3.7	14.8						
DLCDL-4D0380	3.8	15.2	27.8	30	60.8		0.8	
DLCDL-4D0390	3.9	15.6						
DLCDL-4D0400	4.0	16.0						
DLCDL-4D0410	4.1	16.4	31.8		76.8			
DLCDL-4D0420	4.2	16.8						
DLCDL-4D0430	4.3	17.2	31.9	41	76.9	5	0.9	
DLCDL-4D0440	4.4	17.6						
DLCDL-4D0450	4.5	18.0						
DLCDL-4D0460	4.6	18.4						
DLCDL-4D0470	4.7	18.8						
DLCDL-4D0480	4.8	19.2	39.0	35	77.0		1.0	
DLCDL-4D0490	4.9	19.6						
DLCDL-4D0500	5.0	20.0						
DLCDL-4D0510	5.1	20.4						
DLCDL-4D0520	5.2	20.8						
DLCDL-4D0530	5.3	21.2	40.1	38	82.1	6	1.1	
DLCDL-4D0540	5.4	21.6						
DLCDL-4D0550	5.5	22.0						
DLCDL-4D0560	5.6	22.4						
DLCDL-4D0570	5.7	22.8						
DLCDL-4D0580	5.8	23.2	42.2		82.2		1.2	
DLCDL-4D0590	5.9	23.6						
DLCDL-4D0600	6.0	24.0						
DLCDL-4D0610	6.1	24.4						
DLCDL-4D0620	6.2	24.8						
DLCDL-4D0630	6.3	25.2	43.3	37	84.3	7	1.3	
DLCDL-4D0640	6.4	25.6						
DLCDL-4D0650	6.5	26.0						
DLCDL-4D0660	6.6	26.4						
DLCDL-4D0670	6.7	26.8						
DLCDL-4D0680	6.8	27.2	44.4		84.4		1.4	
DLCDL-4D0690	6.9	27.6						
DLCDL-4D0700	7.0	28.0						
DLCDL-4D0710	7.1	28.4						
DLCDL-4D0720	7.2	28.8	46.5	41	91.5	8	1.5	
DLCDL-4D0730	7.3	29.2						
DLCDL-4D0740	7.4	29.6						
DLCDL-4D0750	7.5	30.0	46.6					
DLCDL-4D0760	7.6	30.4						
DLCDL-4D0770	7.7	30.8						
DLCDL-4D0780	7.8	31.2	49.6	40	91.6		1.6	
DLCDL-4D0790	7.9	31.6						
DLCDL-4D0800	8.0	32.0	49.7		91.7			
DLCDL-4D0810	8.1	32.4						
DLCDL-4D0820	8.2	32.8						
DLCDL-4D0830	8.3	33.2	54.7	41	99.7	9	1.7	
DLCDL-4D0840	8.4	33.6						
DLCDL-4D0850	8.5	34.0	54.8					
DLCDL-4D0860	8.6	34.4						
DLCDL-4D0870	8.7	34.8						
DLCDL-4D0880	8.8	35.2	56.8	40	99.8		1.8	
DLCDL-4D0890	8.9	35.6						
DLCDL-4D0900	9.0	36.0	56.9		99.9		1.9	

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDL-4D0910	9.1	36.4						
DLCDL-4D0920	9.2	36.8						
DLCDL-4D0930	9.3	37.2	59.9		106.9	10	1.9	
DLCDL-4D0940	9.4	37.6						
DLCDL-4D0950	9.5	38.0	60.0	43	107.0		2.0	
DLCDL-4D0960	9.6	38.4						
DLCDL-4D0970	9.7	38.8	62.0					
DLCDL-4D0980	9.8	39.2						
DLCDL-4D0990	9.9	39.6	62.1		107.1			
DLCDL-4D1000	10.0	40.0						
DLCDL-4D1010	10.1	40.4					2.1	
DLCDL-4D1020	10.2	40.8	68.1	44	116.1			
DLCDL-4D1030	10.3	41.2						
DLCDL-4D1040	10.4	41.6	68.2					
DLCDL-4D1050	10.5	42.0						
DLCDL-4D1060	10.6	42.4	70.2	43	116.2	11	2.2	
DLCDL-4D1070	10.7	42.8						
DLCDL-4D1080	10.8	43.2	70.3		116.3			
DLCDL-4D1090	10.9	43.6						
DLCDL-4D1100	11.0	44.0						
DLCDL-4D1110	11.1	44.4					2.3	
DLCDL-4D1120	11.2	44.8	73.3	46	123.3			
DLCDL-4D1130	11.3	45.2						
DLCDL-4D1140	11.4	45.6	73.4					
DLCDL-4D1150	11.5	46.0						
DLCDL-4D1160	11.6	46.4						
DLCDL-4D1170	11.7	46.8	75.4	45	123.4	12	2.4	
DLCDL-4D1180	11.8	47.2						
DLCDL-4D1190	11.9	47.6	75.5		123.5		2.5	
DLCDL-4D1200	12.0	48.0						
DLCDL-4D1250	12.5	50.0	78.6	57	139.6	13	2.6	
DLCDL-4D1300	13.0	52.0	80.7	56	139.7		2.7	
DLCDL-4D1350	13.5	54.0	86.8	59	149.8	14	2.8	
DLCDL-4D1400	14.0	56.0	88.9	58	149.9		2.9	
DLCDL-4D1450	14.5	58.0	92.0	60	156.0	15	3.0	
DLCDL-4D1500	15.0	60.0	94.1	59	156.1		3.1	
DLCDL-4D1550	15.5	62.0	97.2	62	163.2	16	3.2	
DLCDL-4D1600	16.0	64.0	99.3	61	163.3		3.3	

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

●可以对铝合金进行高精度开孔加工的硬质合金钻头

Carbide drills for high accurate cutting of Aluminum Alloy.



新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	先端 PL	在庫 Stock
DLCFFDR0200	2.00	8.0						
DLCFFDR0201	2.01							
DLCFFDR0202	2.02	8.1						
DLCFFDR0203	2.03		15.4	47.4				
DLCFFDR0204	2.04							
DLCFFDR0205	2.05	8.2					0.4	
DLCFFDR0210	2.10	8.4						
DLCFFDR0220	2.20	8.8	16.4	48.4				
DLCFFDR0230	2.30	9.2						
DLCFFDR0240	2.40	9.6	17.4	49.4		3		
DLCFFDR0250	2.50	10.0						
DLCFFDR0260	2.60	10.4	17.5	49.5				
DLCFFDR0270	2.70	10.8						
DLCFFDR0280	2.80	11.2						
DLCFFDR0290	2.90	11.6						
DLCFFDR0297	2.97		19.5	51.5			0.5	
DLCFFDR0298	2.98	11.9						
DLCFFDR0299	2.99							
DLCFFDR0300	3.00	12.0			30			
DLCFFDR0301	3.01		21.5	53.5				
DLCFFDR0302	3.02	12.1						
DLCFFDR0303	3.03							
DLCFFDR0304	3.04	12.2						
DLCFFDR0305	3.05		21.6	53.6				
DLCFFDR0310	3.10	12.4						
DLCFFDR0320	3.20	12.8						
DLCFFDR0330	3.30	13.2						
DLCFFDR0340	3.40	13.6	24.6	56.6		4		
DLCFFDR0350	3.50	14.0						
DLCFFDR0360	3.60	14.4	24.7	56.7				
DLCFFDR0370	3.70	14.8						
DLCFFDR0380	3.80	15.2						
DLCFFDR0390	3.90	15.6						
DLCFFDR0397	3.97	15.9		59.7				
DLCFFDR0398	3.98							
DLCFFDR0399	3.99							
DLCFFDR0400	4.00	16.0	27.7				0.7	
DLCFFDR0401	4.01							
DLCFFDR0402	4.02	16.1						
DLCFFDR0403	4.03			71.7				
DLCFFDR0404	4.04	16.2						
DLCFFDR0405	4.05							
DLCFFDR0410	4.10	16.4						
DLCFFDR0420	4.20	16.8	27.8	71.8				
DLCFFDR0430	4.30	17.2						
DLCFFDR0440	4.40	17.6	31.8	75.8			0.8	
DLCFFDR0450	4.50	18.0						
DLCFFDR0460	4.60	18.4						
DLCFFDR0470	4.70	18.8	31.9	75.9	42	6		
DLCFFDR0480	4.80	19.2						
DLCFFDR0490	4.90	19.6	33.9	77.9				
DLCFFDR0497	4.97	19.9						
DLCFFDR0498	4.98							
DLCFFDR0499	4.99							
DLCFFDR0500	5.00	20.0					0.9	
DLCFFDR0501	5.01		38.9	82.9				
DLCFFDR0502	5.02	20.1						
DLCFFDR0503	5.03							
DLCFFDR0504	5.04	20.2						
DLCFFDR0505	5.05							

I. 柄直径比直径大的钻头

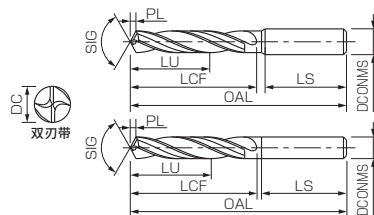

II. 柄直径与直径相同的钻头

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	先端 PL	在庫 Stock
DLCFFDR0510	5.10	20.4						
DLCFFDR0520	5.20	20.8	38.9	82.9			0.9	
DLCFFDR0530	5.30	21.2						
DLCFFDR0540	5.40	21.6	39.0	83.0			1.0	
DLCFFDR0550	5.50	22.0						
DLCFFDR0560	5.60	22.4	42.0	86.0				
DLCFFDR0570	5.70	22.8						
DLCFFDR0580	5.80	23.2						
DLCFFDR0590	5.90	23.6						
DLCFFDR0597	5.97	23.9						
DLCFFDR0598	5.98							
DLCFFDR0599	5.99							
DLCFFDR0600	6.00	24.0						
DLCFFDR0601	6.01		42.1	86.1			1.1	
DLCFFDR0602	6.02	24.1						
DLCFFDR0603	6.03							
DLCFFDR0604	6.04	24.2						
DLCFFDR0605	6.05							
DLCFFDR0610	6.10	24.4						
DLCFFDR0620	6.20	24.8						
DLCFFDR0630	6.30	25.2						
DLCFFDR0640	6.40	25.6	42.2	86.2				
DLCFFDR0650	6.50	26.0						
DLCFFDR0660	6.60	26.4						
DLCFFDR0670	6.70	26.8	44.2	88.2	42		1.2	
DLCFFDR0680	6.80	27.2						
DLCFFDR0690	6.90	27.6						
DLCFFDR0697	6.97	27.9						
DLCFFDR0698	6.98		44.3	88.3				
DLCFFDR0699	6.99							
DLCFFDR0700	7.00	28.0						
DLCFFDR0701	7.01							
DLCFFDR0702	7.02	28.1					1.3	
DLCFFDR0703	7.03							
DLCFFDR0704	7.04	28.2						
DLCFFDR0705	7.05		46.3	90.3				
DLCFFDR0710	7.10	28.4						
DLCFFDR0720	7.20	28.8						
DLCFFDR0730	7.30	29.2						
DLCFFDR0740	7.40	29.6						
DLCFFDR0750	7.50	30.0	46.4	90.4				
DLCFFDR0760	7.60	30.4						
DLCFFDR0770	7.70	30.8						
DLCFFDR0780	7.80	31.2	49.4	93.4			1.4	
DLCFFDR0790	7.90	31.6						
DLCFFDR0797	7.97	31.9						
DLCFFDR0798	7.98		49.5	93.5				
DLCFFDR0799	7.99							
DLCFFDR0800	8.00	32.0						
DLCFFDR0801	8.01							
DLCFFDR0802	8.02	32.1						
DLCFFDR0803	8.03							
DLCFFDR0804	8.04	32.2						
DLCFFDR0805	8.05		54.5	104.5	48	10	1.5	
DLCFFDR0810	8.10	32.4						
DLCFFDR0820	8.20	32.8						
DLCFFDR0830	8.30	33.2						
DLCFFDR0840	8.40	33.6						
DLCFFDR0850	8.50	34.0						
DLCFFDR0860	8.60	34.4	56.6	106.6			1.6	

新商品

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DOCNMS	先端 PL	在庫 Stock		
DLCFFDR0870	8.70	34.8	56.6	106.6	48	10	1.6	□		
DLCFFDR0880	8.80	35.2								
DLCFFDR0890	8.90	35.6								
DLCFFDR0897	8.97	35.9								
DLCFFDR0898	8.98									
DLCFFDR0899	8.99	36.0								
DLCFFDR0900	9.00									
DLCFFDR0901	9.01	36.1	59.6	109.6						
DLCFFDR0902	9.02									
DLCFFDR0903	9.03									
DLCFFDR0904	9.04	36.2								
DLCFFDR0905	9.05									
DLCFFDR0910	9.10	36.4	59.7	109.7						
DLCFFDR0920	9.20	36.8								
DLCFFDR0930	9.30	37.2								
DLCFFDR0940	9.40	37.6								
DLCFFDR0950	9.50	38.0								
DLCFFDR0960	9.60	38.4	61.7	111.7	55	12	1.7			
DLCFFDR0970	9.70	38.8	61.8	111.8						
DLCFFDR0980	9.80	39.2								
DLCFFDR0990	9.90	39.6								
DLCFFDR0997	9.97	39.9								
DLCFFDR0998	9.98									
DLCFFDR0999	9.99	40.0								
DLCFFDR1000	10.00									
DLCFFDR1001	10.01	40.1	67.8	124.8						
DLCFFDR1002	10.02									
DLCFFDR1003	10.03	40.2								
DLCFFDR1004	10.04									
DLCFFDR1005	10.05	40.4								
DLCFFDR1010	10.10									
DLCFFDR1020	10.20	40.8	67.9	124.9	55	12	1.8			
DLCFFDR1030	10.30	41.2								
DLCFFDR1040	10.40	41.6								
DLCFFDR1050	10.50	42.0								
DLCFFDR1060	10.60	42.4								
DLCFFDR1070	10.70	42.8								
DLCFFDR1080	10.80	43.2	69.9	126.9						
DLCFFDR1090	10.90	43.6								
DLCFFDR1100	11.00	44.0	70.0	127.0	57	14	1.9			
DLCFFDR1110	11.10	44.4	73.0	130.0						
DLCFFDR1120	11.20	44.8								
DLCFFDR1130	11.30	45.2	73.1	130.1						
DLCFFDR1140	11.40	45.6								
DLCFFDR1150	11.50	46.0								
DLCFFDR1160	11.60	46.4	75.1	132.1			58	16	2.0	
DLCFFDR1170	11.70	46.8								
DLCFFDR1180	11.80	47.2								
DLCFFDR1190	11.90	47.6								
DLCFFDR1200	12.00	48.0	75.2	132.2	57	14				2.1
DLCFFDR1250	12.50	50.0	78.3	137.3						
DLCFFDR1300	13.00	52.0	80.4	139.4						
DLCFFDR1350	13.50	54.0	86.5	146.5						
DLCFFDR1400	14.00	56.0	88.5							
DLCFFDR1450	14.50	58.0	91.6	151.6	58	16	2.2			
DLCFFDR1500	15.00	60.0	93.7	153.7						
DLCFFDR1550	15.50	62.0	96.8	160.8	62	18	2.3			
DLCFFDR1600	16.00	64.0	98.9	162.9						
DLCFFDR1650	16.50	66.0	105.0	171.0	64	18	2.4			
DLCFFDR1700	17.00	68.0	105.1	171.1						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DOCNMS	先端 PL	在庫 Stock
DLCFFDR1750	17.50	70.0	105.2	171.2	64	18	3.2	□
DLCFFDR1800	18.00	72.0	105.3	171.3			3.3	
DLCFFDR1850	18.50	74.0	117.4	187.4	68	20	3.4	
DLCFFDR1900	19.00	76.0	117.5	187.5			3.5	
DLCFFDR1950	19.50	78.0					117.6	
DLCFFDR2000	20.00	80.0						

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

直径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
10		± 0.006 ~ 0
10		± 0.008 ~ 0

- 可以对铝合金进行高精度开孔加工的硬质合金钻头。
- 可以进行钻头直径 4 倍的加工。

Carbide drills for high accurate cutting of Aluminum Alloy. Realize under 4D drilling.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCFFDOH4D0300	3.00	12.0	21.5	45	68.5	3		
DLCFFDOH4D0301	3.01		25.5		76.5		0.5	
DLCFFDOH4D0302	3.02	12.1						
DLCFFDOH4D0303	3.03			49	76.6		0.6	
DLCFFDOH4D0310	3.10	12.4						
DLCFFDOH4D0320	3.20	12.8	25.6				4	
DLCFFDOH4D0330	3.30	13.2						
DLCFFDOH4D0340	3.40	13.6						
DLCFFDOH4D0350	3.50	14.0						
DLCFFDOH4D0360	3.60	14.4						
DLCFFDOH4D0370	3.70	14.8						
DLCFFDOH4D0380	3.80	15.2						
DLCFFDOH4D0390	3.90	15.6	28.7	46	76.7		0.7	
DLCFFDOH4D0398	3.98	15.9						
DLCFFDOH4D0399	3.99							
DLCFFDOH4D0400	4.00	16.0						
DLCFFDOH4D0401	4.01							
DLCFFDOH4D0402	4.02		32.7		85.7			
DLCFFDOH4D0403	4.03	16.1						
DLCFFDOH4D0410	4.10	16.4		51			0.8	
DLCFFDOH4D0420	4.20	16.8						
DLCFFDOH4D0430	4.30	17.2	32.8		85.8	5		
DLCFFDOH4D0440	4.40	17.6						
DLCFFDOH4D0450	4.50	18.0						
DLCFFDOH4D0460	4.60	18.4	35.8					
DLCFFDOH4D0470	4.70	18.8						
DLCFFDOH4D0480	4.80	19.2						
DLCFFDOH4D0490	4.90	19.6	35.9	48	85.9		0.9	
DLCFFDOH4D0498	4.98	19.9						
DLCFFDOH4D0499	4.99							
DLCFFDOH4D0500	5.00	20.0						
DLCFFDOH4D0501	5.01							
DLCFFDOH4D0502	5.02	20.1	39.9		94.9			
DLCFFDOH4D0503	5.03			53				
DLCFFDOH4D0510	5.10	20.4						
DLCFFDOH4D0520	5.20	20.8						
DLCFFDOH4D0530	5.30	21.2						
DLCFFDOH4D0540	5.40	21.6	40.0		95.0	6	1.0	
DLCFFDOH4D0550	5.50	22.0						
DLCFFDOH4D0560	5.60	22.4	43.0					
DLCFFDOH4D0570	5.70	22.8						
DLCFFDOH4D0580	5.80	23.2						
DLCFFDOH4D0590	5.90	23.6	43.1	50	95.1		1.1	
DLCFFDOH4D0598	5.98	23.9						
DLCFFDOH4D0599	5.99							
DLCFFDOH4D0600	6.00	24.0						
DLCFFDOH4D0601	6.01							
DLCFFDOH4D0602	6.02	24.1						
DLCFFDOH4D0603	6.03	24.4	47.1		103.1			
DLCFFDOH4D0610	6.10	24.8						
DLCFFDOH4D0620	6.20	25.2						
DLCFFDOH4D0630	6.30	25.6						
DLCFFDOH4D0640	6.40	26.0	47.2		103.2	7	1.2	
DLCFFDOH4D0650	6.50	26.4						
DLCFFDOH4D0660	6.60	26.8						
DLCFFDOH4D0670	6.70	27.2	50.2					
DLCFFDOH4D0680	6.80	27.6						
DLCFFDOH4D0690	6.90	27.9	50.3	51	103.3		1.3	
DLCFFDOH4D0698	6.98	28.0						
DLCFFDOH4D0699	6.99							

I. 柄径比直径尺寸大

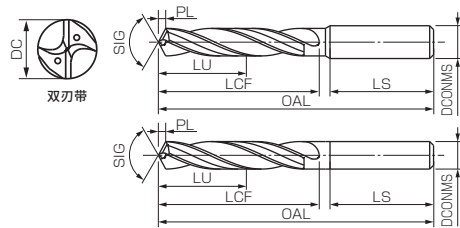

II. 柄直径与直径相同的钻头

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCFFDOH4D0700	7.00	28.0	50.3	51	103.3	7		
DLCFFDOH4D0701	7.01							
DLCFFDOH4D0702	7.02	28.1						
DLCFFDOH4D0703	7.03							
DLCFFDOH4D0710	7.10	28.4	54.3	55	111.3		1.3	
DLCFFDOH4D0720	7.20	28.8						
DLCFFDOH4D0730	7.30	29.2						
DLCFFDOH4D0740	7.40	29.6						
DLCFFDOH4D0750	7.50	30.0	54.4			8		
DLCFFDOH4D0760	7.60	30.4						
DLCFFDOH4D0770	7.70	30.8						
DLCFFDOH4D0780	7.80	31.2	57.4	52	111.4		1.4	
DLCFFDOH4D0790	7.90	31.6						
DLCFFDOH4D0798	7.98	31.9						
DLCFFDOH4D0799	7.99		57.5		111.5			
DLCFFDOH4D0800	8.00	32.0						
DLCFFDOH4D0801	8.01							
DLCFFDOH4D0802	8.02	32.1						
DLCFFDOH4D0803	8.03							
DLCFFDOH4D0810	8.10	32.4	61.5	56	119.5		1.5	
DLCFFDOH4D0820	8.20	32.8						
DLCFFDOH4D0830	8.30	33.2						
DLCFFDOH4D0840	8.40	33.6						
DLCFFDOH4D0850	8.50	34.0				9		
DLCFFDOH4D0860	8.60	34.4						
DLCFFDOH4D0870	8.70	34.8						
DLCFFDOH4D0880	8.80	35.2						
DLCFFDOH4D0890	8.90	35.6	64.6	53	119.6		1.6	
DLCFFDOH4D0898	8.98	35.9						
DLCFFDOH4D0899	8.99							
DLCFFDOH4D0900	9.00	36.0						
DLCFFDOH4D0901	9.01							
DLCFFDOH4D0902	9.02	36.1	68.6		127.6			
DLCFFDOH4D0903	9.03							
DLCFFDOH4D0910	9.10	36.4						
DLCFFDOH4D0920	9.20	36.8						
DLCFFDOH4D0930	9.30	37.2	68.7	57	127.7		1.7	
DLCFFDOH4D0940	9.40	37.6						
DLCFFDOH4D0950	9.50	38.0				10		
DLCFFDOH4D0960	9.60	38.4						
DLCFFDOH4D0970	9.70	38.8	71.7					
DLCFFDOH4D0980	9.80	39.2						
DLCFFDOH4D0990	9.90	39.6						
DLCFFDOH4D0998	9.98	39.9	71.8	54	127.8		1.8	
DLCFFDOH4D0999	9.99							
DLCFFDOH4D1000	10.00	40.0						
DLCFFDOH4D1001	10.01							
DLCFFDOH4D1002	10.02	40.1	75.8		139.8			
DLCFFDOH4D1003	10.03							
DLCFFDOH4D1010	10.10	40.4						
DLCFFDOH4D1020	10.20	40.8						
DLCFFDOH4D1030	10.30	41.2	75.9		139.9	11	1.9	
DLCFFDOH4D1040	10.40	41.6						
DLCFFDOH4D1050	10.50	42.0						
DLCFFDOH4D1060	10.60	42.4						
DLCFFDOH4D1070	10.70	42.8	78.9					
DLCFFDOH4D1080	10.80	43.2						
DLCFFDOH4D1090	10.90	43.6						
DLCFFDOH4D1098	10.98	43.9	79.0	59	140.0		2.0	
DLCFFDOH4D1099	10.99	44.0						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DO/MMS	先端 PL	在庫 Stock
DLCFFDOH4D1100	11.00	44.0	79.0	59	140.0	11		
DLCFFDOH4D1101	11.01							
DLCFFDOH4D1102	11.02							
DLCFFDOH4D1103	11.03		83.0		148.0		2.0	
DLCFFDOH4D1110	11.10	44.4		63				
DLCFFDOH4D1120	11.20	44.8						
DLCFFDOH4D1130	11.30	45.2						
DLCFFDOH4D1140	11.40	45.6	83.1			12	2.1	□
DLCFFDOH4D1150	11.50	46.0			148.1			
DLCFFDOH4D1160	11.60	46.4						
DLCFFDOH4D1170	11.70	46.8	86.1					
DLCFFDOH4D1180	11.80	47.2		60				
DLCFFDOH4D1190	11.90	47.6						
DLCFFDOH4D1198	11.98	47.9	86.2		148.2		2.2	
DLCFFDOH4D1199	11.99							
DLCFFDOH4D1200	12.00	48.0						

直径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
	10	± 0.006 ~ 0
10		± 0.008 ~ 0



工具材料

涂层

先端角

螺旋角

柄径公差

直径范围

- 可以对铝合金进行高精度开孔加工的硬质合金钻头。
可以进行钻头直径 8 倍的加工。

Carbide drills for high accurate cutting of Aluminum Alloy. Realize under 8D drilling.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCFFDOH8D0300	3.00	24.0	33.5	46	81.5	3		
DLCFFDOH8D0301	3.01	24.1			92.5		0.5	
DLCFFDOH8D0302	3.02	24.2	38.5					
DLCFFDOH8D0303	3.03			52	92.6		0.6	
DLCFFDOH8D0310	3.10	24.8						
DLCFFDOH8D0320	3.20	25.6	38.6					
DLCFFDOH8D0330	3.30	26.4					4	
DLCFFDOH8D0340	3.40	27.2						
DLCFFDOH8D0350	3.50	28.0						
DLCFFDOH8D0360	3.60	28.8						
DLCFFDOH8D0370	3.70	29.6						
DLCFFDOH8D0380	3.80	30.4						
DLCFFDOH8D0390	3.90	31.2	44.7	46	92.7		0.7	
DLCFFDOH8D0398	3.98	31.8						
DLCFFDOH8D0399	3.99	31.9						
DLCFFDOH8D0400	4.00	32.0						
DLCFFDOH8D0401	4.01	32.1						
DLCFFDOH8D0402	4.02	32.2	49.7		105.7			
DLCFFDOH8D0403	4.03							
DLCFFDOH8D0410	4.10	32.8		54				
DLCFFDOH8D0420	4.20	33.6						
DLCFFDOH8D0430	4.30	34.4	49.8		105.8		0.8	
DLCFFDOH8D0440	4.40	35.2						
DLCFFDOH8D0450	4.50	36.0						
DLCFFDOH8D0460	4.60	36.8	55.8					
DLCFFDOH8D0470	4.70	37.6						
DLCFFDOH8D0480	4.80	38.4						
DLCFFDOH8D0490	4.90	39.2	55.9	48	105.9			
DLCFFDOH8D0498	4.98	39.8						
DLCFFDOH8D0499	4.99	39.9						
DLCFFDOH8D0500	5.00	40.0					0.9	
DLCFFDOH8D0501	5.01	40.1						
DLCFFDOH8D0502	5.02		60.9		118.9			
DLCFFDOH8D0503	5.03	40.2						
DLCFFDOH8D0510	5.10	40.8		56				
DLCFFDOH8D0520	5.20	41.6						
DLCFFDOH8D0530	5.30	42.4						
DLCFFDOH8D0540	5.40	43.2	61.0					
DLCFFDOH8D0550	5.50	44.0			119.0		6	
DLCFFDOH8D0560	5.60	44.8						
DLCFFDOH8D0570	5.70	45.6	67.0					
DLCFFDOH8D0580	5.80	46.4						
DLCFFDOH8D0590	5.90	47.2						
DLCFFDOH8D0598	5.98	47.8	67.1	50	119.1			
DLCFFDOH8D0599	5.99	47.9						
DLCFFDOH8D0600	6.00	48.0						
DLCFFDOH8D0601	6.01	48.1					1.1	
DLCFFDOH8D0602	6.02	48.2						
DLCFFDOH8D0603	6.03		72.1		131.1			
DLCFFDOH8D0610	6.10	48.8						
DLCFFDOH8D0620	6.20	49.6						
DLCFFDOH8D0630	6.30	50.4						
DLCFFDOH8D0640	6.40	51.2	72.2					
DLCFFDOH8D0650	6.50	52.0						
DLCFFDOH8D0660	6.60	52.8			131.2		7	
DLCFFDOH8D0670	6.70	53.6	78.2					
DLCFFDOH8D0680	6.80	54.4						
DLCFFDOH8D0690	6.90	55.2		51				
DLCFFDOH8D0698	6.98	55.8	78.3		131.3		1.3	
DLCFFDOH8D0699	6.99	55.9						

I. 柄径比直径尺寸大

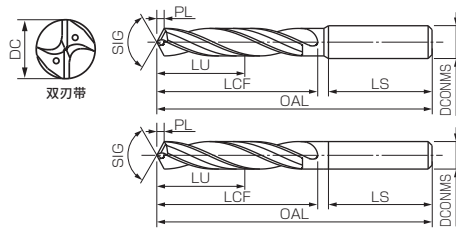

II. 柄径与直径尺寸相同

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCFFDOH8D0700	7.00	56.0	78.3	51	131.3	7		
DLCFFDOH8D0701	7.01	56.1						
DLCFFDOH8D0702	7.02	56.2						
DLCFFDOH8D0703	7.03							
DLCFFDOH8D0710	7.10	56.8	83.3	58	143.3		1.3	
DLCFFDOH8D0720	7.20	57.6						
DLCFFDOH8D0730	7.30	58.4						
DLCFFDOH8D0740	7.40	59.2						
DLCFFDOH8D0750	7.50	60.0	83.4				8	
DLCFFDOH8D0760	7.60	60.8						
DLCFFDOH8D0770	7.70	61.6			143.4		1.4	
DLCFFDOH8D0780	7.80	62.4	89.4	52				
DLCFFDOH8D0790	7.90	63.2						
DLCFFDOH8D0798	7.98	63.8						
DLCFFDOH8D0799	7.99	63.9	89.5		143.5			
DLCFFDOH8D0800	8.00	64.0						
DLCFFDOH8D0801	8.01	64.1						
DLCFFDOH8D0802	8.02	64.2						
DLCFFDOH8D0803	8.03	64.3						
DLCFFDOH8D0810	8.10	64.8	94.5	59	155.5		1.5	
DLCFFDOH8D0820	8.20	65.6						
DLCFFDOH8D0830	8.30	66.4						
DLCFFDOH8D0840	8.40	67.2						
DLCFFDOH8D0850	8.50	68.0					9	
DLCFFDOH8D0860	8.60	68.8						
DLCFFDOH8D0870	8.70	69.6						
DLCFFDOH8D0880	8.80	70.4						
DLCFFDOH8D0890	8.90	71.2	100.6	53	155.6		1.6	
DLCFFDOH8D0898	8.98	71.8						
DLCFFDOH8D0899	8.99	71.9						
DLCFFDOH8D0900	9.00	72.0						
DLCFFDOH8D0901	9.01	72.1						
DLCFFDOH8D0902	9.02		105.6		167.6			
DLCFFDOH8D0903	9.03	72.2						
DLCFFDOH8D0910	9.10	72.8						
DLCFFDOH8D0920	9.20	73.6		60				
DLCFFDOH8D0930	9.30	74.4	105.7		167.7		1.7	
DLCFFDOH8D0940	9.40	75.2						
DLCFFDOH8D0950	9.50	76.0					10	
DLCFFDOH8D0960	9.60	76.8	111.7					
DLCFFDOH8D0970	9.70	77.6						
DLCFFDOH8D0980	9.80	78.4						
DLCFFDOH8D0990	9.90	79.2						
DLCFFDOH8D0998	9.98	79.8	111.8	54	167.8			
DLCFFDOH8D0999	9.99	79.9						
DLCFFDOH8D1000	10.00	80.0					1.8	
DLCFFDOH8D1001	10.01	80.1						
DLCFFDOH8D1002	10.02	80.2	116.8		183.8			
DLCFFDOH8D1003	10.03							
DLCFFDOH8D1010	10.10	80.8						
DLCFFDOH8D1020	10.20	81.6		65				
DLCFFDOH8D1030	10.30	82.4	116.9					
DLCFFDOH8D1040	10.40	83.2						
DLCFFDOH8D1050	10.50	84.0			183.9	11	1.9	
DLCFFDOH8D1060	10.60	84.8						
DLCFFDOH8D1070	10.70	85.6	122.9					
DLCFFDOH8D1080	10.80	86.4						
DLCFFDOH8D1090	10.90	87.2		59				
DLCFFDOH8D1098	10.98	87.8	123.0		184.0		2.0	
DLCFFDOH8D1099	10.99	87.9						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DO/MMS	先端 PL	在庫 Stock
DLCFFDOH8D1100	11.00	88.0	123.0	59	184.0	11		
DLCFFDOH8D1101	11.01	88.1						
DLCFFDOH8D1102	11.02	88.2					2.0	
DLCFFDOH8D1103	11.03		128.0		196.0			
DLCFFDOH8D1110	11.10	88.8		66				
DLCFFDOH8D1120	11.20	89.6						
DLCFFDOH8D1130	11.30	90.4						
DLCFFDOH8D1140	11.40	91.2	128.1			12	2.1	□
DLCFFDOH8D1150	11.50	92.0			196.1			
DLCFFDOH8D1160	11.60	92.8						
DLCFFDOH8D1170	11.70	93.6	134.1					
DLCFFDOH8D1180	11.80	94.4		60				
DLCFFDOH8D1190	11.90	95.2			196.2		2.2	
DLCFFDOH8D1198	11.98	95.8	134.2					
DLCFFDOH8D1199	11.99	95.9						
DLCFFDOH8D1200	12.00	96.0						

直径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
	10	± 0.006 ~ 0
10		± 0.008 ~ 0

DLCDOH3D

DLC 油孔钻 3D
DLC Drills Oil-Hole 3D

切削条件 Cutting Condition ▶▶▶A-178



工具材料

涂层

直径公差

先端角

螺旋角

柄径公差


直径范围

- 可以对铝合金进行高效率加工的钻头。
- 可以进行钻头直径 3D 用加工。

Drills for high efficient cutting of Aluminum Alloy.
Realize under 3D drilling.



2 斜角 +X 形

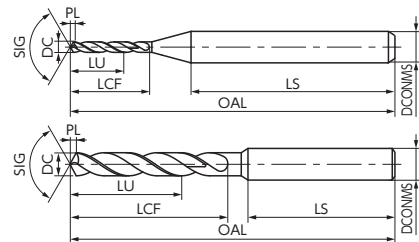

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDOH3D0100	1.0	3.0	6.2	43.3	54.2		0.2	
DLCDOH3D0110	1.1	3.3	7.3	43.5				
DLCDOH3D0120	1.2	3.6	8.3	42.6				
DLCDOH3D0130	1.3	3.9		42.8	55.3		0.3	
DLCDOH3D0140	1.4	4.2	9.3	42.0				
DLCDOH3D0150	1.5	4.5	10.3	41.2				
DLCDOH3D0160	1.6	4.8		43.4				
DLCDOH3D0170	1.7	5.1	11.4	43.6	58.4		0.4	
DLCDOH3D0180	1.8	5.4	12.4	42.8				
DLCDOH3D0190	1.9	5.7		42.9				
DLCDOH3D0200	2.0	6.0	12.5	43.1	58.5	3		
DLCDOH3D0210	2.1	6.3		46.3			0.5	
DLCDOH3D0220	2.2	6.6	13.5	46.5	63.5			
DLCDOH3D0230	2.3	6.9		45.7				
DLCDOH3D0240	2.4	7.2	14.6	44.9	63.6		0.6	
DLCDOH3D0250	2.5	7.5	15.6	44.1				
DLCDOH3D0260	2.6	7.8	16.6	48.3	68.6			
DLCDOH3D0270	2.7	8.1	17.6	48.4				
DLCDOH3D0280	2.8	8.4		48.6				
DLCDOH3D0290	2.9	8.7	17.7	48.8	68.7		0.7	
DLCDOH3D0300	3.0	9.0		48.0				
DLCDOH3D0310	3.1	9.3	20.7	47.2	72.7			
DLCDOH3D0320	3.2	9.6		47.3				
DLCDOH3D0330	3.3	9.9		47.4				
DLCDOH3D0340	3.4	10.2	20.8	47.5	72.8		0.8	
DLCDOH3D0350	3.5	10.5		47.6				
DLCDOH3D0360	3.6	10.8	22.8	47.7		4		
DLCDOH3D0370	3.7	11.1		47.8				
DLCDOH3D0380	3.8	11.4		47.9	72.9		0.9	
DLCDOH3D0390	3.9	11.7		47.9				
DLCDOH3D0400	4.0	12.0		48.0				
DLCDOH3D0410	4.1	12.3		49.2				
DLCDOH3D0420	4.2	12.6		49.3				
DLCDOH3D0430	4.3	12.9	26.0	49.4	81.0		1.0	
DLCDOH3D0440	4.4	13.2		49.5				
DLCDOH3D0450	4.5	13.5		49.6				
DLCDOH3D0460	4.6	13.8		49.7		5		
DLCDOH3D0470	4.7	14.1	28.1	49.8	81.1		1.1	
DLCDOH3D0480	4.8	14.4		49.9				
DLCDOH3D0490	4.9	14.7		49.9				
DLCDOH3D0500	5.0	15.0		50.0	81.2			
DLCDOH3D0510	5.1	15.3	28.2	51.2			1.2	
DLCDOH3D0520	5.2	15.6		51.3				
DLCDOH3D0530	5.3	15.9		51.4				
DLCDOH3D0540	5.4	16.2	28.3	51.5				
DLCDOH3D0550	5.5	16.5		51.6	83.3	6	1.3	
DLCDOH3D0560	5.6	16.8		49.7				
DLCDOH3D0570	5.7	17.1	31.3	49.8				
DLCDOH3D0580	5.8	17.4		49.9				
DLCDOH3D0590	5.9	17.7	31.4	49.9	83.4		1.4	
DLCDOH3D0600	6.0	18.0		50.0				
DLCDOH3D0610	6.1	18.3	33.4	52.2	89.4			
DLCDOH3D0620	6.2	18.6		52.3				
DLCDOH3D0630	6.3	18.9		52.4				
DLCDOH3D0640	6.4	19.2	33.5	52.5			1.5	
DLCDOH3D0650	6.5	19.5		52.6				
DLCDOH3D0660	6.6	19.8	36.5	49.7				
DLCDOH3D0670	6.7	20.1		49.8				
DLCDOH3D0680	6.8	20.4	36.6	49.8	89.6		1.6	
DLCDOH3D0690	6.9	20.7		49.9				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDOH3D0700	7.0	21.0	36.6	50.0	89.6	7	1.6	
DLCDOH3D0710	7.1	21.3		53.2				
DLCDOH3D0720	7.2	21.6		53.3				
DLCDOH3D0730	7.3	21.9	38.7	53.4	95.7		1.7	
DLCDOH3D0740	7.4	22.2		53.5				
DLCDOH3D0750	7.5	22.5		53.6				
DLCDOH3D0760	7.6	22.8		51.7				
DLCDOH3D0770	7.7	23.1	41.8	51.8	95.8		1.8	
DLCDOH3D0780	7.8	23.4		51.9				
DLCDOH3D0790	7.9	23.7		51.9				
DLCDOH3D0800	8.0	24.0	41.9	52.0	95.9			
DLCDOH3D0810	8.1	24.3		54.2			1.9	
DLCDOH3D0820	8.2	24.6	43.9	54.3	101.9			
DLCDOH3D0830	8.3	24.9		54.4				
DLCDOH3D0840	8.4	25.2		54.5				
DLCDOH3D0850	8.5	25.5	44.0	54.6	102.0	9	2.0	
DLCDOH3D0860	8.6	25.8	47.0	51.7				
DLCDOH3D0870	8.7	26.1		51.8				
DLCDOH3D0880	8.8	26.4		51.9				
DLCDOH3D0890	8.9	26.7	47.1	52.0	102.1		2.1	
DLCDOH3D0900	9.0	27.0		52.1				
DLCDOH3D0910	9.1	27.3	49.1	55.2	108.1			
DLCDOH3D0920	9.2	27.6		55.3				
DLCDOH3D0930	9.3	27.9		55.4				
DLCDOH3D0940	9.4	28.2	49.2	55.5	108.2		2.2	
DLCDOH3D0950	9.5	28.5		55.6				
DLCDOH3D0960	9.6	28.8	52.2	53.7		10		
DLCDOH3D0970	9.7	29.1		53.8				
DLCDOH3D0980	9.8	29.4		53.9				
DLCDOH3D0990	9.9	29.7	52.3	54.0	108.3		2.3	
DLCDOH3D1000	10.0	30.0		60.2				
DLCDOH3D1010	10.1	30.3		60.3				
DLCDOH3D1020	10.2	30.6		60.4				
DLCDOH3D1030	10.3	30.9	54.4	60.5	118.4		2.4	
DLCDOH3D1040	10.4	31.2		60.6				
DLCDOH3D1050	10.5	31.5		60.6				
DLCDOH3D1060	10.6	31.8		57.7				
DLCDOH3D1070	10.7	32.1	57.5	57.8	118.5		2.5	
DLCDOH3D1080	10.8	32.4		57.9				
DLCDOH3D1090	10.9	32.7		58.0				
DLCDOH3D1100	11.0	33.0	57.6	61.2	118.6			
DLCDOH3D1110	11.1	33.3		61.3				
DLCDOH3D1120	11.2	33.6	59.6	61.4	124.6		2.6	
DLCDOH3D1130	11.3	33.9		61.5				
DLCDOH3D1140	11.4	34.2	59.7	61.6				
DLCDOH3D1150	11.5	34.5		59.8	124.7	12	2.7	
DLCDOH3D1160	11.6	34.8	62.7	59.9				
DLCDOH3D1170	11.7	35.1		59.8				
DLCDOH3D1180	11.8	35.4	62.8	59.9	124.8		2.8	
DLCDOH3D1190	11.9	35.7		60.0				
DLCDOH3D1200	12.0	36.0		60.0				

DLCD0H5D

DLC 油孔钻 5D
DLC Drills Oil-Hole 5D

切削条件 Cutting Condition ▶▶A-178



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差


直径范围

- 可以对铝合金进行高效率加工的钻头。
- 可以进行钻头直径 5D 用加工。

Drills for high efficient cutting of Aluminum Alloy.
Realize under 5D drilling.



2斜角+X形

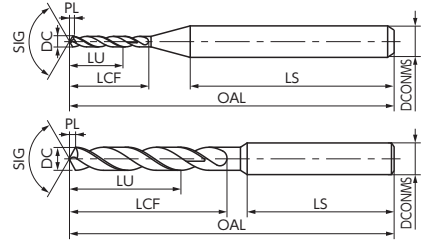

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H5D0100	1.0	5.0	8.2	43.3	56.2		0.2	
DLCD0H5D0110	1.1	5.5	9.3	44.5				
DLCD0H5D0120	1.2	6.0	10.3	43.6	58.3		0.3	
DLCD0H5D0130	1.3	6.5	11.3	42.8				
DLCD0H5D0140	1.4	7.0	12.3	42.0				
DLCD0H5D0150	1.5	7.5	13.3	41.2				
DLCD0H5D0160	1.6	8.0		45.4				
DLCD0H5D0170	1.7	8.5	14.4	44.6	62.4		0.4	
DLCD0H5D0180	1.8	9.0		43.8				
DLCD0H5D0190	1.9	9.5	15.4	42.9				
DLCD0H5D0200	2.0	10.0	16.5	42.1	62.5	3		
DLCD0H5D0210	2.1	10.5	17.5	47.3			0.5	
DLCD0H5D0220	2.2	11.0		46.5	68.5			
DLCD0H5D0230	2.3	11.5	18.5	45.7				
DLCD0H5D0240	2.4	12.0	19.6	44.9			0.6	
DLCD0H5D0250	2.5	12.5	20.6	44.1	68.6			
DLCD0H5D0260	2.6	13.0	21.6	54.3				
DLCD0H5D0270	2.7	13.5	22.6	53.4	78.6			
DLCD0H5D0280	2.8	14.0	22.7	52.6				
DLCD0H5D0290	2.9	14.5	23.7	51.8	78.7			
DLCD0H5D0300	3.0	15.0	28.7	48.0			0.7	
DLCD0H5D0310	3.1	15.5		47.2				
DLCD0H5D0320	3.2	16.0	32.7	47.3	86.7			
DLCD0H5D0330	3.3	16.5		47.4				
DLCD0H5D0340	3.4	17.0	32.8	47.5			0.8	
DLCD0H5D0350	3.5	17.5		47.6	86.8	4		
DLCD0H5D0360	3.6	18.0	36.8	47.7				
DLCD0H5D0370	3.7	18.5						
DLCD0H5D0380	3.8	19.0		47.8			0.9	
DLCD0H5D0390	3.9	19.5	36.9	47.9	86.9			
DLCD0H5D0400	4.0	20.0		48.0				
DLCD0H5D0410	4.1	20.5		49.2				
DLCD0H5D0420	4.2	21.0		49.3				
DLCD0H5D0430	4.3	21.5	41.0	49.4	99.0		1.0	
DLCD0H5D0440	4.4	22.0		49.5				
DLCD0H5D0450	4.5	22.5		49.6				
DLCD0H5D0460	4.6	23.0				5		
DLCD0H5D0470	4.7	23.5		49.7			1.1	
DLCD0H5D0480	4.8	24.0		49.8	99.1			
DLCD0H5D0490	4.9	24.5		49.9				
DLCD0H5D0500	5.0	25.0		50.0	99.2			
DLCD0H5D0510	5.1	25.5		51.2				
DLCD0H5D0520	5.2	26.0		51.3	101.2		1.2	
DLCD0H5D0530	5.3	26.5		51.4				
DLCD0H5D0540	5.4	27.0		51.5				
DLCD0H5D0550	5.5	27.5		51.6	101.3	6	1.3	
DLCD0H5D0560	5.6	28.0		51.7				
DLCD0H5D0570	5.7	28.5	49.3	51.7				
DLCD0H5D0580	5.8	29.0		51.8				
DLCD0H5D0590	5.9	29.5	49.4	51.9	101.4			
DLCD0H5D0600	6.0	30.0		52.0			1.4	
DLCD0H5D0610	6.1	30.5		52.2	110.4			
DLCD0H5D0620	6.2	31.0		52.3				
DLCD0H5D0630	6.3	31.5		52.4				
DLCD0H5D0640	6.4	32.0	53.5	52.5				
DLCD0H5D0650	6.5	32.5		52.6	110.5	7	1.5	
DLCD0H5D0660	6.6	33.0	57.5	52.7				
DLCD0H5D0670	6.7	33.5						
DLCD0H5D0680	6.8	34.0	57.6	52.8	110.6		1.6	
DLCD0H5D0690	6.9	34.5		52.9				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H5D0700	7.0	35.0	57.6	53.0	110.6	7	1.6	
DLCD0H5D0710	7.1	35.5		53.2				
DLCD0H5D0720	7.2	36.0		53.3				
DLCD0H5D0730	7.3	36.5	61.7	53.4	119.7		1.7	
DLCD0H5D0740	7.4	37.0		53.5				
DLCD0H5D0750	7.5	37.5		53.6				
DLCD0H5D0760	7.6	38.0		53.7		8		
DLCD0H5D0770	7.7	38.5		53.8	119.8		1.8	
DLCD0H5D0780	7.8	39.0	65.8	53.8				
DLCD0H5D0790	7.9	39.5		53.9				
DLCD0H5D0800	8.0	40.0	65.9	54.0	119.9			
DLCD0H5D0810	8.1	40.5		54.2			1.9	
DLCD0H5D0820	8.2	41.0	69.9	54.3	128.9			
DLCD0H5D0830	8.3	41.5		54.4				
DLCD0H5D0840	8.4	42.0		54.5				
DLCD0H5D0850	8.5	42.5	70.0	54.6				
DLCD0H5D0860	8.6	43.0		54.7	129.0	9	2.0	
DLCD0H5D0870	8.7	43.5		54.8				
DLCD0H5D0880	8.8	44.0		54.8				
DLCD0H5D0890	8.9	44.5	74.1	54.9	129.1		2.1	
DLCD0H5D0900	9.0	45.0		55.0				
DLCD0H5D0910	9.1	45.5		55.2				
DLCD0H5D0920	9.2	46.0	78.1	55.3	138.1			
DLCD0H5D0930	9.3	46.5		55.4				
DLCD0H5D0940	9.4	47.0	78.2	55.5			2.2	
DLCD0H5D0950	9.5	47.5		55.6	138.2	10		
DLCD0H5D0960	9.6	48.0	82.2	55.7				
DLCD0H5D0970	9.7	48.5		55.8				
DLCD0H5D0980	9.8	49.0		55.9				
DLCD0H5D0990	9.9	49.5	82.3	55.9	138.3		2.3	
DLCD0H5D1000	10.0	50.0		56.0				
DLCD0H5D1010	10.1	50.5		60.2				
DLCD0H5D1020	10.2	51.0		60.3				
DLCD0H5D1030	10.3	51.5	86.4	60.4	151.4		2.4	
DLCD0H5D1040	10.4	52.0		60.5				
DLCD0H5D1050	10.5	52.5		60.6				
DLCD0H5D1060	10.6	53.0		60.7		11		
DLCD0H5D1070	10.7	53.5	90.5	60.8	151.5		2.5	
DLCD0H5D1080	10.8	54.0		60.9				
DLCD0H5D1090	10.9	54.5		60.9				
DLCD0H5D1100	11.0	55.0	90.6	61.0	151.6			
DLCD0H5D1110	11.1	55.5		61.2				
DLCD0H5D1120	11.2	56.0	94.6	61.3	160.6		2.6	
DLCD0H5D1130	11.3	56.5		61.4				
DLCD0H5D1140	11.4	57.0		61.5				
DLCD0H5D1150	11.5	57.5	94.7	61.6	160.7	12	2.7	
DLCD0H5D1160	11.6	58.0		61.7				
DLCD0H5D1170	11.7	58.5	98.7	61.8				
DLCD0H5D1180	11.8	59.0		61.8				
DLCD0H5D1190	11.9	59.5	98.8	61.9	160.8		2.8	
DLCD0H5D1200	12.0	60.0		62.0				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

DLCDOH8D

DLC 油孔钻 8D
DLC Drills Oil-Hole 8D

切削条件 Cutting Condition ▶▶▶A-178



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差


直径范围

- 可以对铝合金进行高效率加工的钻头。
- 可以进行钻头直径 8D 用加工。

Drills for high efficient cutting of Aluminum Alloy.
Realize under 8D drilling.



2 斜角 + X 形

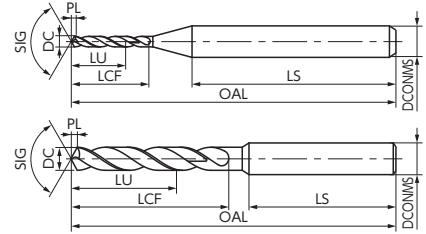

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDOH8D0100	1.0	8.0	11.2	43.3	59.2	3.0	0.2	
DLCDOH8D0110	1.1	8.8	12.3	44.5	61.3		0.3	
DLCDOH8D0120	1.2	9.6	14.3	43.6	62.3			
DLCDOH8D0130	1.3	10.4	15.3	42.8				
DLCDOH8D0140	1.4	11.2	16.3	43.0			0.4	
DLCDOH8D0150	1.5	12.0	18.3	41.2	63.3			
DLCDOH8D0160	1.6	12.8		44.4				
DLCDOH8D0170	1.7	13.6	19.4	44.6	67.4		0.5	
DLCDOH8D0180	1.8	14.4	20.4	43.8				
DLCDOH8D0190	1.9	15.2	21.4	43.9	68.4			
DLCDOH8D0200	2.0	16.0	22.5	43.1	68.5	0.6		
DLCDOH8D0210	2.1	16.8	23.5	48.3	75.5			
DLCDOH8D0220	2.2	17.6		46.5				
DLCDOH8D0230	2.3	18.4	25.5	46.7	76.5	0.7		
DLCDOH8D0240	2.4	19.2	26.6	45.9	76.6			
DLCDOH8D0250	2.5	20.0	28.6	44.1				
DLCDOH8D0260	2.6	20.8	29.6	48.3		0.8		
DLCDOH8D0270	2.7	21.6	30.6	48.4	81.6			
DLCDOH8D0280	2.8	22.4	30.7	48.6				
DLCDOH8D0290	2.9	23.2	32.7	46.8	81.7	0.9		
DLCDOH8D0300	3.0	24.0	33.7	46.0				
DLCDOH8D0310	3.1	24.8		51.2	92.7			
DLCDOH8D0320	3.2	25.6	38.7	51.3		4.0		
DLCDOH8D0330	3.3	26.4		51.4				
DLCDOH8D0340	3.4	27.2	38.8	51.5	92.8			
DLCDOH8D0350	3.5	28.0		51.6				
DLCDOH8D0360	3.6	28.8	44.8					
DLCDOH8D0370	3.7	29.6		45.7				
DLCDOH8D0380	3.8	30.4	44.9	45.8	92.9			
DLCDOH8D0390	3.9	31.2		45.9				
DLCDOH8D0400	4.0	32.0		46.0				
DLCDOH8D0410	4.1	32.8		53.2				5.0
DLCDOH8D0420	4.2	33.6		53.3				
DLCDOH8D0430	4.3	34.4	50.0	53.4	106.0			
DLCDOH8D0440	4.4	35.2		53.5				
DLCDOH8D0450	4.5	36.0		53.6				
DLCDOH8D0460	4.6	36.8						
DLCDOH8D0470	4.7	37.6	56.1	47.7	106.1			
DLCDOH8D0480	4.8	38.4		47.8				
DLCDOH8D0490	4.9	39.2		47.9				
DLCDOH8D0500	5.0	40.0	56.2	48.0	106.2			
DLCDOH8D0510	5.1	40.8		55.2		6.0	1.2	
DLCDOH8D0520	5.2	41.6	61.2	55.3	119.2			
DLCDOH8D0530	5.3	42.4		55.4				
DLCDOH8D0540	5.4	43.2	61.3	55.5		1.3		
DLCDOH8D0550	5.5	44.0		55.6				
DLCDOH8D0560	5.6	44.8	67.3	49.7			1.4	
DLCDOH8D0570	5.7	45.6						
DLCDOH8D0580	5.8	46.4		49.8				
DLCDOH8D0590	5.9	47.2	67.4	49.9	119.4	7.0	1.5	
DLCDOH8D0600	6.0	48.0		50.0				
DLCDOH8D0610	6.1	48.8		56.2				
DLCDOH8D0620	6.2	49.6	72.4	56.3	131.4	1.6		
DLCDOH8D0630	6.3	50.4		56.4				
DLCDOH8D0640	6.4	51.2	72.5	56.5	131.5			
DLCDOH8D0650	6.5	52.0		56.6		1.7		
DLCDOH8D0660	6.6	52.8	78.5					
DLCDOH8D0670	6.7	53.6		50.7				
DLCDOH8D0680	6.8	54.4	78.6	50.8	131.6	1.8		
DLCDOH8D0690	6.9	55.2		50.9				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDOH8D0700	7.0	56.0	78.6	51.0	131.6	7.0	1.6	□
DLCDOH8D0710	7.1	56.8	83.7	57.2	143.7	8.0	1.7	
DLCDOH8D0720	7.2	57.6		57.3				
DLCDOH8D0730	7.3	58.4		57.4				
DLCDOH8D0740	7.4	59.2		57.5				
DLCDOH8D0750	7.5	60.0		57.6				
DLCDOH8D0760	7.6	60.8	89.8	51.7	143.8	1.8		
DLCDOH8D0770	7.7	61.6		51.8				
DLCDOH8D0780	7.8	62.4		51.9				
DLCDOH8D0790	7.9	63.2		52.0				
DLCDOH8D0800	8.0	64.0		52.0			143.9	
DLCDOH8D0810	8.1	64.8	58.2					
DLCDOH8D0820	8.2	65.6	94.9	58.3	155.9			
DLCDOH8D0830	8.3	66.4		58.4				
DLCDOH8D0840	8.4	67.2	95.0	58.5	156.0	2.0		
DLCDOH8D0850	8.5	68.0		58.6				
DLCDOH8D0860	8.6	68.8	101.0	52.7			156.1	
DLCDOH8D0870	8.7	69.6		52.8				
DLCDOH8D0880	8.8	70.4	101.1	52.9				
DLCDOH8D0890	8.9	71.2		53.0				
DLCDOH8D0900	9.0	72.0	53.0	168.1	10.0	2.2		
DLCDOH8D0910	9.1	72.8	59.2					
DLCDOH8D0920	9.2	73.6	59.3					
DLCDOH8D0930	9.3	74.4	59.4					
DLCDOH8D0940	9.4	75.2	59.5					
DLCDOH8D0950	9.5	76.0	59.6	168.2	2.3			
DLCDOH8D0960	9.6	76.8	112.2			53.7		
DLCDOH8D0970	9.7	77.6				53.8		
DLCDOH8D0980	9.8	78.4	112.3			53.9	168.3	
DLCDOH8D0990	9.9	79.2				54.0		
DLCDOH8D1000	10.0	80.0	64.2	184.4	11.0	2.4		
DLCDOH8D1010	10.1	80.8	64.3					
DLCDOH8D1020	10.2	81.6	64.4					
DLCDOH8D1030	10.3	82.4	64.5					
DLCDOH8D1040	10.4	83.2	64.6					
DLCDOH8D1050	10.5	84.0	123.5	58.7	184.5	2.5		
DLCDOH8D1060	10.6	84.8		58.8				
DLCDOH8D1070	10.7	85.6		58.9				
DLCDOH8D1080	10.8	86.4		59.0				
DLCDOH8D1090	10.9	87.2		59.1				
DLCDOH8D1100	11.0	88.0	123.6	59.0	184.6	12.0	2.6	
DLCDOH8D1110	11.1	88.8	65.2					
DLCDOH8D1120	11.2	89.6	128.6	65.3	196.6			
DLCDOH8D1130	11.3	90.4	128.7	65.4	196.7			2.7
DLCDOH8D1140	11.4	91.2		65.5				
DLCDOH8D1150	11.5	92.0		65.6				
DLCDOH8D1160	11.6	92.8		59.7				
DLCDOH8D1170	11.7	93.6		134.7		59.8	196.8	
DLCDOH8D1180	11.8	94.4	59.9					
DLCDOH8D1190	11.9	95.2	60.0					
DLCDOH8D1200	12.0	96.0						

DLCD0H10D

DLC 油孔钻 10D
DLC Drills Oil-Hole 10D

切削条件 Cutting Condition ▶ A-178



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

直径范围

- 可以对铝合金进行高效率加工的钻头。
- 可以进行钻头直径 10D 用加工。

Drills for high efficient cutting of Aluminum Alloy.
Realize under 10D drilling.

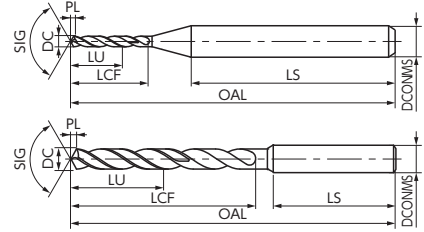

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H10D0100	1.0	10.0	13.2	43.3	61.2		0.2	
DLCD0H10D0110	1.1	11.0	14.3	44.5				
DLCD0H10D0120	1.2	12.0	16.3	42.6				
DLCD0H10D0130	1.3	13.0	17.3	41.8	63.3		0.3	
DLCD0H10D0140	1.4	14.0	18.3	40.0				
DLCD0H10D0150	1.5	15.0	20.3	39.2				
DLCD0H10D0160	1.6	16.0	21.4	45.4				
DLCD0H10D0170	1.7	17.0	22.4	43.6	70.4		0.4	
DLCD0H10D0180	1.8	18.0	23.4	42.8				
DLCD0H10D0190	1.9	19.0	25.4	40.9				
DLCD0H10D0200	2.0	20.0	26.5	40.1	70.5	3		
DLCD0H10D0210	2.1	21.0	27.5	49.3			0.5	
DLCD0H10D0220	2.2	22.0	29.5	47.5	80.5			
DLCD0H10D0230	2.3	23.0	30.5	46.7				
DLCD0H10D0240	2.4	24.0	31.6	44.9	80.6		0.6	
DLCD0H10D0250	2.5	25.0	33.6	44.1				
DLCD0H10D0260	2.6	26.0	34.6	52.3	89.6			
DLCD0H10D0270	2.7	27.0	35.6	50.4				
DLCD0H10D0280	2.8	28.0	36.7	49.6				
DLCD0H10D0290	2.9	29.0	38.7	47.8	89.7		0.7	
DLCD0H10D0300	3.0	30.0	39.7	47.0				
DLCD0H10D0310	3.1	31.0	46.7	46.5	96.7			
DLCD0H10D0320	3.2	32.0		46.6				
DLCD0H10D0330	3.3	33.0						
DLCD0H10D0340	3.4	34.0	46.8	46.7	96.8	4	0.8	
DLCD0H10D0350	3.5	35.0						
DLCD0H10D0360	3.6	36.0	52.8	46.8	102.8			
DLCD0H10D0370	3.7	37.0						
DLCD0H10D0380	3.8	38.0		46.9	102.9		0.9	
DLCD0H10D0390	3.9	39.0	52.9					
DLCD0H10D0400	4.0	40.0		47.0				
DLCD0H10D0410	4.1	41.0		46.5				
DLCD0H10D0420	4.2	42.0		46.6	110.0		1.0	
DLCD0H10D0430	4.3	43.0	60.0					
DLCD0H10D0440	4.4	44.0		46.7				
DLCD0H10D0450	4.5	45.0						
DLCD0H10D0460	4.6	46.0		46.8		5		
DLCD0H10D0470	4.7	47.0	66.1	46.9	116.1		1.1	
DLCD0H10D0480	4.8	48.0						
DLCD0H10D0490	4.9	49.0		47.0	116.2			
DLCD0H10D0500	5.0	50.0	66.2					
DLCD0H10D0510	5.1	51.0		46.5			1.2	
DLCD0H10D0520	5.2	52.0	73.2	46.6	123.2			
DLCD0H10D0530	5.3	53.0						
DLCD0H10D0540	5.4	54.0		46.7	123.3			
DLCD0H10D0550	5.5	55.0	73.3			6	1.3	
DLCD0H10D0560	5.6	56.0		46.8	129.3			
DLCD0H10D0570	5.7	57.0	79.3					
DLCD0H10D0580	5.8	58.0		46.9				
DLCD0H10D0590	5.9	59.0	79.4	47.0	129.4		1.4	
DLCD0H10D0600	6.0	60.0						
DLCD0H10D0610	6.1	61.0	86.4	46.5	136.4			
DLCD0H10D0620	6.2	62.0		46.6				
DLCD0H10D0630	6.3	63.0						
DLCD0H10D0640	6.4	64.0	86.5	46.7	136.5		1.5	
DLCD0H10D0650	6.5	65.0				7		
DLCD0H10D0660	6.6	66.0	92.5	46.8	142.5			
DLCD0H10D0670	6.7	67.0						
DLCD0H10D0680	6.8	68.0	92.6	46.9	142.6		1.6	
DLCD0H10D0690	6.9	69.0		47.0				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H10D0700	7.0	70.0	92.6	47.0	142.6	7	1.6	
DLCD0H10D0710	7.1	71.0		46.5				
DLCD0H10D0720	7.2	72.0		46.6	149.7		1.7	
DLCD0H10D0730	7.3	73.0	99.7					
DLCD0H10D0740	7.4	74.0		46.7				
DLCD0H10D0750	7.5	75.0						
DLCD0H10D0760	7.6	76.0		46.8	155.8		1.8	
DLCD0H10D0770	7.7	77.0	105.8	46.9				
DLCD0H10D0780	7.8	78.0		47.0	155.9			
DLCD0H10D0790	7.9	79.0		46.5			1.9	
DLCD0H10D0800	8.0	80.0	105.9	46.6	162.9			
DLCD0H10D0810	8.1	81.0	112.9					
DLCD0H10D0820	8.2	82.0		46.6	163.0		2.0	
DLCD0H10D0830	8.3	83.0						
DLCD0H10D0840	8.4	84.0	113.0	46.7	169.0			
DLCD0H10D0850	8.5	85.0		46.8	169.1		2.1	
DLCD0H10D0860	8.6	86.0	119.0					
DLCD0H10D0870	8.7	87.0		46.9	176.1			
DLCD0H10D0880	8.8	88.0		46.5	176.2		2.2	
DLCD0H10D0890	8.9	89.0	119.1	47.0	182.2			
DLCD0H10D0900	9.0	90.0		46.6	182.3		2.3	
DLCD0H10D0910	9.1	91.0	126.1					
DLCD0H10D0920	9.2	92.0		46.7	182.4			
DLCD0H10D0930	9.3	93.0		46.8	182.5			
DLCD0H10D0940	9.4	94.0	126.2	46.9	182.6		2.4	
DLCD0H10D0950	9.5	95.0		46.5	199.4			
DLCD0H10D0960	9.6	96.0	132.2					
DLCD0H10D0970	9.7	97.0		46.6	205.5		2.5	
DLCD0H10D0980	9.8	98.0	132.3	46.7	205.6			
DLCD0H10D0990	9.9	99.0		46.8	212.6		2.6	
DLCD0H10D1000	10.0	100.0		46.9	212.7			
DLCD0H10D1010	10.1	101.0		46.5	218.7		2.7	
DLCD0H10D1020	10.2	102.0		46.6	218.8			
DLCD0H10D1030	10.3	103.0	139.4					
DLCD0H10D1040	10.4	104.0		46.7	218.9		2.8	
DLCD0H10D1050	10.5	105.0		46.8	219.0			
DLCD0H10D1060	10.6	106.0		46.9	219.1			
DLCD0H10D1070	10.7	107.0	145.5	46.5	219.2			
DLCD0H10D1080	10.8	108.0		46.6	219.3			
DLCD0H10D1090	10.9	109.0		46.7	219.4			
DLCD0H10D1100	11.0	110.0	145.6					
DLCD0H10D1110	11.1	111.0		46.8	219.5			
DLCD0H10D1120	11.2	112.0	152.6	46.9	219.6		2.9	
DLCD0H10D1130	11.3	113.0		46.5	219.7			
DLCD0H10D1140	11.4	114.0	152.7	46.6	219.8			
DLCD0H10D1150	11.5	115.0		46.7	219.9			
DLCD0H10D1160	11.6	116.0	158.7	46.8	219.0			
DLCD0H10D1170	11.7	117.0		46.9	219.1			
DLCD0H10D1180	11.8	118.0		46.5	219.2			
DLCD0H10D1190	11.9	119.0	158.8	46.6	219.3			
DLCD0H10D1200	12.0	120.0		46.7	219.4			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

DLCDOH15D

DLC 油孔钻 15D
DLC Drills Oil-Hole 15D

切削条件 Cutting Condition ▶▶▶A-178



工具材料

涂层

直径公差

先端角

螺旋角


柄径公差

直径范围

- 可以对铝合金进行高效率加工的钻头。
- 可以进行钻头直径 15D 用加工。

Drills for high efficient cutting of Aluminum Alloy.
Realize under 15D drilling.

新商品

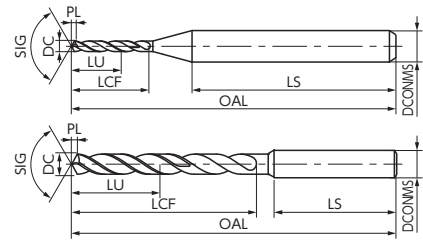

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDOH15D0100	1.0	15.0	18.2	43.3	66.2		0.2	
DLCDOH15D0110	1.1	16.5	20.3	46.5				
DLCDOH15D0120	1.2	18.0	22.3	44.6				
DLCDOH15D0130	1.3	19.5	23.3	42.8		71.3	0.3	
DLCDOH15D0140	1.4	21.0	25.3	41.0				
DLCDOH15D0150	1.5	22.5	27.3	39.2				
DLCDOH15D0160	1.6	24.0	29.4	47.4				
DLCDOH15D0170	1.7	25.5	31.4	45.6		80.4	0.4	
DLCDOH15D0180	1.8	27.0	32.4	43.8				
DLCDOH15D0190	1.9	28.5	34.4	41.9				
DLCDOH15D0200	2.0	30.0	36.5	40.1	80.5			
DLCDOH15D0210	2.1	31.5	38.5	51.3		93.5	0.5	
DLCDOH15D0220	2.2	33.0	40.5	49.5				
DLCDOH15D0230	2.3	34.5	41.5	47.7				
DLCDOH15D0240	2.4	36.0	43.6	45.9	93.6			
DLCDOH15D0250	2.5	37.5	45.6	44.1				
DLCDOH15D0260	2.6	39.0	47.6	54.3	104.6			
DLCDOH15D0270	2.7	40.5	49.6	52.4				
DLCDOH15D0280	2.8	42.0	50.7	50.6				
DLCDOH15D0290	2.9	43.5	52.7	48.8	104.7			
DLCDOH15D0300	3.0	45.0	54.7	47.0				
DLCDOH15D0310	3.1	46.5		46.5	113.7			
DLCDOH15D0320	3.2	48.0	63.7	46.6				
DLCDOH15D0330	3.3	49.5		46.6				
DLCDOH15D0340	3.4	51.0	63.8	46.7	113.8			
DLCDOH15D0350	3.5	52.5		46.7				
DLCDOH15D0360	3.6	54.0	72.8	46.8	122.8			
DLCDOH15D0370	3.7	55.5		46.9				
DLCDOH15D0380	3.8	57.0		46.9	122.9			
DLCDOH15D0390	3.9	58.5	72.9	47.0				
DLCDOH15D0400	4.0	60.0		47.0				
DLCDOH15D0410	4.1	61.5		46.5				
DLCDOH15D0420	4.2	63.0		46.6	132.0			
DLCDOH15D0430	4.3	64.5	82.0	46.7				
DLCDOH15D0440	4.4	66.0		46.7				
DLCDOH15D0450	4.5	67.5		46.8	141.1			
DLCDOH15D0460	4.6	69.0		46.9				
DLCDOH15D0470	4.7	70.5	91.1	47.0	141.2			
DLCDOH15D0480	4.8	72.0		46.5				
DLCDOH15D0490	4.9	73.5		46.6	150.2			
DLCDOH15D0500	5.0	75.0	91.2	46.7				
DLCDOH15D0510	5.1	76.5		46.8				
DLCDOH15D0520	5.2	78.0	100.2	46.9	150.3			
DLCDOH15D0530	5.3	79.5		47.0				
DLCDOH15D0540	5.4	81.0		46.5				
DLCDOH15D0550	5.5	82.5	100.3	46.6	150.4			
DLCDOH15D0560	5.6	84.0		46.7				
DLCDOH15D0570	5.7	85.5	109.3	46.8	159.3			
DLCDOH15D0580	5.8	87.0		46.9				
DLCDOH15D0590	5.9	88.5	109.4	47.0	159.4			
DLCDOH15D0600	6.0	90.0		46.5				
DLCDOH15D0610	6.1	91.5	118.4	46.6	168.4			
DLCDOH15D0620	6.2	93.0		46.7				
DLCDOH15D0630	6.3	94.5		46.8	168.5			
DLCDOH15D0640	6.4	96.0	118.5	46.9				
DLCDOH15D0650	6.5	97.5		47.0	177.5			
DLCDOH15D0660	6.6	99.0	127.5	46.5				
DLCDOH15D0670	6.7	100.5		46.6	177.6			
DLCDOH15D0680	6.8	102.0	127.6	46.7				
DLCDOH15D0690	6.9	103.5		47.0				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDOH15D0700	7.0	105.0	127.6	47.0	177.6	7	1.6	
DLCDOH15D0710	7.1	106.5		46.5				
DLCDOH15D0720	7.2	108.0		46.6	186.7		1.7	
DLCDOH15D0730	7.3	109.5	136.7	46.7				
DLCDOH15D0740	7.4	111.0		46.8				
DLCDOH15D0750	7.5	112.5		46.9	195.8		1.8	
DLCDOH15D0760	7.6	114.0		47.0				
DLCDOH15D0770	7.7	115.5	145.8	46.5	195.9			
DLCDOH15D0780	7.8	117.0		46.6				
DLCDOH15D0790	7.9	118.5		46.7	204.9		1.9	
DLCDOH15D0800	8.0	120.0	145.9	46.8				
DLCDOH15D0810	8.1	121.5		46.9	205.0			
DLCDOH15D0820	8.2	123.0	154.9	47.0				
DLCDOH15D0830	8.3	124.5		47.1	214.0		2.0	
DLCDOH15D0840	8.4	126.0		47.2				
DLCDOH15D0850	8.5	127.5	155.0	47.3	214.1			
DLCDOH15D0860	8.6	129.0	164.0	47.4				
DLCDOH15D0870	8.7	130.5		47.5	223.1		2.1	
DLCDOH15D0880	8.8	132.0		47.6				
DLCDOH15D0890	8.9	133.5	164.1	47.7				
DLCDOH15D0900	9.0	135.0		47.8	232.2			
DLCDOH15D0910	9.1	136.5	173.1	47.9				
DLCDOH15D0920	9.2	138.0		48.0	232.3		2.2	
DLCDOH15D0930	9.3	139.5		48.1				
DLCDOH15D0940	9.4	141.0	173.2	48.2	232.4			
DLCDOH15D0950	9.5	142.5		48.3				
DLCDOH15D0960	9.6	144.0	182.2	48.4	232.5			
DLCDOH15D0970	9.7	145.5		48.5				
DLCDOH15D0980	9.8	147.0	182.3	48.6	232.6		2.3	
DLCDOH15D0990	9.9	148.5		48.7				
DLCDOH15D1000	10.0	150.0		48.8	251.4		2.4	
DLCDOH15D1010	10.1	151.5		48.9				
DLCDOH15D1020	10.2	153.0	191.4	49.0				
DLCDOH15D1030	10.3	154.5		49.1	260.5			
DLCDOH15D1040	10.4	156.0		49.2				
DLCDOH15D1050	10.5	157.5		49.3	260.6		2.5	
DLCDOH15D1060	10.6	159.0		49.4				
DLCDOH15D1070	10.7	160.5	200.5	49.5	260.7			
DLCDOH15D1080	10.8	162.0		49.6				
DLCDOH15D1090	10.9	163.5	200.6	49.7	260.8			
DLCDOH15D1100	11.0	165.0		49.8				
DLCDOH15D1110	11.1	166.5		49.9	260.9		2.6	
DLCDOH15D1120	11.2	168.0		50.0				
DLCDOH15D1130	11.3	169.5	209.6	50.1	261.0			
DLCDOH15D1140	11.4	171.0		50.2				
DLCDOH15D1150	11.5	172.5	209.7	50.3	261.1		2.7	
DLCDOH15D1160	11.6	174.0		50.4				
DLCDOH15D1170	11.7	175.5	218.7	50.5	261.2			
DLCDOH15D1180	11.8	177.0		50.6				
DLCDOH15D1190	11.9	178.5	218.8	50.7	261.3		2.8	
DLCDOH15D1200	12.0	180.0		50.8				

DLCD0H20D

DLC 油孔钻 20D
DLC Drills Oil-Hole 20D

切削条件 Cutting Condition ▶ A-178



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

直径范围

- 可以对铝合金进行高效率加工的钻头。
- 可以进行钻头直径 20D 用加工。

Drills for high efficient cutting of Aluminum Alloy.
Realize under 20D drilling.

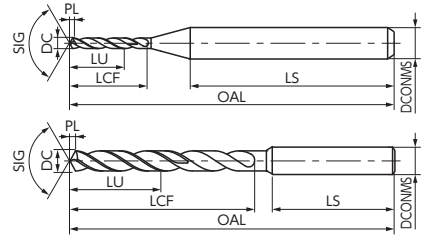

新商品

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H20D0100	1.0	20.0	23.2	43.3	71.2		0.2	
DLCD0H20D0110	1.1	22.0	25.3	48.5				
DLCD0H20D0120	1.2	24.0	28.3	45.6				
DLCD0H20D0130	1.3	26.0	30.3	43.8	78.3		0.3	
DLCD0H20D0140	1.4	28.0	32.3	41.0				
DLCD0H20D0150	1.5	30.0	35.3	39.2				
DLCD0H20D0160	1.6	32.0	37.4	49.4				
DLCD0H20D0170	1.7	34.0	39.4	46.6	90.4		0.4	
DLCD0H20D0180	1.8	36.0	41.4	44.8				
DLCD0H20D0190	1.9	38.0	44.4	41.9				
DLCD0H20D0200	2.0	40.0	46.5	40.1	90.5	3		
DLCD0H20D0210	2.1	42.0	48.5	53.3			0.5	
DLCD0H20D0220	2.2	44.0	51.5	50.5	105.5			
DLCD0H20D0230	2.3	46.0	53.5	48.7				
DLCD0H20D0240	2.4	48.0	55.6	45.9	105.6		0.6	
DLCD0H20D0250	2.5	50.0	58.6	44.1				
DLCD0H20D0260	2.6	52.0	60.6	56.3	119.6			
DLCD0H20D0270	2.7	54.0	62.6	53.4				
DLCD0H20D0280	2.8	56.0	64.7	51.6				
DLCD0H20D0290	2.9	58.0	67.7	48.8	119.7		0.7	
DLCD0H20D0300	3.0	60.0	69.7	47.0				
DLCD0H20D0310	3.1	62.0		46.5	131.7			
DLCD0H20D0320	3.2	64.0	81.7	46.6				
DLCD0H20D0330	3.3	66.0		46.6				
DLCD0H20D0340	3.4	68.0	81.8	46.7	131.8		0.8	
DLCD0H20D0350	3.5	70.0		46.8				
DLCD0H20D0360	3.6	72.0	92.8	46.8	142.8	4		
DLCD0H20D0370	3.7	74.0		46.9				
DLCD0H20D0380	3.8	76.0	92.9	46.9	142.9		0.9	
DLCD0H20D0390	3.9	78.0		47.0				
DLCD0H20D0400	4.0	80.0		47.0				
DLCD0H20D0410	4.1	82.0		46.5				
DLCD0H20D0420	4.2	84.0		46.6	155.0		1.0	
DLCD0H20D0430	4.3	86.0	105.0	46.7				
DLCD0H20D0440	4.4	88.0		46.8				
DLCD0H20D0450	4.5	90.0		46.9	166.1		1.1	
DLCD0H20D0460	4.6	92.0		47.0				
DLCD0H20D0470	4.7	94.0	116.1	47.0	166.2			
DLCD0H20D0480	4.8	96.0		46.5				
DLCD0H20D0490	4.9	98.0		46.6	178.2		1.2	
DLCD0H20D0500	5.0	100.0	116.2	46.7				
DLCD0H20D0510	5.1	102.0		46.8				
DLCD0H20D0520	5.2	104.0	128.2	46.9	178.3		1.3	
DLCD0H20D0530	5.3	106.0		47.0				
DLCD0H20D0540	5.4	108.0		46.5				
DLCD0H20D0550	5.5	110.0	128.3	46.6	189.3		1.4	
DLCD0H20D0560	5.6	112.0		46.7				
DLCD0H20D0570	5.7	114.0	139.3	46.8	189.4			
DLCD0H20D0580	5.8	116.0		46.9				
DLCD0H20D0590	5.9	118.0	139.4	47.0	201.4		1.5	
DLCD0H20D0600	6.0	120.0		46.5				
DLCD0H20D0610	6.1	122.0	151.4	46.6	201.5			
DLCD0H20D0620	6.2	124.0		46.7				
DLCD0H20D0630	6.3	126.0		46.8	212.5		1.6	
DLCD0H20D0640	6.4	128.0	151.5	46.9				
DLCD0H20D0650	6.5	130.0		47.0				
DLCD0H20D0660	6.6	132.0	162.5	46.5	212.6			
DLCD0H20D0670	6.7	134.0		46.6				
DLCD0H20D0680	6.8	136.0	162.6	46.7				
DLCD0H20D0690	6.9	138.0		46.8				

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H20D0700	7.0	140.0	162.6	47.0	212.6	7	1.6	
DLCD0H20D0710	7.1	142.0		46.5				
DLCD0H20D0720	7.2	144.0		46.6	224.7		1.7	
DLCD0H20D0730	7.3	146.0	174.7					
DLCD0H20D0740	7.4	148.0		46.7				
DLCD0H20D0750	7.5	150.0						
DLCD0H20D0760	7.6	152.0		46.8	235.8	8	1.8	
DLCD0H20D0770	7.7	154.0		46.9				
DLCD0H20D0780	7.8	156.0	185.8					
DLCD0H20D0790	7.9	158.0		47.0	235.9			
DLCD0H20D0800	8.0	160.0	185.9				1.9	
DLCD0H20D0810	8.1	162.0		46.5	247.9			
DLCD0H20D0820	8.2	164.0	197.9	46.6				
DLCD0H20D0830	8.3	166.0						
DLCD0H20D0840	8.4	168.0		46.7	248.0			
DLCD0H20D0850	8.5	170.0	198.0					
DLCD0H20D0860	8.6	172.0	209.0	46.8	259.0	9	2.0	
DLCD0H20D0870	8.7	174.0		46.9				
DLCD0H20D0880	8.8	176.0		47.0	259.1		2.1	
DLCD0H20D0890	8.9	178.0	209.1					
DLCD0H20D0900	9.0	180.0		46.5	271.1			
DLCD0H20D0910	9.1	182.0	221.1	46.6				
DLCD0H20D0920	9.2	184.0		46.7	271.2		2.2	
DLCD0H20D0930	9.3	186.0		46.8	282.2			
DLCD0H20D0940	9.4	188.0	221.2					
DLCD0H20D0950	9.5	190.0		46.9	282.3		2.3	
DLCD0H20D0960	9.6	192.0	232.2					
DLCD0H20D0970	9.7	194.0		47.0				
DLCD0H20D0980	9.8	196.0	232.3					
DLCD0H20D0990	9.9	198.0						
DLCD0H20D1000	10.0	200.0						

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

DLCDOH25D

DLC 油孔钻 25D
DLC Drills Oil-Hole 25D

- 可以对铝合金进行高效率加工的钻头。
可以进行钻头直径 25D 用加工。

Drills for high efficient cutting of Aluminum Alloy.
Realize under 25D drilling.

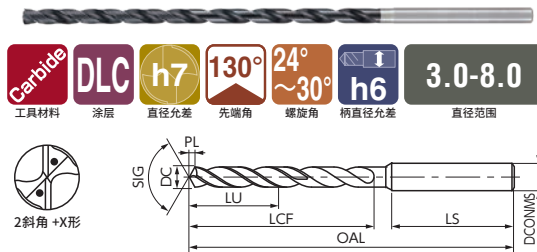


订货方式 商品编码		切削条件 Cutting Condition ▶▶									
-----------	--	---	--	--	--	--	--	--	--	--	--

DLCDOH30D

DLC 油孔钻 30D
DLC Drills Oil-Hole 30D

- 可以对铝合金进行高效率加工的钻头。
可以进行钻头直径 30D 用加工。

Drills for high efficient cutting of Aluminum Alloy.
Realize under 30D drilling.

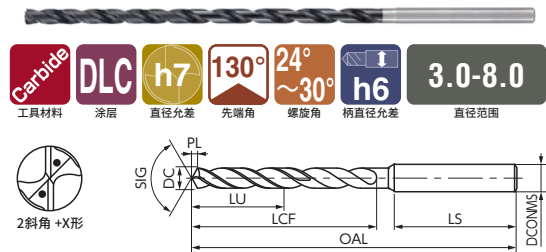

订货方式 商品编码		切削条件 Cutting Condition ▶▶▶A-179										单位 (Unit) : mm	
商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOM	先端 PL	在庫 Stock					
DLCDOH30D0300	3.0	90.0	99.7	47.0	149.7	3		0.7					
DLCDOH30D0310	3.1	93.0	116.7	46.5	166.7	4							
DLCDOH30D0320	3.2	96.0		46.6									
DLCDOH30D0330	3.3	99.0	116.8	46.7	166.8	4		0.8					
DLCDOH30D0340	3.4	102.0											
DLCDOH30D0350	3.5	105.0	132.8	46.8	182.8	4		0.9					
DLCDOH30D0360	3.6	108.0											
DLCDOH30D0370	3.7	111.0	132.9	46.9	182.9	4		1.0					
DLCDOH30D0380	3.8	114.0											
DLCDOH30D0390	3.9	117.0	150.0	46.6	200.0	5		1.1					
DLCDOH30D0400	4.0	120.0											
DLCDOH30D0410	4.1	123.0	166.1	46.8	216.1	5		1.2					
DLCDOH30D0420	4.2	126.0											
DLCDOH30D0430	4.3	129.0	166.2	47.0	216.2	6		1.3					
DLCDOH30D0440	4.4	132.0											
DLCDOH30D0450	4.5	135.0	183.2	46.5	233.2	6		1.4					
DLCDOH30D0460	4.6	138.0											
DLCDOH30D0470	4.7	141.0	183.3	46.7	233.3	6		1.5					
DLCDOH30D0480	4.8	144.0											
DLCDOH30D0490	4.9	147.0	199.3	46.8	249.3	7		1.6					
DLCDOH30D0500	5.0	150.0											
DLCDOH30D0510	5.1	153.0	216.4	46.5	266.4	7		1.7					
DLCDOH30D0520	5.2	156.0											
DLCDOH30D0530	5.3	159.0	216.5	46.6	266.5	7		1.8					
DLCDOH30D0540	5.4	162.0											
DLCDOH30D0550	5.5	165.0	232.5	46.8	282.5	7		1.9					
DLCDOH30D0560	5.6	168.0											
DLCDOH30D0570	5.7	171.0	232.6	46.9	282.6	7		2.0					
DLCDOH30D0580	5.8	174.0											
DLCDOH30D0590	5.9	177.0	249.7	46.6	299.7	8		2.1					
DLCDOH30D0600	6.0	180.0											
DLCDOH30D0610	6.1	183.0	249.7	46.7	315.8	8		2.2					
DLCDOH30D0620	6.2	186.0											
DLCDOH30D0630	6.3	189.0	265.8	46.8	315.8	8		2.3					
DLCDOH30D0640	6.4	192.0											
DLCDOH30D0650	6.5	195.0	265.9	46.9	315.9	8		2.4					
DLCDOH30D0660	6.6	198.0											
DLCDOH30D0670	6.7	201.0	265.9	47.0	315.9	8		2.5					
DLCDOH30D0680	6.8	204.0											
DLCDOH30D0690	6.9	207.0	265.9	47.0	315.9	8		2.6					
DLCDOH30D0700	7.0	210.0											
DLCDOH30D0710	7.1	213.0	265.9	46.5	315.9	8		2.7					
DLCDOH30D0720	7.2	216.0											
DLCDOH30D0730	7.3	219.0	265.9	46.6	315.9	8		2.8					
DLCDOH30D0740	7.4	222.0											
DLCDOH30D0750	7.5	225.0	265.9	46.7	315.9	8		2.9					
DLCDOH30D0760	7.6	228.0											
DLCDOH30D0770	7.7	231.0	265.9	46.8	315.9	8		3.0					
DLCDOH30D0780	7.8	234.0											
DLCDOH30D0790	7.9	237.0	265.9	46.9	315.9	8		3.1					
DLCDOH30D0800	8.0	240.0											

DLCD0H35D


DLC 油孔钻 35D

DLC Drills Oil-Hole 35D

●可以对铝合金进行高效率加工的钻头。

可以进行钻头直径 35D 用加工。

Drills for high efficient cutting of Aluminum Alloy. Realize under 35D drilling.

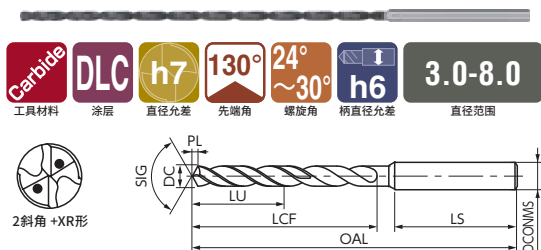

DLCD0H40D


DLC 油孔钻 40D

DLC Drills Oil-Hole 40D

●可以对铝合金进行高效率加工的钻头。

可以进行钻头直径 40D 用加工。

Drills for high efficient cutting of Aluminum Alloy. Realize under 40D drilling.

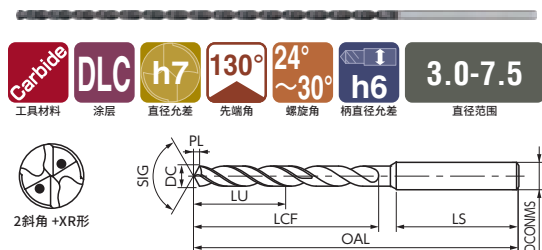

切削条件 Cutting Condition ▶▶A-179

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H35D0300	3.0	105.0	114.7	47.0	164.7	3		
DLCD0H35D0310	3.1	108.5		46.5			0.7	
DLCD0H35D0320	3.2	112.0	133.7		183.7			
DLCD0H35D0330	3.3	115.5		46.6				
DLCD0H35D0340	3.4	119.0	133.8	46.7	183.8		0.8	
DLCD0H35D0350	3.5	122.5				4		
DLCD0H35D0360	3.6	126.0	152.8	46.8	202.8			
DLCD0H35D0370	3.7	129.5						
DLCD0H35D0380	3.8	133.0		46.9	202.9		0.9	
DLCD0H35D0390	3.9	136.5	152.9					
DLCD0H35D0400	4.0	140.0		47.0				
DLCD0H35D0410	4.1	143.5		46.5			1.0	
DLCD0H35D0420	4.2	147.0			222.0			
DLCD0H35D0430	4.3	150.5	172.0	46.6				
DLCD0H35D0440	4.4	154.0		46.7		5		
DLCD0H35D0450	4.5	157.5						
DLCD0H35D0460	4.6	161.0		46.8			1.1	
DLCD0H35D0470	4.7	164.5	191.1	46.9	241.1			
DLCD0H35D0480	4.8	168.0		47.0	241.2		1.2	
DLCD0H35D0490	4.9	171.5						
DLCD0H35D0500	5.0	175.0	191.2	46.5				
DLCD0H35D0510	5.1	178.5		46.6	260.2			
DLCD0H35D0520	5.2	182.0	210.2					
DLCD0H35D0530	5.3	185.5		46.7	260.3		1.3	
DLCD0H35D0540	5.4	189.0	210.3	46.8	279.3			
DLCD0H35D0550	5.5	192.5		46.9		6		
DLCD0H35D0560	5.6	196.0	229.3	47.0	279.4			
DLCD0H35D0570	5.7	199.5						
DLCD0H35D0580	5.8	203.0		46.5	298.4		1.4	
DLCD0H35D0590	5.9	206.5	229.4	46.6				
DLCD0H35D0600	6.0	210.0		46.7	298.5			
DLCD0H35D0610	6.1	213.5	248.4	46.8				
DLCD0H35D0620	6.2	217.0		46.9	317.5		1.5	
DLCD0H35D0630	6.3	220.5				7		
DLCD0H35D0640	6.4	224.0	248.5	46.7				
DLCD0H35D0650	6.5	227.5		46.8	317.6			
DLCD0H35D0660	6.6	231.0	267.5	46.9			1.6	
DLCD0H35D0670	6.7	234.5		47.0				
DLCD0H35D0680	6.8	238.0	267.6	46.5				
DLCD0H35D0690	6.9	241.5		46.6	336.7			
DLCD0H35D0700	7.0	245.0		46.7			1.7	
DLCD0H35D0710	7.1	248.5						
DLCD0H35D0720	7.2	252.0	286.7	46.8				
DLCD0H35D0730	7.3	255.5		46.9	355.8		1.8	
DLCD0H35D0740	7.4	259.0		47.0				
DLCD0H35D0750	7.5	262.5				8		
DLCD0H35D0760	7.6	266.0		46.5				
DLCD0H35D0770	7.7	269.5	305.8	46.6				
DLCD0H35D0780	7.8	273.0		46.7				
DLCD0H35D0790	7.9	276.5		46.8				
DLCD0H35D0800	8.0	280.0	305.9	46.9	355.9		1.9	

切削条件 Cutting Condition ▶▶A-179

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H40D0300	3.0	120.0	129.7	47.0	179.7	3		
DLCD0H40D0310	3.1	124.0		46.5			0.7	
DLCD0H40D0320	3.2	128.0	151.7		201.7			
DLCD0H40D0330	3.3	132.0		46.6				
DLCD0H40D0340	3.4	136.0	151.8	46.7	201.8		0.8	
DLCD0H40D0350	3.5	140.0				4		
DLCD0H40D0360	3.6	144.0	172.8	46.8	222.8			
DLCD0H40D0370	3.7	148.0						
DLCD0H40D0380	3.8	152.0	172.9	46.9	222.9		0.9	
DLCD0H40D0390	3.9	156.0		47.0				
DLCD0H40D0400	4.0	160.0		46.5			1.0	
DLCD0H40D0410	4.1	164.0		46.6	245.0			
DLCD0H40D0420	4.2	168.0		46.7		5		
DLCD0H40D0430	4.3	172.0	195.0	46.8				
DLCD0H40D0440	4.4	176.0		46.9			1.1	
DLCD0H40D0450	4.5	180.0		47.0	266.1			
DLCD0H40D0460	4.6	184.0		46.5				
DLCD0H40D0470	4.7	188.0	216.1	46.6	266.2		1.2	
DLCD0H40D0480	4.8	192.0		46.7				
DLCD0H40D0490	4.9	196.0		46.8	288.2			
DLCD0H40D0500	5.0	200.0	216.2	46.9				
DLCD0H40D0510	5.1	204.0		47.0				
DLCD0H40D0520	5.2	208.0	238.2	46.5				
DLCD0H40D0530	5.3	212.0		46.6	288.3		1.3	
DLCD0H40D0540	5.4	216.0	238.3	46.7	309.3			
DLCD0H40D0550	5.5	220.0		46.8		6		
DLCD0H40D0560	5.6	224.0	259.3	46.9				
DLCD0H40D0570	5.7	228.0		47.0	309.4			
DLCD0H40D0580	5.8	232.0		46.5			1.4	
DLCD0H40D0590	5.9	236.0	259.4	46.6				
DLCD0H40D0600	6.0	240.0		46.7	331.4			
DLCD0H40D0610	6.1	244.0	281.4	46.8				
DLCD0H40D0620	6.2	248.0		46.9	331.5		1.5	
DLCD0H40D0630	6.3	252.0		47.0				
DLCD0H40D0640	6.4	256.0	281.5	46.5				
DLCD0H40D0650	6.5	260.0		46.6	352.5			
DLCD0H40D0660	6.6	264.0	302.5	46.7		7		
DLCD0H40D0670	6.7	268.0		46.8				
DLCD0H40D0680	6.8	272.0	302.6	46.9	352.6		1.6	
DLCD0H40D0690	6.9	276.0		47.0				
DLCD0H40D0700	7.0	280.0		46.5				
DLCD0H40D0710	7.1	284.0		46.6				
DLCD0H40D0720	7.2	288.0	324.7	46.7	374.7		1.7	
DLCD0H40D0730	7.3	292.0		46.8		8		
DLCD0H40D0740	7.4	296.0		46.9				
DLCD0H40D0750	7.5	300.0						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

DLCD0H45D


DLC 油孔钻 45D

DLC Drills Oil-Hole 45D

- 可以对铝合金进行高效率加工的钻头。

可以进行钻头直径 45D 用加工。

Drills for high efficient cutting of Aluminum Alloy. Realize under 45D drilling.

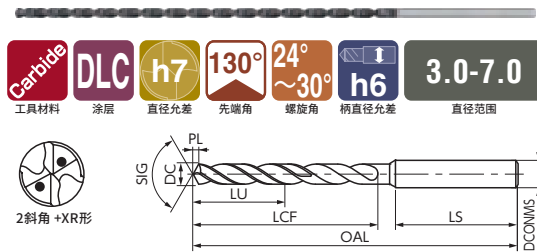

DLCD0H50D


DLC 油孔钻 50D

DLC Drills Oil-Hole 50D

- 可以对铝合金进行高效率加工的钻头。

可以进行钻头直径 50D 用加工。

Drills for high efficient cutting of Aluminum Alloy. Realize under 50D drilling.

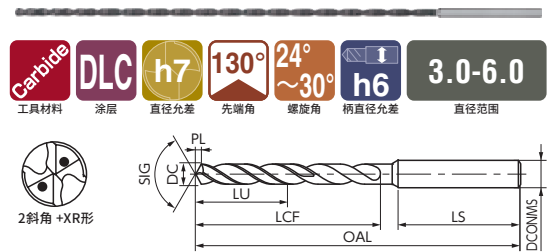

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H45D0300	3.0	135.0	144.7	47.0	194.7	3	0.7	
DLCD0H45D0310	3.1	139.5	168.7	46.5	218.7			
DLCD0H45D0320	3.2	144.0		46.6				
DLCD0H45D0330	3.3	148.5						
DLCD0H45D0340	3.4	153.0	168.8	46.7	218.8		0.8	
DLCD0H45D0350	3.5	157.5						
DLCD0H45D0360	3.6	162.0	192.8	46.8	242.8	4		
DLCD0H45D0370	3.7	166.5						
DLCD0H45D0380	3.8	171.0	192.9	46.9	242.9		0.9	
DLCD0H45D0390	3.9	175.5						
DLCD0H45D0400	4.0	180.0		47.0				
DLCD0H45D0410	4.1	184.5		46.5				
DLCD0H45D0420	4.2	189.0		46.6	267.0		1.0	
DLCD0H45D0430	4.3	193.5	217.0					
DLCD0H45D0440	4.4	198.0		46.7				
DLCD0H45D0450	4.5	202.5						
DLCD0H45D0460	4.6	207.0		46.8		5		
DLCD0H45D0470	4.7	211.5	241.1	46.9	291.1		1.1	
DLCD0H45D0480	4.8	216.0		47.0				
DLCD0H45D0490	4.9	220.5						
DLCD0H45D0500	5.0	225.0	241.2		291.2			
DLCD0H45D0510	5.1	229.5		46.5			1.2	
DLCD0H45D0520	5.2	234.0	265.2	46.6	315.2			
DLCD0H45D0530	5.3	238.5						
DLCD0H45D0540	5.4	243.0		46.7	315.3			
DLCD0H45D0550	5.5	247.5	265.3			6		
DLCD0H45D0560	5.6	252.0		46.8	339.3		1.3	
DLCD0H45D0570	5.7	256.5	289.3					
DLCD0H45D0580	5.8	261.0		46.9				
DLCD0H45D0590	5.9	265.5	289.4	47.0	339.4		1.4	
DLCD0H45D0600	6.0	270.0						
DLCD0H45D0610	6.1	274.5		46.5	363.4			
DLCD0H45D0620	6.2	279.0	313.4	46.6				
DLCD0H45D0630	6.3	283.5						
DLCD0H45D0640	6.4	288.0		46.7	363.5		1.5	
DLCD0H45D0650	6.5	292.5				7		
DLCD0H45D0660	6.6	297.0	337.5	46.8	387.5			
DLCD0H45D0670	6.7	301.5						
DLCD0H45D0680	6.8	306.0		46.9			1.6	
DLCD0H45D0690	6.9	310.5	337.6		387.6			
DLCD0H45D0700	7.0	315.0		47.0				

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCD0H50D0300	3.0	150.0	159.7	47.0	209.7	3	0.7	
DLCD0H50D0310	3.1	155.0		46.5				
DLCD0H50D0320	3.2	160.0	186.7		236.7			
DLCD0H50D0330	3.3	165.0		46.6				
DLCD0H50D0340	3.4	170.0						
DLCD0H50D0350	3.5	175.0	186.8	46.7	236.8		0.8	
DLCD0H50D0360	3.6	180.0						
DLCD0H50D0370	3.7	185.0	212.8	46.8	262.8	4		
DLCD0H50D0380	3.8	190.0						
DLCD0H50D0390	3.9	195.0	212.9	46.9	262.9		0.9	
DLCD0H50D0400	4.0	200.0		47.0				
DLCD0H50D0410	4.1	205.0		46.5				
DLCD0H50D0420	4.2	210.0						
DLCD0H50D0430	4.3	215.0	240.0	46.6	290.0		1.0	
DLCD0H50D0440	4.4	220.0		46.7				
DLCD0H50D0450	4.5	225.0				5		
DLCD0H50D0460	4.6	230.0		46.8				
DLCD0H50D0470	4.7	235.0	266.1	46.9	316.1		1.1	
DLCD0H50D0480	4.8	240.0						
DLCD0H50D0490	4.9	245.0		47.0				
DLCD0H50D0500	5.0	250.0	266.2		316.2			
DLCD0H50D0510	5.1	255.0		46.5			1.2	
DLCD0H50D0520	5.2	260.0	293.2	46.6	343.2			
DLCD0H50D0530	5.3	265.0						
DLCD0H50D0540	5.4	270.0		46.7	343.3			
DLCD0H50D0550	5.5	275.0	293.3			6		
DLCD0H50D0560	5.6	280.0		46.8	369.3		1.3	
DLCD0H50D0570	5.7	285.0	319.3					
DLCD0H50D0580	5.8	290.0		46.9				
DLCD0H50D0590	5.9	295.0	319.4	47.0	369.4		1.4	
DLCD0H50D0600	6.0	300.0						

DLCDOHPLT

DLC 油孔引导钻

DLC Drills Oil-Hole Pilot

切削条件 Cutting Condition ▶ A-180



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

直径范围

●对铝合金进行导向孔加工的钻头。

For guide hole drilling. For Aluminum Alloy.

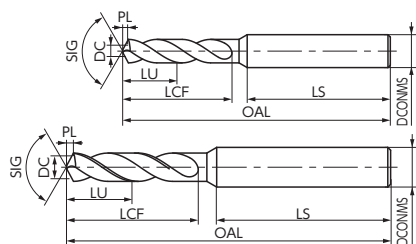

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDOHPLT01015	1.015	3.0	3.5	46.0	54.2	0.2	0.2	
DLCDOHPLT01115	1.115	3.3	3.8	47.9				
DLCDOHPLT01215	1.215	3.6	4.1	47.8	56.2			
DLCDOHPLT01315	1.315	3.9	4.4	47.7		0.3	0.3	
DLCDOHPLT01415	1.415	4.2	4.9	47.4				
DLCDOHPLT01515	1.515	4.5	5.2	47.3	56.3			
DLCDOHPLT01615	1.615	4.8	5.5	51.2		0.4	0.4	
DLCDOHPLT01715	1.715	5.1	5.8	51.1				
DLCDOHPLT01815	1.815	5.4	6.1	51.0	60.3			
DLCDOHPLT01915	1.915	5.7	6.5	50.8		0.5	0.5	
DLCDOHPLT02015	2.015	6.0	9.4	48.2	60.4			
DLCDOHPLT02115	2.115	6.3		49.3				
DLCDOHPLT02215	2.215	6.6	11.4	49.5	63.4	0.6	0.6	
DLCDOHPLT02315	2.315	6.9		49.7				
DLCDOHPLT02415	2.415	7.2	12.4	48.9				
DLCDOHPLT02515	2.515	7.5		49.1	63.5	0.7	0.7	
DLCDOHPLT02615	2.615	7.8	12.5	54.3				
DLCDOHPLT02715	2.715	8.1		52.5				
DLCDOHPLT02815	2.815	8.4	14.5	52.7	68.5	0.8	0.8	
DLCDOHPLT02915	2.915	8.7		52.8				
DLCDOHPLT0303	3.030	9.1	14.6	53.0	68.6	0.9	0.9	
DLCDOHPLT0313	3.130	9.4		53.2				
DLCDOHPLT0323	3.230	9.7	15.6	53.3				
DLCDOHPLT0333	3.330	10.0		53.4	72.6	1.0	1.0	
DLCDOHPLT0343	3.430	10.3		53.5				
DLCDOHPLT0353	3.530	10.6		53.6				
DLCDOHPLT0363	3.630	10.9	16.7	52.7		1.1	1.1	
DLCDOHPLT0373	3.730	11.2		52.8	72.7			
DLCDOHPLT0383	3.830	11.5		52.9				
DLCDOHPLT0393	3.930	11.8		53.0		1.2	1.2	
DLCDOHPLT0403	4.030	12.1		53.0				
DLCDOHPLT0413	4.130	12.4		56.2				
DLCDOHPLT0423	4.230	12.7	19.8	56.3		1.3	1.3	
DLCDOHPLT0433	4.330	13.0		56.4	80.8			
DLCDOHPLT0443	4.430	13.3		56.5				
DLCDOHPLT0453	4.530	13.6	21.8	56.6		1.4	1.4	
DLCDOHPLT0463	4.630	13.9		55.7				
DLCDOHPLT0473	4.730	14.2		55.8				
DLCDOHPLT0483	4.830	14.5	22.9	55.9	80.9	1.5	1.5	
DLCDOHPLT0493	4.930	14.8		55.9				
DLCDOHPLT0503	5.030	15.1	23.9	56.0				
DLCDOHPLT0513	5.130	15.4	24.9	54.2	82.9	1.6	1.6	
DLCDOHPLT0523	5.230	15.7		54.3				
DLCDOHPLT0533	5.330	16.0	25.0	54.4				
DLCDOHPLT0543	5.430	16.3		54.5		1.7	1.7	
DLCDOHPLT0553	5.530	16.6	26.0	54.6	83.0			
DLCDOHPLT0563	5.630	16.9		53.7				
DLCDOHPLT0573	5.730	17.2	28.0	53.8		1.8	1.8	
DLCDOHPLT0583	5.830	17.5		53.9				
DLCDOHPLT0593	5.930	17.8	28.1	53.9	83.1			
DLCDOHPLT0603	6.030	18.1		54.0		1.9	1.9	
DLCDOHPLT0613	6.130	18.4	29.1	55.2	89.1			
DLCDOHPLT0623	6.230	18.7		55.3				
DLCDOHPLT0633	6.330	19.0	29.2	55.4		2.0	2.0	
DLCDOHPLT0643	6.430	19.3		55.5				
DLCDOHPLT0653	6.530	19.6	31.2	55.6	89.2			
DLCDOHPLT0663	6.630	19.9		54.7		2.1	2.1	
DLCDOHPLT0673	6.730	20.2	32.2	54.8				
DLCDOHPLT0683	6.830	20.5		54.9				
DLCDOHPLT0693	6.930	20.8	32.3		89.3	2.2	2.2	

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DLCDOHPLT0703	7.030	21.1	33.3	55.0	89.3	7	1.3	
DLCDOHPLT0713	7.130	21.4		57.2		8	1.4	
DLCDOHPLT0723	7.230	21.7	34.3	57.3	95.3			
DLCDOHPLT0733	7.330	22.0		57.4				
DLCDOHPLT0743	7.430	22.3		57.5		9	1.5	
DLCDOHPLT0753	7.530	22.6	35.4	57.6				
DLCDOHPLT0763	7.630	22.9		56.7	95.4			
DLCDOHPLT0773	7.730	23.2		56.8		10	1.6	
DLCDOHPLT0783	7.830	23.5	37.4	56.9				
DLCDOHPLT0793	7.930	23.8		57.0				
DLCDOHPLT0803	8.030	24.1	37.5	57.0	95.5	11	1.7	
DLCDOHPLT0813	8.130	24.4		58.2				
DLCDOHPLT0823	8.230	24.7	38.5	58.3	101.5			
DLCDOHPLT0833	8.330	25.0		58.4		12	1.8	
DLCDOHPLT0843	8.430	25.3	40.5	58.5				
DLCDOHPLT0853	8.530	25.6		58.6				
DLCDOHPLT0863	8.630	25.9	40.6	57.7		13	1.9	
DLCDOHPLT0873	8.730	26.2		57.8	101.6			
DLCDOHPLT0883	8.830	26.5	41.6	57.9				
DLCDOHPLT0893	8.930	26.8		58.0		14	2.0	
DLCDOHPLT0903	9.030	27.1	42.6	58.0				
DLCDOHPLT0913	9.130	27.4		60.2				
DLCDOHPLT0923	9.230	27.7	43.7	60.3		15	2.1	
DLCDOHPLT0933	9.330	28.0		60.4	107.7			
DLCDOHPLT0943	9.430	28.3	44.7	60.5				
DLCDOHPLT0953	9.530	28.6		60.6		16	2.2	
DLCDOHPLT0963	9.630	28.9	44.8	59.7				
DLCDOHPLT0973	9.730	29.2		59.8				
DLCDOHPLT0983	9.830	29.5	46.8	59.9	107.8	17	2.3	
DLCDOHPLT0993	9.930	29.8		60.0				
DLCDOHPLT1003	10.030	30.1		60.0				
DLCDOHPLT1013	10.130	30.4	47.8	65.2	117.8	18	2.4	
DLCDOHPLT1023	10.230	30.7		65.3				
DLCDOHPLT1033	10.330	31.0	47.9	65.4				
DLCDOHPLT1043	10.430	31.3		65.5	117.9	19	2.5	
DLCDOHPLT1053	10.530	31.6	49.9	65.6				
DLCDOHPLT1063	10.630	31.9		64.7				
DLCDOHPLT1073	10.730	32.2		64.8		20	2.6	
DLCDOHPLT1083	10.830	32.5	51.0	64.9	118.0			
DLCDOHPLT1093	10.930	32.8		65.0				
DLCDOHPLT1103	11.030	33.1		65.0		21	2.7	
DLCDOHPLT1113	11.130	33.4	52.0	67.2	124.0			
DLCDOHPLT1123	11.230	33.7	53.0	67.3				
DLCDOHPLT1133	11.330	34.0	53.1	67.4		22	2.8	
DLCDOHPLT1143	11.430	34.3		67.5				
DLCDOHPLT1153	11.530	34.6	54.1	67.6	124.1			
DLCDOHPLT1163	11.630	34.9		66.7		23	2.9	
DLCDOHPLT1173	11.730	35.2	56.1	66.8				
DLCDOHPLT1183	11.830	35.5		66.9				
DLCDOHPLT1193	11.930	35.8	56.2	67.0	124.2	24	3.0	
DLCDOHPLT1203	12.030	36.1		67.0				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品

其它

精密工具

技术资料

索引

- 无毛刺、多功能平头钻。
- 采用可实现 4D 孔深的常规尺寸


Burr-less and multi-functional flat drill.
This drill adopts regular size for 4 x D drilling depth.



DC < 3
单刃带



DC ≥ 3
双刃带

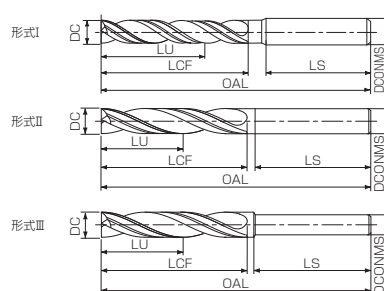

单位 (Unit) : mm

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	形式 Type	在庫 Stock
DLCDZR0100	1.00	4.0	6.3	50	39.5	3	I	□
DLCDZR0105	1.05	4.2	6.6		39.0			
DLCDZR0110	1.10	4.4	6.9					
DLCDZR0115	1.15	4.6	7.2		38.5			
DLCDZR0120	1.20	4.8	7.6					
DLCDZR0125	1.25	5.0	7.9		38.0			
DLCDZR0126	1.26							
DLCDZR0127	1.27	5.1	8.2					
DLCDZR0130	1.30	5.2						
DLCDZR0135	1.35	5.4	8.5		37.5			
DLCDZR0140	1.40	5.6	8.8					
DLCDZR0145	1.45	5.8	9.1					
DLCDZR0150	1.50	6.0	9.5					
DLCDZR0153	1.53	6.1	9.8					
DLCDZR0154	1.54							
DLCDZR0155	1.55	6.2						
DLCDZR0160	1.60	6.4	10.1	36.5				
DLCDZR0165	1.65	6.6	10.4					
DLCDZR0170	1.70	6.8	10.7					
DLCDZR0175	1.75	7.0	11.0		36.0			
DLCDZR0180	1.80	7.2	11.3					
DLCDZR0181	1.81							
DLCDZR0182	1.82	7.3	11.7	35.5				
DLCDZR0185	1.85	7.4						
DLCDZR0190	1.90	7.6	12.0					
DLCDZR0195	1.95	7.8	12.3					
DLCDZR0200	2.00	8.0	12.6	60	45.0	4	I	□
DLCDZR0205	2.05	8.2	13.0					
DLCDZR0210	2.10	8.4						
DLCDZR0211	2.11							
DLCDZR0212	2.12	8.5						
DLCDZR0215	2.15	8.6	14.5					
DLCDZR0220	2.20	8.8						
DLCDZR0225	2.25	9.0						
DLCDZR0228	2.28	9.1						
DLCDZR0229	2.29	9.2	16.0					
DLCDZR0230	2.30							
DLCDZR0235	2.35	9.4			43.5			
DLCDZR0238	2.38	9.5						
DLCDZR0239	2.39	9.6						
DLCDZR0240	2.40							
DLCDZR0245	2.45	9.8	18.0					
DLCDZR0250	2.50	10.0						
DLCDZR0255	2.55	10.2						
DLCDZR0260	2.60	10.4						
DLCDZR0265	2.65	10.6	41.0					
DLCDZR0270	2.70	10.8						
DLCDZR0275	2.75	11.0						
DLCDZR0276	2.76							
DLCDZR0277	2.77	11.1						
DLCDZR0280	2.80	11.2	19.0					
DLCDZR0285	2.85	11.4						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	形式 Type	在庫 Stock
DLCDZR0290	2.90	11.6	19.0	60	40.0	4	I	□
DLCDZR0295	2.95	11.8			37.0			
DLCDZR0300	3.00	12.0	21.0		35.0			
DLCDZR0305	3.05	12.2						
DLCDZR0310	3.10	12.4						
DLCDZR0315	3.15	12.6						
DLCDZR0320	3.20	12.8	23.0		34.0			
DLCDZR0325	3.25	13.0						
DLCDZR0330	3.30	13.2						
DLCDZR0335	3.35	13.4						
DLCDZR0340	3.40	13.6	25.0		33.0			
DLCDZR0345	3.45	13.8						
DLCDZR0350	3.50	14.0						
DLCDZR0355	3.55	14.2						
DLCDZR0360	3.60	14.4	27.0		39.0	6		
DLCDZR0365	3.65	14.6						
DLCDZR0370	3.70	14.8						
DLCDZR0375	3.75	15.0						
DLCDZR0380	3.80	15.2	29.0		37.0			
DLCDZR0385	3.85	15.4						
DLCDZR0390	3.90	15.6						
DLCDZR0395	3.95	15.8						
DLCDZR0400	4.00	16.0	31.0	70	36.0			
DLCDZR0405	4.05	16.2						
DLCDZR0410	4.10	16.4						
DLCDZR0415	4.15	16.6						
DLCDZR0420	4.20	16.8	32.0					
DLCDZR0425	4.25	17.0						
DLCDZR0430	4.30	17.2						
DLCDZR0435	4.35	17.4						
DLCDZR0440	4.40	17.6	34.0	33.0				
DLCDZR0445	4.45	17.8						
DLCDZR0450	4.50	18.0						
DLCDZR0455	4.55	18.2						
DLCDZR0460	4.60	18.4	36.0					
DLCDZR0465	4.65	18.6						
DLCDZR0470	4.70	18.8						
DLCDZR0475	4.75	19.0						
DLCDZR0480	4.80	19.2	38.0					
DLCDZR0485	4.85	19.4						
DLCDZR0490	4.90	19.6						
DLCDZR0495	4.95	19.8						
DLCDZR0500	5.00	20.0	40.0					
DLCDZR0505	5.05	20.2						
DLCDZR0510	5.10	20.4						
DLCDZR0515	5.15	20.6						
DLCDZR0520	5.20	20.8	42.0					
DLCDZR0525	5.25	21.0						
DLCDZR0530	5.30	21.2						
DLCDZR0535	5.35	21.4						
DLCDZR0540	5.40	21.6	44.0					
DLCDZR0545	5.45	21.8						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 D20MM	形式 Type	在庫 Stock								
DLCDZR0550	5.50	22.0	36.0	70	33.0	I	□									
DLCDZR0555	5.55	22.2			31.0											
DLCDZR0560	5.60	22.4														
DLCDZR0565	5.65	22.6	38.0													
DLCDZR0570	5.70	22.8														
DLCDZR0575	5.75	23.0														
DLCDZR0580	5.80	23.2														
DLCDZR0585	5.85	23.4														
DLCDZR0590	5.90	23.6	40.0		44.0	II										
DLCDZR0595	5.95	23.8														
DLCDZR0600	6.00	24.0	40.0	85	42.0	6										
DLCDZR0605	6.05	24.2														
DLCDZR0610	6.10	24.4		44.0		40.0			III							
DLCDZR0615	6.15	24.6														
DLCDZR0620	6.20	24.8														
DLCDZR0625	6.25	25.0														
DLCDZR0630	6.30	25.2	42.0	85	42.0	6										
DLCDZR0635	6.35	25.4														
DLCDZR0640	6.40	25.6														
DLCDZR0645	6.45	25.8														
DLCDZR0650	6.50	26.0	44.0	46.0	44.0	III										
DLCDZR0655	6.55	26.2														
DLCDZR0660	6.60	26.4														
DLCDZR0665	6.65	26.6														
DLCDZR0670	6.70	26.8	46.0	48.0	46.0	III										
DLCDZR0675	6.75	27.0														
DLCDZR0680	6.80	27.2														
DLCDZR0685	6.85	27.4														
DLCDZR0690	6.90	27.6	48.0	90	48.0	III										
DLCDZR0695	6.95	27.8														
DLCDZR0700	7.00	28.0														
DLCDZR0705	7.05	28.2														
DLCDZR0710	7.10	28.4	50.0	90	50.0	III										
DLCDZR0715	7.15	28.6														
DLCDZR0720	7.20	28.8														
DLCDZR0725	7.25	29.0														
DLCDZR0730	7.30	29.2	52.0	100	52.0	III										
DLCDZR0735	7.35	29.4														
DLCDZR0740	7.40	29.6														
DLCDZR0745	7.45	29.8														
DLCDZR0750	7.50	30.0	54.0	100	54.0	III										
DLCDZR0755	7.55	30.2														
DLCDZR0760	7.60	30.4														
DLCDZR0765	7.65	30.6														
DLCDZR0770	7.70	30.8	56.0	100	56.0	III										
DLCDZR0775	7.75	31.0														
DLCDZR0780	7.80	31.2														
DLCDZR0785	7.85	31.4														
DLCDZR0790	7.90	31.6	58.0	100	58.0	III										
DLCDZR0795	7.95	31.8														
DLCDZR0800	8.00	32.0														
DLCDZR0805	8.05	32.2														

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 D20MM	形式 Type	在庫 Stock
DLCDZR0810	8.10	32.4	52.0	100	47.0	8	Ⅲ	□
DLCDZR0815	8.15	32.6						
DLCDZR0820	8.20	32.8						
DLCDZR0825	8.25	33.0						
DLCDZR0830	8.30	33.2						
DLCDZR0835	8.35	33.4	54.0					
DLCDZR0840	8.40	33.6						
DLCDZR0845	8.45	33.8						
DLCDZR0850	8.50	34.0						
DLCDZR0855	8.55	34.2	56.0					
DLCDZR0860	8.60	34.4						
DLCDZR0865	8.65	34.6						
DLCDZR0870	8.70	34.8						
DLCDZR0875	8.75	35.0	58.0					
DLCDZR0880	8.80	35.2						
DLCDZR0885	8.85	35.4						
DLCDZR0890	8.90	35.6						
DLCDZR0895	8.95	35.8	59.0					
DLCDZR0900	9.00	36.0						
DLCDZR0905	9.05	36.2						
DLCDZR0910	9.10	36.4						
DLCDZR0915	9.15	36.6	61.0					
DLCDZR0920	9.20	36.8						
DLCDZR0925	9.25	37.0						
DLCDZR0930	9.30	37.2						
DLCDZR0935	9.35	37.4	63.0					
DLCDZR0940	9.40	37.6						
DLCDZR0945	9.45	37.8						
DLCDZR0950	9.50	38.0						
DLCDZR0955	9.55	38.2	65.0					
DLCDZR0960	9.60	38.4						
DLCDZR0965	9.65	38.6						
DLCDZR0970	9.70	38.8						
DLCDZR0975	9.75	39.0	67.0					
DLCDZR0980	9.80	39.2						
DLCDZR0985	9.85	39.4						
DLCDZR0990	9.90	39.6						
DLCDZR0995	9.95	39.8	69.0					
DLCDZR1000	10.00	40.0						
DLCDZR1010	10.10	40.4						
DLCDZR1020	10.20	40.8						
DLCDZR1030	10.30	41.2	71.0					
DLCDZR1040	10.40	41.6						
DLCDZR1050	10.50	42.0						
DLCDZR1060	10.60	42.4						
DLCDZR1070	10.70	42.8	73.0					
DLCDZR1080	10.80	43.2						
DLCDZR1090	10.90	43.6						
DLCDZR1100	11.00	44.0						
DLCDZR1110	11.10	44.4	75.0					
DLCDZR1120	11.20	44.8						
DLCDZR1130	11.30	45.2						
DLCDZR1140	11.40	45.6						
DLCDZR1150	11.50	46.0	77.0					
DLCDZR1160	11.60	46.4						
DLCDZR1170	11.70	46.8						
DLCDZR1180	11.80	47.2						
DLCDZR1190	11.90	47.6	79.0					
DLCDZR1200	12.00	48.0						
DLCDZR1210	12.10	48.4						
DLCDZR1220	12.20	48.8						
DLCDZR1230	12.30	49.2	81.0					
DLCDZR1240	12.40	49.6						
DLCDZR1250	12.50	50.0						
DLCDZR1260	12.60	50.4						
DLCDZR1270	12.70	50.8	83.0					
DLCDZR1280	12.80	51.2						
DLCDZR1290	12.90	51.6						
DLCDZR1300	13.00	52.0						
DLCDZR1310	13.10	52.4	85.0					
DLCDZR1320	13.20	52.8						
DLCDZR1330	13.30	53.2						
DLCDZR1340	13.40	53.6						
DLCDZR1350	13.50	54.0	87.0					
DLCDZR1360	13.60	54.4						
DLCDZR1370	13.70	54.8						
DLCDZR1380	13.80	55.2						
DLCDZR1390	13.90	55.6	89.0					
DLCDZR1400	14.00	56.0						
DLCDZR1410	14.10	56.4						
DLCDZR1420	14.20	56.8						
DLCDZR1430	14.30	57.2	91.0					
DLCDZR1440	14.40	57.6						
DLCDZR1450	14.50	58.0						
DLCDZR1460	14.60	58.4						
DLCDZR1470	14.70	58.8	93.0					
DLCDZR1480	14.80	59.2						
DLCDZR1490	14.90	59.6						
DLCDZR1500	15.00	60.0						
DLCDZR1510	15.10	60.4	95.0					
DLCDZR1520	15.20	60.8						
DLCDZR1530	15.30	61.2						
DLCDZR1540	15.40	61.6						
DLCDZR1550	15.50	62.0	97.0					
DLCDZR1560	15.60	62.4						
DLCDZR1570	15.70	62.8						
DLCDZR1580	15.80	63.2						
DLCDZR1590	15.90	63.6	99.0					
DLCDZR1600	16.00	64.0						
DLCDZR1610	16.10	64.4						
DLCDZR1620	16.20	64.8						
DLCDZR1630	16.30	65.2	101.0					
DLCDZR1640	16.40	65.6						
DLCDZR1650	16.50	66.0						
DLCDZR1660	16.60	66.4						
DLCDZR1670	16.70	66.8	103.0					
DLCDZR1680	16.80	67.2						
DLCDZR1690	16.90	67.6						
DLCDZR1700	17.00	68.0						
DLCDZR1710	17.10	68.4	105.0					
DLCDZR1720	17.20	68.8						
DLCDZR1730	17.30	69.2						
DLCDZR1740	17.40	69.6						
DLCDZR1750	17.50	70.0	107.0					
DLCDZR1760	17.60	70.4						
DLCDZR1770	17.70	70.8						
DLCDZR1780	17.80	71.2						
DLCDZR1790	17.90	71.6	109.0					
DLCDZR1800	18.00	72.0						
DLCDZR1810	18.10	72.4						
DLCDZR1820	18.20	72.8						
DLCDZR1830	18.30	73.2	111.0					
DLCDZR1840	18.40	73.6						
DLCDZR1850	18.50	74.0						
DLCDZR1860	18.60	74.4						
DLCDZR1870	18.70	74.8	113.0					
DLCDZR1880	18.80	75.2						
DLCDZR1890	18.90	75.6						
DLCDZR1900	19.00	76.0						
DLCDZR1910	19.10	76.4	115.0					
DLCDZR1920	19.20	76.8						
DLCDZR1930	19.30	77.2						
DLCDZR1940	19.40	77.6						
DLCDZR1950	19.50	78.0	117.0					
DLCDZR1960	19.60	78.4						
DLCDZR1970	19.70	78.8						
DLCDZR1980	19.80	79.2						
DLCDZR1990	19.90	79.6	119.0					
DLCDZR2000	20.00	80.0						
DLCDZR2010	20.10	80.4						
DLCDZR2020	20.20	80.8						
DLCDZR2030	20.30	81.2	121.0					
DLCDZR2040	20.40	81.6						
DLCDZR2050	20.50	82.0						
DLCDZR2060	20.60	82.4						
DLCDZR2070	20.70	82.8	123.0					
DLCDZR2080	20.80	83.2						
DLCDZR2090	20.90	83.6						
DLCDZR2100	21.00	84.0						
DLCDZR2110	21.10	84.4	125.0					
DLCDZR2120	21.20	84.8						
DLCDZR2130	21.30	85.2						
DLCDZR2140	21.40	85.6						
DLCDZR2150	21.50	86.0	127.0					
DLCDZR2160	21.60	86.4						
DLCDZR2170	21.70	86.8						
DLCDZR2180	21.80	87.2						
DLCDZR2190	21.90	87.6	129.0					
DLCDZR2200	22.00	88.0						
DLCDZR2210	22.10	88.4						
DLCDZR2220	22.20	88.8						
DLCDZR2230	22.30	89.2	131.0					
DLCDZR2240	22.40	89.6						
DLCDZR2250	22.50	90.0						
DLCDZR2260	22.60	90.4						
DLCDZR2270	22.70	90.8	133.0					
DLCDZR2280	22.80	91.2						
DLCDZR2290	22.90	91.6						
DLCDZR2300	23.00	92.0						
DLCDZR2310	23.10	92.4	135.0					
DLCDZR2320	23.20	92.8						
DLCDZR2330	23.30	93.2						
DLCDZR2340	23.40	93.6						
DLCDZR2350	23.50	94.0	137.0					
DLCDZR2360	23.60	94.4						
DLCDZR2370	23.70	94.8						
DLCDZR2380	23.80	95.2						
DLCDZR2390	23.90	95.6	139.0					
DLCDZR2400	24.00	96.0						
DLCDZR2410	24.10	96.4						
DLCDZR2420	24.20	96.8						
DLCDZR2430	24.30	97.2	141.0					
DLCDZR2440	24.40	97.6						
DLCDZR2450	24.50	98.0						
DLCDZR2460	24.60	98.4						
DLCDZR2470	24.70	98.8	143.0					
DLCDZR2480	24.80	99.2						
DLCDZR2490	24.90	99.6						
DLCDZR2500	25.00	100.0						
DLCDZR2510	25.10	100.4	145.0					
DLCDZR2520	25.20	100.8						
DLCDZR2530	25.30	101.2						
DLCDZR2540	25.40	101.6						
DLCDZR2550	25.50	102.0	147.0					
DLCDZR2560	25.60	102.4						
DLCDZR2570	25.70	102.8						
DLCDZR2580	25.80	103.2						
DLCDZR2590	25.90	103.6	149.0					
DLCDZR2600	26.00	104.0						
DLCDZR2610	26.10	104.4						
DLCDZR2620	26.20	104.8						
DLCDZR2630	26.30	105.2	151.0					
DLCDZR2640	26.40	105.6						
DLCDZR2650	26.50	106.0						
DLCDZR2660	26.60	106.4						
DLCDZR2670	26.70	106.8	153.0					
DLCDZR2680	26.80	107.2						
DLCDZR2690	26.90	107.6						
DLCDZR2700	27.00	108.0						
DLCDZR2710	27.10	108.4	155.0					
DLCDZR2720	27.20	108.8						
DLCDZR2730	27.30	109.2						
DLCDZR2740	27.40	109.6						
DLCDZR2750	27.50	110.0	157.0					
DLCDZR2760	27.60	110.4						
DLCDZR2770	27.70	110.8						
DLCDZR2780	27.80	111.2						
DLCDZR2790	27.90	111.6	159.0					
DLCDZR2800	28.00	112.0						
DLCDZR2810	28.10	112.4						
DLCDZR2820	28.20	112.8						
DLCDZR2830	28.30	113.2	161.0					
DLCDZR2840	28.40	113.6						
DLCDZR2850	28.50	114.0						
DLCDZR2860	28.60	114.4						
DLCDZR2870	28.70	114.8	163.0					
DLCDZR2880	28.80	115.2						
DLCDZR2890	28.90	115.6						
DLCDZR2900	29.00	116.0						
DLCDZR2910	29.10	116.4	165.0					
DLCDZR2920	29.20	116.8						
DLCDZR2930	29.30	117.2						
DLCDZR2940	29.40	117.6						
DLCDZR2950	29.50	118.0	167.0					
DLCDZR2960	29.60	118.4						
DLCDZR2970	29.70	118.8						
DLCDZR2980	29.80	119.2						
DLCDZR2990	29.90	119.6	169.0					
DLCDZR3000	30.00	120.0						
DLCDZR3010	30.10	120.4						
DLCDZR3020	30.20	120.8						
DLCDZR3030	30.30	121.2	171.0					
DLCDZR3040	30.40	121.6						
DLCDZR3050	30.50	122.0						
DLCDZR3060	30.60	122.4						
DLCDZR3070	30.70	122.8	173.0					
DLCDZR3080	30.80	123.2						
DLCDZR3090	30.90	123.6						
DLCDZR3100	31.00	124.0						
DLCDZR3110	31.10	124.4	175.0					
DLCDZR3120	31.20	124.8						
DLCDZR3130	31.30	125.2						
DLCDZR3140	31.40	125.6						
DLCDZR3150	31.50	126.0	177.0					
DLCDZR3160	31.60	126.4						
DLCDZR3170	31.70	126.8						
DLCDZR3180	31.80	127.2						
DLCDZR3190	31.90	127.6	179.0					
DLCDZR3200	32.00	128.0						
DLCDZR3210	32.10	128.4						
DLCDZR3220	32.20	128.8						
DLCDZR3230	32.30	129.2	181.0					
DLCDZR3240	32.40	129.6						
DLCDZR3250	32.50	130.0						
DLCDZR3260	32.60	130.4						
DLCDZR3270	32.70	130.8	183.0					
DLCDZR3280	32.80	131.2						
DLCDZR3290	32.90	131.6						
DLCDZR3300	33.00	132.0						
DLCDZR3310	33.10	132.4	185.0					
DLCDZR3320	33.20	132.8						
DLCDZR3330	33.30	133.2						
DLCDZR3340	33.40	133.6						
DLCDZR3350	33.50	134.0	187.0					
DLCDZR3360	33.60	134.4						
DLCDZR3370	33.70	134.8						
DLCDZR3380	33.80	135.2						
DLCDZR3390	33.90	135.6	189.0					
DLCDZR3400	34.00	136.0						
DLCDZR3410	34.10	136.4						
DLCDZR3420	34.20	136.8						
DLCDZR3430	34.30	137.2	191.0					
DLCDZR3440	34.40	137.6						
DLCDZR3450	34.50	138.0						
DLCDZR3460	34.60	138.4						
DLCDZR3470	34.70	138.8	193.0					
DLCDZR3480	34.80	139.2						
DLCDZR3490	34.90	139.6						
DLCDZR3500	35.00	140.0						
DLCDZR3510	35.10	140.4	195.0					
DLCDZR3520	35.20	140.8						
DLCDZR3530	35.30	141.2						
DLCDZR3540	35.40	141.6						
DLCDZR3550	35.50	142.0	197.0					
DLCDZR3560	35.60	142.4						
DLCDZR3570	35.70	142.8						
DLCDZR3580	35.80	143.2						
DLCDZR3590	35.90	143.6	199.0					
DLCDZR3600	36.00	144.0						
DLCDZR3610	36.10	144.4						
DLCDZR3620	36.20	144.8						
DLCDZR3630	36.30	145.2	201.0					
DLCDZR3640	36.40	145.6						
DLCDZR3650	36.50	146.0						
DLCDZR3660	36.60	146.4						
DLCDZR3670	36.70	146.8	203.0					
DLCDZR3680	36.80	147.2						
DLCDZR3690	36.90	147.6						
DLCDZR3700	37.00	148.0						
DLCDZR3710	37.10	148.4	205.0					
DLCDZR3720	37.20	148.8						
DLCDZR3730	37.30	149.2						
DLCDZR3740	37.40	149.6						
DLCDZR3750	37.50	150.0	207.0					
DLCDZR3760	37.60	150.4						
DLCDZR3770	37.70	150.8						
DLCDZR3780	37.80	151.2						
DLCDZR3790	37.90	151.6	209.0					

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新商品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 D00MS	形式 Type	在庫 Stock
DLCDZR1140	11.40	45.6	73.0	115	41.0	10	Ⅲ	
DLCDZR1150	11.50	46.0						
DLCDZR1160	11.60	46.4	76.0		38.0			
DLCDZR1170	11.70	46.8						
DLCDZR1180	11.80	47.2						
DLCDZR1190	11.90	47.6						
DLCDZR1200	12.00	48.0	78.0	47.0	Ⅱ			
DLCDZR1210	12.10	48.4						
DLCDZR1220	12.20	48.8		80.0	46.0			
DLCDZR1230	12.30	49.2						
DLCDZR1240	12.40	49.6			44.0			
DLCDZR1250	12.50	50.0			81.0	43.0		
DLCDZR1260	12.60	50.4						
DLCDZR1270	12.70	50.8						
DLCDZR1280	12.80	51.2						
DLCDZR1290	12.90	51.6	82.0	47.0				
DLCDZR1310	13.10	52.4						
DLCDZR1320	13.20	52.8	84.0	45.0				
DLCDZR1330	13.30	53.2	86.0	130	43.0			
DLCDZR1340	13.40	53.6						
DLCDZR1350	13.50	54.0						
DLCDZR1360	13.60	54.4						
DLCDZR1370	13.70	54.8	88.0			41.0		
DLCDZR1380	13.80	55.2						
DLCDZR1390	13.90	55.6		90.0	46.0			
DLCDZR1400	14.00	56.0						
DLCDZR1410	14.10	56.4						
DLCDZR1420	14.20	56.8	92.0		44.0			
DLCDZR1430	14.30	57.2						
DLCDZR1440	14.40	57.6		135	42.0			
DLCDZR1450	14.50	58.0						
DLCDZR1460	14.60	58.4						
DLCDZR1470	14.70	58.8	94.0		40.0			
DLCDZR1480	14.80	59.2						
DLCDZR1490	14.90	59.6						
DLCDZR1500	15.00	60.0		95.0	49.0			
DLCDZR1510	15.10	60.4	97.0	145	47.0			
DLCDZR1520	15.20	60.8						
DLCDZR1530	15.30	61.2						
DLCDZR1540	15.40	61.6						
DLCDZR1550	15.50	62.0	98.0		46.0			
DLCDZR1560	15.60	62.4						
DLCDZR1570	15.70	62.8		101.0	43.0			
DLCDZR1580	15.80	63.2						
DLCDZR1590	15.90	63.6						
DLCDZR1600	16.00	64.0	160			56.0	Ⅱ	
DLCDZR1650	16.50	66.0		105.0	54.0			
DLCDZR1700	17.00	68.0	108.0	165	56.0	16	Ⅲ	
DLCDZR1750	17.50	70.0	111.0		53.0			
DLCDZR1800	18.00	72.0	113.0	175	61.0			
DLCDZR1850	18.50	74.0	118.0		56.0			

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 D00MS	形式 Type	在庫 Stock
DLCDZR1900	19.00	76.0	120.0	185	64.0	16	Ⅲ	□
DLCDZR1950	19.50	78.0	124.0		60.0			
DLCDZR2000	20.00	80.0	126.0	195	66.0	20	Ⅱ	



工具材料

涂层

直径公差

先端角



螺旋角

柄径公差

柄径范围

●开孔性能良好,可加工钻头直径的10D孔深的平头钻。

Flat type drill bits have great performance drilling holes to 10 x diameter under head length.



订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	径长 LB	柄长 LS	柄径 DCONMS	在庫 Stock
DLCDZLS0300	3.0	6.0	14	100	29	68	6	□
DLCDZLS0310	3.1	6.2	15		31	66		
DLCDZLS0320	3.2	6.4			32	66		
DLCDZLS0330	3.3	6.6	16		34	64		
DLCDZLS0340	3.4	6.8			36	62		
DLCDZLS0350	3.5	7.0	18		37	61		
DLCDZLS0360	3.6	7.2			39	59		
DLCDZLS0370	3.7	7.4	19		41	57		
DLCDZLS0380	3.8	7.6			43	55		
DLCDZLS0390	3.9	7.8	21		44	55		
DLCDZLS0400	4.0	8.0			46	53		
DLCDZLS0410	4.1	8.2	22		49	50		
DLCDZLS0420	4.2	8.4			48	51		
DLCDZLS0430	4.3	8.6	110		52	57		
DLCDZLS0440	4.4	8.8			55	54		
DLCDZLS0450	4.5	9.0			56	51		
DLCDZLS0460	4.6	9.2		27	59	51		
DLCDZLS0470	4.7	9.4			60	60		
DLCDZLS0480	4.8	9.6		28	90	88		
DLCDZLS0490	4.9	9.8			87	86		
DLCDZLS0500	5.0	10.0		30	85	84		
DLCDZLS0510	5.1	10.2			82	82		
DLCDZLS0520	5.2	10.4		31	80	80		
DLCDZLS0530	5.3	10.6	81		79			
DLCDZLS0540	5.4	10.8	32	78	78			
DLCDZLS0550	5.5	11.0		77	77			
DLCDZLS0560	5.6	11.2	33	76	76			
DLCDZLS0570	5.7	11.4		75	75			
DLCDZLS0580	5.8	11.6	34	74	74			
DLCDZLS0590	5.9	11.8		73	73			
DLCDZLS0600	6.0	12.0	36	72	72			
DLCDZLS0610	6.1	12.2		71	71			
DLCDZLS0620	6.2	12.4	37	70	70			
DLCDZLS0630	6.3	12.6		69	69			
DLCDZLS0640	6.4	12.8	38	68	68			
DLCDZLS0650	6.5	13.0		67	67			
DLCDZLS0660	6.6	13.2	39	66	66			
DLCDZLS0670	6.7	13.4		65	65			
DLCDZLS0680	6.8	13.6	40	64	64			
DLCDZLS0690	6.9	13.8		63	63			
DLCDZLS0700	7.0	14.0	41	62	62			
DLCDZLS0710	7.1	14.2		61	61			
DLCDZLS0720	7.2	14.4	42	60	60			
DLCDZLS0730	7.3	14.6		59	59			
DLCDZLS0740	7.4	14.8	43	58	58			
DLCDZLS0750	7.5	15.0		57	57			
DLCDZLS0760	7.6	15.2	44	56	56			
DLCDZLS0770	7.7	15.4		55	55			
DLCDZLS0780	7.8	15.6	45	54	54			
DLCDZLS0790	7.9	15.8		53	53			
DLCDZLS0800	8.0	16.0	46	52	52			
DLCDZLS0810	8.1	16.2		51	51			
DLCDZLS0820	8.2	16.4	47	50	50			
DLCDZLS0830	8.3	16.6		49	49			
DLCDZLS0840	8.4	16.8	48	48	48			
DLCDZLS0850	8.5	17.0		47	47			
DLCDZLS0860	8.6	17.2	49	46	46			
DLCDZLS0870	8.7	17.4		45	45			
DLCDZLS0880	8.8	17.6	50	44	44			
DLCDZLS0890	8.9	17.8		43	43			

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	径长 LB	柄长 LS	柄径 DCONMS	在庫 Stock	
DLCDZLS0900	9.0	18.0	41	130	—	87	8	□	
DLCDZLS0910	9.1	18.2	42			86			
DLCDZLS0920	9.2	18.4				43			85
DLCDZLS0930	9.3	18.6							44
DLCDZLS0940	9.4	18.8	45						
DLCDZLS0950	9.5	19.0				46			
DLCDZLS0960	9.6	19.2							47
DLCDZLS0970	9.7	19.4	48						
DLCDZLS0980	9.8	19.6				49			
DLCDZLS0990	9.9	19.8							50
DLCDZLS1000	10.0	20.0	51						
DLCDZLS1010	10.1	20.2		52	76				
DLCDZLS1020	10.2	20.4			53	75			
DLCDZLS1030	10.3	20.6	54			74			
DLCDZLS1040	10.4	20.8		55		73			
DLCDZLS1050	10.5	21.0			56	72			
DLCDZLS1060	10.6	21.2	57			71			
DLCDZLS1070	10.7	21.4		58		70			
DLCDZLS1080	10.8	21.6			59	69			
DLCDZLS1090	10.9	21.8	60			68			
DLCDZLS1100	11.0	22.0		61		67			
DLCDZLS1110	11.1	22.2			62	66			
DLCDZLS1120	11.2	22.4	63			65			
DLCDZLS1130	11.3	22.6		64		64			
DLCDZLS1140	11.4	22.8			65	63			
DLCDZLS1150	11.5	23.0	66			62			
DLCDZLS1160	11.6	23.2		67		61			
DLCDZLS1170	11.7	23.4			68	60			
DLCDZLS1180	11.8	23.6	69			59			
DLCDZLS1190	11.9	23.8		70		58			
DLCDZLS1200	12.0	24.0			71	57			
DLCDZLS1250	12.5	25.0	72			56			
DLCDZLS1300	13.0	26.0		73		55			
DLCDZLS1350	13.5	27.0			74	54			
DLCDZLS1400	14.0	28.0	75			53			
DLCDZLS1450	14.5	29.0		76		52			
DLCDZLS1500	15.0	30.0			77	51			
DLCDZLS1550	15.5	31.0	78			50			
DLCDZLS1600	16.0	32.0		79		49			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品

其它

精密工具

技术资料

索引

DLCDZO5D

DLC 油孔平头钻 5D
DLC Drills FLAT Oil-Hole 5D

切削条件 Cutting Condition ▶▶▶ A-182



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

直径范围

●可进行孔深达 5D 的高效率平孔加工。

High performance flat drilling up to 5x drill diameter is possible.



订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
DLCDZO5D0300	3.0	15.0	20	74	53	3	
DLCDZO5D0310	3.1	15.5					
DLCDZO5D0320	3.2	16.0	22		54		
DLCDZO5D0330	3.3	16.5					
DLCDZO5D0340	3.4	17.0					
DLCDZO5D0350	3.5	17.5	24	80		4	
DLCDZO5D0360	3.6	18.0					
DLCDZO5D0370	3.7	18.5			53		
DLCDZO5D0380	3.8	19.0					
DLCDZO5D0390	3.9	19.5	26				
DLCDZO5D0400	4.0	20.0					
DLCDZO5D0410	4.1	20.5					
DLCDZO5D0420	4.2	21.0	28		59		
DLCDZO5D0430	4.3	21.5					
DLCDZO5D0440	4.4	22.0					
DLCDZO5D0450	4.5	22.5	29	90		5	
DLCDZO5D0460	4.6	23.0					
DLCDZO5D0470	4.7	23.5			56		
DLCDZO5D0480	4.8	24.0	32				
DLCDZO5D0490	4.9	24.5					
DLCDZO5D0500	5.0	25.0	33				
DLCDZO5D0510	5.1	25.5					
DLCDZO5D0520	5.2	26.0	35		55		
DLCDZO5D0530	5.3	26.5					
DLCDZO5D0540	5.4	27.0					
DLCDZO5D0550	5.5	27.5	37	94		6	
DLCDZO5D0560	5.6	28.0					
DLCDZO5D0570	5.7	28.5					
DLCDZO5D0580	5.8	29.0			54		
DLCDZO5D0590	5.9	29.5	39				
DLCDZO5D0600	6.0	30.0					
DLCDZO5D0610	6.1	30.5					
DLCDZO5D0620	6.2	31.0	41		56		
DLCDZO5D0630	6.3	31.5					
DLCDZO5D0640	6.4	32.0					
DLCDZO5D0650	6.5	32.5	43	101		7	
DLCDZO5D0660	6.6	33.0					
DLCDZO5D0670	6.7	33.5					
DLCDZO5D0680	6.8	34.0	45		55		
DLCDZO5D0690	6.9	34.5					
DLCDZO5D0700	7.0	35.0	46				
DLCDZO5D0710	7.1	35.5					
DLCDZO5D0720	7.2	36.0			58		
DLCDZO5D0730	7.3	36.5					
DLCDZO5D0740	7.4	37.0					
DLCDZO5D0750	7.5	37.5	50	110		8	
DLCDZO5D0760	7.6	38.0					
DLCDZO5D0770	7.7	38.5					
DLCDZO5D0780	7.8	39.0					
DLCDZO5D0790	7.9	39.5	52		57		
DLCDZO5D0800	8.0	40.0					
DLCDZO5D0810	8.1	40.5					
DLCDZO5D0820	8.2	41.0					
DLCDZO5D0830	8.3	41.5	54		59		
DLCDZO5D0840	8.4	42.0					
DLCDZO5D0850	8.5	42.5					
DLCDZO5D0860	8.6	43.0					
DLCDZO5D0870	8.7	43.5					
DLCDZO5D0880	8.8	44.0	56	117		9	
DLCDZO5D0890	8.9	44.5			58		

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
DLCDZO5D0900	9.0	45.0	59	117	58	9	
DLCDZO5D0910	9.1	45.5					
DLCDZO5D0920	9.2	46.0	61		61		
DLCDZO5D0930	9.3	46.5					
DLCDZO5D0940	9.4	47.0					
DLCDZO5D0950	9.5	47.5	63	126		10	
DLCDZO5D0960	9.6	48.0					
DLCDZO5D0970	9.7	48.5			60		
DLCDZO5D0980	9.8	49.0					
DLCDZO5D0990	9.9	49.5	65				
DLCDZO5D1000	10.0	50.0					
DLCDZO5D1010	10.1	50.5					
DLCDZO5D1020	10.2	51.0	67		67		
DLCDZO5D1030	10.3	51.5					
DLCDZO5D1040	10.4	52.0					
DLCDZO5D1050	10.5	52.5	69	138		11	
DLCDZO5D1060	10.6	53.0					
DLCDZO5D1070	10.7	53.5			65		
DLCDZO5D1080	10.8	54.0	72				
DLCDZO5D1090	10.9	54.5					
DLCDZO5D1100	11.0	55.0	73				
DLCDZO5D1110	11.1	55.5					
DLCDZO5D1120	11.2	56.0	74		68		
DLCDZO5D1130	11.3	56.5					
DLCDZO5D1140	11.4	57.0					
DLCDZO5D1150	11.5	57.5	76	146		12	
DLCDZO5D1160	11.6	58.0					
DLCDZO5D1170	11.7	58.5					
DLCDZO5D1180	11.8	59.0			67		
DLCDZO5D1190	11.9	59.5	78				
DLCDZO5D1200	12.0	60.0					
DLCDZO5D1250	12.5	62.5	82	153	69	13	
DLCDZO5D1300	13.0	65.0	86		67		
DLCDZO5D1350	13.5	67.5	89	162	71	14	
DLCDZO5D1400	14.0	70.0	91		70		
DLCDZO5D1450	14.5	72.5	95	169	72	15	
DLCDZO5D1500	15.0	75.0	98		71		
DLCDZO5D1550	15.5	77.5	102	178	74	16	
DLCDZO5D1600	16.0	80.0	104		73		

直径 DC (mm)		倒角量 C (mm)
超过 Above	以下 Up to	
	6.0	0.04
6.0	10.0	0.10
10.0		0.20

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	—	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	×	◎	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

DLCDZ3F

DLC 3 刃平头钻
DLC Drills FLAT 3 Flutes

切削条件 Cutting Condition ▶ A-182



工具材料

涂层

直径公差

先端角

螺旋角

柄径公差


直径范围

- 凭借切削平衡性优良的3刃和平头底刃，可实现高质量的孔加工。
- 开孔深度采用5D。

This Drill is realized high dignity drilling by superior drilling balance of three flutes and shape of end cutting edge.
This drilling depth adopts 5x D type.



2斜角+3F形

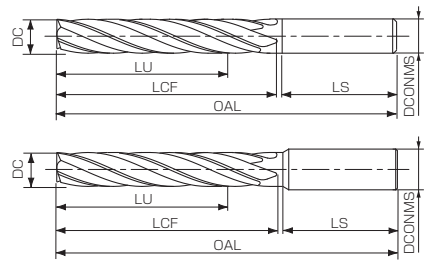

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
DLCDZ3F0300	3.0	15.0	28	78	48.0	3	
DLCDZ3F0310	3.1	15.5			47.2		
DLCDZ3F0320	3.2	16.0			47.3		
DLCDZ3F0330	3.3	16.5	32		47.4		
DLCDZ3F0340	3.4	17.0			47.5		
DLCDZ3F0350	3.5	17.5		86	47.6	4	
DLCDZ3F0360	3.6	18.0			47.7		
DLCDZ3F0370	3.7	18.5			47.8		
DLCDZ3F0380	3.8	19.0	36		47.9		
DLCDZ3F0390	3.9	19.5			48.0		
DLCDZ3F0400	4.0	20.0			49.2		
DLCDZ3F0410	4.1	20.5			49.3		
DLCDZ3F0420	4.2	21.0	40		49.4		
DLCDZ3F0430	4.3	21.5			49.5		
DLCDZ3F0440	4.4	22.0		98	49.6	5	
DLCDZ3F0450	4.5	22.5			49.7		
DLCDZ3F0460	4.6	23.0			49.8		
DLCDZ3F0470	4.7	23.5			49.9		
DLCDZ3F0480	4.8	24.0	44		50.0		
DLCDZ3F0490	4.9	24.5			51.2		
DLCDZ3F0500	5.0	25.0			51.3		
DLCDZ3F0510	5.1	25.5			51.4		
DLCDZ3F0520	5.2	26.0			51.5		
DLCDZ3F0530	5.3	26.5		100	51.6	6	
DLCDZ3F0540	5.4	27.0			51.7		
DLCDZ3F0550	5.5	27.5			51.8		
DLCDZ3F0560	5.6	28.0	48		51.9		
DLCDZ3F0570	5.7	28.5			52.0		
DLCDZ3F0580	5.8	29.0			52.2		
DLCDZ3F0590	5.9	29.5			52.3		
DLCDZ3F0600	6.0	30.0	52		52.4		
DLCDZ3F0610	6.1	30.5			52.5		
DLCDZ3F0620	6.2	31.0			52.6		
DLCDZ3F0630	6.3	31.5		109	52.7	7	
DLCDZ3F0640	6.4	32.0			52.8		
DLCDZ3F0650	6.5	32.5			52.9		
DLCDZ3F0660	6.6	33.0	56		53.0		
DLCDZ3F0670	6.7	33.5			53.2		
DLCDZ3F0680	6.8	34.0			53.3		
DLCDZ3F0690	6.9	34.5			53.4		
DLCDZ3F0700	7.0	35.0			53.5		
DLCDZ3F0710	7.1	35.5	60		53.6		
DLCDZ3F0720	7.2	36.0			53.7		
DLCDZ3F0730	7.3	36.5		118	53.8	8	
DLCDZ3F0740	7.4	37.0			53.9		
DLCDZ3F0750	7.5	37.5			54.0		
DLCDZ3F0760	7.6	38.0			54.2		
DLCDZ3F0770	7.7	38.5	64		54.3		
DLCDZ3F0780	7.8	39.0			54.4		
DLCDZ3F0790	7.9	39.5			54.5		
DLCDZ3F0800	8.0	40.0			54.6		
DLCDZ3F0810	8.1	40.5		127	54.7	9	
DLCDZ3F0820	8.2	41.0			54.8		
DLCDZ3F0830	8.3	41.5	68		54.9		
DLCDZ3F0840	8.4	42.0					
DLCDZ3F0850	8.5	42.5					
DLCDZ3F0860	8.6	43.0					
DLCDZ3F0870	8.7	43.5					
DLCDZ3F0880	8.8	44.0	72				
DLCDZ3F0890	8.9	44.5					

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	柄径 DCONMS	在庫 Stock
DLCDZ3F0900	9.0	45.0	72	127	55.0	9	
DLCDZ3F0910	9.1	45.5			55.2		
DLCDZ3F0920	9.2	46.0			55.3		
DLCDZ3F0930	9.3	46.5	76		55.4		
DLCDZ3F0940	9.4	47.0			55.5		
DLCDZ3F0950	9.5	47.5		136	55.6	10	
DLCDZ3F0960	9.6	48.0			55.7		
DLCDZ3F0970	9.7	48.5			55.8		
DLCDZ3F0980	9.8	49.0	80		55.9		
DLCDZ3F0990	9.9	49.5			56.0		
DLCDZ3F1000	10.0	50.0			56.1		
DLCDZ3F1010	10.1	50.5			56.2		
DLCDZ3F1020	10.2	51.0	84		56.3		
DLCDZ3F1030	10.3	51.5			56.4		
DLCDZ3F1040	10.4	52.0		149	56.5	11	
DLCDZ3F1050	10.5	52.5			56.6		
DLCDZ3F1060	10.6	53.0			56.7		
DLCDZ3F1070	10.7	53.5	88		56.8		
DLCDZ3F1080	10.8	54.0			56.9		
DLCDZ3F1090	10.9	54.5			57.0		
DLCDZ3F1100	11.0	55.0			57.1		
DLCDZ3F1110	11.1	55.5			57.2		
DLCDZ3F1120	11.2	56.0			57.3		
DLCDZ3F1130	11.3	56.5	92		57.4		
DLCDZ3F1140	11.4	57.0			57.5		
DLCDZ3F1150	11.5	57.5		158	57.6	12	
DLCDZ3F1160	11.6	58.0			57.7		
DLCDZ3F1170	11.7	58.5			57.8		
DLCDZ3F1180	11.8	59.0	96		57.9		
DLCDZ3F1190	11.9	59.5			58.0		
DLCDZ3F1200	12.0	60.0			58.1		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	—	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	×	◎	○


◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●采用 CFRP，开孔性能良好的金刚石涂层钻头。

Diamond coated drills give great performance for drilling in CFRP.



2斜角 +X形



订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DCDCF0200	2.000	10.0	16.0	31	50.0		1.0	
DCDCF0210	2.100	10.5						
DCDCF0220	2.200	11.0	18.1		50.1		1.1	
DCDCF0230	2.300	11.5						
DCDCF0240	2.400	12.0	18.2		50.2		1.2	
DCDCF0250	2.500	12.5	18.3		50.3	3	1.3	
DCDCF0260	2.600	13.0	20.3					
DCDCF0270	2.700	13.5			50.4		1.4	
DCDCF0280	2.800	14.0	20.4					
DCDCF0290	2.900	14.5			50.5		1.5	
DCDCF0300	3.000	15.0	20.5					
DCDCF0310	3.100	15.5						
DCDCF03175	3.175	15.9	25.6		61.6		1.6	
DCDCF0320	3.200	16.0						
DCDCF0330	3.300	16.5	25.7		61.7		1.7	
DCDCF0340	3.400	17.0						
DCDCF0350	3.500	17.5	25.8		61.8	4	1.8	
DCDCF0360	3.600	18.0	28.8					
DCDCF0370	3.700	18.5			61.9		1.9	
DCDCF0380	3.800	19.0	28.9					
DCDCF0390	3.900	19.5			62.0		2.0	
DCDCF0400	4.000	20.0						
DCDCF0410	4.100	20.5	33.1		78.1		2.1	
DCDCF0420	4.200	21.0						
DCDCF0430	4.300	21.5	33.2		78.2		2.2	
DCDCF0440	4.400	22.0						
DCDCF0450	4.500	22.5	33.3		78.3	5	2.3	
DCDCF0460	4.600	23.0	40.3					
DCDCF0470	4.700	23.5			78.4		2.4	
DCDCF04763	4.763	23.8	40.4					
DCDCF0480	4.800	24.0			78.5		2.5	
DCDCF0490	4.900	24.5	40.5					
DCDCF0500	5.000	25.0						
DCDCF0510	5.100	25.5			83.6		2.6	
DCDCF0520	5.200	26.0	41.6					
DCDCF0530	5.300	26.5			83.7		2.7	
DCDCF0540	5.400	27.0						
DCDCF0550	5.500	27.5	41.8		83.8	6	2.8	
DCDCF0560	5.600	28.0	43.8					
DCDCF0570	5.700	28.5			83.9		2.9	
DCDCF0580	5.800	29.0	43.9					
DCDCF0590	5.900	29.5			84.0		3.0	
DCDCF0600	6.000	30.0						
DCDCF0610	6.100	30.5	45.1		86.1		3.1	
DCDCF0620	6.200	31.0						
DCDCF0630	6.300	31.5			86.2		3.2	
DCDCF0635	6.350	31.8	45.2					
DCDCF0640	6.400	32.0						
DCDCF0650	6.500	32.5	45.3		86.3	7	3.3	
DCDCF0660	6.600	33.0	46.3					
DCDCF0670	6.700	33.5			86.4		3.4	
DCDCF0680	6.800	34.0	46.4					
DCDCF0690	6.900	34.5			86.5		3.5	
DCDCF0700	7.000	35.0						
DCDCF0710	7.100	35.5	48.6		93.6		3.6	
DCDCF0720	7.200	36.0						
DCDCF0730	7.300	36.5	48.7		93.7		3.7	
DCDCF0740	7.400	37.0						
DCDCF0750	7.500	37.5	48.8		93.8	8	3.8	
DCDCF0760	7.600	38.0	51.8					
DCDCF0770	7.700	38.5			93.9		3.9	
DCDCF0780	7.800	39.0	51.9					
DCDCF0790	7.900	39.5			94.0		4.0	
DCDCF07938	7.938	39.7	52.0					

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DCDCF0800	8.000	40.0	52.0	42	94.0	8	4.0	
DCDCF0810	8.100	40.5						
DCDCF0820	8.200	41.0	57.1		102.1		4.1	
DCDCF0830	8.300	41.5						
DCDCF0840	8.400	42.0	57.2		102.2		4.2	
DCDCF0850	8.500	42.5	57.3					
DCDCF0860	8.600	43.0	59.3	43	102.3	9	4.3	
DCDCF0870	8.700	43.5			102.4		4.4	
DCDCF0880	8.800	44.0	59.4					
DCDCF0890	8.900	44.5			102.5		4.5	
DCDCF0900	9.000	45.0						
DCDCF0910	9.100	45.5						
DCDCF0920	9.200	46.0	62.6		109.6		4.6	
DCDCF0930	9.300	46.5						
DCDCF0940	9.400	47.0	62.7		109.7		4.7	
DCDCF0950	9.500	47.5	62.8					
DCDCF09525	9.525	47.6						
DCDCF0960	9.600	48.0	64.8	45	109.8	10	4.8	
DCDCF0970	9.700	48.5						
DCDCF0980	9.800	49.0	64.9		109.9		4.9	
DCDCF0990	9.900	49.5						
DCDCF1000	10.000	50.0	65.0		110.0		5.0	
DCDCF1010	10.100	50.5						
DCDCF1020	10.200	51.0	71.1		119.1		5.1	
DCDCF1030	10.300	51.5						
DCDCF1040	10.400	52.0	71.2		119.2		5.2	
DCDCF1050	10.500	52.5	71.3					
DCDCF1060	10.600	53.0	73.3	46	119.3	11	5.3	
DCDCF1070	10.700	53.5						
DCDCF1080	10.800	54.0	73.4		119.4		5.4	
DCDCF1090	10.900	54.5						
DCDCF1100	11.000	55.0	73.5		119.5		5.5	
DCDCF1110	11.100	55.5						
DCDCF11113	11.113	55.6	76.6		126.6		5.6	
DCDCF1120	11.200	56.0						
DCDCF1130	11.300	56.5	76.7		126.7		5.7	
DCDCF1140	11.400	57.0						
DCDCF1150	11.500	57.5	76.8	48	126.8	12	5.8	
DCDCF1160	11.600	58.0	78.8					
DCDCF1170	11.700	58.5			126.9		5.9	
DCDCF1180	11.800	59.0	78.9					
DCDCF1190	11.900	59.5			127.0		6.0	
DCDCF1200	12.000	60.0						
DCDCF1210	12.100	60.5	82.1		143.1		6.1	
DCDCF1220	12.200	61.0						
DCDCF1230	12.300	61.5	82.2		143.2		6.2	
DCDCF1240	12.400	62.0						
DCDCF1250	12.500	62.5	82.3	59	143.3	13	6.3	
DCDCF1260	12.600	63.0	84.3					
DCDCF1270	12.700	63.5			143.4		6.4	
DCDCF1280	12.800	64.0	84.4					
DCDCF1290	12.900	64.5			143.5		6.5	
DCDCF1300	13.000	65.0						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30~40 HRC	40~50 HRC	50~65HRC
×	×	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	CFRP	AC / ADC	Cu
×	×	×	⊙	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●适合用于铝合金、高硅铝合金、高分子材料（CFRP、GFRP）的长寿加工。

This drill coated 100% pure diamond is most suitable for long life drilling of Aluminum Alloy, High Silicon Aluminum Alloy and FRP.



新商品

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	在庫 Stock
DCD0.4	0.40	4.1	30.1	0.1	□
DCD0.45	0.45	5.1			
DCD0.5	0.50	5.2	30.2	0.2	
DCD0.55	0.55	6.2			
DCD0.6	0.60				
DCD0.65	0.65				
DCD0.7	0.70				
DCD0.75	0.75	10.2	40.2		
DCD0.8	0.80				
DCD0.85	0.85	10.3	40.3	0.3	
DCD0.9	0.90				
DCD0.95	0.95				
DCD1.0	1.00				
DCD1.05	1.05				
DCD1.1	1.10	10.4	40.4	0.4	
DCD1.15	1.15				
DCD1.2	1.20	12.4			
DCD1.25	1.25				
DCD1.3	1.30				
DCD1.35	1.35				
DCD1.4	1.40	12.5	40.5	0.5	
DCD1.45	1.45				
DCD1.5	1.50				
DCD1.55	1.55				
DCD1.6	1.60	15.5			
DCD1.65	1.65				
DCD1.7	1.70				
DCD1.75	1.75				
DCD1.8	1.80				
DCD1.85	1.85	15.6	40.6	0.6	
DCD1.9	1.90				
DCD1.95	1.95	20.6			
DCD2.0	2.00				
DCD2.05	2.05				
DCD2.1	2.10				
DCD2.15	2.15	20.7	45.6		
DCD2.2	2.20				
DCD2.25	2.25				
DCD2.3	2.30				
DCD2.35	2.35				
DCD2.4	2.40	45.7	45.7	0.7	
DCD2.45	2.45				
DCD2.5	2.50				
DCD2.55	2.55				
DCD2.6	2.60				
DCD2.65	2.65	20.8	45.8	0.8	
DCD2.7	2.70				
DCD2.75	2.75				
DCD2.8	2.80				
DCD2.85	2.85				
DCD2.9	2.90	20.9	45.9	0.9	
DCD2.95	2.95				
DCD3.0	3.00				
DCD3.05	3.05				
DCD3.1	3.10	25.9	55.9		
DCD3.15	3.15				
DCD3.2	3.20				
DCD3.25	3.25	26.0	56.0	1.0	
DCD3.3	3.30				
DCD3.35	3.35				

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	在庫 Stock
DCD3.4	3.40	26.0	56.0	1.0	□
DCD3.45	3.45				
DCD3.5	3.50				
DCD3.55	3.55				
DCD3.6	3.60	26.1	56.1	1.1	
DCD3.65	3.65				
DCD3.7	3.70				
DCD3.75	3.75				
DCD3.8	3.80				
DCD3.85	3.85	26.2	56.2	1.2	
DCD3.9	3.90				
DCD3.95	3.95				
DCD4.0	4.00				
DCD4.05	4.05	31.2	66.2		
DCD4.1	4.10				
DCD4.15	4.15				
DCD4.2	4.20				
DCD4.25	4.25	31.3	66.3	1.3	
DCD4.3	4.30				
DCD4.35	4.35				
DCD4.4	4.40				
DCD4.45	4.45				
DCD4.5	4.50	31.4	66.4	1.4	
DCD4.55	4.55				
DCD4.6	4.60				
DCD4.65	4.65				
DCD4.7	4.70				
DCD4.75	4.75	31.5	66.5	1.5	
DCD4.8	4.80				
DCD4.85	4.85				
DCD4.9	4.90				
DCD4.95	4.95				
DCD5.0	5.00	31.6	66.6	1.6	
DCD5.05	5.05				
DCD5.1	5.10				
DCD5.15	5.15				
DCD5.2	5.20	36.6	71.6		
DCD5.25	5.25				
DCD5.3	5.30				
DCD5.35	5.35				
DCD5.4	5.40				
DCD5.45	5.45	36.7	71.7	1.7	
DCD5.5	5.50				
DCD5.55	5.55				
DCD5.6	5.60				
DCD5.65	5.65				
DCD5.7	5.70	36.8	71.8	1.8	
DCD5.75	5.75				
DCD5.8	5.80				
DCD5.85	5.85				
DCD5.9	5.90				
DCD5.95	5.95	41.8	76.8		
DCD6.0	6.00				
DCD6.1	6.10				
DCD6.2	6.20				
DCD6.3	6.30	41.9	76.9	1.9	
DCD6.4	6.40				
DCD6.5	6.50				
DCD6.6	6.60				
DCD6.7	6.70	42.0	77.0	2.0	

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新品

← 上一页 Previous Page

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	在庫 Stock
DCD6.8	6.80	42.0	77.0	2.0	□
DCD6.9	6.90	42.1	77.1	2.1	
DCD7.0	7.00				
DCD7.1	7.10	47.1	82.1	2.2	
DCD7.2	7.20	47.2	82.2		
DCD7.3	7.30				
DCD7.4	7.40	47.3	82.3	2.3	
DCD7.5	7.50				
DCD7.6	7.60				
DCD7.7	7.70				
DCD7.8	7.80	47.4	82.4	2.4	
DCD7.9	7.90				
DCD8.0	8.00	47.5	87.4	2.5	
DCD8.1	8.10				
DCD8.2	8.20	47.6	87.6	2.6	
DCD8.3	8.30				
DCD8.4	8.40	47.7	87.7	2.7	
DCD8.5	8.50				
DCD8.6	8.60				
DCD8.7	8.70				
DCD8.8	8.80	47.8	87.8	2.8	
DCD8.9	8.90				
DCD9.0	9.00	47.9	87.9	2.9	
DCD9.1	9.10				
DCD9.2	9.20	48.0	88.0	3.0	
DCD9.3	9.30				
DCD9.4	9.40	48.1	88.1	3.1	
DCD9.5	9.50				
DCD9.6	9.60				
DCD9.7	9.70				
DCD9.8	9.80	48.2	88.2	3.2	
DCD9.9	9.90				
DCD10.0	10.00	48.3	88.3	3.3	
DCD10.1	10.10				
DCD10.2	10.20	48.4	88.4	3.4	
DCD10.3	10.30				
DCD10.4	10.40	48.5	88.5	3.5	
DCD10.5	10.50				
DCD10.6	10.60				
DCD10.7	10.70				
DCD10.8	10.80	48.6	88.6	3.6	
DCD10.9	10.90				
DCD11.0	11.00	48.7	88.7	3.7	
DCD11.1	11.10				
DCD11.2	11.20	48.8	88.8	3.8	
DCD11.3	11.30				
DCD11.4	11.40	48.9	88.9	3.9	
DCD11.5	11.50				
DCD11.6	11.60				
DCD11.7	11.70				
DCD11.8	11.80	49.0	89.0	4.0	
DCD11.9	11.90				
DCD12.0	12.00	49.1	89.1	4.1	
DCD12.1	12.10				
DCD12.2	12.20	49.2	89.2	4.2	
DCD12.3	12.30				
DCD12.4	12.40	49.3	89.3	4.3	
DCD12.5	12.50				
DCD12.6	12.60				
DCD12.7	12.70				


单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	在庫 Stock
DCD12.8	12.80	63.8	103.8	3.8	□
DCD12.9	12.90	63.9	103.9	3.9	
DCD13.0	13.00				

直径 Drill Dia. (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	0.95	0 ~ -0.014
0.95	3.00	0 ~ -0.020
3.00	6.00	0 ~ -0.022
6.00	10.00	0 ~ -0.025
10.00	13.00	0 ~ -0.028

- 铝加工用金刚石涂层钻头。
- 可实现高精度开孔。

This drill coated 100% pure diamond is most suitable for Aluminum.
 High precision drilling is possible.



新商品

订货方式 商品编码

商品编码 Code	直径 DC	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DFFD3.0	3.0	21.6	40.0	70.6	3	0.6	□
DFFD3.1	3.1	24.6	44.2	78.6	4		
DFFD3.2	3.2	24.7	44.3	78.7			
DFFD3.3	3.3		44.4				
DFFD3.4	3.4		44.5				
DFFD3.5	3.5		44.6				
DFFD3.6	3.6	28.7	44.7	78.8	0.8		
DFFD3.7	3.7	28.8	44.8				
DFFD3.8	3.8		44.9				
DFFD3.9	3.9		45.0				
DFFD4.0	4.0	31.8	44.2	86.8	5	0.9	
DFFD4.1	4.1		44.3				
DFFD4.2	4.2		44.4				
DFFD4.3	4.3		44.5				
DFFD4.4	4.4	31.9	44.6	86.9		1.0	
DFFD4.5	4.5		44.7				
DFFD4.6	4.6		44.8				
DFFD4.7	4.7		44.9				
DFFD4.8	4.8	37.0	49.2	87.0	1.1		
DFFD4.9	4.9		49.3				
DFFD5.0	5.0		49.4				
DFFD5.1	5.1		49.5				
DFFD5.2	5.2	40.1	49.6	96.1	6	1.2	
DFFD5.3	5.3		49.7				
DFFD5.4	5.4		49.8				
DFFD5.5	5.5		49.9				
DFFD5.6	5.6	43.2	50.0	96.2		1.3	
DFFD5.7	5.7		50.1				
DFFD5.8	5.8		50.2				
DFFD5.9	5.9		50.3				
DFFD6.0	6.0	47.3	50.4	106.3	7	1.4	
DFFD6.1	6.1		50.5				
DFFD6.2	6.2		50.6				
DFFD6.3	6.3		50.7				
DFFD6.4	6.4	50.4	50.8	106.4		1.5	
DFFD6.5	6.5		50.9				
DFFD6.6	6.6		51.0				
DFFD6.7	6.7		51.1				
DFFD6.8	6.8	54.5	51.2	111.5	8	1.6	
DFFD6.9	6.9		51.3				
DFFD7.0	7.0		51.4				
DFFD7.1	7.1		51.5				
DFFD7.2	7.2	54.6	51.6	111.6		1.7	
DFFD7.3	7.3		51.7				
DFFD7.4	7.4		51.8				
DFFD7.5	7.5		51.9				
DFFD7.6	7.6	57.6	52.0	121.7	9	1.8	
DFFD7.7	7.7		52.1				
DFFD7.8	7.8		52.2				
DFFD7.9	7.9		52.3				
DFFD8.0	8.0	61.7	52.4	121.8		1.9	
DFFD8.1	8.1		52.5				
DFFD8.2	8.2		52.6				
DFFD8.3	8.3		52.7				
DFFD8.4	8.4	64.8	52.8	121.9	2.0		
DFFD8.5	8.5		52.9				
DFFD8.6	8.6		53.0				
DFFD8.7	8.7		53.1				
DFFD8.8	8.8	67.9	53.2	122.0	2.1		
DFFD8.9	8.9		53.3				

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	在庫 Stock
DFFD9.0	9.0	64.9	53.0	121.9	9	1.9	□
DFFD9.1	9.1	68.9	53.2	131.9	10		
DFFD9.2	9.2		53.3				
DFFD9.3	9.3		53.4				
DFFD9.4	9.4		53.5				
DFFD9.5	9.5	69.0	53.6	132.0			
DFFD9.6	9.6	72.0	53.7				
DFFD9.7	9.7		53.8				
DFFD9.8	9.8		53.9				
DFFD9.9	9.9		54.0				
DFFD10.0	10.0	72.1	54.0	132.1		2.1	
DFFD10.1	10.1	76.1	59.2	142.1			
DFFD10.2	10.2		59.3				
DFFD10.3	10.3		59.4				
DFFD10.4	10.4		59.5				
DFFD10.5	10.5	76.2	59.6	142.2			
DFFD10.6	10.6	79.2	59.7				
DFFD10.7	10.7		59.8				
DFFD10.8	10.8		59.9				
DFFD10.9	10.9		60.0	142.3			
DFFD11.0	11.0	79.3	59.2	152.3	2.3		
DFFD11.1	11.1	83.3	59.3				
DFFD11.2	11.2		59.4				
DFFD11.3	11.3		59.5				
DFFD11.4	11.4		59.6				
DFFD11.5	11.5	83.4	59.7			152.4	
DFFD11.6	11.6	86.4	59.8				
DFFD11.7	11.7		59.9				
DFFD11.8	11.8		60.0				
DFFD11.9	11.9		86.5			60.2	
DFFD12.0	12.0	90.5	60.3				
DFFD12.1	12.1		60.4				
DFFD12.2	12.2		60.5				
DFFD12.3	12.3		60.6	157.6			
DFFD12.4	12.4	93.6	60.7				
DFFD12.5	12.5		60.8				
DFFD12.6	12.6		60.9				
DFFD12.7	12.7		93.7	61.0	157.7		
DFFD12.8	12.8	93.7		61.0			
DFFD12.9	12.9			61.0			
DFFD13.0	13.0	93.8	61.0	157.8			
DFFD13.1	13.1		61.0				

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
×	×	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	×	◎	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

AQDEXVF1.5D

AQUA EX VF 钻头 1.5D

AQUA Drills EX VF 1.5D

切削条件 Cutting Condition ▶▶▶A-184

25°

h6

14.0-32.0



螺旋角

柄直径公差

直径范围

●可更换切削刃的大直径钻头，适合高效率、高精度的加工。

The most suitable indexable insert drills for high efficiency and high precision drilling of large diameter.

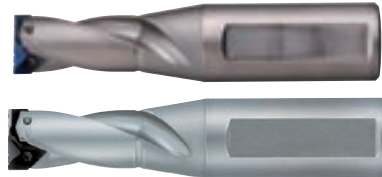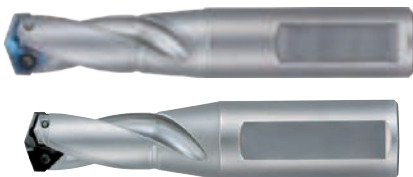

● 钻杆 Holder

LIST 9846


订货方式 商品编码

单位 (Unit) : mm

直径 DC		钻杆 Holder										适用刀片 Applicable Insert			
最小 Min.	最大 Max.	商品编码 Code	有效长 LU	颈长 LB	颈长 平头刀片 使用时 (LB)	全长 OAL	全长 平头刀片 使用时 (OAL)	柄长 LS	柄径 D30MM	在库 Stock	TVF	TVFZ (平头刀片)	TVFDLC	TVFZDLC (平头刀片)	
14.0	14.5	AQDEXVF1.5D14	21.0	31.5	30.6	93.5	92.6	48	16		TVF1400	TVFZ1400	TVF1400DLC	TVFZ1400DLC	
			21.2								TVF1410	TVFZ1410	TVF1410DLC	TVFZ1410DLC	
			21.3								TVF1420	TVFZ1420	TVF1420DLC	TVFZ1420DLC	
			21.5	31.6	30.7	93.6	92.7				TVF1430	TVFZ1430	TVF1430DLC	TVFZ1430DLC	
			21.6								TVF1440	TVFZ1440	TVF1440DLC	TVFZ1440DLC	
			21.8								TVF1450	TVFZ1450	TVF1450DLC	TVFZ1450DLC	
14.6	15.5	AQDEXVF1.5D15	21.9					50	20		TVF1460	TVFZ1460	TVF1460DLC	TVFZ1460DLC	
			22.1	33.7	33.3	98.7	98.3				TVF1470	TVFZ1470	TVF1470DLC	TVFZ1470DLC	
			22.2								TVF1480	TVFZ1480	TVF1480DLC	TVFZ1480DLC	
			22.4								TVF1490	TVFZ1490	TVF1490DLC	TVFZ1490DLC	
			22.5								TVF1500	TVFZ1500	TVF1500DLC	TVFZ1500DLC	
			22.7								TVF1510	TVFZ1510	TVF1510DLC	TVFZ1510DLC	
			22.8								TVF1520	TVFZ1520	TVF1520DLC	TVFZ1520DLC	
			23.0	33.8	33.4	98.8	98.4				TVF1530	TVFZ1530	TVF1530DLC	TVFZ1530DLC	
			23.1								TVF1540	TVFZ1540	TVF1540DLC	TVFZ1540DLC	
			23.3								TVF1550	TVFZ1550	TVF1550DLC	TVFZ1550DLC	
			23.4	35.8	35.4	101.8	101.4				TVF1560	TVFZ1560	TVF1560DLC	TVFZ1560DLC	
			23.6								TVF1570	TVFZ1570	TVF1570DLC	TVFZ1570DLC	
15.6	16.5	AQDEXVF1.5D16	23.7					50	20		TVF1580	TVFZ1580	TVF1580DLC	TVFZ1580DLC	
			23.9	35.9	35.5	101.9	101.5				TVF1590	TVFZ1590	TVF1590DLC	TVFZ1590DLC	
			24.0								TVF1600	TVFZ1600	TVF1600DLC	TVFZ1600DLC	
			24.2								TVF1610	TVFZ1610	TVF1610DLC	TVFZ1610DLC	
			24.3								TVF1620	TVFZ1620	TVF1620DLC	TVFZ1620DLC	
			24.5								TVF1630	TVFZ1630	TVF1630DLC	TVFZ1630DLC	
			24.6	36.0	35.6	102.0	101.6				TVF1640	TVFZ1640	TVF1640DLC	TVFZ1640DLC	
			24.8								TVF1650	TVFZ1650	TVF1650DLC	TVFZ1650DLC	
			24.9	38.0	37.2	105.0	104.2				TVF1660	TVFZ1660	TVF1660DLC	TVFZ1660DLC	
			25.1								TVF1670	TVFZ1670	TVF1670DLC	TVFZ1670DLC	
			25.2								TVF1680	TVFZ1680	TVF1680DLC	TVFZ1680DLC	
			25.4								TVF1690	TVFZ1690	TVF1690DLC	TVFZ1690DLC	
16.6	17.5	AQDEXVF1.5D17	25.5	38.1	37.3	105.1	104.3	50	20		TVF1700	TVFZ1700	TVF1700DLC	TVFZ1700DLC	
			25.7								TVF1710	TVFZ1710	TVF1710DLC	TVFZ1710DLC	
			25.8								TVF1720	TVFZ1720	TVF1720DLC	TVFZ1720DLC	
			26.0								TVF1730	TVFZ1730	TVF1730DLC	TVFZ1730DLC	
			26.1	38.2	37.4	105.2	104.4				TVF1740	TVFZ1740	TVF1740DLC	TVFZ1740DLC	
			26.3								TVF1750	TVFZ1750	TVF1750DLC	TVFZ1750DLC	
			26.4								TVF1760	TVFZ1760	TVF1760DLC	TVFZ1760DLC	
			26.6	40.2	39.7	108.2	107.7				TVF1770	TVFZ1770	TVF1770DLC	TVFZ1770DLC	
			26.7								TVF1780	TVFZ1780	TVF1780DLC	TVFZ1780DLC	
			26.9								TVF1790	TVFZ1790	TVF1790DLC	TVFZ1790DLC	
			27.0								TVF1800	TVFZ1800	TVF1800DLC	TVFZ1800DLC	
			27.2	40.3	39.8	108.3	107.8				TVF1810	TVFZ1810	TVF1810DLC	TVFZ1810DLC	
17.6	18.5	AQDEXVF1.5D18	27.3					50	20		TVF1820	TVFZ1820	TVF1820DLC	TVFZ1820DLC	
			27.5								TVF1830	TVFZ1830	TVF1830DLC	TVFZ1830DLC	
			27.6								TVF1840	TVFZ1840	TVF1840DLC	TVFZ1840DLC	
			27.8	40.4	39.9	108.4	107.9				TVF1850	TVFZ1850	TVF1850DLC	TVFZ1850DLC	
			27.9								TVF1860	TVFZ1860	TVF1860DLC	TVFZ1860DLC	
			28.1	42.4	41.8	117.4	116.8				TVF1870	TVFZ1870	TVF1870DLC	TVFZ1870DLC	
			28.2								TVF1880	TVFZ1880	TVF1880DLC	TVFZ1880DLC	
			28.4								TVF1890	TVFZ1890	TVF1890DLC	TVFZ1890DLC	
			28.5								TVF1900	TVFZ1900	TVF1900DLC	TVFZ1900DLC	
			28.7	42.5	41.9	117.5	116.9				TVF1910	TVFZ1910	TVF1910DLC	TVFZ1910DLC	
			28.8								TVF1920	TVFZ1920	TVF1920DLC	TVFZ1920DLC	
			29.0								TVF1930	TVFZ1930	TVF1930DLC	TVFZ1930DLC	
18.6	19.5	AQDEXVF1.5D19	29.1					56	25		TVF1940	TVFZ1940	TVF1940DLC	TVFZ1940DLC	
			29.3								TVF1950	TVFZ1950	TVF1950DLC	TVFZ1950DLC	
			29.3								TVF1950	TVFZ1950	TVF1950DLC	TVFZ1950DLC	

※ 钻杆上不带刀片。请另外购买。

※ Inserts are sold separately. The holder does not come with an insert.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

直径 DC		钻杆 Holder										适用刀片 Applicable Insert			
最小 Min.	最大 Max.	商品编码 Code	有效长 LU	颈长 LB	颈长 平头刀片 使用时 (LB)	全长 OAL	全长 平头刀片 使用时 (OAL)	柄长 LS	柄径 DCONMS	在庫 Stock	TVF	TVFZ (平头刀片)	TVFDLC	TVFZDLC (平头刀片)	
19.6	20.5	AQDEXVF1.5D20	29.4	44.6	43.9	120.6	119.9	56	25		TVF1960	TVFZ1960	TVF1960DLC	TVFZ1960DLC	
			29.6								TVF1970	TVFZ1970	TVF1970DLC	TVFZ1970DLC	
			29.7								TVF1980	TVFZ1980	TVF1980DLC	TVFZ1980DLC	
			29.9								TVF1990	TVFZ1990	TVF1990DLC	TVFZ1990DLC	
			30.0								TVF2000	TVFZ2000	TVF2000DLC	TVFZ2000DLC	
20.6	21.5	AQDEXVF1.5D21	30.8	44.7	44.0	120.7	120.0	56	25		TVF2050	TVFZ2050	TVF2050DLC	TVFZ2050DLC	
			31.5								TVF2100	TVFZ2100	TVF2100DLC	TVFZ2100DLC	
			31.7								TVF2110	—	—	—	
			31.8								TVF2120	—	—	—	
			32.3								TVF2150	TVFZ2150	TVF2150DLC	TVFZ2150DLC	
21.6	22.5	AQDEXVF1.5D22	33.0	49.0	48.1	127.0	126.1	56	25		TVF2200	TVFZ2200	TVF2200DLC	TVFZ2200DLC	
			33.8								TVF2250	TVFZ2250	TVF2250DLC	TVFZ2250DLC	
22.6	23.5	AQDEXVF1.5D23	33.9	51.1	33.7	130.1	—	56	25		TVF2260	—	—	—	
			34.1								TVF2270	—	—	—	
			34.5								TVF2300	TVFZ2300	TVF2300DLC	TVFZ2300DLC	
			35.3								TVF2350	TVFZ2350	TVF2350DLC	TVFZ2350DLC	
			36.0								TVF2400	TVFZ2400	TVF2400DLC	TVFZ2400DLC	
23.6	24.5	AQDEXVF1.5D24	36.2	53.4	35.2	137.4	—	56	25		TVF2410	—	—	—	
			36.3								TVF2420	—	—	—	
			36.8								TVF2450	TVFZ2450	TVF2450DLC	TVFZ2450DLC	
			37.1								TVF2470	—	—	—	
			37.5								TVF2500	TVFZ2500	TVF2500DLC	TVFZ2500DLC	
24.6	25.5	AQDEXVF1.5D25	38.3	55.6	54.6	140.6	139.6	56	25		TVF2550	TVFZ2550	TVF2550DLC	TVFZ2550DLC	
			38.4								TVF2560	—	—	—	
			38.6								TVF2570	—	—	—	
			39.0								TVF2600	TVFZ2600	TVF2600DLC	TVFZ2600DLC	
			39.8								TVF2650	TVFZ2650	TVF2650DLC	TVFZ2650DLC	
25.6	26.5	AQDEXVF1.5D26	39.9	57.8	56.7	143.8	142.7	56	25		TVF2660	—	—	—	
			40.1								TVF2670	—	—	—	
			40.5								TVF2700	TVFZ2700	TVF2700DLC	TVFZ2700DLC	
			41.3								TVF2750	TVFZ2750	TVF2750DLC	TVFZ2750DLC	
			42.0								TVF2800	TVFZ2800	TVF2800DLC	TVFZ2800DLC	
26.6	27.5	AQDEXVF1.5D27	42.8	62.2	61.1	150.2	149.1	56	25		TVF2850	TVFZ2850	TVF2850DLC	TVFZ2850DLC	
			42.9								TVF2860	—	—	—	
			43.1								TVF2870	—	—	—	
			43.5								TVF2900	TVFZ2900	TVF2900DLC	TVFZ2900DLC	
			44.3								TVF2950	TVFZ2950	TVF2950DLC	TVFZ2950DLC	
27.6	28.5	AQDEXVF1.5D28	44.4	64.4	63.2	153.4	152.2	56	25		TVF3000	TVFZ3000	TVF3000DLC	TVFZ3000DLC	
			45.0								TVF3050	TVFZ3050	TVF3050DLC	TVFZ3050DLC	
			45.8								TVF3100	TVFZ3100	TVF3100DLC	TVFZ3100DLC	
			46.5								TVF3150	TVFZ3150	TVF3150DLC	TVFZ3150DLC	
			47.3								TVF3200	TVFZ3200	TVF3200DLC	TVFZ3200DLC	
28.6	29.5	AQDEXVF1.5D29	47.9	64.2	62.1	153.2	—	56	25		TVF3250	TVFZ3250	TVF3250DLC	TVFZ3250DLC	
			48.0								TVF3300	TVFZ3300	TVF3300DLC	TVFZ3300DLC	
			48.1								TVF3350	TVFZ3350	TVF3350DLC	TVFZ3350DLC	
			48.2								TVF3400	TVFZ3400	TVF3400DLC	TVFZ3400DLC	
			48.3								TVF3450	TVFZ3450	TVF3450DLC	TVFZ3450DLC	
29.6	30.5	AQDEXVF1.5D30	48.4	66.5	65.4	156.6	155.4	56	25		TVF3500	TVFZ3500	TVF3500DLC	TVFZ3500DLC	
			48.5								TVF3550	TVFZ3550	TVF3550DLC	TVFZ3550DLC	
			48.6								TVF3600	TVFZ3600	TVF3600DLC	TVFZ3600DLC	
			48.7								TVF3650	TVFZ3650	TVF3650DLC	TVFZ3650DLC	
			48.8								TVF3700	TVFZ3700	TVF3700DLC	TVFZ3700DLC	
30.6	31.5	AQDEXVF1.5D31	48.9	69.6 *(97.6)	98.3 *(96.3)	159.6	158.3	57	25		TVF3750	TVFZ3750	TVF3750DLC	TVFZ3750DLC	
			49.0								TVF3800	TVFZ3800	TVF3800DLC	TVFZ3800DLC	
			49.1								TVF3850	TVFZ3850	TVF3850DLC	TVFZ3850DLC	
			49.2								TVF3900	TVFZ3900	TVF3900DLC	TVFZ3900DLC	
			49.3								TVF3950	TVFZ3950	TVF3950DLC	TVFZ3950DLC	
31.6	32.0	AQDEXVF1.5D32	49.4	102.8 *(100.8)	101.5 *(99.5)	162.8	161.5	57	25		TVF4000	TVFZ4000	TVF4000DLC	TVFZ4000DLC	
			49.5								TVF4050	TVFZ4050	TVF4050DLC	TVFZ4050DLC	
			49.6								TVF4100	TVFZ4100	TVF4100DLC	TVFZ4100DLC	
			49.7								TVF4150	TVFZ4150	TVF4150DLC	TVFZ4150DLC	
			49.8								TVF4200	TVFZ4200	TVF4200DLC	TVFZ4200DLC	

() 值为槽长。

In the "()", it is the flute length.

※ 钻杆上不带刀片。请另外购买。

※ Inserts are sold separately. The holder does not come with an insert.

AQDEXVF3D

AQUA EX VF 钻头 3D

AQUA Drills EX VF 3D

切削条件 Cutting Condition ▶▶▶A-184

25°

螺旋角

h6



柄直径公差

14.0-32.0

直径范围

- 可更换切削刃的大直径钻头，适合高效率、高精度的加工。

The most suitable indexable insert drills for high efficiency and high precision drilling of large diameter.

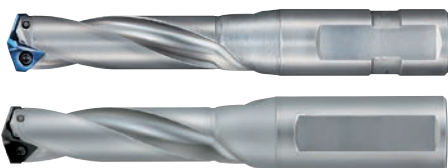

●钻杆 Holder

LIST 9822

订货方式 商品编码

单位 (Unit) : mm

直径 DC		钻杆 Holder							适用刀片 Applicable Insert				
最小 Min.	最大 Max.	商品编码 Code	有效长 LU	颈长 LB	全长 OAL	柄长 LS	柄径 DCONMS	在库 Stock	TVF	TVFDLC			
14.0	14.5	AQDEXVF3D14	42.0	53.5	115.5	48	16		TVF1400	TVF1400DLC			
			42.3	53.6	115.6				TVF1410	TVF1410DLC			
			42.6						TVF1420	TVF1420DLC			
			42.9						TVF1430	TVF1430DLC			
			43.2						TVF1440	TVF1440DLC			
14.6	15.5	AQDEXVF3D15	43.5	56.7	115.7	50	20		TVF1450	TVF1450DLC			
			43.8						TVF1460	TVF1460DLC			
			44.1						TVF1470	TVF1470DLC			
			44.4						TVF1480	TVF1480DLC			
			44.7						TVF1490	TVF1490DLC			
			45.0	56.8	115.8				TVF1500	TVF1500DLC			
			45.3						TVF1510	TVF1510DLC			
			45.6						TVF1520	TVF1520DLC			
			45.9						TVF1530	TVF1530DLC			
			46.2						TVF1540	TVF1540DLC			
15.6	16.5	AQDEXVF3D16	46.5	60.8	126.8	50	20		TVF1550	TVF1550DLC			
			46.8						TVF1560	TVF1560DLC			
			47.1	60.9	126.9				TVF1570	TVF1570DLC			
			47.4						TVF1580	TVF1580DLC			
			47.7						TVF1590	TVF1590DLC			
			48.0	61.0	127.0				TVF1600	TVF1600DLC			
			48.3						TVF1610	TVF1610DLC			
			48.6						TVF1620	TVF1620DLC			
			48.9						TVF1630	TVF1630DLC			
			49.2						TVF1640	TVF1640DLC			
16.6	17.5	AQDEXVF3D17	49.5	64.0	131.0	50	20		TVF1650	TVF1650DLC			
			49.8						TVF1660	TVF1660DLC			
			50.1	64.1	131.1				TVF1670	TVF1670DLC			
			50.4						TVF1680	TVF1680DLC			
			50.7						TVF1690	TVF1690DLC			
			51.0	64.2	131.2				TVF1700	TVF1700DLC			
			51.3						TVF1710	TVF1710DLC			
			51.6						TVF1720	TVF1720DLC			
			51.9						TVF1730	TVF1730DLC			
			52.2						TVF1740	TVF1740DLC			
17.6	18.5	AQDEXVF3D18	52.5	68.2	136.2	56	25		TVF1750	TVF1750DLC			
			52.8						TVF1760	TVF1760DLC			
			53.1	68.3	136.3				TVF1770	TVF1770DLC			
			53.4						TVF1780	TVF1780DLC			
			53.7						TVF1790	TVF1790DLC			
			54.0	68.4	136.4				TVF1800	TVF1800DLC			
			54.3						TVF1810	TVF1810DLC			
			54.6						TVF1820	TVF1820DLC			
			54.9						TVF1830	TVF1830DLC			
			55.2						TVF1840	TVF1840DLC			
18.6	19.5	AQDEXVF3D19	55.5	71.4	146.4	56	25		TVF1850	TVF1850DLC			
			55.8						TVF1860	TVF1860DLC			
			56.1	71.5	146.5				TVF1870	TVF1870DLC			
			56.4						TVF1880	TVF1880DLC			
			56.7						TVF1890	TVF1890DLC			
			57.0						TVF1900	TVF1900DLC			
			57.3						TVF1910	TVF1910DLC			
			57.6						TVF1920	TVF1920DLC			
			57.9						TVF1930	TVF1930DLC			
			58.2						TVF1940	TVF1940DLC			
58.5	TVF1950	TVF1950DLC											

※ 钻杆上不带刀片。请另外购买。

※ Inserts are sold separately. The holder does not come with an insert.

单位 (Unit) : mm

直径 DC		钻杆 Holder							适用刀片 Applicable Insert				
最小 Min.	最大 Max.	商品编码 Code	有效长 LU	颈长 LB	全长 OAL	柄长 LS	柄径 DCONMS	在库 Stock	TVF	TVFDLC			
19.6	20.5	AQDEXVF3D20	58.8	75.6	151.6	56	25		TVF1960	TVF1960DLC			
			59.1						TVF1970	TVF1970DLC			
			59.4						TVF1980	TVF1980DLC			
			59.7						TVF1990	TVF1990DLC			
			60.0						TVF2000	TVF2000DLC			
20.6	21.5	AQDEXVF3D21	61.5	75.7	151.7	56	25		TVF2050	TVF2050DLC			
			63.0	78.8	155.8				TVF2100	TVF2100DLC			
			63.3	78.9	155.9				TVF2110	—			
			63.6						TVF2120	—			
			64.5						TVF2150	TVF2150DLC			
21.6	22.5	AQDEXVF3D22	66.0	83.0	161.0	56	25		TVF2200	TVF2200DLC			
			67.5	83.1	161.1				TVF2250	TVF2250DLC			
22.6	23.5	AQDEXVF3D23	67.8	86.1	165.1				TVF2260	—			
			68.1						TVF2270	—			
			69.0	86.2	165.2				TVF2300	TVF2300DLC			
			70.5	86.3	165.3	TVF2350	TVF2350DLC						
			23.6	24.5	AQDEXVF3D24	72.0	90.4	174.4				TVF2400	TVF2400DLC
72.3	TVF2410	—											
72.6	TVF2420	—											
24.6	25.5	AQDEXVF3D25				73.5	90.5	174.5	60	32		TVF2450	TVF2450DLC
						74.1	93.5	178.5				TVF2470	—
			75.0	TVF2500	TVF2500DLC								
			76.5	93.6	178.6	TVF2550	TVF2550DLC						
			25.6	26.5	AQDEXVF3D26	76.8	97.7	183.7				TVF2560	—
77.1	TVF2570	—											
78.0	TVF2600	TVF2600DLC											
26.6	27.5	AQDEXVF3D27				79.5	97.8	183.8	60	32		TVF2650	TVF2650DLC
						79.8	100.8	187.8				TVF2660	—
			80.1	100.9	187.9							TVF2670	—
			81.0									TVF2700	TVF2700DLC
			82.5	101.0	188.0	TVF2750	TVF2750DLC						
27.6	28.5	AQDEXVF3D28	84.0	105.1	193.1	60	32		TVF2800	TVF2800DLC			
			85.5	105.2	193.2				TVF2850	TVF2850DLC			
28.6	29.5	AQDEXVF3D29	85.8	108.2	197.2				TVF2860	—			
			86.1						TVF2870	—			
			87.0	108.3	197.3				TVF2900	TVF2900DLC			
			88.5	108.4	197.4	TVF2950	TVF2950DLC						
			29.6	30.5	AQDEXVF3D30	90.0	112.5	202.5	57			TVF3000	TVF3000DLC
91.5	112.6	202.6				TVF3050	TVF3050DLC						
30.6	31.5	AQDEXVF3D31	93.0	146.6 *(144.6)	206.6	57						TVF3100	TVF3100DLC
			94.5	146.7 *(144.7)	206.7							TVF3150	TVF3150DLC
31.6	32.0	AQDEXVF3D32	96.0	151.8 *(149.8)	211.8							TVF3200	TVF3200DLC

() 值为槽长。
In the (), it is the flute length.

※ 钻杆上不带刀片。请另外购买。
※ Inserts are sold separately. The holder does not come with an insert.



采用 V 型支架方式，胴部刚性、刀片安装刚性和安装精度良好

AQDEXVF5D

AQUA EX VF 钻头 5D

AQUA Drills EX VF 5D

切削条件 Cutting Condition ▶▶A-184

25°

螺旋角

h6

柄直径公差

14.0-32.0


直径范围

●可更换切削刃的大直径钻头，适合高效率、高精度的加工。

The most suitable indexable insert drills for high efficiency and high precision drilling of large diameter.



2斜角+XR形



●钻杆 Holder

LIST 9828

订货方式 商品编码

单位 (Unit) : mm

直径 DC		钻杆 Holder							适用刀片 Applicable Insert				
最小 Min.	最大 Max.	商品编码 Code	有效长 LU	颈长 LB	全长 OAL	柄长 LS	柄径 DCONMS	在库 Stock	TVF	TVFDLC			
14.0	14.5	AQDEXVF5D14	70.0	82.5	147.5	48	16		TVF1400	TVF1400DLC			
			70.5	82.6	147.6				TVF1410	TVF1410DLC			
			71.0						TVF1420	TVF1420DLC			
			71.5						TVF1430	TVF1430DLC			
			72.0						TVF1440	TVF1440DLC			
14.6	15.5	AQDEXVF5D15	72.5	87.7	155.7	50	20		TVF1450	TVF1450DLC			
			73.0						TVF1460	TVF1460DLC			
			73.5						TVF1470	TVF1470DLC			
			74.0						TVF1480	TVF1480DLC			
			74.5						TVF1490	TVF1490DLC			
			75.0	87.8	155.8				TVF1500	TVF1500DLC			
			75.5						TVF1510	TVF1510DLC			
			76.0						TVF1520	TVF1520DLC			
			76.5						TVF1530	TVF1530DLC			
			77.0						TVF1540	TVF1540DLC			
15.6	16.5	AQDEXVF5D16	77.5	93.8	162.8	50	20		TVF1550	TVF1550DLC			
			78.0						TVF1560	TVF1560DLC			
			78.5						TVF1570	TVF1570DLC			
			79.0	93.9	162.9				TVF1580	TVF1580DLC			
			79.5						TVF1590	TVF1590DLC			
			80.0						TVF1600	TVF1600DLC			
			80.5						TVF1610	TVF1610DLC			
			81.0	94.0	163.0				TVF1620	TVF1620DLC			
			81.5						TVF1630	TVF1630DLC			
			82.0						TVF1640	TVF1640DLC			
16.6	17.5	AQDEXVF5D17	82.5		50	20		TVF1650	TVF1650DLC				
			83.0	99.0				170.0				TVF1660	TVF1660DLC
			83.5									TVF1670	TVF1670DLC
			84.0									TVF1680	TVF1680DLC
			84.5									TVF1690	TVF1690DLC
			85.0	99.1				170.1				TVF1700	TVF1700DLC
			85.5									TVF1710	TVF1710DLC
			86.0									TVF1720	TVF1720DLC
			86.5									TVF1730	TVF1730DLC
			87.0	99.2				170.2				TVF1740	TVF1740DLC
87.5	TVF1750	TVF1750DLC											
17.6	18.5	AQDEXVF5D18	88.0	105.2	176.2	56	25		TVF1760	TVF1760DLC			
			88.5						TVF1770	TVF1770DLC			
			89.0						TVF1780	TVF1780DLC			
			89.5						TVF1790	TVF1790DLC			
			90.0	105.3	176.3				TVF1800	TVF1800DLC			
			90.5						TVF1810	TVF1810DLC			
			91.0						TVF1820	TVF1820DLC			
			91.5						TVF1830	TVF1830DLC			
			92.0						TVF1840	TVF1840DLC			
			18.6	19.5	AQDEXVF5D19				92.5	105.4	176.4	56	25
93.0	TVF1860	TVF1860DLC											
93.5	TVF1870	TVF1870DLC											
94.0	110.4	189.4				TVF1880	TVF1880DLC						
94.5						TVF1890	TVF1890DLC						
95.0						TVF1900	TVF1900DLC						
95.5						TVF1910	TVF1910DLC						
96.0	110.5	189.5				TVF1920	TVF1920DLC						
96.5						TVF1930	TVF1930DLC						
97.0						TVF1940	TVF1940DLC						
97.5						TVF1950	TVF1950DLC						

※钻杆上不带刀片。请另外购买。

※ Inserts are sold separately. The holder does not come with an insert.

单位 (Unit) : mm

直径 DC		钻杆 Holder							适用刀片 Applicable Insert		
最小 Min.	最大 Max.	商品编码 Code	有效长 LU	颈长 LB	全长 OAL	柄长 LS	柄径 DCONMS	在库 Stock	TVF	TVFDLC	
19.6	20.5	AQDEXVF5D20	98.0	116.6	196.6	56	25	●	TVF1960	TVF1960DLC	
			98.5						TVF1970	TVF1970DLC	
			99.0						TVF1980	TVF1980DLC	
			99.5						TVF1990	TVF1990DLC	
			100.0						TVF2000	TVF2000DLC	
			102.5						TVF2050	TVF2050DLC	
20.6	21.5	AQDEXVF5D21	105.0	121.8	202.8				TVF2100	TVF2100DLC	
			105.5	121.9	202.9				TVF2110	—	
			106.0						TVF2120	—	
			107.5						TVF2150	TVF2150DLC	
21.6	22.5	AQDEXVF5D22	110.0	128.0	210.0				TVF2200	TVF2200DLC	
			112.5	128.1	210.1				TVF2250	TVF2250DLC	
22.6	23.5	AQDEXVF5D23	113.0	133.1	217.1				TVF2260	—	
			113.5	TVF2270	—						
			115.0	133.2	217.2				TVF2300	TVF2300DLC	
			117.5	133.3	217.3				TVF2350	TVF2350DLC	
			120.0	139.4	228.4				TVF2400	TVF2400DLC	
23.6	24.5	AQDEXVF5D24	120.5						TVF2410	—	
			121.0			TVF2420	—				
			122.5			TVF2450	TVF2450DLC				
			123.5			TVF2470	—				
24.6	25.5	AQDEXVF5D25	125.0			TVF2500	TVF2500DLC				
			127.5			TVF2550	TVF2550DLC				
			128.0	150.7	241.7		TVF2560	—			
25.6	26.5	AQDEXVF5D26	128.5				TVF2570	—			
			130.0				TVF2600	TVF2600DLC			
			132.5				TVF2650	TVF2650DLC			
			133.0	155.8	248.8	TVF2660	—				
26.6	27.5	AQDEXVF5D27	133.5	155.9	248.9	TVF2670	—				
			135.0	TVF2700	TVF2700DLC						
			137.5	156.0	249.0	TVF2750	TVF2750DLC				
			140.0	162.1	255.1	TVF2800	TVF2800DLC				
27.6	28.5	AQDEXVF5D28	142.5	162.2	255.2	TVF2850	TVF2850DLC				
			143.0	167.2	262.2		TVF2860	—			
28.6	29.5	AQDEXVF5D29	143.5				TVF2870	—			
			145.0				TVF2900	TVF2900DLC			
			147.5				TVF2950	TVF2950DLC			
			150.0	173.5	269.5	TVF3000	TVF3000DLC				
29.6	30.5	AQDEXVF5D30	152.5	173.6	269.6	TVF3050	TVF3050DLC				
			155.0	215.6 *(213.6)	275.6	57	TVF3100	TVF3100DLC			
157.5	215.7 *(213.7)	TVF3150		TVF3150DLC							
31.6	32.0	AQDEXVF5D32	160.0	222.8 *(220.8)	282.8		TVF3200	TVF3200DLC			

() 值为槽长。

In the *(), it is the flute length.

※ 钻杆上不带刀片。请另外购买。

※ Inserts are sold separately. The holder does not come with an insert.

AQDEXVF8D

AQUA EX VF 钻头 8D

AQUA Drills EX VF 8D

切削条件 Cutting Condition ▶▶A-184

25°

螺旋角

h6

柄直径公差

14.0-32.0


直径范围

- 可更换切削刃的大直径钻头，适合高效率、高精度的加工。

The most suitable indexable insert drills for high efficiency and high precision drilling of large diameter.



2斜角+XR形



●钻杆 Holder

LIST 9844

订货方式 商品编码

单位 (Unit) : mm

直径 DC		钻杆 Holder							适用刀片 Applicable Insert				
最小 Min.	最大 Max.	商品编码 Code	有效长 LU	颈长 LB	全长 OAL	柄长 LS	柄径 DCONMS	在库 Stock	TVF	TVFDLC			
14.0	14.5	AQDEXVF8D14	112.0	121.5	183.5	48	16		TVF1400	TVF1400DLC			
			112.8	121.6	183.6				TVF1410	TVF1410DLC			
			113.6						TVF1420	TVF1420DLC			
			114.4						TVF1430	TVF1430DLC			
			115.2						TVF1440	TVF1440DLC			
14.6	15.5	AQDEXVF8D15	116.0	130.7	195.7	50	20	●	TVF1450	TVF1450DLC			
			116.8						TVF1460	TVF1460DLC			
			117.6						TVF1470	TVF1470DLC			
			118.4						TVF1480	TVF1480DLC			
			119.2						TVF1490	TVF1490DLC			
			120.0	130.8	195.8				TVF1500	TVF1500DLC			
			120.8						TVF1510	TVF1510DLC			
			121.6						TVF1520	TVF1520DLC			
			122.4						TVF1530	TVF1530DLC			
			123.2						TVF1540	TVF1540DLC			
15.6	16.5	AQDEXVF8D16	124.0	138.8	204.8				TVF1550	TVF1550DLC			
			124.8						TVF1560	TVF1560DLC			
			125.6						TVF1570	TVF1570DLC			
			126.4						TVF1580	TVF1580DLC			
			127.2	138.9	204.9				TVF1590	TVF1590DLC			
			128.0						TVF1600	TVF1600DLC			
			128.8						TVF1610	TVF1610DLC			
			129.6						TVF1620	TVF1620DLC			
			130.4	139.0	205.0				TVF1630	TVF1630DLC			
			131.2						TVF1640	TVF1640DLC			
16.6	17.5	AQDEXVF8D17	132.0	148.0	215.0				TVF1650	TVF1650DLC			
			132.8						TVF1660	TVF1660DLC			
			133.6						TVF1670	TVF1670DLC			
			134.4	148.1	215.1				TVF1680	TVF1680DLC			
			135.2						TVF1690	TVF1690DLC			
			136.0						TVF1700	TVF1700DLC			
			136.8						TVF1710	TVF1710DLC			
			137.6	148.2	215.2				TVF1720	TVF1720DLC			
			138.4						TVF1730	TVF1730DLC			
			139.2						TVF1740	TVF1740DLC			
17.6	18.5	AQDEXVF8D18	140.0	156.2	224.2				TVF1750	TVF1750DLC			
			140.8						TVF1760	TVF1760DLC			
			141.6						TVF1770	TVF1770DLC			
			142.4	156.3	224.3				TVF1780	TVF1780DLC			
			143.2						TVF1790	TVF1790DLC			
			144.0						TVF1800	TVF1800DLC			
			144.8						TVF1810	TVF1810DLC			
			145.6						TVF1820	TVF1820DLC			
			146.4	156.4	224.4				TVF1830	TVF1830DLC			
			147.2						TVF1840	TVF1840DLC			
148.0	TVF1850	TVF1850DLC											
18.6	19.5	AQDEXVF8D19	148.8	165.4	240.4				TVF1860	TVF1860DLC			
			149.6						TVF1870	TVF1870DLC			
			150.4						TVF1880	TVF1880DLC			
			151.2						TVF1890	TVF1890DLC			
			152.0	165.5	240.5				TVF1900	TVF1900DLC			
			152.8						TVF1910	TVF1910DLC			
			153.6						TVF1920	TVF1920DLC			
			154.4						TVF1930	TVF1930DLC			
			155.2						TVF1940	TVF1940DLC			
			156.0						TVF1950	TVF1950DLC			

※ 钻杆上不带刀片。请另外购买。

※ Inserts are sold separately. The holder does not come with an insert.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速 钢立铣刀

切割工具

*（ ）值为槽长。 ※钻杆上不带刀片。请另外购买。
In the *(), it is the flute length. ※ Inserts are sold separately. The holder does not come with an insert.

套装商品
其它


精密工具

技术资料
索引

螺钉 (5 支装)、螺丝扳手请另外购买。
Screws (5pcs) and Wrenches can be purchased separately

● 钻孔精度高，耐磨损性能出色。

High-precision drilling and superior resistance to chipping.



● 刀片 Inserts

LIST 9824

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	刀片长度 INSL	刀片厚度 S	先端 PL	在庫 Stock	适用钻杆 Applicable Holder
TVF1400	14.0	11.4	4.5	2.5		AQDEXVF1.5D14 AQDEXVF3D14 AQDEXVF5D14 AQDEXVF8D14
TVF1410	14.1			2.6		
TVF1420	14.2			2.6		
TVF1430	14.3			2.6		
TVF1440	14.4			2.6		
TVF1450	14.5	11.5	4.8	2.7		AQDEXVF1.5D15 AQDEXVF3D15 AQDEXVF5D15 AQDEXVF8D15
TVF1460	14.6			2.7		
TVF1470	14.7			2.7		
TVF1480	14.8			2.7		
TVF1490	14.9			2.7		
TVF1500	15.0			2.7		
TVF1510	15.1			2.7		
TVF1520	15.2			2.7		
TVF1530	15.3			2.8		
TVF1540	15.4			2.8		
TVF1550	15.5	12.4	5.0	2.9		AQDEXVF1.5D16 AQDEXVF3D16 AQDEXVF5D16 AQDEXVF8D16
TVF1560	15.6			2.9		
TVF1570	15.7			2.9		
TVF1580	15.8			2.9		
TVF1590	15.9			2.9		
TVF1600	16.0			2.9		
TVF1610	16.1			2.9		
TVF1620	16.2			2.9		
TVF1630	16.3			2.9		
TVF1640	16.4			2.9		
TVF1650	16.5	13.2	5.5	3.0		AQDEXVF1.5D17 AQDEXVF3D17 AQDEXVF5D17 AQDEXVF8D17
TVF1660	16.6			3.0		
TVF1670	16.7			3.0		
TVF1680	16.8			3.0		
TVF1690	16.9			3.0		
TVF1700	17.0			3.0		
TVF1710	17.1			3.0		
TVF1720	17.2			3.0		
TVF1730	17.3			3.0		
TVF1740	17.4			3.0		
TVF1750	17.5	13.5	5.8	3.1		AQDEXVF1.5D18 AQDEXVF3D18 AQDEXVF5D18 AQDEXVF8D18
TVF1760	17.6			3.1		
TVF1770	17.7			3.1		
TVF1780	17.8			3.1		
TVF1790	17.9			3.1		
TVF1800	18.0			3.1		
TVF1810	18.1			3.1		
TVF1820	18.2			3.1		
TVF1830	18.3			3.1		
TVF1840	18.4			3.1		
TVF1850	18.5	14.2	6.0	3.2		AQDEXVF1.5D19 AQDEXVF3D19 AQDEXVF5D19 AQDEXVF8D19
TVF1860	18.6			3.2		
TVF1870	18.7			3.2		
TVF1880	18.8			3.2		
TVF1890	18.9			3.2		
TVF1900	19.0			3.2		
TVF1910	19.1			3.2		
TVF1920	19.2			3.2		
TVF1930	19.3			3.2		
TVF1940	19.4			3.2		
TVF1950	19.5			3.2		

商品编码 Code	直径 DC	刀片长度 INSL	刀片厚度 S	先端 PL	在庫 Stock	适用钻杆 Applicable Holder
TVF1960	19.6	15.1	6.5	3.6		AQDEXVF1.5D20 AQDEXVF3D20 AQDEXVF5D20 AQDEXVF8D20
TVF1970	19.7			3.6		
TVF1980	19.8			3.6		
TVF1990	19.9			3.6		
TVF2000	20.0			3.6		
TVF2050	20.5	15.7	6.7	3.7		AQDEXVF1.5D21 AQDEXVF3D21 AQDEXVF5D21 AQDEXVF8D21
TVF2100	21.0			3.7		
TVF2110	21.1			3.7		
TVF2120	21.2			3.7		
TVF2150	21.5			3.7		
TVF2200	22.0	16.6	7.5	4.0		AQDEXVF1.5D22 AQDEXVF3D22 AQDEXVF5D22 AQDEXVF8D22
TVF2250	22.5			4.0		
TVF2260	22.6			4.1		
TVF2270	22.7			4.1		
TVF2300	23.0			4.1		
TVF2350	23.5	17.4	8.0	4.2		AQDEXVF1.5D23 AQDEXVF3D23 AQDEXVF5D23 AQDEXVF8D23
TVF2400	24.0			4.2		
TVF2410	24.1			4.2		
TVF2420	24.2			4.2		
TVF2450	24.5			4.2		
* TVF2470	24.7	19.1	4.6	4.3		AQDEXVF1.5D24 AQDEXVF3D24 AQDEXVF5D24 AQDEXVF8D24
* TVF2500	25.0			4.3		
* TVF2550	25.5			4.3		
* TVF2560	25.6			4.3		
* TVF2570	25.7			4.3		
* TVF2600	26.0	19.7	4.7	4.4		AQDEXVF1.5D25 AQDEXVF3D25 AQDEXVF5D25 AQDEXVF8D25
* TVF2650	26.5			4.4		
* TVF2660	26.6			4.4		
* TVF2670	26.7			4.4		
* TVF2700	27.0			4.4		
TVF2750	27.5	20.4	8.5	4.5		AQDEXVF1.5D26 AQDEXVF3D26 AQDEXVF5D26 AQDEXVF8D26
TVF2800	28.0			4.5		
TVF2850	28.5			4.5		
TVF2860	28.6			4.5		
TVF2870	28.7			4.5		
TVF2900	29.0	22.1	9.0	4.6		AQDEXVF1.5D27 AQDEXVF3D27 AQDEXVF5D27 AQDEXVF8D27
TVF2950	29.5			4.6		
TVF3000	30.0			4.6		
TVF3050	30.5			4.6		
TVF3100	31.0			4.6		
TVF3150	31.5	22.5	9.5	4.7		AQDEXVF1.5D28 AQDEXVF3D28 AQDEXVF5D28 AQDEXVF8D28
TVF3200	32.0			4.7		
TVF2850	28.5			4.7		
TVF2860	28.6			4.7		
TVF2870	28.7			4.7		
TVF2900	29.0	22.1	9.0	4.7		AQDEXVF1.5D29 AQDEXVF3D29 AQDEXVF5D29 AQDEXVF8D29
TVF2950	29.5			4.7		
TVF3000	30.0			4.7		
TVF3050	30.5			4.7		
TVF3100	31.0			4.7		
TVF3150	31.5	22.5	9.5	4.7		AQDEXVF1.5D30 AQDEXVF3D30 AQDEXVF5D30 AQDEXVF8D30
TVF3200	32.0			4.7		
TVF2850	28.5			4.7		
TVF2860	28.6			4.7		
TVF2870	28.7			4.7		
TVF2900	29.0	22.1	9.0	4.7		AQDEXVF1.5D31 AQDEXVF3D31 AQDEXVF5D31 AQDEXVF8D31
TVF2950	29.5			4.7		
TVF3000	30.0			4.7		
TVF3050	30.5			4.7		
TVF3100	31.0			4.7		
TVF3150	31.5	22.5	9.5	4.7		AQDEXVF1.5D32 AQDEXVF3D32 AQDEXVF5D32 AQDEXVF8D32
TVF3200	32.0			4.7		
TVF2850	28.5			4.7		
TVF2860	28.6			4.7		
TVF2870	28.7			4.7		

* 桥梁用规格。



* : Size of bridge.

* 钻杆另售。

* Holder is sold separately.

●适用于倾斜面的加工。

Superior for drilling on angled surfaces.



●刀片 Inserts

LIST 9840

订货方式 商品编码

商品编码 Code	直径 DC	刀片长度 INSL	刀片厚度 S	在库 Stock	适用钻杆 Applicable Holder
TVFZ1400	14.0	10.5	4.5		AQDEXVF1.5D14
TVFZ1410	14.1				
TVFZ1420	14.2				
TVFZ1430	14.3				
TVFZ1440	14.4				
TVFZ1450	14.5	11.1	4.8		AQDEXVF1.5D15
TVFZ1460	14.6				
TVFZ1470	14.7				
TVFZ1480	14.8				
TVFZ1490	14.9				
TVFZ1500	15.0				
TVFZ1510	15.1				
TVFZ1520	15.2				
TVFZ1530	15.3				
TVFZ1540	15.4				
TVFZ1550	15.5	12.0	5.0		AQDEXVF1.5D16
TVFZ1560	15.6				
TVFZ1570	15.7				
TVFZ1580	15.8				
TVFZ1590	15.9				
TVFZ1600	16.0				
TVFZ1610	16.1				
TVFZ1620	16.2				
TVFZ1630	16.3				
TVFZ1640	16.4				
TVFZ1650	16.5	12.4	5.5		AQDEXVF1.5D17
TVFZ1660	16.6				
TVFZ1670	16.7				
TVFZ1680	16.8				
TVFZ1690	16.9				
TVFZ1700	17.0				
TVFZ1710	17.1				
TVFZ1720	17.2				
TVFZ1730	17.3				
TVFZ1740	17.4				
TVFZ1750	17.5	13.0	5.8		AQDEXVF1.5D18
TVFZ1760	17.6				
TVFZ1770	17.7				
TVFZ1780	17.8				
TVFZ1790	17.9				
TVFZ1800	18.0				
TVFZ1810	18.1				
TVFZ1820	18.2				
TVFZ1830	18.3				
TVFZ1840	18.4				
TVFZ1850	18.5				

单位 (Unit) : mm

商品编码 Code	直径 DC	刀片长度 INSL	刀片厚度 S	在库 Stock	适用钻杆 Applicable Holder
TVFZ1860	18.6	13.6	6.0		AQDEXVF1.5D19
TVFZ1870	18.7				
TVFZ1880	18.8				
TVFZ1890	18.9				
TVFZ1900	19.0				
TVFZ1910	19.1				
TVFZ1920	19.2				
TVFZ1930	19.3				
TVFZ1940	19.4				
TVFZ1950	19.5				
TVFZ1960	19.6	14.4	6.5		AQDEXVF1.5D20
TVFZ1970	19.7				
TVFZ1980	19.8				
TVFZ1990	19.9				
TVFZ2000	20.0				
TVFZ2050	20.5				
TVFZ2100	21.0				
TVFZ2150	21.5				
TVFZ2200	22.0				
TVFZ2250	22.5				
TVFZ2300	23.0	15.7	7.5		AQDEXVF1.5D21
TVFZ2350	23.5				
TVFZ2400	24.0				
TVFZ2450	24.5				
TVFZ2500	25.0				
TVFZ2550	25.5				
TVFZ2600	26.0				
TVFZ2650	26.5				
TVFZ2700	27.0				
TVFZ2750	27.5				
TVFZ2800	28.0	20.1	9.0		AQDEXVF1.5D22
TVFZ2850	28.5				
TVFZ2900	29.0				
TVFZ2950	29.5				
TVFZ3000	30.0				
TVFZ3050	30.5				
TVFZ3100	31.0				
TVFZ3150	31.5				
TVFZ3200	32.0				
		20.9	9.5		AQDEXVF1.5D23
		21.3	9.5		AQDEXVF1.5D24
		22.1	10.0		AQDEXVF1.5D25
		23.0	23.0		AQDEXVF1.5D26

※ AQDEXVF3D/5D/8D 倍径，仅在加工孔底或加工通孔时可使用 TVFZ。

* It is possible to drill the bottom of the hole or a through hole by using a combination of TVFZ and AQDEXVF3D/5D/8D.

※ 钻杆另售。

※ Holder is sold separately.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

● DLC 刀片适合加工铝材。

The most suitable DLC Insert for Aluminum Alloy cutting.



● 刀片 Inserts

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	刀片长度 INSL	刀片厚度 S	先端 PL	在庫 Stock	适用钻杆 Applicable Holder
TVF1400DLC	14.0	11.4	4.5	2.5		AQDEXVF1.5D14 AQDEXVF3D14 AQDEXVF5D14 AQDEXVF8D14
TVF1410DLC	14.1			2.6		
TVF1420DLC	14.2			2.6		
TVF1430DLC	14.3			2.6		
TVF1440DLC	14.4			2.6		
TVF1450DLC	14.5	11.5	4.8	2.7		AQDEXVF1.5D15 AQDEXVF3D15 AQDEXVF5D15 AQDEXVF8D15
TVF1460DLC	14.6			2.7		
TVF1470DLC	14.7			2.7		
TVF1480DLC	14.8			2.7		
TVF1490DLC	14.9			2.7		
TVF1500DLC	15.0	12.4	5.0	2.8		AQDEXVF1.5D16 AQDEXVF3D16 AQDEXVF5D16 AQDEXVF8D16
TVF1510DLC	15.1			2.8		
TVF1520DLC	15.2			2.8		
TVF1530DLC	15.3			2.8		
TVF1540DLC	15.4			2.8		
TVF1550DLC	15.5	13.2	5.5	2.9		AQDEXVF1.5D17 AQDEXVF3D17 AQDEXVF5D17 AQDEXVF8D17
TVF1560DLC	15.6			2.9		
TVF1570DLC	15.7			2.9		
TVF1580DLC	15.8			2.9		
TVF1590DLC	15.9			2.9		
TVF1600DLC	16.0	13.5	5.8	3.0		AQDEXVF1.5D18 AQDEXVF3D18 AQDEXVF5D18 AQDEXVF8D18
TVF1610DLC	16.1			3.0		
TVF1620DLC	16.2			3.0		
TVF1630DLC	16.3			3.0		
TVF1640DLC	16.4			3.0		
TVF1650DLC	16.5	14.2	6.0	3.1		AQDEXVF1.5D19 AQDEXVF3D19 AQDEXVF5D19 AQDEXVF8D19
TVF1660DLC	16.6			3.1		
TVF1670DLC	16.7			3.1		
TVF1680DLC	16.8			3.1		
TVF1690DLC	16.9			3.1		
TVF1700DLC	17.0	13.2	5.5	3.2		AQDEXVF1.5D18 AQDEXVF3D18 AQDEXVF5D18 AQDEXVF8D18
TVF1710DLC	17.1			3.2		
TVF1720DLC	17.2			3.2		
TVF1730DLC	17.3			3.2		
TVF1740DLC	17.4			3.2		
TVF1750DLC	17.5	13.5	5.8	3.3		AQDEXVF1.5D18 AQDEXVF3D18 AQDEXVF5D18 AQDEXVF8D18
TVF1760DLC	17.6			3.3		
TVF1770DLC	17.7			3.3		
TVF1780DLC	17.8			3.3		
TVF1790DLC	17.9			3.3		
TVF1800DLC	18.0	14.2	6.0	3.4		AQDEXVF1.5D19 AQDEXVF3D19 AQDEXVF5D19 AQDEXVF8D19
TVF1810DLC	18.1			3.4		
TVF1820DLC	18.2			3.4		
TVF1830DLC	18.3			3.4		
TVF1840DLC	18.4			3.4		
TVF1850DLC	18.5	14.2	6.0	3.5		AQDEXVF1.5D19 AQDEXVF3D19 AQDEXVF5D19 AQDEXVF8D19
TVF1860DLC	18.6			3.5		
TVF1870DLC	18.7			3.5		
TVF1880DLC	18.8			3.5		
TVF1890DLC	18.9			3.5		
TVF1900DLC	19.0	14.2	6.0	3.5		AQDEXVF1.5D19 AQDEXVF3D19 AQDEXVF5D19 AQDEXVF8D19
TVF1910DLC	19.1			3.5		
TVF1920DLC	19.2			3.5		
TVF1930DLC	19.3			3.5		
TVF1940DLC	19.4			3.5		
TVF1950DLC	19.5			3.5		

商品编码 Code	直径 DC	刀片长度 INSL	刀片厚度 S	先端 PL	在庫 Stock	适用钻杆 Applicable Holder
TVF1960DLC	19.6	15.1	6.5	3.6		AQDEXVF1.5D20 AQDEXVF3D20 AQDEXVF5D20 AQDEXVF8D20
TVF1970DLC	19.7			3.6		
TVF1980DLC	19.8			3.6		
TVF1990DLC	19.9			3.6		
TVF2000DLC	20.0			3.6		
TVF2050DLC	20.5	15.7	6.7	3.7		AQDEXVF1.5D21 AQDEXVF3D21 AQDEXVF5D21 AQDEXVF8D21
TVF2100DLC	21.0			3.7		
TVF2150DLC	21.5			3.7		
TVF2200DLC	22.0			3.7		
TVF2250DLC	22.5			3.7		
TVF2300DLC	23.0	16.6	7.5	4.0		AQDEXVF1.5D22 AQDEXVF3D22 AQDEXVF5D22 AQDEXVF8D22
TVF2350DLC	23.5			4.1		
TVF2400DLC	24.0			4.2		
TVF2450DLC	24.5			4.2		
TVF2500DLC	25.0			4.2		
TVF2550DLC	25.5	17.4	8.0	4.3		AQDEXVF1.5D23 AQDEXVF3D23 AQDEXVF5D23 AQDEXVF8D23
TVF2600DLC	26.0			4.3		
TVF2650DLC	26.5			4.3		
TVF2700DLC	27.0			4.3		
TVF2750DLC	27.5			4.3		
TVF2800DLC	28.0	18.2	8.0	4.4		AQDEXVF1.5D24 AQDEXVF3D24 AQDEXVF5D24 AQDEXVF8D24
TVF2850DLC	28.5			4.4		
TVF2900DLC	29.0			4.4		
TVF2950DLC	29.5			4.4		
TVF3000DLC	30.0			4.4		
TVF3050DLC	30.5	19.1	8.0	4.5		AQDEXVF1.5D25 AQDEXVF3D25 AQDEXVF5D25 AQDEXVF8D25
TVF3100DLC	31.0			4.5		
TVF3150DLC	31.5			4.5		
TVF3200DLC	32.0			4.5		
TVF3250DLC	32.5			4.5		
TVF3300DLC	33.0	19.7	8.5	4.6		AQDEXVF1.5D26 AQDEXVF3D26 AQDEXVF5D26 AQDEXVF8D26
TVF3350DLC	33.5			4.6		
TVF3400DLC	34.0			4.6		
TVF3450DLC	34.5			4.6		
TVF3500DLC	35.0			4.6		
TVF3550DLC	35.5	20.4	8.5	4.7		AQDEXVF1.5D27 AQDEXVF3D27 AQDEXVF5D27 AQDEXVF8D27
TVF3600DLC	36.0			4.7		
TVF3650DLC	36.5			4.7		
TVF3700DLC	37.0			4.7		
TVF3750DLC	37.5			4.7		
TVF3800DLC	38.0	21.2	9.0	4.8		AQDEXVF1.5D28 AQDEXVF3D28 AQDEXVF5D28 AQDEXVF8D28
TVF3850DLC	38.5			4.8		
TVF3900DLC	39.0			4.8		
TVF3950DLC	39.5			4.8		
TVF4000DLC	40.0			4.8		
TVF4050DLC	40.5	22.1	9.5	4.9		AQDEXVF1.5D29 AQDEXVF3D29 AQDEXVF5D29 AQDEXVF8D29
TVF4100DLC	41.0			4.9		
TVF4150DLC	41.5			4.9		
TVF4200DLC	42.0			4.9		
TVF4250DLC	42.5			4.9		
TVF4300DLC	43.0	22.5	9.5	5.0		AQDEXVF1.5D30 AQDEXVF3D30 AQDEXVF5D30 AQDEXVF8D30
TVF4350DLC	43.5			5.0		
TVF4400DLC	44.0			5.0		
TVF4450DLC	44.5			5.0		
TVF4500DLC	45.0			5.0		
TVF4550DLC	45.5	23.4	10.0	5.1		AQDEXVF1.5D31 AQDEXVF3D31 AQDEXVF5D31 AQDEXVF8D31
TVF4600DLC	46.0			5.1		
TVF4650DLC	46.5			5.1		
TVF4700DLC	47.0			5.1		
TVF4750DLC	47.5			5.1		
TVF4800DLC	48.0	24.3	10.0	5.2		AQDEXVF1.5D32 AQDEXVF3D32 AQDEXVF5D32 AQDEXVF8D32
TVF4850DLC	48.5			5.2		
TVF4900DLC	49.0			5.2		
TVF4950DLC	49.5			5.2		
TVF5000DLC	50.0			5.2		

※ 钻杆另售。

※ Holder is sold separately.

TVFZDLC

AQUA EX VF 型用 DLC 平头刀片

For AQUA Drills EX VF DLC Insert FLAT Type

切削条件

Cutting Condition

A-185

Carbide

DLC

h7

180°

14.0-32.0

工具材料

涂层


直径公差

先端角

直径范围

- DLC 平头刀片适合加工铝材。
- 适用于倾斜面的加工。

The most suitable DLC Insert FLAT Type for Aluminum Alloy cutting.
Superior for drilling on angled surfaces.



● 刀片 Inserts

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	刀片长度 INSL	刀片厚度 S	在庫 Stock	适用钻杆 Applicable Holder
TVFZ1400DLC	14.0	10.5	4.5		AQDEXVF1.5D14
TVFZ1410DLC	14.1				
TVFZ1420DLC	14.2				
TVFZ1430DLC	14.3				
TVFZ1440DLC	14.4				
TVFZ1450DLC	14.5	11.1	4.8		AQDEXVF1.5D15
TVFZ1460DLC	14.6				
TVFZ1470DLC	14.7				
TVFZ1480DLC	14.8				
TVFZ1490DLC	14.9				
TVFZ1500DLC	15.0				
TVFZ1510DLC	15.1				
TVFZ1520DLC	15.2				
TVFZ1530DLC	15.3				
TVFZ1540DLC	15.4				
TVFZ1550DLC	15.5	12.0	5.0	□	AQDEXVF1.5D16
TVFZ1560DLC	15.6				
TVFZ1570DLC	15.7				
TVFZ1580DLC	15.8				
TVFZ1590DLC	15.9				
TVFZ1600DLC	16.0				
TVFZ1610DLC	16.1				
TVFZ1620DLC	16.2				
TVFZ1630DLC	16.3				
TVFZ1640DLC	16.4				
TVFZ1650DLC	16.5	12.4	5.5		AQDEXVF1.5D17
TVFZ1660DLC	16.6				
TVFZ1670DLC	16.7				
TVFZ1680DLC	16.8				
TVFZ1690DLC	16.9				
TVFZ1700DLC	17.0				
TVFZ1710DLC	17.1				
TVFZ1720DLC	17.2				
TVFZ1730DLC	17.3				
TVFZ1740DLC	17.4				
TVFZ1750DLC	17.5	13.0	5.8		AQDEXVF1.5D18
TVFZ1760DLC	17.6				
TVFZ1770DLC	17.7				
TVFZ1780DLC	17.8				
TVFZ1790DLC	17.9				
TVFZ1800DLC	18.0				
TVFZ1810DLC	18.1				
TVFZ1820DLC	18.2				
TVFZ1830DLC	18.3				
TVFZ1840DLC	18.4				
TVFZ1850DLC	18.5				

商品编码 Code	直径 DC	刀片长度 INSL	刀片厚度 S	在庫 Stock	适用钻杆 Applicable Holder
TVFZ1860DLC	18.6	13.6	6.0		AQDEXVF1.5D19
TVFZ1870DLC	18.7				
TVFZ1880DLC	18.8				
TVFZ1890DLC	18.9				
TVFZ1900DLC	19.0				
TVFZ1910DLC	19.1	14.4	6.5		AQDEXVF1.5D20
TVFZ1920DLC	19.2				
TVFZ1930DLC	19.3				
TVFZ1940DLC	19.4				
TVFZ1950DLC	19.5				
TVFZ1960DLC	19.6	15.0	6.7	□	AQDEXVF1.5D21
TVFZ1970DLC	19.7				
TVFZ1980DLC	19.8				
TVFZ1990DLC	19.9				
TVFZ2000DLC	20.0				
TVFZ2050DLC	20.5	15.7	7.5		AQDEXVF1.5D22
TVFZ2100DLC	21.0				
TVFZ2150DLC	21.5				
TVFZ2200DLC	22.0				
TVFZ2250DLC	22.5				
TVFZ2300DLC	23.0	16.5	8.0		AQDEXVF1.5D23
TVFZ2350DLC	23.5				
TVFZ2400DLC	24.0				
TVFZ2450DLC	24.5				
TVFZ2500DLC	25.0				
TVFZ2550DLC	25.5	17.3	8.5		AQDEXVF1.5D24
TVFZ2600DLC	26.0				
TVFZ2650DLC	26.5				
TVFZ2700DLC	27.0				
TVFZ2750DLC	27.5				
TVFZ2800DLC	28.0	18.1	9.0		AQDEXVF1.5D25
TVFZ2850DLC	28.5				
TVFZ2900DLC	29.0				
TVFZ2950DLC	29.5				
TVFZ3000DLC	30.0				
TVFZ3050DLC	30.5	20.1	9.5		AQDEXVF1.5D26
TVFZ3100DLC	31.0				
TVFZ3150DLC	31.5				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0	20.9	10.0		AQDEXVF1.5D27
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0	22.1	10.0		AQDEXVF1.5D28
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0	23.0	10.0		AQDEXVF1.5D29
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0	23.0	10.0		AQDEXVF1.5D30
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0	23.0	10.0		AQDEXVF1.5D31
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0	23.0	10.0		AQDEXVF1.5D32
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				
TVFZ3200DLC	32.0				

※ 钻杆另售。

※ Holder is sold separately.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●凭借优良的切削平衡，可以对普通钢、不锈钢实现稳定的钻孔加工。

Superior balance provides consistent drilling of materials ranging from Low Carbon Steel to Stainless Steel.

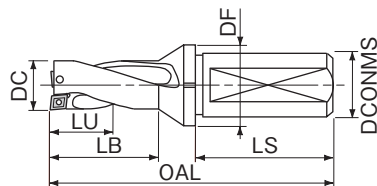

● 钻杆 Holder

LIST 9514


订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	有效长 LU	全长 OAL	颈长 LB	边缘径 DF	柄径 DCONMS	柄长 LS	半径方向 偏移量 (最大)	在庫 Stock	形状
NWDX130D2S20	13.0	26.0	88	29	28.0	20	44	0.35		
NWDX135D2S20	13.5	27.0	89	30				0.30		
NWDX140D2S20	14.0	28.0	90	31				0.25		
NWDX145D2S20	14.5	29.0	91	32				0.20		
NWDX150D2S20	15.0	30.0	92	33				0.15		
NWDX155D2S20	15.5	31.0	93	34				0.40		
NWDX160D2S20	16.0	32.0	94	35	32.0	25	56	0.35		
NWDX165D2S20	16.5	33.0	95	36				0.30		
NWDX170D2S20	17.0	34.0	96	37				0.25		
NWDX175D2S25	17.5	35.0	109	38				0.20		
NWDX180D2S25	18.0	36.0	110	39				0.20		
NWDX185D2S25	18.5	37.0	111	40				0.50		
NWDX190D2S25	19.0	38.0	112	41	33.0	25	56	0.45		
NWDX195D2S25	19.5	39.0	113	42				0.40		
NWDX200D2S25	20.0	40.0	114	43				0.30		
NWDX205D2S25	20.5	41.0	115	44				0.20		
NWDX210D2S25	21.0	42.0	116	45				0.15		
NWDX215D2S25	21.5	43.0	117	46				0.10		
NWDX220D2S25	22.0	44.0	118	47	37.0	32	60	0.05		
NWDX225D2S25	22.5	45.0	119	48				0.70		
NWDX230D2S25	23.0	46.0	123	49				0.60		
NWDX235D2S25	23.5	47.0	124	50				0.50		
NWDX240D2S25	24.0	48.0	125	51				0.45		
NWDX245D2S25	24.5	49.0	126	52				0.40		
NWDX250D2S25	25.0	50.0	127	53	41.0	32	60	0.45		
NWDX255D2S32	25.5	51.0	134	54				0.40		
NWDX260D2S32	26.0	52.0	135	55				0.35		
NWDX265D2S32	26.5	53.0	136	56				0.25		
NWDX270D2S32	27.0	54.0	137	57				0.20		
NWDX275D2S32	27.5	55.0	138	58				0.15		
NWDX280D2S32	28.0	56.0	139	59	50.0	40	70	0.10		
NWDX285D2S32	28.5	57.0	140	60				1.00		
NWDX290D2S32	29.0	58.0	143	62				0.95		
NWDX295D2S32	29.5	59.0	144	63				0.90		
NWDX300D2S40	30.0	60.0	158	64				0.80		
NWDX310D2S40	31.0	62.0	160	66	54.0	40	70	0.70		
NWDX320D2S40	32.0	64.0	162	68				0.55		
NWDX330D2S40	33.0	66.0	164	70				0.45		
NWDX340D2S40	34.0	68.0	166	72				0.35		
NWDX350D2S40	35.0	70.0	168	74				0.20		
NWDX360D2S40	36.0	72.0	170	76				1.00		
NWDX370D2S40	37.0	74.0	179	79	49.5	40	70	0.90		
NWDX380D2S40	38.0	76.0	181	81				0.80		
NWDX390D2S40	39.0	78.0	183	83				0.70		
NWDX400D2S40	40.0	80.0	185	85				0.60		
NWDX410D2S40	41.0	82.0	187	87				0.50		
NWDX420D2S40	42.0	84.0	189	89				0.40		
NWDX430D2S40	43.0	86.0	191	91				1.50		
NWDX440D2S40	44.0	88.0	193	93				1.40		
NWDX450D2S40	45.0	90.0	195	95				1.30		
NWDX460D2S40	46.0	92.0	197	97				1.20		
NWDX470D2S40	47.0	94.0	199	99				1.10		
NWDX480D2S40	48.0	96.0	201	101	—	40	70	1.00		
NWDX490D2S40	49.0	98.0	203	103				0.90		
NWDX500D2S40	50.0	100.0	205	105				0.80		
NWDX510D2S40	51.0	102.0	207	107				0.60		
NWDX520D2S40	52.0	104.0	209	109				0.50		
NWDX530D2S40	53.0	106.0	211	111	—	40	70	0.60		
NWDX540D2S40	54.0	108.0	213	113				0.60		
NWDX550D2S40	55.0	110.0	215	115				0.50		

●凭借优良的切削平衡，可以对普通钢、不锈钢实现稳定的钻孔加工。

Superior balance provides consistent drilling of materials ranging from Low Carbon Steel to Stainless Steel.

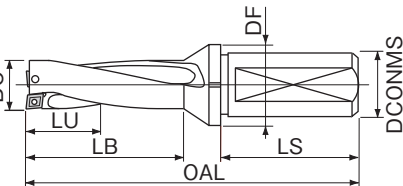

●钻杆 Holder

LIST 9514

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	有效长 LU	全长 OAL	颈长 LB	边缘径 DF	柄径 DCONMS	柄长 LS	半径方向 偏移量 (最大)	在庫 Stock	形状
NWDX130D3S20	13.0	39.0	101.0	42.0	28.0	20	44	0.35		
NWDX135D3S20	13.5	40.5	102.5	43.5				0.30		
NWDX140D3S20	14.0	42.0	104.0	45.0				0.25		
NWDX145D3S20	14.5	43.5	105.5	46.5				0.20		
NWDX150D3S20	15.0	45.0	107.0	48.0				0.15		
NWDX155D3S20	15.5	46.5	108.5	49.5				0.40		
NWDX160D3S20	16.0	48.0	110.0	51.0	32.0	25	56	0.35		
NWDX165D3S20	16.5	49.5	111.5	52.5				0.30		
NWDX170D3S20	17.0	51.0	113.0	54.0				0.25		
NWDX175D3S25	17.5	52.5	126.5	55.5				0.20		
NWDX180D3S25	18.0	54.0	128.0	57.0				0.50		
NWDX185D3S25	18.5	55.5	129.5	58.5				0.45		
NWDX190D3S25	19.0	57.0	131.0	60.0	33.0	25	56	0.40		
NWDX195D3S25	19.5	58.5	132.5	61.5				0.30		
NWDX200D3S25	20.0	60.0	134.0	63.0				0.20		
NWDX205D3S25	20.5	61.5	135.5	64.5				0.15		
NWDX210D3S25	21.0	63.0	137.0	66.0				0.10		
NWDX215D3S25	21.5	64.5	138.5	67.5				0.05		
NWDX220D3S25	22.0	66.0	140.0	69.0	37.0	32	60	0.70		
NWDX225D3S25	22.5	67.5	141.5	70.5				0.60		
NWDX230D3S25	23.0	69.0	146.0	72.0				0.50		
NWDX235D3S25	23.5	70.5	147.5	73.5				0.45		
NWDX240D3S25	24.0	72.0	149.0	75.0				0.40		
NWDX245D3S25	24.5	73.5	150.5	76.5				0.35		
NWDX250D3S25	25.0	75.0	152.0	78.0	41.0	32	60	0.25		
NWDX255D3S32	25.5	76.5	159.5	79.5				0.20		
NWDX260D3S32	26.0	78.0	161.0	81.0				0.15		
NWDX265D3S32	26.5	79.5	162.5	82.5				0.10		
NWDX270D3S32	27.0	81.0	164.0	84.0				0.05		
NWDX275D3S32	27.5	82.5	165.5	85.5				0.90		
NWDX280D3S32	28.0	84.0	167.0	87.0	50.0	40	70	1.00		
NWDX285D3S32	28.5	85.5	168.5	88.5				0.95		
NWDX290D3S32	29.0	87.0	172.0	91.0				0.80		
NWDX295D3S32	29.5	88.5	173.5	92.5				0.70		
NWDX300D3S40	30.0	90.0	188.0	94.0				0.55		
NWDX310D3S40	31.0	93.0	191.0	97.0	54.0	40	70	0.45		
NWDX320D3S40	32.0	96.0	194.0	100.0				0.35		
NWDX330D3S40	33.0	99.0	197.0	103.0				0.20		
NWDX340D3S40	34.0	102.0	200.0	106.0				1.00		
NWDX350D3S40	35.0	105.0	203.0	109.0				0.90		
NWDX360D3S40	36.0	108.0	206.0	112.0				0.80		
NWDX370D3S40	37.0	111.0	216.0	116.0	49.5	40	70	0.70		
NWDX380D3S40	38.0	114.0	219.0	119.0				0.60		
NWDX390D3S40	39.0	117.0	222.0	122.0				0.50		
NWDX400D3S40	40.0	120.0	225.0	125.0				0.40		
NWDX410D3S40	41.0	123.0	228.0	128.0				1.50		
NWDX420D3S40	42.0	126.0	231.0	131.0				1.40		
NWDX430D3S40	43.0	129.0	234.0	134.0				1.30		
NWDX440D3S40	44.0	132.0	237.0	137.0				1.20		
NWDX450D3S40	45.0	135.0	240.0	140.0				1.10		
NWDX460D3S40	46.0	138.0	243.0	143.0				1.00		
NWDX470D3S40	47.0	141.0	246.0	146.0				0.90		
NWDX480D3S40	48.0	144.0	249.0	149.0	—	—	—	0.80		
NWDX490D3S40	49.0	147.0	252.0	152.0				0.60		
NWDX500D3S40	50.0	150.0	255.0	155.0				0.50		
NWDX510D3S40	51.0	153.0	258.0	158.0				0.40		
NWDX520D3S40	52.0	156.0	261.0	161.0				0.30		
NWDX530D3S40	53.0	159.0	264.0	164.0	—	—	—	0.20		
NWDX540D3S40	54.0	162.0	267.0	167.0				0.10		
NWDX550D3S40	55.0	165.0	270.0	170.0				0.05		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●凭借优良的切削平衡，可以对普通钢、不锈钢实现稳定的钻孔加工。

Superior balance provides consistent drilling of materials ranging from Low Carbon Steel to Stainless Steel.

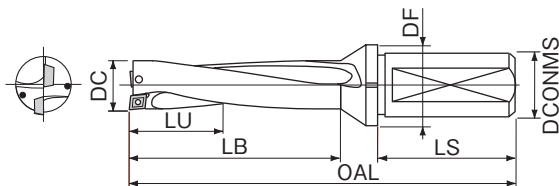

●钻头 Holder

LIST 9514

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	有效长 LU	全长 OAL	颈长 LB	边缘径 DF	柄径 DCONMS	柄长 LS	半径方向 偏移量 (最大)	在庫 Stock	形状				
NWDX130D4S20	13.0	52.0	114	55	28.0	20	44	0.35						
NWDX135D4S20	13.5	54.0	116	57				0.30						
NWDX140D4S20	14.0	56.0	118	59				0.25						
NWDX145D4S20	14.5	58.0	120	61				0.20						
NWDX150D4S20	15.0	60.0	122	63				0.15						
NWDX155D4S20	15.5	62.0	124	65				0.40						
NWDX160D4S20	16.0	64.0	126	67				0.35						
NWDX165D4S20	16.5	66.0	128	69				0.30						
NWDX170D4S20	17.0	68.0	130	71				0.25						
NWDX175D4S25	17.5	70.0	144	73	32.0	25	56	0.25						
NWDX180D4S25	18.0	72.0	146	75				0.20						
NWDX185D4S25	18.5	74.0	148	77				0.50						
NWDX190D4S25	19.0	76.0	150	79				0.45						
NWDX195D4S25	19.5	78.0	152	81	0.40									
NWDX200D4S25	20.0	80.0	154	83	0.30									
NWDX205D4S25	20.5	82.0	156	85	0.20									
NWDX210D4S25	21.0	84.0	158	87	0.15									
NWDX215D4S25	21.5	86.0	160	89	0.10									
NWDX220D4S25	22.0	88.0	162	91	0.10									
NWDX225D4S25	22.5	90.0	164	93	0.05									
NWDX230D4S25	23.0	92.0	169	95	37.0			32			60	0.70		
NWDX235D4S25	23.5	94.0	171	97		0.60								
NWDX240D4S25	24.0	96.0	173	99		0.50								
NWDX245D4S25	24.5	98.0	175	101		0.45								
NWDX250D4S25	25.0	100.0	177	103	41.0	40	70		0.40					
NWDX255D4S32	25.5	102.0	185	105					0.35					
NWDX260D4S32	26.0	104.0	187	107					0.25					
NWDX265D4S32	26.5	106.0	189	109					0.20					
NWDX270D4S32	27.0	108.0	191	111					0.15					
NWDX275D4S32	27.5	110.0	193	113					0.10					
NWDX280D4S32	28.0	112.0	195	115					1.00					
NWDX285D4S32	28.5	114.0	197	117					0.95					
NWDX290D4S32	29.0	116.0	201	120				0.90						
NWDX295D4S32	29.5	118.0	203	122	0.80									
NWDX300D4S40	30.0	120.0	218	124	54.0			49.5	70		0.70			
NWDX310D4S40	31.0	124.0	222	128							0.55			
NWDX320D4S40	32.0	128.0	226	132							0.45			
NWDX330D4S40	33.0	132.0	230	136		0.35								
NWDX340D4S40	34.0	136.0	234	140		0.20								
NWDX350D4S40	35.0	140.0	238	144		1.00								
NWDX360D4S40	36.0	144.0	242	148		0.90								
NWDX370D4S40	37.0	148.0	253	153		0.80								
NWDX380D4S40	38.0	152.0	257	157		0.70								
NWDX390D4S40	39.0	156.0	261	161	0.60									
NWDX400D4S40	40.0	160.0	265	165	49.5	40	70			0.50				
NWDX410D4S40	41.0	164.0	269	169						0.40				
NWDX420D4S40	42.0	168.0	273	173						1.50				
NWDX430D4S40	43.0	172.0	277	177						1.40				
NWDX440D4S40	44.0	176.0	281	181						1.30				
NWDX450D4S40	45.0	180.0	285	185						1.20				
NWDX460D4S40	46.0	184.0	289	189						1.10				
NWDX470D4S40	47.0	188.0	293	193						1.00				
NWDX480D4S40	48.0	192.0	297	197						0.90				
NWDX490D4S40	49.0	196.0	301	201						0.80				
NWDX500D4S40	50.0	200.0	305	205						0.60				
NWDX510D4S40	51.0	204.0	309	209						0.50				
NWDX520D4S40	52.0	208.0	313	213	—					40		70	0.40	
NWDX530D4S40	53.0	212.0	317	217									0.30	
NWDX540D4S40	54.0	216.0	321	221									0.20	
NWDX550D4S40	55.0	220.0	325	225									0.10	
NWDX560D4S40	56.0	224.0	329	229				0.05						



●刀片 Inserts LIST 9514

订货方式 刀片型号 材料

■NWDX钻头用刀片型号的代号名称 NWDXT 06 30 06 -G NCP300

切削刃长度 (6.0) 厚度×10 (3.0) 断屑槽 材料
圆弧半径R×10 (0.6)

■采用4个刃尖的刀片经济实惠

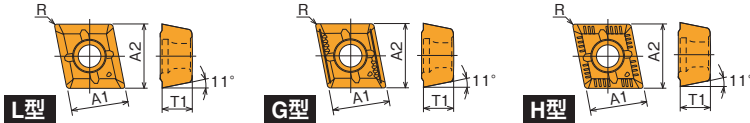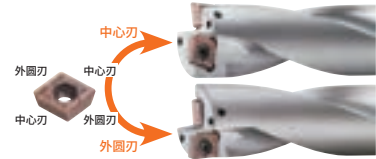

单位 (Unit) : mm

钻杆 直径范围 DC (mm)	刀片型号	材料		尺寸				螺丝 Screw	螺丝扳手 Wrench	推荐 紧固力矩 (N·m)
		NCP300	NCK300	A ₁	A ₂	T ₁	R		TRX TRD	
13.0 15.0	NWDXT042004-L	●	●	4.2	4.6	2.0	0.4	BFTX01604N	TRX06	0.5
	NWDXT042004-G	●	●							
	NWDXT042004-H	●	●							
15.5 18.0	NWDXT052504-L	●	●	5.0	5.5	2.5	0.4	BFTX0204N	TRD07	1.0
	NWDXT052504-G	●	●							
	NWDXT052504-H	●	●							
18.5 22.5	NWDXT063006-L	●	●	6.0	6.6	3.0	0.6	BFTY02206	TRD08	1.5
	NWDXT063006-G	●	●							
	NWDXT063006-H	●	●							
23.0 28.5	NWDXT073506-L	●	●	7.5	8.3	3.5	0.6	BFTX02506N	TRD15	3.5
	NWDXT073506-G	●	●							
	NWDXT073506-H	●	●							
29.0 36.0	NWDXT094008-L	●	●	9.6	10.6	4.0	0.8	BFTX03584	TRD20	5.0
	NWDXT094008-G	●	●							
	NWDXT094008-H	●	●							
37.0 45.0	NWDXT125012-L	●	●	12.4	12.6	5.0	1.2	BFTX0511N	TRD25	5.0
	NWDXT125012-G	●	●							
	NWDXT125012-H	●	●							
46.0 55.0	NWDXT156012-L	●	●	15.2	16.7	6.0	1.2	BFTX0615N	TRD25	5.0
	NWDXT156012-G	●	●							
	NWDXT156012-H	●	●							

■刀片特长

刀片材料

材料	NCP300	NCK300
被削材		
钢一般加工用	○	
钢高速加工用		○
不锈钢	○	
铸铁		○

断屑槽的型号

型	L型	G型	H型
	低速进给、切屑处理用	泛用	刀尖强化型
外观			
断面形状			
前刀角	大 小		
断屑槽宽度	窄 宽		

■刀片选定指南

普通钢、合金钢、不锈钢



低硬度的加工
·SS400, SCM415, SCM420等, 推荐高速进给。
·切屑烧结导致产生振动时, 降低进给。
不锈钢
·由于设备原因, 无法提升切削速度和进给, 难以进行切屑处理时



断续加工
·进行倾斜切入等断续加工时, 降低断续部(入口、贯通)的进给。(f0.05左右)
高硬度钢(热处理)的加工
·刀头强度不足时



普通钢、合金钢的加工中, 后面磨耗明显时
进给条件低时

铸铁



断续加工
·进行倾斜切入等断续加工时, 降低断续部(入口、贯通)的进给。(f0.05左右)
·因为高速进给加工导致刀头强度不足时

NWDX2D/3D/4D

AQUA 钻头 NWDX 型 2D/3D/4D

AQUA Drills NWDX 2D/3D/4D

NWDX推荐切削条件

NWDX2D

被削材		工件 硬度 HB	推荐 断屑槽	推荐 刀片种类	切削速度 (Vc) m/min	进给速度 (f) mm/rev <下限值—标准值—上限值>			
						φ13.0~φ18.0	φ18.5~φ29.0	φ29.5~φ36.0	φ37.0~φ55.0
钢、碳钢	SS400	125	G型	NCP300	100-150-200	0.05-0.08-0.10	0.05-0.08-0.10	0.05-0.08-0.11	0.05-0.08-0.12
	S15C	125	L型	NCP300	130-170-220	0.04-0.08-0.12	0.04-0.08-0.12	0.04-0.08-0.13	0.05-0.10-0.15
	S45C	190	G型	NCP300	100-150-200	0.08-0.13-0.24	0.08-0.13-0.24	0.08-0.14-0.26	0.09-0.16-0.29
	S75C	250	G型	NCP300	80-120-160	0.06-0.11-0.18	0.06-0.11-0.18	0.06-0.12-0.19	0.07-0.13-0.22
		270	G型	NCP300	100-130-160	0.08-0.13-0.22	0.08-0.13-0.22	0.08-0.14-0.23	0.09-0.16-0.26
低合金钢	SCM,SNM	300	G型	NCP300	70-100-140	0.06-0.11-0.17	0.06-0.11-0.17	0.06-0.12-0.18	0.07-0.13-0.20
		180	L型	NCP300	100-140-180	0.05-0.08-0.14	0.05-0.08-0.14	0.05-0.08-0.16	0.06-0.09-0.17
		275	G型	NCP300	80-120-160	0.06-0.11-0.17	0.06-0.11-0.17	0.06-0.12-0.18	0.07-0.13-0.20
		300	G型	NCP300	75-110-140	0.06-0.11-0.17	0.06-0.11-0.17	0.06-0.12-0.18	0.07-0.13-0.20
		350	G型	NCP300	60-85-110	0.06-0.11-0.17	0.06-0.11-0.17	0.06-0.12-0.18	0.07-0.13-0.20
高合金钢	SKD,SKT,SKH	200	G型	NCP300	100-130-160	0.08-0.13-0.24	0.08-0.13-0.24	0.08-0.14-0.26	0.09-0.16-0.29
		325	G型	NCP300	80-100-120	0.06-0.11-0.18	0.06-0.11-0.18	0.06-0.12-0.19	0.07-0.13-0.22
不锈钢	SUS403 其他	200	G型	NCP300	100-140-180	0.06-0.11-0.18	0.06-0.11-0.18	0.06-0.12-0.19	0.07-0.13-0.22
		240	G型	NCP300	90-120-150	0.06-0.11-0.18	0.06-0.11-0.18	0.06-0.12-0.19	0.07-0.13-0.22
	SUS304,SUS316	180	G型	NCP300	100-140-180	0.06-0.11-0.18	0.06-0.11-0.18	0.06-0.12-0.19	0.07-0.13-0.22
铸铁			H型	NCK300	120-160-200	0.09-0.20-0.32	0.10-0.22-0.36	0.11-0.24-0.39	0.12-0.26-0.44
球墨铸铁			H型	NCK300	90-120-150	0.09-0.20-0.32	0.10-0.22-0.36	0.11-0.24-0.39	0.12-0.26-0.44
难削材 (耐热合金、超合金、钛合金 etc.)		200	G型	NCP300	25-50-70	0.06-0.11-0.18	0.06-0.11-0.18	0.06-0.12-0.19	0.07-0.13-0.22



NWDX3D

被削材		工件 硬度 HB	推荐 断屑槽	推荐 刀片种类	切削速度 (Vc) m/min	进给速度 (f) mm/rev <下限值—标准值—上限值>			
						φ13.0~φ18.0	φ18.5~φ29.0	φ29.5~φ36.0	φ37.0~φ55.0
钢、碳钢	SS400	125	G型	NCP300	100-150-200	0.05-0.07-0.10	0.05-0.07-0.10	0.05-0.08-0.11	0.05-0.08-0.12
	S15C	125	L型	NCP300	130-170-220	0.04-0.07-0.10	0.04-0.07-0.10	0.04-0.08-0.11	0.05-0.09-0.12
	S45C	190	G型	NCP300	100-150-200	0.08-0.12-0.20	0.08-0.12-0.20	0.08-0.13-0.22	0.09-0.14-0.24
	S75C	250	G型	NCP300	80-120-160	0.06-0.10-0.15	0.06-0.10-0.15	0.06-0.11-0.16	0.07-0.12-0.18
		270	G型	NCP300	100-130-160	0.08-0.12-0.18	0.08-0.12-0.18	0.08-0.13-0.19	0.09-0.14-0.22
低合金钢	SCM,SNM	300	G型	NCP300	70-100-140	0.06-0.10-0.14	0.06-0.10-0.14	0.06-0.11-0.15	0.07-0.12-0.17
		180	L型	NCP300	100-140-180	0.05-0.07-0.12	0.05-0.07-0.12	0.05-0.08-0.13	0.06-0.08-0.15
		275	G型	NCP300	80-120-160	0.06-0.10-0.14	0.06-0.10-0.14	0.06-0.11-0.15	0.07-0.12-0.17
		300	G型	NCP300	75-110-140	0.06-0.10-0.14	0.06-0.10-0.14	0.06-0.11-0.15	0.07-0.12-0.17
		350	G型	NCP300	60-85-110	0.06-0.10-0.14	0.06-0.10-0.14	0.06-0.11-0.15	0.07-0.12-0.17
高合金钢	SKD,SKT,SKH	200	G型	NCP300	100-130-160	0.08-0.12-0.20	0.08-0.12-0.20	0.08-0.13-0.22	0.09-0.14-0.24
		325	G型	NCP300	80-100-120	0.06-0.10-0.15	0.06-0.10-0.15	0.06-0.11-0.16	0.07-0.12-0.18
不锈钢	SUS403 其他	200	G型	NCP300	100-140-180	0.06-0.10-0.15	0.06-0.10-0.15	0.06-0.11-0.16	0.07-0.12-0.18
		240	G型	NCP300	90-120-150	0.06-0.10-0.15	0.06-0.10-0.15	0.06-0.11-0.16	0.07-0.12-0.18
	SUS304,SUS316	180	G型	NCP300	100-140-180	0.06-0.10-0.15	0.06-0.10-0.15	0.06-0.11-0.16	0.07-0.12-0.18
铸铁			H型	NCK300	120-160-200	0.09-0.18-0.27	0.10-0.20-0.30	0.11-0.22-0.32	0.12-0.24-0.36
球墨铸铁			H型	NCK300	90-120-150	0.09-0.18-0.27	0.10-0.20-0.30	0.11-0.22-0.32	0.12-0.24-0.36
难削材 (耐热合金、超合金、钛合金 etc.)		200	G型	NCP300	25-50-70	0.06-0.10-0.15	0.06-0.10-0.15	0.06-0.11-0.16	0.07-0.12-0.18

NWDX4D

被削材		工件 硬度 HB	推荐 断屑槽	推荐 刀片种类	切削速度 (Vc) m/min	进给速度 (f) mm/rev <下限值—标准值—上限值>			
						φ13.0~φ18.0	φ18.5~φ29.0	φ29.5~φ36.0	φ37.0~φ55.0
钢、碳钢	SS400	125	G型	NCP300	100-150-200	0.05-0.07-0.10	0.05-0.07-0.10	0.05-0.07-0.10	0.05-0.08-0.10
	S15C	125	L型	NCP300	130-170-220	0.04-0.07-0.09	0.04-0.07-0.09	0.04-0.07-0.09	0.05-0.08-0.10
	S45C	190	G型	NCP300	100-150-200	0.08-0.11-0.17	0.08-0.11-0.17	0.08-0.12-0.18	0.09-0.14-0.21
	S75C	250	G型	NCP300	80-120-160	0.06-0.10-0.13	0.06-0.10-0.13	0.06-0.10-0.14	0.07-0.11-0.15
		270	G型	NCP300	100-130-160	0.08-0.11-0.15	0.08-0.11-0.15	0.08-0.12-0.17	0.09-0.14-0.19
低合金钢	SCM,SNM	300	G型	NCP300	70-100-140	0.06-0.10-0.12	0.06-0.10-0.12	0.06-0.10-0.13	0.07-0.11-0.14
		180	L型	NCP300	100-140-180	0.05-0.07-0.10	0.05-0.07-0.10	0.05-0.07-0.11	0.06-0.08-0.12
		275	G型	NCP300	80-120-160	0.06-0.10-0.12	0.06-0.10-0.12	0.06-0.10-0.13	0.07-0.11-0.14
		300	G型	NCP300	75-110-140	0.06-0.10-0.12	0.06-0.10-0.12	0.06-0.10-0.13	0.07-0.11-0.14
		350	G型	NCP300	60-85-110	0.06-0.10-0.12	0.06-0.10-0.12	0.06-0.10-0.13	0.07-0.11-0.14
高合金钢	SKD,SKT,SKH	200	G型	NCP300	100-130-160	0.08-0.11-0.17	0.08-0.11-0.17	0.08-0.12-0.18	0.09-0.14-0.21
		325	G型	NCP300	80-100-120	0.06-0.10-0.13	0.06-0.10-0.13	0.06-0.10-0.14	0.07-0.11-0.15
不锈钢	SUS403 其他	200	G型	NCP300	100-140-180	0.06-0.10-0.13	0.06-0.10-0.13	0.06-0.10-0.14	0.07-0.11-0.15
		240	G型	NCP300	90-120-150	0.06-0.10-0.13	0.06-0.10-0.13	0.06-0.10-0.14	0.07-0.11-0.15
	SUS304,SUS316	180	G型	NCP300	100-140-180	0.06-0.10-0.13	0.06-0.10-0.13	0.06-0.10-0.14	0.07-0.11-0.15
铸铁			H型	NCK300	120-160-200	0.09-0.17-0.23	0.10-0.19-0.26	0.11-0.21-0.28	0.12-0.23-0.31
球墨铸铁			H型	NCK300	90-120-150	0.09-0.17-0.23	0.10-0.19-0.26	0.11-0.21-0.28	0.12-0.23-0.31
难削材 (耐热合金、超合金、钛合金 etc.)		200	G型	NCP300	25-50-70	0.06-0.10-0.13	0.06-0.10-0.13	0.06-0.10-0.14	0.07-0.11-0.15

加工用途

	切入方向倾斜时	半孔	有底孔时	交叉孔	镗孔	外径加工	重叠板材	背镗
加工用途								
进给量 mm/rev	0.05	0.05	0.08	0.05	0.1	0.1	不适用	不适用

请采用内部冷却方式。受钻头直径、切削条件影响，切削动力、轴向力会增大。请使用带一定刚性的机械、钻杆。
使用注意事项等请参照 I-23。

旧款刀片零部件

AQWDS-3 AQUA 钻头 WAVY 型 (3D) AQUA Drills WAVY (3D)

AQWDS-5 AQUA 钻头 WAVY 型 (5D) AQUA Drills WAVY (5D)

●刀片 Inserts

LIST 9512

订货方式 刀片型号 材料

单位 (Unit) : mm

Fig. 1						Fig. 2							
刀片型号 Code	材料 Material		尺寸 Dimension(mm)			形状 Figure	库存 Stock	适用钻杆直径 Applicable Holder					
	钢用	铸铁用	ℓ	厚度 Thickness	圆弧半径 Corner Radius								
LPMX06T206S04N	AQ350	AQ310	6.00	2.80	0.6	Fig.1	●	14.0 ~ 15.0					
LPMX07T208S04N	AQ350	AQ310	6.75		0.8			15.5 ~ 17.0					
LPMX080308S04N	AQ350	AQ310	7.60	3.20				17.5 ~ 20.0					
LPMX090308S04N	AQ350	AQ310	8.80					20.5 ~ 23.5					
XPMX11T308S04N	AQ350	AQ310	11.10	3.97	0.8	Fig.2		24.0 ~ 27.0					
XPMX13T308S04N	AQ350	AQ310	13.00					28.0 ~ 32.0					
XPMX150408S04N	AQ350	AQ310	15.00	4.76				33.0 ~ 37.0					
XPMX170412S04N	AQ350	AQ310	17.00					38.0 ~ 43.0					
XPMX200412S04N	AQ350	AQ310	19.50	1.2	44.0 ~ 50.0								

●配件 Parts

订货方式 商品编码

商品编码 Code	螺丝 Screw	螺丝扳手 Wrench	螺丝扳手 Wrench	库存 Stock	适用钻杆直径 Diameter of applicable holder
					
BFTY02205		TRD07	—	●	14.0 ~ 15.0
BFTY02206		TRD07	—	●	15.5 ~ 17.0
BFTX02506N		TRD08	—	●	17.5 ~ 20.0
BFTX02508		TRD08	—	●	20.5 ~ 27.0
BFTX0309N	—	—	TRX10	●	28.0 ~ 32.0
BFTX03584	—	—	TRX15	●	33.0 ~ 37.0
BFTX0409N	—	—	TRX15	●	38.0 ~ 43.0
BFTX0511N	—	—	TRX20	●	44.0 ~ 50.0

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXS | AQUA EX 短刃钻 AQUA Drills EX Stub

泛用条件 Conventional Condition

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	12700	600	10500	480	5600	230	4000	140	9500	450	4800	140
3.0	8500	660	7000	540	3700	260	2650	160	6400	500	3200	150
5.0	5100	660	4100	540	2200	260	1600	160	3800	500	1900	150
8.0	3200	660	2600	540	1400	260	1000	160	2400	500	1200	150
10.0	2550	630	2100	510	1100	250	800	150	1900	470	950	140
12.0	2100	600	1700	480	950	230	650	140	1600	440	800	130
16.0	1600	550	1300	440	700	210	500	130	1200	410	600	120

高速条件 High-Speed Condition

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	19100	900	15900	750	8000	330	6400	230	14000	670
3.0	12700	1000	10500	830	5300	370	4250	260	9500	750
5.0	7600	1000	6400	830	3200	370	2550	260	5700	750
8.0	4800	1000	4000	830	2000	370	1600	260	3600	750
10.0	3800	940	3200	790	1600	350	1250	240	2900	710
12.0	3200	890	2650	750	1300	330	1050	230	2400	670
16.0	2400	820	2000	690	1000	300	800	210	1800	620

A-12 尺寸表 Stocked Sized

AQDEXSL | AQUA EX 中长刃钻 AQUA Drills EX Semi-long

请参照以下内容。

AQDEXS/AQDEXR/AQDEXSL

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 湿式加工是指使用水溶性切削油剂时的加工。
- 3) 使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
- 4) 非水溶性切削油剂请勿用于高速条件。
- 5) 不适用于铝合金、轻金属及不锈钢的加工。
- 6) 加工不锈钢时，如孔深超过 2DC，请按每 0.5DC 进行分级加工。
- 7) 采用干式加工时，为进行冷却及去除切屑，请采取气冷措施。
- 8) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险，因此请采取防火对策。
- 9) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 10) 开孔深度超过 3DC 时，请将转数及进给速度降低 20%。
- 11) AQDEXSL 请在 AQDEXS 的泛用条件的基础上，将转数降低 25%，进给速度降低 45%。
- 12) 开孔深度超过 3DC 时，请采用分级加工方式。
- 13) 分级进给时请返回到孔的上面。
- 14) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径或 AQDEXSL 时，为 0.2 ~ 0.5DC 左右。
- 15) 夹紧时，请将钻头的振动控制在 0.02mm 以下，高速切削时控制在 0.01mm 以下。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) Wet condition are for drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Do not use the high speed drilling in wet condition in using non-water soluble cutting fluid.
- 5) Drilling Aluminum Alloy, Light Metal, Stainless Steel are not recommended.
- 6) Drilling the step feed in Stainless Steel when hole depth more than 2 × DC deep, step feed interval is about 0.5 × DC.
- 7) Use air blow for cooling and the chip exclusion in dry process.
- 8) By sparks during cutting, or heat by breakage, or hot chip, there is danger of fire. Take fire prevention measures.
- 9) Use the table values for drilling depth under 3 × DC.
- 10) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 11) AQDEXSL reduce the rotation to 75% and feed to 55% for table values of AQDEXS conventional condition.
- 12) When for hole depth more than 3 × DC deep, add step feeding.
- 13) In step feed, return to the entrance hole.
- 14) Step feed interval is about 0.5 ~ 1 × DC. In small diameter and AQDEXSL, about 0.2 ~ 0.5 × DC.
- 15) Adjust the drill run out to 0.02mm or less, in high speed drilling, adjust the drill run out to 0.01mm or less.

A-16 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXR | AQUA EX 标准刃钻 AQUA Drills EX Regular

泛用条件 Conventional Condition

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	12700	530	10500	430	5600	200	4000	130	9500	400	4800	130
3.0	8500	590	7000	480	3700	220	2650	140	6400	440	3200	140
5.0	5100	590	4100	480	2200	220	1600	140	3800	440	1900	140
8.0	3200	590	2600	480	1400	220	1000	140	2400	440	1200	140
10.0	2550	560	2100	460	1100	210	800	140	1900	420	950	130
12.0	2100	530	1700	430	950	200	650	130	1600	400	800	120
16.0	1600	490	1300	390	700	180	500	120	1200	370	600	110

高速条件 High-Speed Condition

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	19100	790	15900	660	8000	290	6400	210	14000	590
3.0	12700	880	10500	730	5300	320	4250	230	9500	660
5.0	7600	880	6400	730	3200	320	2550	230	5700	660
8.0	4800	880	4000	730	2000	320	1600	230	3600	660
10.0	3800	840	3200	700	1600	300	1250	220	2900	630
12.0	3200	790	2650	660	1300	280	1050	210	2400	600
16.0	2400	730	2000	610	1000	260	800	190	1800	550

A-14 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

AQDEXE | AQUA EX 长刃钻 AQUA Drills EX Extension

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD51 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	12700	450	10500	350	4200	150	3000	90	9500	330	4800	100
3.0	8500	480	7000	400	2800	170	2000	110	6400	370	3200	110
5.0	5100	480	4100	400	1650	170	1200	110	3800	370	1900	110
8.0	3200	480	2600	400	1050	170	750	110	2400	370	1200	110
10.0	2550	460	2100	370	820	160	600	100	1900	350	950	100
12.0	2100	440	1700	350	700	150	480	90	1600	320	800	90
16.0	1600	400	1300	320	520	140	370	85	1200	300	600	85

AQDEXE

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 湿式加工是指使用水溶性切削油剂时的加工。
- 3) 使用非水溶性切削油剂时, 请将转数和进给速度降低 20%。
- 4) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 5) 加工不锈钢时, 如孔深超过 2DC, 请按每 0.5DC 进行分级加工。
- 6) 分级进给时请返回到孔的上部。
- 7) 请将分级量的大致标准设定为 0.5 ~ 1DC。
- 8) 夹紧时, 请将钻头的振动控制在 0.02mm 以下。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) Wet condition are for drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Use the table values for drilling depth under 3 × DC.
- 5) Drilling the step feed in Stainless Steel when hole depth more than 2 × DC deep, step feed interval is about 0.5 × DC.
- 6) In step feed, return to the entrance hole.
- 7) Step feed interval is about 0.5 ~ 1 × DC.
- 8) Adjust the drill run out to 0.02mm or less.

A-18 ◀ ▶ 尺寸表 Stocked Sized

切削工具

套装商品
其它

精密工具

技术资料
索引

PF2D | AQUA EX 飞速钻 2D AQUA Drills EX Power Feed 2D

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~200HB		20~30HRC		30~40HRC		40~50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1.0	25500	660~1540	21000	520~1140	11000	220~460	8000	140~280	19000	500~1170
1.5	17000		13900		7400		5300		12700	
2.0	12700		10500		5600		4000		9500	
3.0	8500		7000		3700		2650		6400	
5.0	5100		4200		2200		1600		3800	
8.0	3200		2600		1400		1000		2400	
10.0	2550	600~1360	2100	480~1040	1100	210~440	800	130~270	1900	470~1070
12.0	2100		1750		930		660		1600	
16.0	1600		1300		700		500		1200	

A-20 尺寸表 Stocked Sized

有关切削条件的注意事项

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本条件为使用水溶性切削油剂时的条件。使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 3) 不适用于铝合金、轻金属及不锈钢的加工。
- 4) 采用干式加工时，为进行冷却及去除切屑，请采取气冷措施。
- 5) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险，因此请采取防火对策。
- 6) 本切削条件表的 PF2D 适用于开孔深度在 2DC 以下的加工。但是，依被削材及加工条件，切屑的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将寸动量的大致标准设定为 0.2DC ~ 1.0DC。
- 9) 夹紧时，请将钻头的振动控制在 0.02mm 以下，高速切削时控制在 0.01mm 以下。
- 10) 钻头刀头再研磨极限量的大致标准为不超过 1DC。若超过 1DC，可能导致切屑排出性变差。
- 11) 需要再研磨钻头时，请委托本公司。在不同形状的再研磨中，性能可能无法得到发挥。

Cutting condition of the note

- 1) Please adjust the cutting condition according to the mechanical rigidity and the workpiece holder and the shape of the machining place.
- 2) For drilling with water soluble cutting fluid. In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 3) Less suitable for processing Aluminum, light metal, Stainless Steel.
- 4) Use air blow for cooling and the chip exclusion in dry process.
- 5) By sparks during cutting, or heat by breakage, or hot chip, there is danger of fire. Take fire prevention measures.
- 6) This cutting condition table, "PF2D" is only applicable to 2 × DC of hole depth. In addition, according to the workpiece material and processing condition, there is a possibility that the performance of discharging chip may be deteriorated. When such a situation, even within the scope of machining hole depth, please use the step-feed machining.
- 7) Retraction of the step feed is to be returned to the top of the hole.
- 8) Step feed is recommended to 0.2 ~ 1.0 × DC.
- 9) Please use the fixture to control the amplitude of the drill bit below 0.02mm, high-speed cutting control amplitude of the drill bit 0.01mm or less.
- 10) The re-grinding amount of the tip of the drill bit is recommended to be 1 × DC. If more than 1 × DC, the performance of chip discharge may be worse.
- 11) Please contact us about re-grinding the drill bit. Depending on the shape, the properties may be different after regrinding.

切削条件的计算公式

$$\text{切削速度}(V_c) = \frac{\text{工具直径}(DC) \times \text{圆周率}(\pi) \times \text{转速}(n)}{1,000} \quad (\text{m/min})$$

$$\text{进给量}(f) = \frac{\text{进给速度}(V_f)}{\text{转速}(n)} \quad (\text{mm/rev})$$

$$\text{进给率} = \frac{\text{进给量}(f)}{\text{工具直径}(DC)} \quad (\%)$$

■例 被削材：碳钢 S50C 转速：5100min⁻¹
PF4D 工具直径：φ5 进给速度：590mm/min

$$\text{切削速度}(V_c) = \frac{5.0 \times \pi \times 5100}{1000} = 80\text{m/min}$$

$$\text{进给量}(f) = \frac{590}{5100} = 0.116\text{mm/rev}$$

$$\text{进给率} = \frac{0.116}{5} = 2.3\%$$

Cutting condition of the calculator

$$\text{Cutting speed}(V_c) = \frac{\text{Tool diameter} \times \pi \times \text{Rotation}}{1,000} \quad (\text{m/min})$$

$$\text{Feed amount}(f) = \frac{\text{Feed speed}}{\text{Rotation}} \quad (\text{mm/rev})$$

$$\text{Feed rate} = \frac{\text{Feed amount}}{\text{Tool diameter}} \quad (\%)$$

■Example Workpiece material:S50C Rotation:5100min⁻¹
PF4D Diameter: φ 5mm Feed:590mm/min

$$\text{Cutting speed}(V_c) = \frac{5.0 \times \pi \times 5100}{1000} = 80\text{m/min}$$

$$\text{Feed amount}(f) = \frac{590}{5100} = 0.116\text{mm/rev}$$

$$\text{Feed rate} = \frac{0.116}{5} = 2.3\%$$

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

PF4D | AQUA EX 飞速钻 4D AQUA Drills EX Power Feed 4D

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1.0	25500	590 ~ 1270	21000	460 ~ 930	11000	200 ~ 400	8000	115 ~ 230	19000	440 ~ 950
1.5	17000		13900		7400		5300		12700	
2.0	12700		10500		5600		4000		9500	
3.0	8500		7000		3700		2650		6400	
5.0	5100		4200		2200		1600		3800	
8.0	3200		2600		1400		1000		2400	
10.0	2550	560 ~ 1170	2100	440 ~ 900	1100	170 ~ 340	800	110 ~ 220	1900	370 ~ 780
12.0	2100		1750		930		660		1600	
16.0	1600		1300		700		500		1200	

有关切削条件的注意事项

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本条件为使用水溶性切削油剂时的条件。使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 3) 不适用于铝合金、轻金属及不锈钢的加工。
- 4) 采用干式加工时, 为进行冷却及去除切屑, 请采取气冷措施。
- 5) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险, 因此请采取防火对策。
- 6) 本切削条件表的 PF4D 适用于开孔深度在 4DC 以下的加工。但是, 依被削材及加工条件, 切屑的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将寸动量的大致标准设定为 0.2DC ~ 1.0DC。
- 9) 夹紧时, 请将钻头的振动控制在 0.02mm 以下, 高速切削时控制在 0.01mm 以下。
- 10) 钻头刀头再研磨极限量的大致标准为不超过 1DC。若超过 1DC, 可能导致切屑排出性变差。
- 11) 需要再研磨钻头时, 请委托本公司。在不同形状的再研磨中, 性能可能无法得到发挥。

Cutting condition of the note

- 1) Please adjust the cutting condition according to the mechanical rigidity and the workpiece holder and the shape of the machining place.
- 2) For drilling with water soluble cutting fluid. In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 3) Less suitable for processing Aluminum, light metal, Stainless Steel.
- 4) Use air blow for cooling and the chip exclusion in dry process.
- 5) By sparks during cutting, or heat by breakage, or hot chip, there is danger of fire. Take fire prevention measures.
- 6) This cutting condition table, 'PF4D' is only applicable to 4 × DC of hole depth. In addition, according to the workpiece material and processing condition, there is a possibility that the performance of discharging chip may be deteriorated. When such a situation, even within the scope of machining hole depth, please use the step-feed machining.
- 7) Retraction of the step feed is to be returned to the top of the hole.
- 8) Step feed is recommended to 0.2 ~ 1.0 × DC.
- 9) Please use the fixture to control the amplitude of the drill bit below 0.02mm, high-speed cutting control amplitude of the drill bit 0.01 mm or less.
- 10) The re-grinding amount of the tip of the drill bit is recommended to be 1 × DC. If more than 1 × DC, the performance of chip discharge may be worse.
- 11) Please contact us about re-grinding the drill bit. Depending on the shape, the properties may be different after regrinding.

一般加工条件的大致标准 General recommendations of the processing condition

被削材 Work Material	切削速度 Cutting speed (mm/min)	一般进给率 General feed rate (%/DC)	机动进给钻头的进给率 Feed rate of Power Feed (%/DC)
一般结构用钢 · 碳钢 · 灰口铸铁 Structural Steel Carbon Steel Cast Iron	80	2.0 ~ 2.5	2.0 ~ 6.0
合金钢 · 调质钢 Alloy Steel Heat Treated Steel	65	2.0 ~ 2.5	2.0 ~ 5.5
模具钢 · 预硬钢 Mold Steel Pre-Hardened Steel	35	1.5 ~ 2.0	1.5 ~ 4.0
高硬度钢 (40 ~ 50HRC) Hardened steel	25	1.3 ~ 1.8	1.3 ~ 3.5
球墨铸铁 Ductile Iron	60	2.0 ~ 2.5	2.0 ~ 6.0

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXDLM-4D | AQUA EX微型钻 螺旋角 渐弱型 AQUA Drills EX Micro Twist Angle Decrescendo Type

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~200HB		20~30HRC		30~40HRC		40~50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
0.5	31800	330~720	25500	230~460	14000	110~230	10000	65~130	25500	270~570
0.99	16100		12900		7100		5000		12900	
1.0	25500	590~1270	21000	460~930	11000	200~400	8000	115~230	19000	440~950
1.5	17000		13900		7400		5300		12700	
2.0	12700		10500		5600		4000		9500	
3.0	8500		7000		3700		2650		6400	

有关切削条件的注意事项

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本条件为使用水溶性切削油剂时的条件。使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
- 3) 不适用于铝合金、轻金属及不锈钢的加工。
- 4) 采用干式加工时，为进行冷却及去除切屑，请采取气冷措施。
- 5) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险，因此请采取防火对策。
- 6) 本切削条件表适用于开孔深度为 4DC 以下的加工。
但是，依被削材及加工条件，切屑的排出性有时会变差。
此时，即使孔深小于规定的孔深，也请使用分级进给。
- 7) 分级进给时请返回到孔的上部。
- 8) 请将分级量的大致标准设定为 0.2~1.0DC。小直径时请将分级量的大致标准设定为 0.2~0.5DC。
- 9) 夹紧时，请将钻头的振动控制在 0.02mm 以下，高速切削时控制在 0.01mm 以下。
- 10) 钻头刀头再研磨极限量的大致标准为不超过 1DC。若超过 1DC，可能导致切屑排出性变差。
- 11) 需要再研磨钻头时，请委托本公司。在不同形状的再研磨中，性能可能无法得到发挥。

Cutting condition of the note

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state and the shape of the machining place.
- 2) This table shows the cutting condition under which water soluble cutting fluid is used. If using non-water soluble cutting fluid, reduce the speed and feed rate by 20%.
- 3) Less suitable for processing Aluminum, light metal, Stainless Steel.
- 4) Use air blow for cooling and the chip exclusion in dry process.
- 5) By sparks during cutting, or heat by breakage, or hot chip, there is danger of fire. Take fire prevention measures.
- 6) This cutting condition table is applicable to under 4 × DC of hole depth. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 7) Retraction of the step feed is to be returned to the top of the hole.
- 8) Step feed is recommended to 0.2 ~ 1.0 × DC. Small diameter is to 0.2 ~ 0.5 × DC.
- 9) Please use the fixture to control the amplitude of the drill bit below 0.02mm, high-speed cutting control amplitude of the drill bit 0.01mm or less.
- 10) The re-grinding amount of the tip of the drill bit is recommended to be 1 × DC. If more than 1 × DC, the performance of chip discharge may be worse.
- 11) Please contact us about re-grinding the drill bit. Depending on the shape, the properties may be different after re-grinding.

A-27 ◀ ▶ 尺寸表 Stacked Sized

AQDEXSN | AQUA EX 短刃钻 耐热合金用 AQUA Drills EX Stub for Titanium Alloy and Nickel Alloy

AQDEXRN | AQUA EX 标准刃钻 耐热合金用 AQUA Drills EX for Titanium Alloy and Nickel Alloy

被削材 Work Material	钛合金 Titanium Alloy (Ti 6Al-4V)		镍基合金 Nickel Alloy (沃斯帕洛、哈斯特洛伊) Waspaloy, Hastelloy		镍基合金 Nickel Alloy (铬镍铁合金 718) Inconel718	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	2700	190	1600	60	1200	40
4.0	2300	220	1500	80	1000	50
5.0	2000	240	1280	90	830	60
6.0	1600	240	1070	90	690	60
8.0	1200	240	800	90	520	60
10.0	1000	240	640	90	420	60
12.0	800	240	540	90	350	60
分级量 Step feed interval	开孔深度 2DC 以下 不需要 Drilling depth under 2 × DC Non step		0.5DC		0.5DC	
	开孔深度超过 2DC 1DC Drilling depth than 2 × DC 1DC					

AQDEXSN/AQDEXRN

- 1) 不适用于奥氏体不锈钢 (SUS304 等) 的加工。推荐使用 AQUA EX 油孔钻或 AQUA EX 钻头。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
- 4) 请向加工点及钻头充分供给切削油剂。
- 5) 以上的切削条件表支持 2DC 以下。开孔深度超过 2DC 时请降，请将转数及进给速度降低 20%。
- 6) 最佳条件会因耐热合金的被削性、硬度、使用机械的刚性等改变。请根据切屑、工具损伤状态调整。

- 1) Not suitable for Austenitic Stainless Steel (SUS304 and other). Recommend the AQDEXOH and AQDEX.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 5) When for hole depth more than 2 × DC, reduce the rotation and feed by 20%.
- 6) The optimum cutting condition vary depending on the rigidity of the drill and the hardness and machinability of the heat resistant alloy. Adjustments should be made according to the chip and damage to the bit.

A-30, A-31 ◀ ▶ 尺寸表 Stacked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXXOH5D/10D | AQUA EX X型油孔钻 铸铁用 AQUA Drills EX Oil-Hole Cross for cast metal

被削材 Work Material	铸铁 FC Cast Iron			球墨铸铁 FCD Ductile Cast Iron			铝铸件 AC, ADC Aluminum Alloy Casting		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
5D			10D	5D		10D	5D		10D
3.0	5900	450	360	4800	180	150	10700	970	810
4.0	4800	480	390	4000	240	200	8000	960	800
5.0	3900	490	390	3190	240	200	6370	960	800
6.0	3200	480	390	2660	240	200	5310	960	800
8.0	2400	480	390	1990	240	200	3980	960	800
10.0	2000	500	400	1600	240	200	3190	960	800
12.0	1600	480	390	1330	240	200	2660	960	800

AQDEXXOH5D/10D

- 1) 请将本钻头用于铸件的加工。
- 2) 刀头上设有微小的高低差。请创建加工程序, 确保加工通孔时, 能完全拔出高低差部分。
- 3) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 4) 请采用内部冷却方式。
- 5) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 6) 开孔深度超过 5DC 时, 请采用分级加工方式。
但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量的大致标准设定为 0.2 ~ 1DC。
- 9) 使用 10D 用钻头时, 请预先加工导向孔。

- 1) Use this drill bit for cast metals.
- 2) Cutting edge has very tiny differential. Create a program for drilling so the differential part completely comes out when drilling through hole.
- 3) Adjust cutting condition according to the situation, such as rigidity of machine, work clamp, and shape of workpiece.
- 4) Use on internal coolant.
- 5) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 6) Do step drilling for hole deeper than 5 × DC.
However, chip ejection may deteriorate depending on the work material and the cutting condition.
If this is the case, set the hole depth lower than the maximum and do step drilling.
- 7) Return the drill bit to the upper surface of the hole when doing step feeding.
- 8) Depth of steps should be from 0.2 to 1 diameter.
- 9) Drill a guide hole to drill deeper than 10 diameters.

A-78, A-79 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXOH3D/5D | AQUA EX 油孔钻 3D/5D AQUA Drills EX Oil-Hole 3D/5D

湿式加工 Wet Condition

被削材 Work Material	一般结构用钢・碳钢・ 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		耐热・耐腐蚀合金 钛合金 铬镍铁合金 Corrosion and Heat Resistant Alloy Titanium Alloy Inconel	
	~200HB		20~30HRC		30~40HRC		40~50HRC						30~40HRC	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1.0	15700	360	14100	280	12600	200	9400	110	12600	260	9400	115	3150	30
1.5	10500	360	9450	280	8400	200	6300	110	8400	260	6300	115	2100	30
2.0	7900	360	7100	280	6300	200	4700	110	6300	260	4700	115	1650	30
2.5	7600	470	7000	380	6300	200	4400	160	6300	340	4400	165	1650	50
2.9	6600	470	6000	380	5500	200	3800	160	5500	340	3800	165	1400	50
3.0	12700	1150	10600	950	8500	760	5300	330	10600	950	8500	680	3200	190
4.0	9600	1150	8000	950	6400	760	4000	330	8000	950	6400	680	2400	190
6.0	6400	1070	5300	950	4200	710	2700	320	5300	950	4200	660	1600	190
8.0	4800	1070	4000	880	3200	710	2000	320	4000	880	3200	620	1200	190
10.0	3800	960	3200	790	2500	640	1600	290	3200	790	2500	540	950	180
12.0	3200	800	2700	670	2100	540	1300	290	2700	670	2100	500	800	180
16.0	2400	730	2000	620	1600	480	1000	260	2000	620	1600	480	600	150

A-32, A-35 ◀▶ 尺寸表 Stocked Sized

AQDEXOH8D | AQUA EX 油孔钻 8D AQUA Drills EX Oil-Hole 8D

湿式加工 Wet Condition

被削材 Work Material	一般结构用钢・碳钢・ 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		耐热・耐腐蚀合金 钛合金 铬镍铁合金 Corrosion and Heat Resistant Alloy Titanium Alloy Inconel	
	~200HB		20~30HRC		30~40HRC		40~50HRC						30~40HRC	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	12700	950	10600	840	8500	630	5300	320	10600	800	8500	630	3200	170
4.0	9600	950	8000	840	6400	630	4000	320	8000	800	6400	630	2400	170
6.0	6400	890	5300	840	4200	600	2700	300	5300	740	4200	600	1600	170
8.0	4800	890	4000	800	3200	590	2000	300	4000	740	3200	570	1200	170
10.0	3800	790	3200	710	2500	530	1600	290	3200	680	2500	510	950	160
12.0	3200	730	2700	640	2100	480	1300	270	2700	630	2100	490	800	150
16.0	2400	650	2000	580	1600	440	1000	260	2000	550	1600	470	600	140

A-38 ◀▶ 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXOH3D/5D | AQUA EX 油孔钻 3D/5D AQUA Drills EX Oil-Hole 3D/5D

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢・碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	8500	710	7400	520	6400	540	3200	210	7400	620
4.0	6400	710	5600	520	4800	540	2400	190	5600	620
6.0	4200	710	3700	520	3200	540	1600	180	3700	620
8.0	3200	660	2800	490	2400	500	1200	170	2800	580
10.0	2500	590	2200	440	1900	440	960	160	2200	500
12.0	2100	510	1900	370	1600	380	800	150	1900	460
16.0	1600	460	1400	330	1200	340	600	140	1400	400

A-32, A-35 ◀ ▶ 尺寸表 Stocked Sized

AQDEXOH8D | AQUA EX 油孔钻 8D AQUA Drills EX Oil-Hole 8D

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢・碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	8500	560	7400	450	6400	400	3200	180	7400	500
4.0	6400	560	5600	450	4800	400	2400	180	5600	500
6.0	4200	540	3700	450	3200	370	1600	170	3700	470
8.0	3200	540	2800	430	2400	370	1200	170	2800	470
10.0	2600	510	2200	400	1900	340	1000	150	2200	440
12.0	2100	480	1900	350	1600	340	800	150	1900	430
16.0	1600	410	1400	310	1200	330	600	140	1400	360

A-38 ◀ ▶ 尺寸表 Stocked Sized

AQDEXOH3D/5D/8D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 湿式加工是指使用水溶性切削油剂时的加工。
- 3) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
直径 < 3.0 时
请将转速和进给速度降低 30%。
- 4) 请采用内部冷却方式。
直径 < 3.0 时
请将切削油剂的供给压力设为 1.5MPa 以上。
为防止切削油剂中的杂质堵塞油孔, 请使用经细网眼过滤器过滤后的切削液。
推荐使用孔眼为 5μm 的过滤器。
- 5) 开孔深度超过 3DC 时, 请采用分级加工方式。
但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 6) 如果加工不锈钢, 即使开孔深度在 3DC 以下, 也请采用分级加工方式。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量的大致标准设定为 0.2 ~ 1DC。
直径 < 3.0mm 时请将分级量的大致标准设定为 0.1 ~ 0.5DC。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) Wet condition are for drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
In the case of drill dia. for less than 3mm.
Reduce the rotation and feed by 30%.
- 4) Use on internal coolant.
In the case of drill dia. for less than 3mm.
Lubricated pressure of fluid is over 1.5Mpa.
To prevent oil-hole stopped up by impurities of cutting fluid, use fine mesh filter, recommend to filtration efficiency 5 μm.
- 5) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 6) In case of Stainless Steel, even if hole depth under 3 × DC, please step feed.
- 7) In step feed, return to the entrance hole.
- 8) Step feed interval is about 0.2 ~ 1 × DC.
In the case of drill dia. for less than 3mm, Step feed interval is about 0.1 ~ 0.5 × DC.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXOH10D/15D/20D

AQUA EX 油孔钻 10D/15D/20D AQUA Drills EX Oil-Hole 10D/15D/20D

湿式加工 Wet Condition

直径 < 3.0

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		耐热、耐腐蚀合金、钛合金 镍铬合金 Corrosion and Heat Resistant Alloy Titanium Alloy Inconel	
	~200HB		20~30HRC		30~40HRC		40~50HRC						30~40HRC	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1.0	14300	310	12700	250	11150	170	6350	65	11150	220	7950	80	3150	30
1.5	9550	310	8500	250	7400	170	4250	65	7400	220	5300	80	2100	30
2.0	7150	310	6350	250	5550	170	3200	65	5550	220	4000	80	1600	30
2.5	7000	470	6350	360	5700	280	3200	95	5700	350	3800	140	1650	50
2.9	6050	470	5500	360	4950	280	2750	95	4950	350	3300	140	1400	50

AQDEXOH10D/15D/20D 直径 < 3.0

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性油剂时，请将转速和进给速度降低 30%。
- 4) 请采用内部冷却方式。
- 5) 请将切削油剂的供给压力设为 1.5MPa 以上。
- 6) 为防止切削油剂中的杂质堵塞油孔，请使用细网眼过滤器过滤后的切削液。
- 7) 开孔深度超过 10DC 时，请采用分级加工方式。但是，依被削材及加工条件，切屑的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给或者修改切削条件。
- 8) 如果加工不锈钢，即使开孔深度在 10DC 以下，也请采用分级加工方式。
- 9) 分级进给时请返回到孔的上面。
- 10) 请将分级量级的大致标准设定为 0.1DC ~ 0.5DC。
- 11) 请预先加工导向孔。孔深为 1DC ~ 2DC。
- 12) 导向孔加工时，推荐使用 AQDEXOHPLT。推荐使用尺寸比深孔钻大 0.015mm 的钻头。
- 1) By the condition such as the rigidity of machine, work clamp and the shape of the drilling part, adjust cutting condition.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 30%.
- 4) Use an internal coolant.
- 5) Lubricated pressure of fluid is over 1.5MPa.
- 6) To prevent oil-hole stopped up by impurities of cutting fluid, use fine mesh filter, recommend to filtration efficiency 5 μ m.
- 7) In case hole-depth exceed 10 $\times$ DC, please step drilling.
- There are cases that chip ejection is bad by work materials and cutting condition. Even if hole-depth under 10 $\times$ DC, please step feed or check cutting condition.
- 8) In case of Stainless Steel, even if hole depth under 10 $\times$ DC, please step feed.
- 9) In step feed, return to the entrance hole.
- 10) Step feed interval is about 0.1 ~ 0.5 $\times$ DC.
- 11) Recommend pre-drilling of guide hole. Hole-depth is 1 ~ 2 $\times$ DC.
- 12) Recommend the AQDEXOHPLT for guide drilling.

Recommend the diameter that is 0.015mm larger than the deep hole drill.

直径 ≥ 3.0

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel	
	~200HB		20~30HRC		30~40HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	11500	1140	7600	570	6700	500	6700	600	6700	440
4.0	8600	1140	5700	570	5000	500	5000	600	5000	440
5.0	7600	1260	5100	640	4500	560	4500	670	4500	490
6.0	6400	1260	4200	640	3700	560	3700	670	3700	490
7.0	5500	1260	3600	640	3200	560	3200	670	3200	490
8.0	4800	1260	3200	640	2800	560	2800	670	2800	490
9.0	4200	1190	2800	610	2500	540	2500	650	2500	470
10.0	3800	1100	2500	590	2200	510	2200	620	2200	450
11.0	3500	1030	2300	560	2000	490	2000	600	2000	420
12.0	3200	960	2100	540	1900	470	1900	580	1900	400

AQDEXOH25D/30D

AQUA EX 油孔钻 25D/30D AQUA Drills EX Oil-Hole 25D/30D

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel	
	~200HB		20~30HRC		30~40HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	11500	1030	7600	530	6700	460	6700	560	6700	400
4.0	8600	1030	5700	530	5000	460	5000	560	5000	400
5.0	7600	1150	5100	590	4500	510	4500	620	4500	450
6.0	6400	1150	4200	590	3700	510	3700	620	3700	450
7.0	5500	1150	3600	590	3200	510	3200	620	3200	450
8.0	4800	1150	3200	590	2800	510	2800	620	2800	450
9.0	4200	1070	2800	560	2500	490	2500	600	2500	420
10.0	3800	1000	2500	540	2200	470	2200	580	2200	400

AQDEXOH10D/15D/20D 直径 ≥ 3.0 AQDEXOH25D/30D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂和油雾时的条件。
- 3) 使用非水溶性切削油剂时，请将转速和进给速度降低 30%。
- 4) 请采用内部冷却方式。
- 5) 可进行不分段加工。但是，依被削材及加工条件，切屑的排出性有时会变差。此时，请进行分级进给或者修改切削条件。
- 6) 不锈钢的开孔深度超过 20DC 时，推荐采用分级加工方式。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量级的大致标准设定为 0.5DC ~ 1DC。
- 9) 请预先加工导向孔。孔深为 2DC ~ 3DC。
- 10) 导向孔加工时，推荐使用 AQDEXOHPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。
- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) The table values condition are for drilling with water soluble cutting fluid or mist.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 30%.
- 4) Use an internal coolant.
- 5) Non-step drilling is possible. However, a work material and cutting condition to chip removal may be worse.
- In that case, add step feed or review the cutting condition.
- For hole deeper than 20 $\times$ DC in Stainless Steel, recommend in step feed.
- 6) In step feed, return to the entrance hole.
- 7) Step feed interval is about 0.5 ~ 1 $\times$ DC.
- 8) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 $\times$ DC.
- 9) Recommend the AQDEXOHPLT for guide drilling.
- Recommend the diameter that is 0.03mm larger than the deep hole drill.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXOH10D/15D/20D | AQUA EX 油孔钻 10D/15D/20D AQUA Drills EX Oil-Hole 10D/15D/20D

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢、碳钢、 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	7600	750	6700	500	5700	430	5700	520
4.0	5700	750	5000	500	4300	430	4300	520
5.0	5100	840	4450	560	3800	480	3800	570
6.0	4200	840	3700	560	3200	480	3200	570
7.0	3600	840	3200	560	2700	480	2700	570
8.0	3200	840	2800	560	2400	480	2400	570
9.0	2800	790	2500	540	2100	460	2100	550
10.0	2550	740	2200	510	1900	440	1900	540
11.0	2300	690	2000	490	1700	420	1700	520
12.0	2100	640	1900	470	1600	400	1600	500

AQDEXOH25D/30D | AQUA EX 油孔钻 25D/30D AQUA Drills EX Oil-Hole 25D/30D

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢、碳钢、 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	7700	690	6700	460	5700	400	5700	480
4.0	5700	690	5000	460	4300	400	4300	480
5.0	5100	750	4450	510	3800	440	3800	540
6.0	4200	750	3700	510	3200	440	3200	540
7.0	3600	750	3200	510	2700	440	2700	540
8.0	3200	750	2800	510	2400	440	2400	540
9.0	2800	730	2500	490	2100	420	2100	520
10.0	2550	690	2200	470	1900	400	1900	500

AQDEXOH10D/15D/20D/25D/30D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用 MQL 时的条件。
- 3) 可进行不分段加工。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 请进行分级进给或者修改切削条件。
- 4) 分级进给时请返回到孔的上面。
- 5) 请将分级量的大致标准设定为 0.5DC ~ 1DC。
- 6) 请预先加工导向孔。孔深为 2DC ~ 3DC。
- 7) 导向孔加工时, 推荐使用 AQDEXOHPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。
- 8) 不适用不锈钢的加工。推荐采用湿式加工。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) The table values condition are for drilling with MQL.
- 3) Non-step drilling is possible. However, a work material and cutting condition to chip removal may be worse. In that case, add step feed or review the cutting condition.
- 4) In step feed, return to the entrance hole.
- 5) Step feed interval is about 0.5 ~ 1 × DC.
- 6) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 7) Recommend the AQDEXOHPLT for guide drilling. Recommend the diameter that is 0.03mm larger than the deep hole drill.
- 8) It is non-application for Stainless Steel. Please drill with Wet.

A-40, A-41, A-42, A-43, A-44 ◀ ▶ 尺寸表 Stocked Sized

深孔加工方法也请参照 I-11。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXOH35D/40D

AQUA EX 油孔钻 35D/40D AQUA Drills EX Oil-Hole 35D/40D

湿式加工 Wet Condition

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel	
	~200HB		20~30HRC		30~40HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	9600	690	6400	350	5500	300	5500	360	5500	270
4.0	7200	690	4800	350	4200	300	4200	360	4200	270
5.0	6400	760	4300	390	3700	340	3700	400	3700	300
6.0	5300	760	3600	390	3100	340	3100	400	3100	300
7.0	4600	760	3000	390	2600	340	2600	400	2600	300
7.5	4200	760	2900	390	2500	340	2500	400	2500	300

AQDEXOH35D/40D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性切削油剂时，请将转速和进给速度降低 30%。
- 4) 请采用内部冷却方式。
- 5) 可进行不分段加工。但是，依被削材及加工条件，切削的排出性有时会变差。此时，请进行分级进给或者修改切削条件。
- 6) 分给进给时请返回到孔的上面。
- 7) 请将分级量的大致标准设定为 0.5DC ~ 1DC。
- 8) 请预先加工导向孔。孔深为 2DC ~ 3DC。
- 9) 导向孔加工时，推荐使用 AQDEXOHPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 30%.
- 4) Use on internal coolant.
- 5) Non-step drilling is possible. However, a work material and cutting condition to chip removal may be worse.
- 6) In that case, add step feed or review the cutting condition.
- 7) For hole deeper than 20 × DC in Stainless Steel, recommend in step feed.
- 8) In step feed, return to the entrance hole.
- 9) Step feed interval is about 0.5 ~ 1 × DC.
- 10) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 11) Recommend the AQDEXOHPLT for guide drilling.
- 12) Recommend the diameter that is 0.03mm larger than the deep hole drill.

A-45 尺寸表 Stocked Sized

AQDEXOH45D/50D

AQUA EX 油孔钻 45D/50D AQUA Drills EX Oil-Hole 45D/50D

湿式加工 Wet Condition

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel	
	~200HB		20~30HRC		30~40HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	7600	480	5100	250	4400	210	4400	250	4400	190
4.0	5700	480	3800	250	3300	210	3300	250	3300	190
5.0	5100	540	3400	270	3000	240	3000	280	3000	210
6.0	4200	540	2800	270	2500	240	2500	280	2500	210

AQDEXOH45D/50D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性切削油剂时，请将转速和进给速度降低 30%。
- 4) 请采用内部冷却方式。
- 5) 可进行不分段加工。但是，依被削材及加工条件，切削的排出性有时会变差。此时，请进行分级进给或者修改切削条件。
- 6) 分给进给时请返回到孔的上面。
- 7) 请将分级量的大致标准设定为 0.5DC ~ 1DC。
- 8) 请预先加工导向孔。孔深为 2DC ~ 3DC。
- 9) 导向孔加工时，推荐使用 AQDEXOHPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。
- 10) 开孔深度为 45DC 以上时，依被削材和给油压，切削的排出性有时会变差。此时，推荐进行 25DC 以上的预加工。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 30%.
- 4) Use on internal coolant.
- 5) Non-step drilling is possible. However, a work material and cutting condition to chip removal may be worse.
- 6) In that case, add step feed or review the cutting condition.
- 7) For hole deeper than 20 × DC in Stainless Steel, recommend in step feed.
- 8) In step feed, return to the entrance hole.
- 9) Step feed interval is about 0.5 ~ 1 × DC.
- 10) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 11) Recommend the AQDEXOHPLT for guide drilling.
- 12) Recommend the diameter that is 0.03mm larger than the deep hole drill.
- 13) When depth of hole over than 45 × DC, work material or pressure lubrication will make chip ejection worse. At that time, we recommend to transact pre-stage process of over 25 × DC.

A-46 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXOH35D/40D | AQUA EX 油孔钻 35D/40D AQUA Drills EX Oil-Hole 35D/40D

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢、碳钢、 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	6400	460	5600	320	4800	280	4800	320
4.0	4800	460	4200	320	3600	280	3600	320
5.0	4200	500	3700	350	3200	300	3200	350
6.0	3500	500	3100	350	2600	300	2600	350
7.0	3000	500	2600	350	2300	300	2300	350
7.5	2800	500	2500	350	2100	300	2100	350

AQDEXOH35D/40D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用 MQL 时的条件。
- 3) 可进行不分段加工。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 请进行分级进给或者修改切削条件。
- 4) 分级进给时请返回到孔的上面。
- 5) 请将分级量的大致标准设定为 0.5DC ~ 1DC。
- 6) 请预先加工导向孔。孔深为 2DC ~ 3DC。
- 7) 导向孔加工时, 推荐使用 AQDEXOHPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。
- 8) 不适用不锈钢的加工。推荐采用湿式加工。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) The table values condition are for drilling with MQL.
- 3) Non-step drilling is possible. However, a work material and cutting condition to chip removal may be worse.
In that case, add step feed or review the cutting condition.
- 4) In step feed, return to the entrance hole.
- 5) Step feed interval is about 0.5 ~ 1 × DC.
- 6) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 7) Recommend the AQDEXOHPLT for guide drilling.
Recommend the diameter that is 0.03mm larger than the deep hole drill.
- 8) It is non-application for Stainless Steel. Please drill with Wet.

A-45 ◀ ▶ 尺寸表 Stocked Sized

AQDEXOH45D/50D | AQUA EX 油孔钻 45D/50D AQUA Drills EX Oil-Hole 45D/50D

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢、碳钢、 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	5200	330	4500	230	3900	200	3900	230
4.0	3900	330	3400	230	2900	200	2900	230
5.0	3400	360	3000	250	2600	210	2600	250
6.0	2800	360	2500	250	2100	210	2100	250

AQDEXOH45D/50D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用 MQL 时的条件。
- 3) 可进行不分段加工。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 请进行分级进给或者修改切削条件。
- 4) 分级进给时请返回到孔的上面。
- 5) 请将分级量的大致标准设定为 0.5DC ~ 1DC。
- 6) 请预先加工导向孔。孔深为 2DC ~ 3DC。
- 7) 导向孔加工时, 推荐使用 AQDEXOHPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。
- 8) 不适用不锈钢的加工。推荐采用湿式加工。
- 9) 开孔深度为 45DC 以上时, 依被削材和给油压, 切削的排出性有时会变差。此时, 推荐进行 25DC 以上的预加工。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) The table values condition are for drilling with MQL.
- 3) Non-step drilling is possible. However, a work material and cutting condition to chip removal may be worse.
In that case, add step feed or review the cutting condition.
- 4) In step feed, return to the entrance hole.
- 5) Step feed interval is about 0.5 ~ 1 × DC.
- 6) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 7) Recommend the AQDEXOHPLT for guide drilling.
Recommend the diameter that is 0.03mm larger than the deep hole drill.
- 8) It is non-application for Stainless Steel. Please drill with Wet.
- 9) When depth of hole over than 45 × DC, work material or pressure lubrication will make chip ejection worse.
At that time, we recommend to transact pre-stage process of over 25 × DC.

A-46 ◀ ▶ 尺寸表 Stocked Sized

深孔加工方法也请参照 I-11。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXOHPLT | AQUA EX 油孔引导钻 AQUA Drills EX Oil-Hole Pilot

湿式加工 Wet Condition

直径 < 3.03

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		耐热、耐腐蚀合金、钛合金 铬镍铁合金 Corrosion and Heat Resistant Alloy Titanium Alloy Inconel	
	~200HB		20~30HRC		30~40HRC		40~50HRC						30~40HRC	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1.015	15700	400	14100	350	12600	250	9400	140	12600	320	9400	115	3150	30
1.515	10500	400	9450	350	8400	250	6300	140	8400	320	6300	115	2100	30
2.015	7900	400	7100	350	6300	250	4700	140	6300	320	4700	115	1650	30
2.515	7600	520	7000	470	6300	360	4400	200	6300	430	4400	165	1650	50
2.915	6600	520	6000	470	5500	360	3800	200	5500	430	3800	165	1400	50

AQDEXOHPLT 直径 < 3.03

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
 - 2) 本切削条件为使用水溶性切削油剂时的条件。
 - 3) 使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
 - 4) 请采用内部冷却方式。
 - 5) 请将切削油剂的供给压力设为 1.5MPa 以上。
 - 6) 为防止切削油剂中的杂质堵塞油孔，请使用细网眼过滤器过滤后的切削液。
 - 7) 请将孔深的大致标准设定为 1DC ~ 2DC。
- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
 - 2) For drilling with water soluble cutting fluid.
 - 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
 - 4) Use on internal coolant.
 - 5) Lubricated pressure of fluid is over 1.5MPa.
 - 6) To prevent oil-hole stopped up by impurities of cutting fluid, use fine mesh filter, recommend to filtration efficiency 5 μ m.
 - 7) Hole-depth is about 1 ~ 2 $\times$ DC.

直径 ≥ 3.03

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		耐热、耐腐蚀合金、钛合金 铬镍铁合金 Corrosion and Heat Resistant Alloy Titanium Alloy Inconel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC						30 ~ 40HRC	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
直径 Drill Dia. (mm)														
3.03	10500	950	8400	760	6800	520	4200	270	8400	760	6800	550	2650	160
4.03	7900	950	6300	760	5100	520	3150	270	6300	760	5100	550	2000	160
5.03	6350	950	5050	760	4100	520	2550	270	5050	760	4100	550	1600	160
6.03	5300	900	4200	710	3400	480	2100	250	4200	710	3400	530	1300	150
7.03	4550	900	3600	710	2950	480	1800	250	3600	710	2950	530	1150	150
8.03	4000	900	3150	710	2600	480	1600	250	3150	710	2600	500	1000	150
9.03	3550	800	2800	640	2300	420	1400	230	2800	640	2300	500	900	145
10.03	3200	800	2550	640	2050	420	1250	230	2550	640	2050	450	800	145
11.03	2900	800	2300	640	1900	420	1150	230	2300	640	1900	450	720	145
12.03	2650	670	2100	530	1700	370	1050	200	2100	530	1700	410	650	130

AQDEXOHPLT 直径 ≥ 3.03

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
 - 2) 湿式加工是指使用水溶性切削油剂时的加工。
 - 3) 使用非水溶性油剂时，请将转数和进给速度降低 20%。
 - 4) 请采用内部冷却方式。
- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
 - 2) Wet condition are for drilling with water soluble cutting fluid.
 - 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
 - 4) Use on internal coolant.

MQL 加工 MQL Condition

被削材 Work Material	一般结构用钢、碳钢、灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢、调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢、预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC			
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
直径 Drill Dia. (mm)										
3.03	6800	550	5800	470	5250	360	2600	150	5800	500
4.03	5100	550	4350	470	3950	360	2000	150	4350	500
5.03	4100	550	3500	470	3150	360	1600	150	3500	500
6.03	3400	520	2900	440	2650	330	1300	140	2900	470
7.03	2950	520	2500	440	2250	330	1150	140	2500	470
8.03	2600	520	2200	440	2000	330	1000	140	2200	470
9.03	2300	460	1950	400	1750	290	900	130	1950	420
10.03	2050	460	1750	400	1600	290	800	130	1750	420
11.03	1900	460	1600	400	1450	290	700	120	1600	420
12.03	1700	390	1450	330	1300	250	650	110	1450	350

AQDEXOHPLT

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
 - 2) 请采用内部 MQL 方式。
 - 3) 不适用不锈钢、钛合金、耐热合金的加工。推荐采用湿式加工。
- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
 - 2) Use on internal MQL.
 - 3) It is non-application for Stainless Steel, Heat Resistant Alloy, and Titanium Alloy. Please drill with Wet.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXOH3F3D/5D | AQUA EX 3 刃油孔钻 3D/5D AQUA Drills EX Oil-Hole 3 Flutes 3D/5D

被削材 Work Material	一般结构用钢・碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK HPM Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		不锈钢 SUS304 SUS316 Stainless Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC					
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
3.0	10700	1280	8500	1020	7450	780	5600	540	5300	560	8500	1020
4.0	8000	1280	6400	1020	5600	780	4200	540	4000	560	6400	1020
6.0	5300	1280	4250	1020	3750	780	2800	540	2650	560	4250	1020
8.0	4000	1280	3200	1020	2800	780	2100	540	2000	560	3200	1020
10.0	3200	1280	2550	1020	2250	780	1700	540	1600	560	2550	1020
12.0	2650	1280	2100	1020	1850	780	1400	540	1350	560	2100	1020
14.0	2250	1120	1800	900	1600	670	1200	450	1150	480	1800	890
16.0	2000	1120	1600	900	1400	670	1050	450	1000	480	1600	890

AQDEXOH3F3D/5D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 4) 请采用内部冷却方式。
- 5) 当 AQDEXOH3F3D 的开孔深度在 3DC 以下、AQDEXOH3F5D 的开孔深度在 5DC 以下时适用本切削条件。
但是，依被削材及加工条件，切屑的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 6) 分级进给时请返回到孔的上面。
- 7) 请将分级量的大致标准设定为 0.2 ~ 1DC。
- 8) 夹紧时，请将钻头的振动控制在 0.01mm 以下。

- 1) Adjust cutting condition according to the situation, such as rigidity of machine, work clamp, and shape of workpiece.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Use on internal coolant.
- 5) These cutting condition are for the AQDEXOH3F3D up to 3 × DC and for the AQDEXOH3F5D up to 5 × DC.
However a work material and cutting condition to chip removal may be worse.
In that case, add step feed even if drilling depth 3 × DC, 5 × DC it as follows.
- 6) In step feed, return to the entrance hole.
- 7) Step feed interval is about 0.2 ~ 1 × DC.
- 8) Set up the chuck for the drill bit so there is less than 0.01mm of runout.

A-49, A-51 ◀ ▶ 尺寸表 Stocked Sized

AQDEXOH3F10D | AQUA EX 3 刃油孔钻 10D AQUA Drills EX Oil-Hole 3 Flutes 10D

被削材 Work Material	一般结构用钢・碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK HPM Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		不锈钢 SUS304 SUS316 Stainless Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC					
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
3.0	8500	1020	7400	890	6700	700	4800	480	4800	500	7400	890
4.0	6400	1020	5600	890	5000	700	3600	480	3600	500	5600	890
5.0	6400	1280	5100	1020	4450	780	3350	540	3200	560	5100	1020
6.0	5300	1280	4250	1020	3750	780	2800	540	2650	560	4250	1020
8.0	4000	1280	3200	1020	2800	780	2100	540	2000	560	3200	1020
10.0	3200	1280	2550	1020	2250	780	1700	540	1600	560	2550	1020
12.0	2650	1280	2100	1020	1850	780	1400	540	1350	560	2100	1020
14.0	2250	1120	1800	900	1600	670	1200	450	1150	480	1800	890
16.0	2000	1120	1600	900	1400	670	1050	450	1000	480	1600	890

AQDEXOH3F10D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 4) 请采用内部冷却方式。
- 5) 本切削条件适用于开孔深度为 10DC 以下的加工。
但是，依被削材及加工条件，切屑的排出性有时会变差。此时，即使开孔深度在规定的开孔深度以下，也请使用寸动进给或者分级进给。
- 6) 当为不锈钢时，请使用寸动进给或者分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将寸动量及分级量的大致标准设定为 0.1DC 以下。
- 9) 请预先加工导向孔。孔深为 2DC ~ 3DC。
- 10) 导向孔加工时，推荐使用 AQDEXOHPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。
- 11) 夹紧时，请将钻头的振动控制在 0.01mm 以下。

- 1) Adjust cutting condition according to the situation, such as rigidity of machine, work clamp, and shape of workpiece.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Use on internal coolant.
- 5) These cutting condition are for the AQDEXOH3F10D up to 10 × DC.
However a work material and cutting condition to chip removal may be worse.
In that case, add inching feed or step feed even if drilling depth 10 × DC, it as follows.
- 6) In case of Stainless Steel, add inching feed or step feed.
- 7) In step feed, return to the entrance hole.
- 8) Interval of inching feed and step feed are under about 0.1 × DC.
- 9) Recommend pre-drilling of guide hole. Hole depth is 2 ~ 3 × DC.
- 10) Recommend the diameter that is 0.03mm larger than the deep-hole drill.
- 11) Run out of Drills limits under 0.01mm, please chucking.

A-52 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQDEX3FR | AQUA EX 标准刃 3 刃钻 AQUA Drills EX 3 Flutes Regular

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~200HB		20~30HRC		30~40HRC		40~50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	7450	670	6900	620	6350	540	4250	320	6350	480
4.0	5600	670	5200	620	4800	540	3200	320	4800	480
6.0	3700	670	3450	620	3200	540	2100	320	3200	480
8.0	2800	670	2600	620	2400	540	1600	320	2400	480
10.0	2250	670	2050	620	1900	540	1250	320	1900	480
12.0	1850	670	1700	620	1600	540	1050	320	1600	480
14.0	1600	670	1500	620	1400	540	900	320	1400	480
16.0	1400	670	1300	620	1200	540	800	320	1200	480

AQDEX3FR

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
 - 2) 本切削条件为使用水溶性切削油剂时的条件。
 - 3) 使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
 - 4) 本切削条件表适用于开孔深度为 3DC 以下的加工。
 - 5) 开孔深度超过 3DC 时，请采用分级加工方式。
但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
 - 6) 分级进给时请返回到孔的上部。
 - 7) 请将分级量的大致标准设定为 0.5 ~ 1DC。
 - 8) 夹紧时，请将钻头的振动控制在 0.01mm 以下。
 - 9) 齿距精度有严格要求时，请使用 AQUA EX 定心钻 **AQDEXST (A-77)**。
- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
 - 2) For drilling with water soluble cutting fluid.
 - 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
 - 4) Use the table values for drilling depth under 3 × DC.
 - 5) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
 - 6) In step feed, return to the entrance hole.
 - 7) Step feed interval is about 0.5 ~ 1 × DC.
 - 8) Adjust the drill run out to 0.01mm or less.
 - 9) Use AQUA Drills EX Starting in the case of pitch accuracy is strict.

A-53 ◀ ▶ 尺寸表 Stocked Sized

AQDEX3FH | AQUA EX 高硬型 3 刃钻 AQUA Drills EX 3 Flutes Hard

被削材 Work Material	被削材硬度 Work Hardness							
	50 ~ 55HRC		55 ~ 60HRC		60 ~ 65HRC		65HRC ~	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	4200	310	2900	170	2100	115	1600	90
4.0	3200	310	2150	170	1600	95	1200	72
6.0	2100	260	1450	145	1100	80	800	48
8.0	1600	200	1070	120	800	60	600	36
10.0	1300	160	860	100	640	48	480	29
12.0	1100	140	720	80	530	40	400	24
16.0	800	100	540	60	400	30	300	18

AQDEX3FH

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
 - 2) 本切削条件为使用水溶性切削油剂时的条件。
 - 3) 使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
 - 4) 加工 50HRC 以下的被削材时，推荐使用 AQUA EX 钻头 短刃型和 AQUA EX 3 刃孔钻 3D。
 - 5) 本切削条件表适用于开孔深度为 3DC 以下的加工。
 - 6) 开孔深度超过 3DC 时，请采用分级加工方式。
但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
 - 7) 分级进给时请返回到孔的上部。
 - 8) 请将分级量的大致标准设定为 0.5 ~ 1DC。
 - 9) 夹紧时，请将钻头的振动控制在 0.01mm 以下。
- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
 - 2) For drilling with water soluble cutting fluid.
 - 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
 - 4) Recommend AQDEXS, AQDEXOH3F3D in drilling work material which hardness is below 50HRC.
 - 5) Use the table values for drilling depth under 3 × DC.
 - 6) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
 - 7) In step feed, return to the entrance hole.
 - 8) Step feed interval is about 0.5 ~ 1 × DC.
 - 9) Adjust the drill run out to 0.01mm or less.

A-56 ◀ ▶ 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQD3F | AQUA 3 刃钻 AQUA Drills 3 Flutes

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	8500	820	6400	580	5300	400	4200	250	5300	320
5.0	5100	820	3800	580	3200	400	2500	250	3200	320
6.0	4200	820	3200	580	2700	400	2100	250	2700	320
8.0	3200	780	2400	550	2000	380	1600	240	2000	300
10.0	2500	720	1900	510	1600	360	1300	230	1600	290
12.0	2100	690	1600	490	1300	330	1100	220	1300	270
14.0	1820	670	1360	470	1140	320	910	200	1140	260
16.0	1600	650	1190	450	990	320	800	190	990	250

AQD3F

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
 - 2) 要求加工孔精度时, 推荐采用湿式加工。
 - 3) 采用干式加工时, 请将转速及进给速度均降低到上表的 70% 以下。
 - 4) 采用干式加工时, 为进行冷却及去除切屑, 请采用气冷措施。
 - 5) 不适用于铝合金、轻金属及不锈钢的加工。
 - 6) 本切削条件为使用水溶性切削油剂时的条件。
 - 7) 请向加工点及钻头充分供给切削油剂。
 - 8) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
 - 9) 本切削条件表适用于开孔深度为 2DC 以下的加工。
 - 10) 开孔深度超过 2DC 时, 请将转速及进给速度降低 20%。
 - 11) 开孔深度超过 2DC 时, 请采用分级加工方式。
- 但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 12) 分级进给时请返回到孔的上面。
 - 13) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
 - 14) 夹紧时, 请将钻头的振动控制在 0.01mm 以下。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
 - 2) For precision drilling, use in wet condition.
 - 3) In case of dry condition, reduce the rotation and feed to 70% of table values.
 - 4) Use air blow for cooling and the chip exclusion in dry condition.
 - 5) Drilling Aluminum Alloy, Light Metal, Stainless Steel are not recommended.
 - 6) For drilling with water soluble cutting fluid.
 - 7) Provide sufficient amount cutting fluid to the cutting point and in the flute.
 - 8) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
 - 9) Use the table values for drilling depth under 2 × DC.
 - 10) When for hole depth more than 2 × DC, reduce the rotation and feed by 20%.
 - 11) When for hole depth more than 2 × DC deep, add step feeding.
- However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 12) In step feed, return to the entrance hole.
 - 13) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
 - 14) Adjust the drill run out to 0.01mm or less.

A-57 尺寸表 Stocked Sized

AQDED3F | AQUA 带底刃 3 刃钻 AQUA Drill 3 Flutes with end cutting teeth

被削材 Work Material	灰口铸铁 FC250 FC300 Cast Iron		球墨铸铁 FCD400 Ductile Cast Iron		球墨铸铁 FCD700 Ductile Cast Iron		一般结构用钢 SS 碳钢 S-C Structural Steel Carbon Steel		铝铸件※ 1 ADC12 Aluminum Alloy Casting	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
直径 Drill Dia. (mm)										
3.0	10600	1000	8500	760	6400	460	8500	760	12700	1530
5.0	6400	1000	5100	760	3800	460	5100	760	7600	1530
8.0	4000	950	3200	740	2400	440	3200	740	4750	1490
10.0	3200	920	2550	710	1900	420	2550	710	3800	1450
12.0	2650	900	2120	690	1600	400	2120	690	3180	1410

AQDED3F

- 1) 上述条件为加工孔径的 80% 以上的底孔已开好时的切削条件。
- 2) 没有底孔时, 推荐使用 AQUA 3 刃钻。
- 3) 要求加工孔精度时, 推荐采用湿式加工。
- 4) 采用干式加工时, 请将转速及进给速度均降低到上表的 70% 以下。
- 5) 采用干式加工时, 为进行冷却及去除切屑, 请采用气冷措施。
- 6) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
- 7) 本切削条件为使用水溶性切削油剂时的条件。
- 8) 请向加工点及钻头充分供给切削油剂。
- 9) 夹紧时, 请将钻头的振动控制在 0.01mm 以下。

※ 1 铝铸件时, 请使用 DLC 3 刃平头钻 **DLCDZ3F (A-123)**。

- 1) A list is a cutting condition when there are prepared hole more than 80% of a drilling hole.
- 2) When there is not a prepared hole, we recommend AQUA Drills 3 Flutes.
- 3) For precision drilling, use in wet condition.
- 4) In case of dry condition, reduce the rotation and feed to 70% of table values.
- 5) Use air blow for cooling and the chip exclusion in dry process.
- 6) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 7) For drilling with water soluble cutting fluid.
- 8) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 9) Adjust the drill run out to 0.01mm or less.

※ 1 Use DLC Drills FLAT 3 Flutes in the case of Aluminum Alloy Casting.

A-61 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXZS | AQUA EX 平头钻 短刃型 AQUA Drills EX FLAT Short


被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		铝合金 A7075 Aluminum Alloy		铝合金铸件 AC ADC Aluminum Alloy Casting	
	~200HB		20~30HRC		30~40HRC		40~50HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	11100	380	9550	320	5550	170	3980	70	9550	270	23100	880	16700	570
3.0	7950	480	6900	410	3700	190	2650	90	6900	350	17000	1150	12500	760
4.0	5950	480	5150	410	2800	190	2000	90	5150	350	12500	1150	9550	760
5.0	4800	480	4150	410	2200	190	1600	90	4150	350	10000	1150	7650	760
6.0	4000	480	3450	410	1800	190	1300	90	3450	350	8500	1150	6400	760
8.0	3000	480	2600	410	1400	190	1000	90	2600	350	6350	1150	4750	760
10.0	2400	480	2050	410	1100	190	800	90	2050	350	5100	1150	3800	760
12.0	2000	480	1700	410	950	190	650	90	1700	350	4250	1150	3200	760
16.0	1500	480	1300	410	700	190	500	90	1300	350	3200	1150	2400	760
20.0	1200	480	1050	410	550	190	400	90	1050	350	2550	1150	1900	760

AQDEXZS

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本条件适用于乙去除黑皮的加工。
- 3) 本条件为使用水溶性切削油剂时的条件。使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
- 4) 本条件为平坦面的孔深在 1DC 以下、倾斜面的孔深在 1.5DC 以下时的条件。不推荐用于在平坦面加工超过 1DC 的孔或在倾斜面加工超过 1.5DC 的孔。切屑的排出能力有时会降低。
- 5) 加工倾斜面时，请根据加工倾角 (θ) 进行调整。
加工倾角 (θ) 在 30°以下时，请将进给速度降低到 50%。
加工倾角 (θ) 超过 30°时，请将转速降低到 70% 以下、将进给速度降低到 30% 以下。
- 6) 不能进行外周方向的切削。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) It's the case when it is used for drilling with the mill scale surfaces removed.
- 3) For drilling with water soluble cutting fluid. In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) For drilling depth on flat surface of 1 × DC or less. Drilling over 1 × DC is not recommended.
For drilling depth on sloped surface or 1.5 × DC or less. Drilling over 1.5 × DC is not recommended.
- 5) For slope drilling, adjust according to inclined angle (θ).
For inclined angle under 30°, reduce the feed to 50%.
When drilling on inclined surface over 30°, reduce the rotation to 70% or less and cutting speed to 30% or less.
- 6) Side milling is not possible.

切削深度
Depth of cut



A-62 ◀ ▶ 尺寸表 Stacked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXZ AQDEXZ-R

AQUA EX 平头钻 AQUA Drills EX FLAT

AQUA EX 平头钻 带R角 AQUA Drills EX FLAT Radius


被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		铝合金 A7075 Aluminum Alloy		铝合金铸件 AC ADC Aluminum Alloy Casting	
	~200HB		20~30HRC		30~40HRC		40~50HRC									
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
0.2	32000	40	29000	35	16000	20	14000	10	29000	25	16000	10	60000	120	56000	100
0.3	30000	60	25000	45	15000	30	12000	15	25000	35	15000	15	60000	180	50000	130
0.4	28000	70	23000	55	14000	35	11000	20	23000	45	14000	20	60000	240	47000	170
0.5	25500	80	21000	65	12500	40	10000	20	21000	50	12500	20	60000	300	45000	200
0.6	24000	120	19000	90	11500	60	9000	25	19000	70	11500	25	53000	350	40000	250
0.7	22000	150	18000	125	11000	75	8000	30	18000	100	11000	30	48000	450	36000	300
0.8	21000	200	17000	160	10500	80	7500	30	17000	130	10500	35	45000	550	33000	350
0.9	20000	250	16500	200	10000	100	7000	35	16500	160	10000	40	42000	650	31000	400
1.0	19100	290	15900	240	9550	110	6400	40	15900	190	9550	50	40000	720	28600	460
1.9	11700	360	10100	310	5900	160	4200	70	10100	250	5030	50	24300	830	17600	540
2.0	11100	360	9550	310	5550	160	3980	70	9550	250	—	—	23100	830	16700	530
3.0	7950	420	6900	360	3700	170	2650	80	6900	310	—	—	17000	1020	12500	660
4.0	5950	420	5150	360	2800	170	2000	80	5150	310	—	—	12500	1020	9550	660
5.0	4800	420	4150	360	2200	170	1600	80	4150	310	—	—	10000	1020	7650	660
6.0	4000	420	3450	360	1800	170	1300	80	3450	310	—	—	8500	1020	6400	660
8.0	3000	420	2600	360	1400	170	1000	80	2600	310	—	—	6350	1020	4750	660
10.0	2400	420	2050	360	1100	170	800	80	2050	310	—	—	5100	1020	3800	660
12.0	2000	420	1700	360	950	170	650	80	1700	310	—	—	4250	1020	3200	660
16.0	1500	420	1300	360	700	170	500	80	1300	310	—	—	3200	1020	2400	660
20.0	1200	420	1050	360	550	170	400	80	1050	310	—	—	2550	1020	1900	660

AQDEXZ/AQDEXZ-R

- 1) 请根据机械刚性及工装夹具、加工形状等的情况调整切削条件。
- 2) 本条件适用于乙去除黑皮的加工。
- 3) 本条件为使用水溶性切削油剂时的条件。
使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 4) 本条件为孔深在 2DC 以下的条件。不推荐用于加工超过 2DC 的孔。切削的排出能力有时会有下降。
- 5) 加工不锈钢 (SUS304、316) 时, 请使用 1.9mm 以下的钻头。
- 6) 加工倾斜面时, 请根据加工倾角 (θ) 进行调整。
加工倾角 (θ) 在 30° 以下时, 请将进给速度降低到 50%。
加工倾角 (θ) 超过 30° 时, 请将转速降低到 70% 以下、将进给速度降低到 30% 以下。
- 7) 不能进行外周方向的切削。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) It's the case when it is used for drilling with the mill scale surfaces removed.
- 3) For drilling with water soluble cutting fluid. In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) For drilling depth of 2×DC or less. Drilling over 2×DC is not recommended.
- 5) For drilling Stainless Steel (SUS304, 316, etc.), use it as 1.9mm or less.
- 6) For slope drilling, adjust according to inclined angle (θ). For inclined angle under 30°, reduce the feed to 50%. When drilling on inclined surface over 30°, reduce the rotation to 70% or less and cutting speed to 30% or less.
- 7) Side milling is not possible.

切削深度
Depth of cut




A-64, A-70 ◀ ▶ 尺寸表 Stocked Sized

AQDEXZ 的倾斜面加工的切削条件比较示例

Comparisons of cutting condition when drilling on an angled surface with the AQDEXZ

加工位置 Operation position		切削速度 Speed			进给速度 Feed		
No.	角度 Angle	mm/min	min ⁻¹	比率 Rate	mm/min	mm/rev	比率 Rate
①	0°	75	2400	100%	420	0.18	100%
②	19°				210	0.09	50%
③	35°				120	0.07	40%
④	51°	52	1650	70%	120	0.07	40%
⑤	64°				90	0.06	33%
⑥	一半				60	0.04	20%

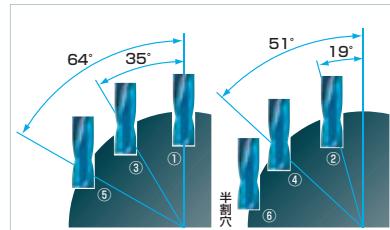

AQDEXZ1000(φ10) / 被削材 S45C / 深度 15mm / 水溶性切削油剂
AQDEXZ1000(φ10) / Work material S45C / Depth 15mm / Water soluble cutting fluid

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXZR | AQUA EX 平头钻 标准刃型 AQUA Drills EX FLAT Regular

被削材 Work Material	一般结构用钢		合金钢		模具钢		高硬度钢		球墨铸铁		铝合金	
	碳钢		调质钢		预硬钢		Hardened Steel		FCD400		A7075	
	灰口铸铁		SCM440 NAK		SKD61 NAK HPM				Ductile Cast Iron		Aluminum Alloy	
	SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Mold Steel Pre-Hardened Steel							
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	10600	630	9500	430	7400	330	5300	240	9500	430	12700	760
4.0	7900	630	7100	430	5550	330	3980	240	7100	430	9500	760
5.0	6300	630	5700	430	4450	330	3180	240	5700	430	7600	760
6.0	5300	630	4750	430	3700	330	2650	240	4750	430	6400	760
8.0	3950	630	3550	430	2790	330	1990	240	3550	430	4780	760
10.0	3150	630	2860	430	2230	330	1590	240	2860	430	3800	760
12.0	2650	630	2390	430	1860	330	1300	240	2390	430	3180	760
16.0	1990	630	1790	430	1390	330	990	240	1790	430	2390	760
20.0	1590	630	1430	430	1110	330	800	240	1430	430	1910	760

AQDEXZR

- 1) 本条件为需要预加工（导向孔）时的切削条件。
- 2) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 3) 本条件为使用水溶性切削油剂时的条件。使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 4) 本条件为孔深在 4DC 以下的条件。
- 5) 不适用不锈钢（SUS304、316 等）的加工。推荐使用 AQUA EX 平头钻 OH 3D/5D。
- 6) 开孔加工时，需要比①直径更大的定心孔，或者与②直径一样的导向孔。
(①定心孔加工推荐使用 AG 定心钻、②导向孔加工推荐使用 AQUA EX 平头钻)
- 7) 不能进行外周方向的切削。

1) This table values are guide hole drilled.

- 2) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 3) For drilling with water soluble cutting fluid. In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Use the table values for drilling depth under 4 × DC.
- 5) Drilling Stainless Steel (SUS304, 316, etc.) are not recommend. We recommend the AQUA Drills EX FLAT OH 3D/5D.
- 6) When for hole drilling require, 1:centering hole larger than the diameter or 2:same diameter guide hole.
(1:Recommend the AG Starting Drills for centering hole, 2:Recommend the AQUA Drills EX FLAT for guide hole.)
- 7) Side milling is not possible.

A-71 尺寸表 Stocked Sized


AQDEXZ/AQDEXZOH3D 的扩孔及振动的对策

AQDEXZ/AQDEXZOH3D hole distension and vibration countermeasures




AQDEXZR/AQDEXZLS/AQDEXZOH5D 的使用

Using AQDEXZR/AQDEXZLS/AQDEXZOH5D

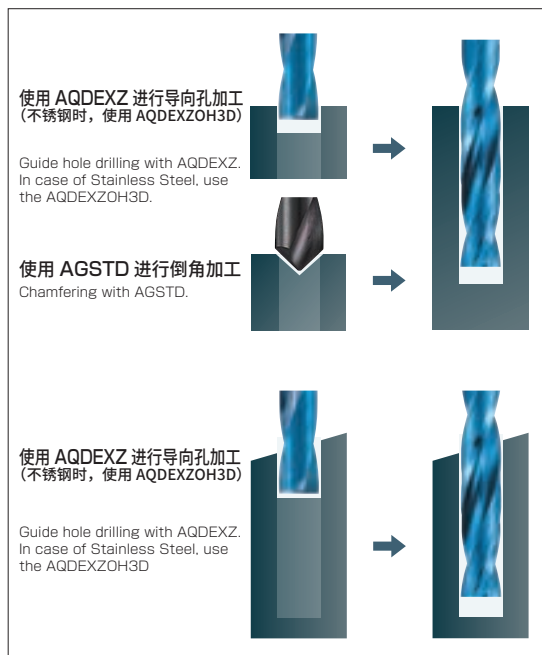

倾斜面的加工和切削条件

Angled surface drilling and cutting condition

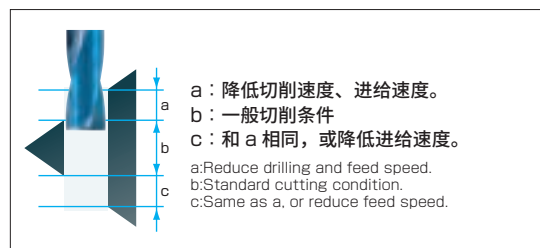

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXZLS | AQUA EX 平头钻 长柄型 AQUA Drills EX FLAT Long Shank

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		铝合金 A7075 Aluminum Alloy	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC					
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	直径 Drill Dia. (mm)											
3.0	10600	790	9500	570	7400	330	5300	240	9500	430	12700	950
4.0	7900	790	7100	570	5550	330	3980	240	7100	430	9500	950
5.0	6300	790	5700	570	4450	330	3180	240	5700	430	7600	950
6.0	5300	790	4750	570	3700	330	2650	240	4750	430	6400	950
8.0	3950	790	3550	570	2790	330	1990	240	3550	430	4780	950
10.0	3150	790	2860	570	2230	330	1590	240	2860	430	3800	950
12.0	2650	790	2390	570	1860	330	1300	240	2390	430	3180	950
16.0	1990	790	1790	570	1390	330	990	240	1790	430	2390	950
20.0	1590	790	1430	570	1110	330	800	240	1430	430	1910	950

AQDEXZLS

- 1) 本条件为孔深在 2DC 以下的条件。
- 2) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 3) 本条件为使用水溶性切削油剂时的条件。使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 4) 本条件为孔深在 2DC 以下的条件。
- 5) 不适用不锈钢 (SUS304、316 等) 的加工。推荐使用 AQUA EX 平头钻 OH 3D/5D。
- 6) 进行平面加工时, 需要大于直径的中心孔或者相同直径的导向孔。
- 7) 进行倾斜角度 5 ~ 15° 的倾斜面加工时, 无需导向孔。但是, 请将转速降到 60% 以下, 将进给速度降低到 40% 以下。
- 8) 不能进行外周方向的切削。

1) This table values are guide hole drilled.

- 2) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 3) For drilling with water soluble cutting fluid. In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Use the table values for drilling depth under 2 × DC.
- 5) Drilling Stainless Steel (SUS304, 316, etc.) are not recommend. Recommend the AQUA Drills EX FLAT OH 3D/5D.
- 6) When for hole on flat surfaces, 1.centering hole larger than the diameter or 2.same diameter guide hole. (Recommend the AG Starting Drills for centering hole.)
- 7) Guide hole is not necessary when for hole on surfaces angled between 5 and 15°, reduce the RPM by under 60%, the feed by under 40%.
- 8) Side milling is not possible.

A-73 ◀ ▶ 尺寸表 Stocked Sized

AQDEXZOH3D AQDEXZOHPLT

AQUA EX 油孔平头钻 3D AQUA Drills EX FLAT Oil-Hole 3D AQUA EX 油孔平头引导钻 AQUA Drills EX FLAT Oil-Hole Pilot

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		铝合金 A7075 Aluminum Alloy	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC							
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
1.0	15900	130	12700	80	9550	45	7960	40	12700	60	9550	20	22300	210
1.5	10600	130	8490	80	6370	45	5320	40	8490	60	6370	20	14900	210
2.0	9550	160	7960	100	5570	55	4790	50	7960	75	6370	40	12700	240
2.5	11500	470	9600	315	9500	230	5750	140	9560	240	8900	250	13300	660
2.9	13000	950	10900	635	7600	330	6600	285	11000	480	11000	635	15350	1330
3.0	12700	950	10600	635	7400	330	6370	285	10600	480	10600	635	14800	1330
4.0	9500	950	7900	635	5550	330	4780	285	7900	480	7900	635	11100	1330
5.0	7600	950	6300	635	4450	330	3820	285	6300	480	6300	635	8900	1330
6.0	6370	950	5300	635	3700	330	3180	285	5300	480	5300	635	7400	1330
8.0	4780	950	3950	635	2790	330	2390	285	3950	480	3950	635	5570	1330
10.0	3820	950	3150	635	2230	330	1900	285	3150	480	3150	635	4460	1330
12.0	3180	950	2650	635	1860	330	1590	285	2650	480	2650	635	3710	1330
16.0	2390	950	1990	635	1390	330	1190	285	1990	480	1990	635	2790	1330

AQDEXZOH3D/AQDEXZOHPLT

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本条件为使用水溶性切削油剂时的条件。使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 3) 请采用内部冷却方式。
直径 DC < 3.0 时
请将切削油剂的供给压力设为 1.5MPa 以上。
为防止切削油剂中的杂质堵塞油孔, 请使用经细网眼过滤器过滤后的切削液。
推荐使用孔眼为 5μm 的过滤器。
- 4) 本条件为孔深在 3DC 以下的条件。
依被削材及加工条件, 切削的排出性有时会变差。
此时, 即使孔深小于规定的孔深, 也请使用分级进给或者修改切削条件。
- 5) 加工不锈钢时, 请进行分级加工。
- 6) 分级进给时请返回到孔的上面。
- 7) 请将进给速度的大致标准设定为 0.1DC ~ 0.5DC。
- 8) 进行倾斜角度 5 ~ 15° 的倾斜面加工时, 无需导向孔。但是, 请将转速降到 50% 以下, 将进给速度降低到 40% 以下。
- 9) 不能进行外周方向的切削。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid. In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 3) Use on internal coolant.
In the case of drill dia. for less than 3mm. Lubricated pressure of cutting fluid is over 1.5MPa.
To prevent oil-hole stopped up by impurities of cutting fluid, use fine mesh filter, recommend to filtration efficiency 5 μm.
- 4) Use the table values for drilling depth under 3 × DC.
However, chip ejection may deteriorate depending on the work material and the cutting condition.
If this is case, set the hole depth lower than the maximum and do step cutting condition.
- 5) In case of Stainless Steel, please step feed.
- 6) In step feed, return to the entrance hole.
- 7) Step feed interval is about 0.1 ~ 0.5DC.
- 8) Guide hole is not necessary when for hole on surfaces angled between 5° and 15°, reduce the RPM by under 50%, the feed by under 40%.
- 9) Side milling is not possible.

A-74, A-48 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套袋商品
其它

精密工具

技术资料
索引

A-165

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXZOH5D | AQUA EX 油孔平头钻 5D AQUA Drills EX FLAT Oil-Hole 5D

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		铝合金 A7075 Aluminum Alloy	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		40 ~ 50HRC							
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
1.0	19100	190	15900	105	11100	55	9550	50	15900	80	12730	65	25500	255
1.5	12700	190	10600	105	7430	55	6370	50	10600	80	8490	65	17000	255
2.0	11100	330	9550	190	6700	100	5570	80	9550	140	7960	130	14300	430
2.5	13500	760	10200	380	7130	200	5740	160	10200	270	9500	330	15900	890
2.9	15300	1340	11000	635	7660	330	6590	285	10900	480	10900	635	17600	1530
3.0	14800	1340	10600	635	7400	330	6370	285	10500	480	10500	635	17000	1530
4.0	11100	1340	7900	635	5550	330	4780	285	7900	480	7900	635	13700	1530
5.0	8900	1340	6300	635	4450	330	3820	285	6300	480	6300	635	10200	1530
6.0	7400	1340	5300	635	3700	330	3180	285	5300	480	5300	635	9500	1530
8.0	5570	1340	3950	635	2790	330	2390	285	3950	480	3950	635	6370	1530
10.0	4460	1340	3150	635	2230	330	1900	285	3150	480	3150	635	5100	1530
12.0	3700	1340	2650	635	1860	330	1590	285	2650	480	2650	635	4240	1530
16.0	2790	1340	1990	635	1390	330	1190	285	1990	480	1990	635	3180	1530

AQDEXZOH5D

- 1) 本条件为需要预加工（导向孔）时的切削条件。
- 2) 请根据机械刚性及工夹具、加工形状等的情况调整切削条件。
- 3) 本条件为使用水溶性切削油剂时的条件。使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 4) 请采用内部冷却方式。
直径 DC < 3.0 时
请将切削油剂的供给压力设为 1.5MPa 以上。
为防止切削油剂中的杂质堵塞油孔，请使用经细网眼过滤器过滤后的切削液。
推荐使用孔眼为 5μm 的过滤器。
- 5) 本条件为孔深在 5DC 以下时的条件。
依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给或者修改切削条件。
- 6) 加工不锈钢时，请进行分级加工。
- 7) 分级进给时请返回到孔的上部。
- 8) 请将分级量的大致标准设定为 0.1DC ~ 0.5DC。
- 9) 进行平面加工时，需要大于直径的中心孔或者相同直径的导向孔。
(定心孔加工推荐使用 AG 定心钻，导向孔加工推荐使用 AQUA EX 平头钻，但不锈钢的导向孔加工（直径 > 1.9）推荐使用 AQUA EXOH3D 或 AQUA EX 平头钻 OH3D）
- 10) 不能进行外周方向的切削。

1) This table values are guide hole drilled.

- 2) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 3) For drilling with water soluble cutting fluid. In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Use on internal coolant.
In the case of drill dia. for less than 3mm. Lubricated pressure of fluid is over 1.5MPa.
To prevent oil-hole stopped up by impurities of cutting fluid, use fine mesh filter, recommend to filtration efficiency 5 μm.
- 5) Use the table values for drilling depth under 5 × DC.
However, chip ejection may deteriorate depending on the work material and the cutting condition.
If this is case, set the hole depth lower than the maximum and do step cutting condition.
- 6) In case of Stainless Steel, please step feed.
- 7) In step feed, return to the entrance hole.
- 8) Step feed interval is about 0.1 ~ 0.5DC.
- 9) Drilling requires a centering hole larger than the diameter or a guide hole of the same diameter.
(AG Starting Drills is recommended for centering hole, and AQUA Drills EX FLAT is recommended for guide hole. For drilling Stainless Steel, AQUA Drills EX FLAT OH 3D is recommended.)
- 10) Side milling is not possible.

A-75 ◀ ▶ 尺寸表 Stocked Sized

AQDEXZ3FR | AQUA EX 3 刃标准型平头钻 AQUA Drills EX FLAT 3 Flutes Regular

被削材 Work Material	灰口铸铁 FC250 FC300		球墨铸铁 FCD400		球墨铸铁 FCD700		一般结构用钢 SS 碳钢 S-C		铝铸件※ 1 ADC12	
	Cast Iron		Ductile Cast Iron		Ductile Cast Iron		Structural Steel Carbon Steel		Aluminum Alloy Casting	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	10600	1000	8500	760	6400	460	8500	760	12700	1530
5.0	6400	1000	5100	760	3800	460	5100	760	7600	1530
8.0	4000	950	3200	740	2400	440	3200	740	4750	1490
10.0	3200	920	2550	710	1900	420	2550	710	3800	1450
12.0	2650	900	2120	690	1600	400	2120	690	3180	1410

AQDEXZ3FR

- 1) 上述条件为加工孔径的 80% 以上的底孔已开好时的切削条件。
- 2) 没有底孔时，推荐使用 AQUA 3 刃钻。
- 3) 要求加工孔精度时，推荐采用湿式加工。
- 4) 采用干式加工时，请将转速及进给速度均降低到上表的 70% 以下。
- 5) 采用干式加工时，为进行冷却及去除切屑，请采用气冷措施。
- 6) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 7) 本切削条件为使用水溶性切削油剂时的条件。
- 8) 请向加工点及钻头充分供给切削油剂。
- 9) 夹紧时，请将钻头的振动控制在 0.01mm 以下。

※ 1 铝铸件时，请使用 DLC 3 刃平头钻 **DLCDZ3F (A-123)**。

- 1) A list is a cutting condition when there are prepared hole more than 80% of a drilling hole.
- 2) When there is not a prepared hole, we recommend AQUA Drills 3 Flutes.
- 3) For precision drilling, use in wet condition.
- 4) In case of dry condition, reduce the rotation and feed to 70% of table values.
- 5) Use air blow for cooling and the chip exclusion in dry process.
- 6) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 7) For drilling with water soluble cutting fluid.
- 8) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 9) Adjust the drill run out to 0.01mm or less.

※ 1 Use DLC Drills FLAT 3 Flutes in the case of Aluminum Alloy Casting.

A-76 ◀ ▶ 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXST | AQUA EX 定心钻 AQUA Drills EX Starting

定心 Centering

被削材 Work Material	一般结构用钢、 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		铝合金 有色金属 A5052 C1100 Aluminum Alloy Non-Ferrous Metal	
	~200HB		20~30HRC		30~40HRC		40~50HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	7400	450	4800	290	2100	95	1900	70	7400	450	2650	130	10600	1100
4.0	5600	430	3600	260	1600	85	1450	65	5600	430	2000	110	7950	1050
5.0	4450	380	2850	240	1250	75	1150	60	4450	380	1600	100	6350	950
6.0	3700	380	2400	240	1050	75	950	60	3700	380	1300	100	5300	950
8.0	2800	380	1800	240	800	75	700	60	2800	380	1000	100	4000	950
10.0	2200	330	1450	220	650	70	550	55	2200	330	800	95	3200	800
12.0	1850	330	1200	220	530	70	480	55	1850	330	650	95	2650	800
16.0	1400	290	900	190	400	65	350	50	1400	290	500	90	2000	700
20.0	1100	260	720	170	320	65	280	50	1100	260	400	80	1600	650

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 请向加工点充分供给切削油剂。
- 4) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 5) 请在定心时适用本切削条件。
- 6) 在压延面及黑皮面进行定心时, 请将转速和进给速度降低 20%。
- 7) 请使用筒夹、铣夹。
- 8) 对曲面、倾斜面定心时, 请将进给速度降低 20%。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) Apply sufficient cutting fluid to work area.
- 4) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 5) Use these cutting condition for centering work.
- 6) Reduce RPM and feed speed by 20% for centering work on the rolled surfaces or the mill scale surfaces.
- 7) Use collet chuck or milling chuck.
- 8) Reduce feed speed by 20% when centering on curved or angled surfaces.

倒角加工 Chamfering

被削材 Work Material	一般结构用钢、 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		高硬度钢 Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron		不锈钢 SUS304 SUS316 Stainless Steel		铝合金 有色金属 A5052 C1100 Aluminum Alloy Non-Ferrous Metal	
	~200HB		20~30HRC		30~40HRC		40~50HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	7400	360	4800	230	2100	65	1900	50	7400	360	2650	100	10600	890
4.0	5600	340	3600	210	1600	60	1450	45	5600	340	2000	85	7950	840
5.0	4450	300	2850	190	1250	55	1150	40	4450	300	1600	80	6350	760
6.0	3700	300	2400	190	1050	55	950	40	3700	300	1300	80	5300	760
8.0	2800	300	1800	190	800	55	700	40	2800	300	1000	80	4000	760
10.0	2200	260	1450	175	650	50	550	35	2200	260	800	75	3200	640
12.0	1850	260	1200	175	530	50	480	35	1850	260	650	75	2650	640
16.0	1400	230	900	150	400	45	350	30	1400	230	500	70	2000	560
20.0	1100	210	720	135	320	45	280	30	1100	210	400	60	1600	510

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 在机械或加工物安装过程中, 无刚性或者发生颤动时, 请按照相同比例, 降低上表中的转速和进给速度。
- 3) 本切削条件为使用水溶性切削油剂时的条件。
- 4) 请向加工点充分供给切削油剂。
- 5) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 6) 请在倒角加工时适用本切削条件。
- 7) 请使用筒夹、铣夹。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) Reduce the RPM and feed speed in the above table at the same rate if chattering occurs because the workpiece is not rigidity mounted to the machine.
- 3) For drilling with water soluble cutting fluid.
- 4) Apply sufficient cutting fluid to work area.
- 5) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 6) Use these cutting condition for chamfering.
- 7) Use collet chuck or milling chuck.

A-77 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEX-HCD AQDEX-SCD AQDEX-RCD

AQUA EX 平头小螺丝钻 沉孔用 AQUA Drills EX Machine screw counter bore
AQUA EX 盘头小螺丝平头钻 沉孔用 AQUA Drills EX Machine screw counter sink
AQUA EX 六角螺栓钻 沉孔用 AQUA Drills EX Counter bore for hexagon socket head bolts

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC			
螺纹尺寸 Thread size (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
M3	4700	320	3800	260	2100	125	3500	240
M4	3500	320	2900	260	1600	125	2700	240
M5	2900	320	2400	260	1300	125	2200	240
M6	2400	320	2000	260	1100	125	1800	240
M8	1800	300	1400	250	780	120	1300	230
M10	1400	290	1200	240	640	115	1100	220
M12	1150	265	920	215	500	105	850	200

AQDEX-HCD/SCD/RCD

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
- 4) 依被削材及加工条件，切屑的排出性有时会变差。此时，请进行分级进给或者修改切削条件。
- 5) 请将分级量的大致标准设定为 0.5DC ~ 1.0DC。
- 6) 夹紧时，请将钻头的振动控制在 0.02mm 以下。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Work material and cutting condition to chip removal may be worse. In that case, add step feed or review the cutting condition.
- 5) Step feed interval is about 0.5 ~ 1 × DC.
- 6) Adjust the drill run out to 0.02 mm or less.

A-80 尺寸表 Stocked Sized

AQDEXZ-HCD AQDEXZ-SCD AQDEXZ-RCD

AQUA EX 平头小螺丝平头钻 沉孔用 AQUA Drills EX FLAT Machine screw counter bore
AQUA EX 盘头小螺丝平头钻 沉孔用 AQUA Drills EX FLAT Machine screw counter sink
AQUA EX 六角螺栓平头钻 沉孔用 AQUA Drills EX FLAT Counter bore for hexagon socket head bolts

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC			
螺纹尺寸 Thread size (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
M3	4700	80	3800	65	2100	30	3500	60
M4	3500	80	2900	65	1600	30	2700	60
M5	2900	80	2400	65	1300	30	2200	60
M6	2400	80	2000	65	1100	30	1800	60
M8	1800	75	1400	60	780	30	1300	57
M10	1400	70	1200	60	640	30	1100	55
M12	1100	65	920	55	500	25	850	50

AQDEXZ-HCD/SCD/RCD

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
- 4) 依被削材及加工条件，切屑的排出性有时会变差。此时，请进行分级进给或者修改切削条件。
- 5) 请将分级量的大致标准设定为 0.2DC ~ 0.5DC。
- 6) 夹紧时，请将钻头的振动控制在 0.02mm 以下。
- 7) 加工倾斜面时，请根据加工倾角 (θ) 进行调整。
加工倾角 (θ) 在 30° 以下时，请将进给速度降低到 50%。
加工倾角 (θ) 超过 30° 时，请将转速降低到 70% 以下、将进给速度降低到 30% 以下。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Work material and cutting condition to chip removal may be worse. In that case, add step feed or review the cutting condition.
- 5) Step feed interval is about 0.2 ~ 0.5 × DC.
- 6) Adjust the drill run out to 0.02 mm or less.
- 7) For slope drilling, adjust according to inclined angle (θ). For inclined angle under 30°, reduce the feed to 50%. When drilling on inclined surface over 30°, reduce the rotation to 70% or less and cutting speed to 30% or less.

A-81 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQMD | AQUA 微型钻头 AQUA Micro Drills

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron			合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel			模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel			高硬度钢 Hardened Steel		
	~ 200HB			20 ~ 30HRC			30 ~ 40HRC			40 ~ 50HRC		
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	分级进给 Step Feed (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	分级进给 Step Feed (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	分级进给 Step Feed (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	分级进给 Step Feed (mm)
0.2	31800	60	0.1D	26500	50	0.1D	21200	40	0.1D	12700	30	0.1D
0.3	31800	100	0.1D	26500	80	0.1D	21200	60	0.1D	12700	40	0.1D
0.4	31800	130	0.1D	25900	100	0.1D	19900	80	0.1D	12700	50	0.1D
0.5	31800	190	0.2D	25500	150	0.1D	19100	110	0.1D	12700	60	0.1D
1.0	23900	360	0.2D~0.5D	15900	240	0.2D~0.5D	12700	190	0.2D~0.5D	8000	100	0.1D
1.5	21200	570	0.2D~0.5D	13800	370	0.2D~0.5D	9500	260	0.2D~0.5D	6400	140	0.1D
1.99	19200	950	0.2D~0.5D	12800	640	0.2D~0.5D	8000	400	0.2D~0.5D	5600	220	0.1D

被削材 Work Material	高硬度钢 Hardened Steel			球墨铸铁 FCD400 Ductile Cast Iron			不锈钢 SUS304 SUS316 Stainless Steel		
	50 ~ 55HRC								
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	分级进给 Step Feed (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	分级进给 Step Feed (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	分级进给 Step Feed (mm)
0.2	10600	20	0.1D	31800	60	0.1D	10600	20	0.1D
0.3	10600	30	0.1D	31800	100	0.1D	10600	30	0.1D
0.4	9900	40	0.1D	31800	130	0.1D	9500	40	0.1D
0.5	9500	50	0.1D	31800	190	0.1D	9500	50	0.1D
1.0	5600	60	0.1D	19100	290	0.2D~0.5D	5600	80	0.1D
1.5	4200	60	0.1D	17000	460	0.2D~0.5D	4200	130	0.1D
1.99	3600	70	0.1D	16000	570	0.2D~0.5D	3600	140	0.1D

A-82 ◀ ▶ 尺寸表 Stocked Sized

AQMD

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 湿式加工是指使用水溶性切削油剂时的加工。
- 3) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 4) 非水溶性切削油剂请勿用于高速条件。
- 5) 采用干式加工时, 为进行冷却及去除切屑, 请采取气冷措施。
- 6) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险, 因此请采取防火对策。
- 7) 钻头直径不足 1mm 时, 请采用湿式加工。
- 8) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 9) 开孔深度超过 3DC 时, 请将转速及进给速度降低 20%。
- 10) 分级进给时请返回到孔的上面。
- 11) 请将分级量的大致标准设定为 0.1 ~ 0.5DC。
- 12) 夹紧时, 请将钻头的振动控制在 0.02mm 以下, 高速切削时控制在 0.01mm 以下。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) Wet condition are for drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Do not use the high speed drilling in wet condition in using non-water soluble cutting fluid.
- 5) Use air blow for cooling and the chip exclusion in dry process.
- 6) By sparks during cutting, or heat by breakage, or hot chip, there is danger of fire. Take fire prevention measures.
- 7) Drill which diameter is under 1mm, must be used in wet condition.
- 8) Use the table values for drilling depth under 3 × DC.
- 9) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 10) In step feed, return to the entrance hole.
- 11) Step feed interval is about 0.1 ~ 0.5 × DC.
- 12) Adjust the drill run out to 0.02mm or less, in high speed drilling, adjust the drill run out to 0.01mm or less.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AQDH | AQUA 钻头 高硬型 AQUA Drills Hard

Table with 9 columns: Drill Dia. (mm), Rotation (min⁻¹), Feed (mm/min) for hardness ranges 50~55HRC, 55~60HRC, 60~65HRC, and 65HRC~. Rows include diameters from 2.0 to 12.0 mm.

AQDH

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 加工 50HRC 以下的被削材时，推荐使用 AQUA 钻头 短刃型和 AQUA 钻头标准型。
- 3) 干式加工和湿式加工的条件相同。但硬度 60HRC 以上的被削材请采用湿式加工。
- 4) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 5) 开孔深度超过 3DC 时，请将转数及进给速度降低 30%。
- 6) 开孔深度超过 3DC 时，请采用分级加工方式。但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时，为 0.2 ~ 0.5DC 左右。
- 9) 夹紧时，请将钻头的振动控制在 0.02mm 以下。
- 10) 切入时，请将进给速度降低 50%。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) Recommend AQUA Drills Stub, AQUA Drills Regular in drilling work material which hardness is below 50HRC.
- 3) This table value is used in dry & wet condition, but work material having over 60HRC hardness is used in wet condition.
- 4) Use the table values for drilling depth under 3 x DC.
- 5) When for hole depth more than 3 x DC, reduce the rotation and feed by 30%.
- 6) When for hole depth more than 3 x DC deep, add step feeding. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 7) In step feed, return to the entrance hole.
- 8) Step feed interval is about 0.5 ~ 1 x DC. In small diameter, about 0.2 ~ 0.5 x DC.
- 9) Adjust the drill run out to 0.02mm or less.
- 10) Reduce feed to 50% of table values at starting.

A-84 尺寸表 Stocked Sized

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品 其它

精密工具

技术资料 索引

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDFC | AQUA 钻头 铸铁专用型 AQUA Drills FC

泛用条件 Conventional Condition

被削材 Work Material	灰口铸铁 FC250 FC300		球墨铸铁 FCD400		球墨铸铁 FCD700		一般结构用钢 SS400 低碳钢 S15C	
	Gray Cast Iron		Ductile Cast Iron		Ductile Cast Iron		Structural Steel Low Carbon Steel	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	13000	540	10500	400	8600	260	7000	210
3.0	9600	760	7700	550	6400	370	5100	290
5.0	5800	760	4600	550	3800	370	3100	290
8.0	3600	760	2900	550	2400	370	1910	290
10.0	2900	760	2300	550	1900	370	1530	290
12.0	2400	680	1900	500	1600	330	1270	260

高速条件 High-Speed Condition

被削材 Work Material	灰口铸铁 FC250 FC300		球墨铸铁 FCD400		球墨铸铁 FCD700		一般结构用钢 SS400 低碳钢 S15C	
	Gray Cast Iron		Ductile Cast Iron		Ductile Cast Iron		Structural Steel Low Carbon Steel	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	21500	1130	17200	830	14300	550	11500	440
3.0	16000	1580	12700	1150	10600	760	8500	610
5.0	9600	1580	7600	1150	6400	760	5100	610
8.0	6000	1580	4800	1150	4000	760	3200	610
10.0	4800	1580	3800	1150	3200	760	2550	610
12.0	4000	1420	3200	1030	2650	690	2120	550

AQDFC

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 高碳钢、合金钢、调质钢, 推荐使用 AQUA 钻头 短刀型和标准型。
- 3) 采用干式加工时, 为进行冷却及去除切屑, 请采取气冷措施。
- 4) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险, 因此请采取防火对策。
- 5) 湿式加工是指使用水溶性切削油剂时的加工。
- 6) 请向加工点及钻头充分供给切削油剂。
- 7) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 8) 开孔深度超过 3DC 时, 请将转数及进给速度降低 20%。
- 9) 开孔深度超过 3DC 时, 请采用分级加工方式。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 10) 分级进给时请返回到孔的上面。
- 11) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
- 12) 夹紧时, 请将钻头的振动控制在 0.02mm 以下。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) In High Carbon Steel, Alloy Steel, Heat Treated Steel, recommend AQUA Drills Stub and Regular.
- 3) Use air blow for cooling and the chip exclusion in dry process.
- 4) By sparks during cutting, or heat by breakage, or hot chip, there is danger of fire. Take fire prevention measures.
- 5) Wet condition are for drilling with water soluble cutting fluid.
- 6) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 7) Use the table values for drilling depth under 3 × DC.
- 8) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 9) When for hole depth more than 3 × DC deep, add step feeding. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 10) In step feed, return to the entrance hole.
- 11) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 12) Adjust the drill run out to 0.02mm or less.

A-85 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

MQLPLD | MQL 强力长钻头 MQL Power Long Drills

MQL 加工 MQL Condition

10D / 15D / 20D 用

被削材 Work Material	一般结构用钢 碳钢 灰口铸铁 SS400 S50C FC250 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC			
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
4.0	5700	750	5000	500	4300	430	4300	520
5.0	5100	840	4450	560	3800	480	3800	570
6.0	4200	840	3700	560	3200	480	3200	570
7.0	3600	840	3200	560	2700	480	2700	570
8.0	3200	840	2800	560	2400	480	2400	570
9.0	2800	790	2500	540	2100	460	2100	550
10.0	2550	740	2200	510	1900	440	1900	540

25 / 30D 用

直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
4.0	5700	690	5000	460	4300	400	4300	480
5.0	5100	750	4450	510	3800	440	3800	540
6.0	4200	750	3700	510	3200	440	3200	540
7.0	3600	750	3200	510	2700	440	2700	540
8.0	3200	750	2800	510	2400	440	2400	540
9.0	2800	730	2500	490	2100	420	2100	520
10.0	2550	690	2200	470	1900	400	1900	500

湿式加工 Wet Condition

10D / 15D / 20D 用

直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
4.0	7200	950	5000	500	4300	430	5700	340	4300	520
5.0	6400	1050	4450	560	3800	480	5100	380	3800	570
6.0	5300	1050	3700	560	3200	480	4200	380	3200	570
7.0	4550	1050	3200	560	2700	480	3600	380	2700	570
8.0	4000	1050	2800	560	2400	480	3200	380	2400	570
9.0	3500	1000	2500	540	2100	460	2800	340	2100	550
10.0	3200	920	2200	510	1900	440	2550	300	1900	540

25 / 30D 用

直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
4.0	7200	860	5000	460	4300	400	5700	300	4300	480
5.0	6400	960	4450	510	3800	440	5100	330	3800	540
6.0	5300	960	3700	510	3200	440	4200	330	3200	540
7.0	4550	960	3200	510	2700	440	3600	330	2700	540
8.0	4000	960	2800	510	2400	440	3200	330	2400	540
9.0	3500	910	2500	490	2100	420	2800	300	2100	520
10.0	3200	860	2200	470	1900	400	2550	280	1900	500

MQLPLD

- 1) 请根据机械刚性及工夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂和油雾时的条件。
- 3) 使用非水溶性切削油剂时，请将转速和进给速度降低 30%。
- 4) 请采用内部冷却方式。
- 5) 可进行不分段加工。但是，依被削材及加工条件，切屑的排出性有时会变差。此时，请进行分级进给或者修改切削条件。
- 6) 分级进给时请返回到孔的上面。
- 7) 请将分级量的大致标准设定为 0.5 ~ 1DC。
- 8) 请预先加工导向孔。孔深为 2 ~ 3DC。
- 9) 导向孔加工时，推荐使用 AQDEXOHPLT (A-47)。推荐使用尺寸比深孔钻头大 0.02 ~ 0.03mm 的钻头。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) The table values condition are for drilling with water soluble cutting fluid or mist.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 30%.
- 4) Use on internal coolant.
- 5) Non-step drilling is possible. However, a work material and cutting condition to chip removal may be worse. In that case, add step feed or review the cutting condition.
- 6) In step feed, return to the entrance hole.
- 7) Step feed interval is about 0.5 ~ 1 × DC.
- 8) Recommend pre-drilling of guide hole. Depth is 2 to 3 × DC.
- 9) Recommend the AQDEXOH PLT Drill for guide drilling. Recommend the diameter that is 0.02mm larger than the deep hole drill.

A-86 ◀ • ▶ 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

PLOH3D | 白金油孔钻 3D PLATINA Oil-Hole Drills (3D)

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		铸铁 FC250 FCD400 Cast Iron		铝合金 铜合金 A5052 C1100 Aluminum Alloy Copper Alloy		高硬度钢 Hardened Steel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC						40 ~ 50HRC	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
5.0	3800	760	3100	530	2300	350	4200	1100	6500	1600	1500	210
8.0	2400	660	1900	440	1400	290	2600	890	4100	1400	960	180
10.0	1900	590	1500	390	1100	260	2100	810	3200	1200	760	160
12.0	1600	550	1300	380	960	250	1800	780	2700	1200	640	150
16.0	1200	500	1000	360	720	230	1300	680	2000	1000	480	140

A-90 ◀ ▶ 尺寸表 Stocked Sized

PLOH5D | 白金油孔钻 5D PLATINA Oil-Hole Drills (5D)

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		铸铁 FC250 FCD400 Cast Iron		铝合金 铜合金 A5052 C1100 Aluminum Alloy Copper Alloy		高硬度钢 Hardened Steel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC						40 ~ 50HRC	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
5.0	3800	650	3100	450	2300	290	4200	900	6500	1400	1500	180
8.0	2400	560	1900	380	1400	250	2600	760	4100	1200	960	160
10.0	1900	510	1500	340	1200	230	2100	700	3200	1100	760	140
12.0	1600	470	1300	320	960	210	1800	650	2700	1000	640	130
16.0	1200	430	960	290	720	190	1300	590	2000	910	480	120
20.0	960	390	760	260	570	170	1100	530	1600	820	380	110

A-92 ◀ ▶ 尺寸表 Stocked Sized

PLOH7D | 白金油孔钻 7D PLATINA Oil-Hole Drills (7D)

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		铸铁 FC250 FCD400 Cast Iron		铝合金 铜合金 A5052 C1100 Aluminum Alloy Copper Alloy		高硬度钢 Hardened Steel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC						40 ~ 50HRC	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
5.0	3800	540	3100	380	2300	250	4200	750	6500	1200	1500	150
8.0	2400	470	1900	320	1400	210	2600	630	4100	1000	960	130
10.0	1900	420	1500	290	1200	190	2100	580	3200	880	760	120
12.0	1600	390	1300	270	960	180	1800	540	2700	830	640	110
16.0	1200	360	960	240	720	160	1300	490	2000	760	480	100
20.0	960	320	760	220	570	140	1100	440	1600	680	380	90

A-94 ◀ ▶ 尺寸表 Stocked Sized

PLOH3D/5D/7D

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 不推荐用于钛合金、不锈钢 (SUS304 等) 的开孔加工。
- 3) 本切削条件为使用水溶性切削油剂时的条件。
- 4) 请向加工点及钻头充分供给切削油剂。
- 5) 使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 6) 请采用内部冷却方式。
- 7) 开孔深度超过 3DC 时，请采用分级加工方式。但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 8) 分级进给时请返回到孔的上面。
- 9) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时，为 0.2 ~ 0.5DC 左右。
- 10) 夹紧时，请将钻头的振动控制在 0.02mm 以下。

- 1) Adjust cutting condition according to the situation, such as rigidity of machine, work clamp, and shape of workpiece.
- 2) Not recommended for drilling in Titanium Alloy or Stainless Steel (SUS304).
- 3) For drilling with water soluble cutting fluid.
- 4) Apply sufficient cutting fluid to the cutting point and the flutes.
- 5) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 6) Use on internal coolant.
- 7) Do step drilling for hole deeper than 3 × DC. However, chip ejection may deteriorate depending on the work material and the cutting condition. If this is the case, set the hole depth lower than the maximum and do step drilling.
- 8) Return the drill bit to the upper surface of the hole when doing step feeding.
- 9) Depth of steps should be from 0.5 to 1 diameter. For small diameters, about 0.2 to 0.5 diameters.
- 10) Adjust the drill run out to 0.02 mm or less.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件
Standard Cutting Condition for Carbide Drills

DLCMD | DLC 微型钻头 DLC Micro drills
DLCDR | DLC 钻头 标准型 DLC Drills Regular

湿式加工、MQL 加工 Wet Condition and MQL Condition

Table with 14 columns: Work Material, Diameter, Rotation, Feed, and their counterparts for various materials (Aluminum, Aluminum Alloy, Aluminum Alloy Casting, Copper Alloy).

干式加工（气冷） Dry Condition (Air blow)

Table with 14 columns: Work Material, Diameter, Rotation, Feed, and their counterparts for various materials (Aluminum, Aluminum Alloy, Aluminum Alloy Casting, Copper Alloy).

DLCMD/DLCDR

- 1) DLC 钻头是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 5) 开孔深度超过 3DC 时，请将转数及进给速度降低 20%。
- 6) 开孔深度超过 3DC 时，请采用分级加工方式。但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量的大致标准设定为 0.2 ~ 1DC。直径 1mm 以下时为 0.1 ~ 0.2DC 左右。
- 9) 夹紧时，请将钻头的振动控制在 0.02mm 以下。

- 1) DLC Drills are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy. Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) Use the table values for drilling depth under 3 x DC.
- 5) When for hole depth more than 3 x DC, reduce the rotation and feed by 20%.
- 6) When for hole depth more than 3 x DC deep, add step feeding. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 7) In step feed, return to the entrance hole.
- 8) Step feed interval is about 0.2 ~ 1 x DC. In drill diameter of 1.0mm or less, about 0.1 ~ 0.2 x DC.
- 9) Adjust the drill run out to 0.02mm or less.

A-96, A-97 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

DLCDLM-4D | DLC 微型钻头 螺旋角渐弱型 DLC Drills Micro Twist Angle Decrescendo Type

湿式加工、MQL 加工 Wet Condition and MQL Condition

被削材 Work Material	纯铝 A1070		铝合金 Si、Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si、Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
0.5	60000	550	58000	550	60000	550	60000	650	60000	650	38000	400
1.0	50000	1100	38000	900	50000	1100	50000	1400	48000	1300	25000	700
2.0	40000	2100	24000	1300	32000	1800	32000	2000	29000	1800	16000	1000
3.0	26500	2100	16000	1300	21000	1800	21000	2000	19000	1800	10500	1000

干式加工 (气冷) Dry Condition (Air blow)

被削材 Work Material	纯铝 A1070 Aluminum		铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si		铝合金 Mg 类 A5052 Aluminum Alloy Mg		铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg		铝合金铸件 AC ADC Aluminum Alloy Casting		铜合金 C1100 Copper Alloy	
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
0.5	不适用 Not used		30000	180	38000	230	45000	300	38000	300	22000	150
1.0			20000	300	25000	400	30000	350	25000	450	15000	250
2.0			12500	500	16000	650	19000	900	16000	700	9500	400
3.0			8500	500	10600	650	12700	900	10600	700	6400	400

DLCDLM-4D

- 1) DLCDLM-4D 是铝合金、铜合金等有色金属用钻头。不适用于高硬度钢、钛合金。
- 2) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
- 3) 请向加工点和钻头充分供给切削油剂。
- 4) 本切削条件表适用于开孔深度 4DC 以下的加工。但是, 依被削材及加工条件, 铁屑的排出性有时会变差。此时, 即使孔深小于规定的深度, 也请使用分级进给。
- 5) 分级进给时请返回到孔的上面。
- 6) 请将分级量的大致标准设定为 0.2~1.0DC。小径约为 0.2~0.5DC。
- 7) 夹紧时, 请将钻头的振动控制在 0.02mm 以下。
- 8) 钻头刃尖再研磨极限量请以 1DC 为标准。超过 1DC 有可能导致铁屑排出不良。
- 9) 请委托本公司进行钻头再研磨服务。因形状不同, 再研磨后的性能可能会有所不同。

- 1) DLC Drills Micro Twist Angle Decrescendo Type are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy. Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) Use the table values for drilling depth under 4 × DC. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 5) In step feed, return to the entrance hole.
- 6) Step feed interval is about 0.2 ~ 1 × DC. For small diameters, about 0.2 to 0.5 diameters.
- 7) Adjust the drill run out to 0.02mm or less.
- 8) The re-grinding amount of the tip of the drill bit is recommended to be 1 × DC. If more than 1 × DC, the performance of chip discharge may be worse.
- 9) Please contact us about re-grinding the drill bit. Depending on the shape, the properties may be different after regrounding.

A-98 ◀▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

DLCDL-4D | DLC 钻头 螺旋角渐弱型 DLC Drills Twist Angle Decrescendo Type

湿式加工、MQL 加工 Wet Condition and MQL Condition

Table with 12 columns: Work Material, Rotation, Feed, and their counterparts for different materials (Aluminum, Aluminum Alloy, Aluminum Alloy Casting, Copper Alloy).

干式加工（气冷） Dry Condition (Air blow)

Table with 12 columns: Work Material, Rotation, Feed, and their counterparts for different materials (Aluminum, Aluminum Alloy, Aluminum Alloy Casting, Copper Alloy).

- DLCDL-4D 是铝合金、铜合金等有色金属用钻头。不适用于高硬度钢被切。
- 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 请向加工点和钻头充分供给切削油剂。
- 本切削条件表适用于开孔深度 4DC 以下的加工。
- 但是，依被削材及加工条件，铁屑的排出性有时会变差。此时，即使孔深小于规定的深度，也请使用分级进给。
- 分级进给时请返回到孔的上面。
- 请将分级量的大致标准设定为 0.2~1.0DC。小径约为 0.2~0.5DC。
- 夹紧时，请将钻头的振动控制在 0.02mm 以下。
- 钻头刃尖再研磨极限量请以 1DC 为标准。超过 1DC 有可能会产生铁屑排出不良。
- 请委托本公司进行钻头再研磨服务。因形状不同，再研磨后的性能可能会有所不同。
- DLC Drills Twist Angle Decrescendo Type are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy.
- Not suitable for very hard beryllium Copper.
- Adjust cutting condition when unusual vibration, different sound occur by cutting.
- Provide sufficient amount cutting fluid to the cutting point and in the flute.
- Use the table values for drilling depth under 4 x DC.
- However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- In step feed, return to the entrance hole.
- Step feed interval is about 0.5 ~ 1 x DC.
- Adjust the drill run out to 0.02mm or less.
- The re-grinding amount of the tip of the drill bit is recommended to be 1 x DC. If more than 1 x DC, the performance of chip discharge may be worse.
- Please contact us about re-grinding the drill bit. Depending on the shape, the properties may be different after regrinding.

A-101 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

DLCFFDR | DLC 抛光钻头 标准型 DLC Burnishing Drills Regular

被削材 Work Material	纯铝 A1070		铝合金 Si、Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si、Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2.0	22300	1350	22300	1350	27000	1800	27000	1800	28000	1850	19000	950
3.0	14900	1350	14900	1350	18000	1800	18000	1800	18600	1850	12500	950
4.0	11200	1350	11200	1350	13500	1800	13500	1800	14000	1850	9500	950
5.0	8900	1350	8900	1350	10800	1800	10800	1800	11200	1850	7500	950
6.0	7500	1350	7500	1350	9000	1800	9000	1800	9300	1850	6300	950
8.0	5600	1300	5600	1300	6800	1750	6800	1750	7000	1750	4700	930
10.0	4500	1260	4500	1260	5400	1700	5400	1700	5600	1700	3800	910
12.0	3700	1230	3700	1230	4500	1650	4500	1650	4700	1600	3200	900
16.0	2000	870	2000	870	2600	1250	2600	1250	2800	1200	2000	720
20.0	1300	700	1300	700	1600	950	1600	950	1700	900	1200	540

DLCFFDR

- 1) DLCFFDR 钻头是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 5) 开孔深度超过 3DC 时, 请将转速及进给速度降低 20%。
- 6) 开孔深度超过 3DC 时, 请采用分级加工方式。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量的大致标准设定为 0.2DC ~ 1DC。
- 9) 夹紧时, 请将钻头的振动控制在 0.01mm 以下。

- 1) DLC Burnishing Drills Regular are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy. Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) Use the table values for drilling depth under 3 × DC.
- 5) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 6) When for hole depth more than 3 × DC deep, add step feeding. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 7) In step feed, return to the entrance hole.
- 8) Step feed interval is about 0.2 ~ 1 × DC.
- 9) Adjust the drill run out to 0.01mm or less.

A-102 尺寸表 Stocked Sized

DLCFFDOH4D/8D | DLC 抛光油孔钻 4D/8D DLC Burnishing Drills Oil-Hole 4D/8D

被削材 Work Material	纯铝 A1070		铝合金 Al、Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si、Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	14900	715	14900	715	18000	860	18000	860	18600	900	12500	460
4.0	11200	715	11200	715	13500	860	13500	860	14000	900	9500	460
5.0	8900	890	8900	890	10800	1080	10800	1080	11200	1100	7500	560
6.0	7500	890	7500	890	9000	1080	9000	1080	9300	1100	6300	560
8.0	5600	1120	5600	1120	6800	1360	6800	1360	7000	1410	4700	680
10.0	4500	1120	4500	1120	5400	1360	5400	1360	5600	1410	3800	680
12.0	3700	1300	3700	1300	4500	1570	4500	1570	4700	1650	3200	850

DLCFFDOH4D/8D

- 1) DLCFFDOH4D/8D 是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
- 3) 请采用内部冷却方式。
- 4) 夹紧时, 请将钻头的振动控制在 0.01mm 以下。

- 1) DLC Burnishing Drills Oil-Hole are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy. Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when usual vibration, different sound occur by cutting.
- 3) Use on internal coolant.
- 4) Adjust the drill run out to 0.01mm or less.

A-104, A-106 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

DLCD0H3D/5D/8D | DLC 油孔钻 3D/5D/8D

DLC Drills Oil-Hole 3D/5D/8D

被削材 Work Material	纯铝 A1070 Aluminum			铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si			铝合金 Mg 类 A5052 Aluminum Alloy Mg			铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg			铝合金铸件 AC ADC Aluminum Alloy Casting			铜合金 C1100 Copper Alloy		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
新商品	1.0	30000	900	30000	900	30000	900	30000	900	30000	900	30000	1100	25500	770			
	2.0	30000	1800	19200	1150	25400	1500	25400	1500	19100	1360	12800	770					
	3.0	21200	2200	12800	1300	17000	1800	17000	1850	12700	1570	8500	930					
	4.0	15900	2200	9600	1300	12700	1800	12700	1850	9500	1570	6400	930					
	5.0	12700	2200	7600	1300	10200	1800	10200	1850	7600	1570	5100	930					
	6.0	10600	2200	6400	1300	8500	1800	8500	1850	6400	1570	4200	930					
	8.0	8000	2200	4800	1300	6400	1800	6400	1850	4800	1570	3200	930					
	10.0	6400	2200	3800	1300	5100	1800	5100	1850	3800	1570	2500	930					
	12.0	5300	2100	3200	1300	4200	1700	4200	1750	3200	1570	2100	930					

DLCD0H10D/15D/20D | DLC 油孔钻 10D/15D/20D

DLC Drills Oil-Hole 10D/15D/20D

被削材 Work Material	纯铝 A1070 Aluminum			铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si			铝合金 Mg 类 A5052 Aluminum Alloy Mg			铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg			铝合金铸件 AC ADC Aluminum Alloy Casting			铜合金 C1100 Copper Alloy		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
丝锥	1.0	30000	750	30000	750	30000	750	30000	750	30000	750	30000	900	25500	640			
	2.0	30000	1500	19200	960	25400	1270	25400	1270	19100	1150	12800	640					
	3.0	21200	1850	12800	1110	17000	1530	17000	1580	12700	1330	8500	790					
	4.0	15900	1850	9600	1110	12700	1530	12700	1580	9500	1330	6400	790					
	5.0	12700	1850	7600	1110	10200	1530	10200	1580	7600	1330	5100	790					
	6.0	10600	1850	6400	1110	8500	1530	8500	1580	6400	1340	4200	790					
	8.0	8000	1850	4800	1110	6400	1530	6400	1580	4800	1340	3200	790					
	10.0	6400	1850	3800	1110	5100	1530	5100	1580	3800	1340	2500	790					
	12.0	5300	1850	3200	1110	4200	1530	4200	1580	3200	1340	2100	790					

A-108, A-109, A-110, A-111, A-112, A-113 尺寸表 Stacked Sized

DLCD0H3D/5D/10D/15D/20D 直径 <3.0

- 1) DLC 油孔钻是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 3) 本切削条件为使用水溶性切削油剂时的条件。
- 4) 请采用内部冷却方式。
- 5) 请将切削油剂的供给压力设为 1.5MPa 以上。
- 6) 为防止切削油剂的杂质堵塞油孔，请使用经细网过滤器过滤后的切削液。推荐使用孔径为 5μm 的过滤器。
- 7) 夹紧时，请将钻头的振动控制在 0.02mm 以下。
- 8) 依被削材及加工条件，切屑的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 9) 分级进给时请返回到孔的上面。
- 10) 请将分级量的大致标准设定为 0.2DC ~ 1DC。
- 11) 孔深为 10DC 以上时，请预先加工导向孔。推荐孔深为 1DC ~ 2DC。
- 12) 导向孔加工时，推荐使用 DLCD0HPLT。推荐使用尺寸比深孔钻大 0.015mm 的钻头。

DC < 3.0

- 1) DLC Drills Oil-Hole are available in Nonferrous Metals such as Aluminum, Copper Alloy.
Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when usual vibration, different sound occur by cutting.
- 3) For drilling with water soluble cutting fluid.
- 4) Use on internal coolant.
- 5) Lubricated pressure of fluid is over 1.5MPa.
- 6) To prevent oil-hole stopped up by impurities of cutting fluid, use fine mesh filter, recommend to filtration efficiency 5μm.
- 7) Adjust the drill run out to 0.02mm or less.
- 8) There are cases that chip ejection is bad by work materials and cutting condition.
Even if hole-depth under 3 × DC, 5 × DC, 10 × DC, 15 × DC or 20 × DC, please step feed or check cutting condition.
- 9) In step feed, return to the entrance hole.
- 10) Step feed interval is about 0.2 ~ 1.0 × DC.
- 11) When for hole depth more than 10 × DC, recommend pre-drilling of guide hole. Depth is 1 ~ 2 × DC.
- 12) Recommend the DLCD0HPLT for guide drilling.
Recommend the diameter that is 0.015mm larger than the deep hole drill.

DLCD0H3D/5D/10D/15D/20D 直径 ≥ 3.0

- 1) DLC 油孔钻是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 3) 本切削条件为使用水溶性切削油剂时的条件。
- 4) 请采用内部冷却方式。
- 5) 夹紧时，请将钻头的振动控制在 0.02mm 以下。
- 6) 依被削材及加工条件，切屑的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量的大致标准设定为 0.2DC ~ 1DC。
- 9) 孔深为 10DC 以上时，请预先加工导向孔。推荐孔深为 2DC ~ 3DC。
- 10) 导向孔加工时，推荐使用 DLCD0HPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。

DC ≥ 3.0

- 1) DLC Drills Oil-Hole are available in Nonferrous Metals such as Aluminum, Copper Alloy.
Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when usual vibration, different sound occur by cutting.
- 3) For drilling with water soluble cutting fluid.
- 4) Use on internal coolant.
- 5) Adjust the drill run out to 0.02mm or less.
- 6) There are cases that chip ejection is bad by work materials and cutting condition.
Even if hole-depth under 3 × DC, 5 × DC, 10 × DC, 15 × DC or 20 × DC, please step feed or check cutting condition.
- 7) In step feed, return to the entrance hole.
- 8) Step feed interval is about 0.2 ~ 1.0 × DC.
- 9) When for hole depth more than 10 × DC, recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 10) Recommend the DLCD0HPLT for guide drilling.
Recommend the diameter that is 0.03mm larger than the deep hole drill.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

DLCD0H25D/30D | DLC 油孔钻 25D/30D DLC Drills Oil-Hole 25D/30D

被削材 Work Material	纯铝 A1070 Aluminum			铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si			铝合金 Mg 类 A5052 Aluminum Alloy Mg			铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg			铝合金铸件 AC ADC Aluminum Alloy Casting			铜合金 C1100 Copper Alloy		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
3.0	21200	1670	12800	1000	17000	1380	17000	1420	12700	1200	8500	710						
4.0	15900	1670	9600	1000	12700	1380	12700	1420	9500	1200	6400	710						
5.0	12700	1670	7600	1000	10200	1380	10200	1420	7600	1200	5100	710						
6.0	10600	1670	6400	1000	8500	1380	8500	1420	6400	1200	4200	710						
8.0	8000	1670	4800	1000	6400	1380	6400	1420	4800	1200	3200	710						

DLCD0H35D/40D | DLC 油孔钻 35D/40D DLC Drills Oil-Hole 35D/40D

被削材 Work Material	纯铝 A1070 Aluminum			铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si			铝合金 Mg 类 A5052 Aluminum Alloy Mg			铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg			铝合金铸件 AC ADC Aluminum Alloy Casting			铜合金 C1100 Copper Alloy		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
3.0	26500	1100	19100	800	23300	1050	23300	1100	23300	700	16000	480						
4.0	20000	1100	14900	800	17500	1050	17500	1100	17500	700	12000	480						
5.0	16000	1100	11500	800	14000	1050	14000	1100	14000	700	9600	480						
6.0	13200	1100	9600	800	11700	1050	11700	1100	11700	700	8000	480						
7.0	11400	1100	8200	800	10000	1050	10000	1100	10000	700	6800	480						
7.5	10600	1100	7600	800	9300	1050	9300	1100	9300	700	6400	480						

DLCD0H45D/50D | DLC 油孔钻 45D/50D DLC Drills Oil-Hole 45D/50D

被削材 Work Material	纯铝 A1070 Aluminum			铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si			铝合金 Mg 类 A5052 Aluminum Alloy Mg			铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg			铝合金铸件 AC ADC Aluminum Alloy Casting			铜合金 C1100 Copper Alloy		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
3.0	21200	890	14800	620	19100	860	19100	920	19100	570	12700	380						
4.0	16000	890	11100	620	14300	860	14300	920	14300	570	9600	380						
5.0	12700	890	8900	620	11500	860	11500	920	11500	570	7600	380						
6.0	10600	890	7400	620	9600	860	9600	920	9600	570	6400	380						

A-114, A-115, A-116 ◀ ▶ 尺寸表 Stocked Sized

DLCD0H25D/30D/35D/40D/45D/50D

- 1) DLC 油孔钻是铝合金、铜合金等有色金属用钻头。不适用于高硬度碳钢。
- 2) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
- 3) 本切削条件为使用水溶性切削油剂时的条件。
- 4) 请采用内部冷却方式。
- 5) 依被削材及加工条件, 切屑的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用寸动进给。
- 6) 请将寸动量的大致标准设定为 0.5DC ~ 1.0DC。
- 7) 夹紧时, 请将钻头的振动控制在 0.02mm 以下。
- 8) 请预先加工导向孔。推荐孔深为 2DC ~ 3DC。
- 9) 导向孔加工时, 推荐使用 DLCD0HPLT。推荐使用尺寸比深孔钻大 0.03mm 的钻头。
- 10) 开孔深度为 30DC 以上时, 依被削材和给油压, 切屑的排出性有时会变差。此时, 推荐进行 20DC 以上的预加工。

- 1) DLC Drills Oil-Hole are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy.
Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when usual vibration, different sound occur by cutting.
- 3) For drilling with water soluble cutting fluid.
- 4) Use on internal coolant.
- 5) Work material and cutting condition to chip removal may be worse.
If this is the case, set the hole depth lower than the maximum and do inching.
- 6) Inching amount is about 0.5 ~ 1.0 × DC.
- 7) Adjust the drill run out to 0.02mm or less.
- 8) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 9) Recommend the DLCD0HPLT for guide drilling.
Recommend the diameter that is 0.03mm larger than the deep hole drill.
- 10) When depth of hole over than 30 × DC, work material of pressure lubrication will make chip ejection worse.
At that time, we recommend to transact pre-stage process of over 20 × DC.

深孔加工方法也请参照 I-11。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

DLCD0HPLT | DLC 油孔引导钻 DLC Drills Oil-Hole Pilot

被削材 Work Material	纯铝 A1070		铝合金 Si、Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si、Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1.015	63300	950	38400	590	51000	770	51000	920	38200	680	25500	460
2.015	31700	1110	19200	690	25400	950	25400	1030	19100	790	12800	510
3.030	21200	1120	12800	690	17000	960	17000	1040	12700	800	8500	510
4.030	15900	1120	9600	690	12700	960	12700	1040	9500	800	6400	510
5.030	12700	1120	7700	690	10200	960	10200	1040	7700	800	5100	510
6.030	10600	1120	6400	690	8500	960	8500	1040	6400	800	4200	510
8.030	8000	1120	4800	690	6400	960	6400	1040	4800	800	3200	510
10.030	6400	1120	3900	690	5100	960	5100	1040	3800	800	2500	510
12.030	5300	1120	3200	690	4200	960	4200	1040	3200	800	2100	510

A-117 尺寸表 Stocked Sized

DLCDOHPLT 直径 <3.030

- 1) DLC 油孔引导钻是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 3) 本切削条件为使用水溶性切削油剂时的条件。
- 4) 请采用内部冷却方式。
- 5) 请将切削油剂的供给压力设为 1.5MPa 以上。
- 6) 为防止切削油剂的杂质堵塞油孔，请使用经细网眼过滤器过滤后的切削液。推荐使用孔眼为 5μm 的过滤器。
- 7) 夹紧时，请将钻头的振动控制在 0.02mm 以下。

DLCDOHPLT 直径 ≥ 3.030

- 1) DLC 油孔引导钻是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 3) 本切削条件为使用水溶性切削油剂时的条件。
- 4) 请采用内部冷却方式。
- 5) 夹紧时，请将钻头的振动控制在 0.02mm 以下。

DC < 3.030

- 1) DLC Drills Oil-Hole Pilot are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy. Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when usual vibration, different sound occur by cutting.
- 3) For drilling with water soluble cutting fluid.
- 4) Use on internal coolant.
- 5) Lubricated pressure of cutting fluid is over 1.5MPa.
- 6) To prevent oil-hole stopped up by impurities of cutting fluid, use fine mesh filter, recommend to filtration efficiency 5μm.
- 7) Adjust the drill run out to 0.02mm or less.

DC ≥ 3.030

- 1) DLC Drills Oil-Hole Pilot are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy. Not suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when usual vibration, different sound occur by cutting.
- 3) For drilling with water soluble cutting fluid.
- 4) Use on internal coolant.
- 5) Adjust the drill run out to 0.02mm or less.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

DLCDZR

DLC 平头钻标准型 DLC Drills FLAT Regular

被削材 Work Material	纯铝 A1070		铝合金 Al、Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si、Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1.0	40000	410	24000	240	31800	320	31800	340	28600	310	16000	170
1.5	26000	550	16000	320	21000	440	21000	390	19000	420	10700	230
2.0	20000	750	12000	430	16000	590	16000	460	14300	560	8000	310
2.5	15700	910	9550	530	13000	740	13000	560	11500	690	6400	380
2.9	13600	1060	8250	630	11250	880	11250	660	10200	850	5500	450
3.0	13000	1060	8000	630	11000	880	11000	910	10000	850	5300	450
4.0	10000	1060	6000	630	8000	880	8000	910	7200	850	4000	450
5.0	8000	1060	4800	630	6400	880	6400	910	5700	850	3200	450
6.0	6600	1060	4000	630	5300	880	5300	910	4800	850	2600	450
8.0	5000	1060	3000	630	4000	880	4000	910	3600	850	2000	450
10.0	4000	1060	2400	630	3200	880	3200	910	2900	850	1600	450
12.0	3300	1000	2000	610	2700	860	2700	890	2400	820	1300	430
16.0	2500	940	1500	560	2000	780	2000	820	1800	760	1000	410

DLCDZR

- 1) 请在湿式加工时使用。
- 2) 是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 3) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
- 4) 请向加工点及钻头充分供给切削油剂。
- 5) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 6) 开孔深度超过 3DC 时, 请将转速及进给速度降低 20%。
- 7) 开孔深度超过 3DC 时, 请采用分级加工方式。依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 8) 分级进给时请返回到孔的上部。
- 9) 请将分级量的大致标准设定为 0.2DC ~ 1DC。
- 10) 夹紧时, 请将钻头的振动控制在 0.02mm 以下。
- 11) 不能进行外周方向的切削。
- 12) 加工倾斜面时, 请根据加工倾角 (θ) 进行调整。
加工倾角 (θ) 在 30°以下时, 请将进给速度降低到 50%。
加工倾角 (θ) 超过 30°时, 请将转速降低到 70% 以下、将进给速度降低到 30% 以下。

- 1) Please use the drilling in wet condition.
- 2) DLC drills are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy.
Non suitable for very hard beryllium Copper.
- 3) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 4) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 5) Use the table values for drilling depth under 3 × DC.
- 6) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 7) When for hole depth more than 3 × DC, deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse.
In that case, even if under predetermined hole depth, please step feed.
- 8) In step feed, return to the entrance hole.
- 9) Depth of steps should be from 0.2 ~ 1 × DC.
- 10) Adjust the drill run out to 0.02mm or less.
- 11) Side milling is not possible.
- 12) When drilling incline angle is less than 30°, reduce the feed by 50%.
When drilling incline angle is over 30°, reduce the rotation by under 70%.
the feed by under 30%.

A-118 ◀ ▶ 尺寸表 Stocked Sized

DLCDZLS

DLC 平头钻长柄型 DLC Drills FLAT Long Shank

被削材 Work Material	纯铝 A1070		铝合金 Si、Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si、Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	18600	1340	11100	800	14900	1120	14900	1160	13300	1080	7400	580
4.0	13900	1340	8400	800	11100	1120	11100	1160	10000	1080	5600	580
5.0	11100	1340	6700	800	8900	1120	8900	1160	8000	1080	4500	580
6.0	9300	1340	5600	800	7400	1120	7400	1160	6600	1080	3700	580
8.0	7000	1340	4200	800	5600	1120	5600	1160	5000	1080	2800	580
10.0	5600	1340	3300	800	4500	1120	4500	1160	4000	1080	2200	580
12.0	4600	1340	2800	800	3700	1120	3700	1160	3300	1080	1900	580
16.0	3500	1230	2100	740	2800	1030	2800	1080	2500	1000	1400	540

DLCDZLS

- 1) 是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 夹紧时, 请将钻头的振动控制在 0.02mm 以下。
- 5) 不能进行外周方向的切削。
- 6) 加工倾斜面时, 请根据加工倾角 (θ) 进行调整。
加工倾角 (θ) 在 30°以下时, 请将进给速度降低到 50%。
加工倾角 (θ) 超过 30°时, 请将转速降低到 70% 以下、将进给速度降低到 30% 以下。

- 1) DLC drills are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy.
Non suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) Adjust the drill run out to 0.02mm or less.
- 5) Side milling is not possible.
- 6) When drilling incline angle is less than 30°, reduce the feed by 50%.
When drilling incline angle is over 30°, reduce the rotation by under 70%.
the feed by under 30%.

A-121 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

DLCDZOH5D | DLC 油孔平头钻 5D DLC Drills FLAT Oil-Hole 5D

被削材 Work Material	纯铝 A1070		铝合金 Si、Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si、Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	21200	1850	12800	1110	17000	1530	17000	1580	14900	1430	8500	790
4.0	15900	1850	9600	1110	12700	1530	12700	1580	8900	1430	6400	790
5.0	12700	1850	7600	1110	10200	1530	10200	1580	7400	1430	5100	790
6.0	10600	1850	6400	1110	8500	1530	8500	1580	5600	1430	4200	790
8.0	8000	1850	4800	1110	6400	1530	6400	1580	4500	1430	3200	790
10.0	6400	1850	3800	1110	5100	1530	5100	1580	4000	1430	2500	790
12.0	5300	1850	3200	1110	4200	1530	4200	1580	3700	1430	2100	790
16.0	4000	1730	2400	1040	3200	1430	3200	1480	2800	1340	1600	740

DLCDZOH5D

- 1) 是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 2) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 3) 切削油请用于内部冷却。
- 4) 夹紧时，请将钻头的振动控制在 0.02mm 以下。
- 5) 不能进行外周方向的切削。
- 6) 请采用内部冷却方式。
- 7) 加工倾斜面时，请根据加工倾角 (θ) 进行调整。
加工倾角 (θ) 在 30° 以下时，请将进给速度降低到 50%。
加工倾角 (θ) 超过 30° 时，请将转速降低到 70% 以下、将进给速度降低到 30% 以下。
- 1) DLC drills are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy.
Non suitable for very hard beryllium Copper.
- 2) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 3) Use on internal coolant.
- 4) Adjust the drill run out to 0.02mm or less.
- 5) Side milling is not possible.
- 6) Use or internal coolant.
- 7) When drilling incline angle is less than 30°, reduce the feed by 50%.
When drilling incline angle is over 30°, reduce the rotation by under 70%, the feed by under 30%.

A-122 尺寸表 Stocked Sized

DLCDZ3F | DLC 3 刃平头钻 DLC Drills FLAT 3 Flutes

被削材 Work Material	纯铝 A1070		铝合金 Si、Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si、Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3.0	19200	3400	10600	1800	16000	2900	16000	3000	12700	1500	8500	1000
4.0	14400	3400	8000	1800	12000	2900	12000	3000	9500	1500	6400	1000
5.0	11500	3400	6300	1800	9600	2900	9600	3000	7600	1500	5100	1000
6.0	9600	3400	5300	1800	8000	2900	8000	3000	6300	1500	4200	1000
8.0	7200	3400	4000	1800	6000	2900	6000	3000	4800	1500	3200	1000
10.0	5700	3400	3200	1800	4800	2900	4800	3000	3800	1500	2500	1000
12.0	4800	3400	2600	1800	4000	2900	4000	3000	3200	1500	2100	1000

DLCDZ3F

- 1) 请在湿式加工或者油雾加工时使用。
- 2) 是铝合金、铜合金等有色金属用钻头。不适用于高硬度铍铜。
- 3) 使用 DLCDZ3F 时，请先开相等于加工孔径的 80% 以上的底孔。
- 4) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 5) 请向加工点及钻头充分供给切削油剂。
- 6) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 7) 开孔深度超过 3DC 时，请将转速及进给速度降低 20%。
- 8) 开孔深度超过 3DC 时，请采用分级加工方式。
依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 9) 分级进给时请返回到孔的上面。
- 10) 请将分给量级的大致标准设定为 0.2DC ~ 1DC。
- 11) 夹紧时，请将钻头的振动控制在 0.01mm 以下。
- 12) 不能进行外周方向的切削。
- 1) Please use the drilling in wet condition or MQL condition.
- 2) DLC drills are available in Non-Ferrous Metal such as Aluminum Alloy and Copper Alloy.
Non suitable for very hard beryllium Copper.
- 3) Please drilling the prepared hole of more than 80% of processing hole diameter.
- 4) Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 5) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 6) Use the table values for drilling depth under 3 × DC.
- 7) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 8) When for hole depth more than 3 × DC, deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse.
In that case, even if under predetermined hole depth, please step feed.
- 9) In step feed, return to the entrance hole.
- 10) Depth of steps should be from 0.2 to 1 diameter.
- 11) Adjust the drill run out to 0.01mm or less.
- 12) Side milling is not possible.

A-123 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

DCDCF | 晶体金刚石涂层钻头 Crystal Diamond Coat Drills

被削材 Work Material	CFRP 单体 (干式加工) CFRP dry condition				CFRP+ 铝合金 重叠板材 (湿式加工) CFRP+Aluminum Alloy wet condition			
	直径 Drill Dia. (mm)	切削速度 Speed (m/min)	进给量 Feed (mm/rev)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削速度 Speed (m/min)	进给量 Feed (mm/rev)	转速 Rotation (min ⁻¹)
	2.0	100 (50 ~ 150)	0.075 (0.05 ~ 0.10)	16000	1190	70 (50 ~ 100)	0.08	12,000
	3.0			11000	800		0.12	7,500
	4.0			8000	600		0.17	5,600
	5.0			6400	480		0.21	4,500
	6.0			5400	400		0.24	3,800
	7.0			4600	340		0.29	3,200
	8.0			4000	300		0.33	2,800
	9.0			3600	270		0.37	2,500
	10.0			3200	240		0.40	2,300
	11.0			2900	220		0.44	2,100
	12.0			2700	200		0.49	1,900
	13.0			2500	180		0.52	1,800

DCDCF

● CFRP 单体 (干式加工)

- 1) 本切削条件是干式加工时的条件。
- 2) 加工 3DC 以上的厚板时, 请将切削速度降低 20%。
- 3) CFRP 的被削性因材质而不同。请参考推荐条件, 调整切削速度和进给量。
- 4) 开孔深度超过 3DC 时, 请采用分级加工方式。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 5) 分级进给时请返回到孔的上面。
- 6) 请将分级量的大致标准设定为 0.2 ~ 1DC。
- 7) 为防止切屑飞散, 请采取全面的防尘对策。作业时请使用防护眼镜、防尘口罩等。

● CFRP+ 铝合金 重叠板材 (湿式加工)

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 3DC 时, 请采用分级加工方式。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 4) 分级进给时请返回到孔的上面。
- 5) 请将分级量的大致标准设定为 0.2 ~ 1DC。
- 6) 加工 3DC 以上的厚板时, 请将切削速度降低 20%。
- 7) CFRP 的被削性因材质而不同。请参考推荐条件, 调整切削速度和进给量。加工铝合金单体, 推荐使用金刚石涂层钻头 (DCD)。

A-124 ◀ ▶ 尺寸表 Stocked Sized

DCD | 金刚石涂层钻头 Diamond Coating Drills

被削材 Work Material	切削速度 Speed (m/min)	进给量 Feed (mm/rev)
铝合金 Aluminum Alloy	40 ~ 200	0.05 ~ 0.20
高硅铝合金 High Silicon Aluminum Alloy	40 ~ 100	0.03 ~ 0.15
铜合金 Copper Alloy	40 ~ 200	0.05 ~ 0.20
陶瓷煅烧体 Ceramics calcined Body	20 ~ 90	0.03 ~ 0.15
高分子材料 (CFRP、GFRP 等) FRP, CFRP, GFRP	40 ~ 200	0.03 ~ 0.15

A-125 ◀ ▶ 尺寸表 Stocked Sized

DFFD | 金刚石涂层的 FF 钻头 Diamond Coating FF Drills

被削材 Work Material	铝合金 Aluminum Alloy		高硅铝合金 High Silicon Aluminum Alloy	
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)
	3.0	6400	3.0	5300
	4.0	4800	4.0	4000
	5.0	3800	5.0	3200
	6.0	5300	6.0	4200
	7.0	4500	7.0	3600
	8.0	3200	8.0	2800
	9.0	2800	9.0	2500
	10.0	2500	10.0	2200
	11.0	2300	11.0	2000
	12.0	2100	12.0	1900
	13.0	1900	13.0	1700

A-127 ◀ ▶ 尺寸表 Stocked Sized

DCD/DFFD

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 3DC 时, 请采用分级加工方式。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 4) 分级进给时请返回到孔的上面。
- 5) 请将分级量的大致标准设定为 0.2 ~ 1DC。
- 6) 请使用筒夹、钻夹。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) When for hole depth more than 3 × DC deep, add step feeding. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 4) In step feed, return to the entrance hole.
- 5) Step feed interval is about 0.2 ~ 1 × DC.
- 6) Use a collet chuck, milling chuck.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金钻头的基准切削条件

Standard Cutting Condition for Carbide Drills

AQDEXVF 1.5D/3D/5D + TVF | AQUA EX VF 钻头 1.5D/3D/5D + 刀片

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 SCM440 NAK Alloy Steel		不锈钢 SUS304 SUS316 Stainless Steel		灰口铸铁 FC250 FC300 Cast Iron		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
14.0	2300	520	1800	330	900	200	2300	700	1600	400
16.0	2000	520	1600	330	800	200	2300	700	1400	350
18.0	1800	520	1400	330	700	200	2200	700	1400	350
20.0	1800	500	1400	320	700	190	2200	700	1300	350
22.0	1600	500	1300	320	650	190	2000	700	1300	350
24.0	1500	500	1200	320	600	190	1800	600	1200	350
26.0	1400	470	1100	300	550	180	1700	600	1200	350
28.0	1300	470	1000	300	500	180	1600	600	1100	330
30.0	1300	430	1000	280	500	170	1500	600	1100	330
32.0	1200	400	950	270	480	160	1400	560	1000	300

AQDEXVF1.5D/3D/5D + TVF

- 1) 本切削条件为使用 TVF 刀片时的条件。
- 2) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 3) 开孔深度超过 3DC 时，请将转速及进给速度降低 30%。
- 4) 请采用内部冷却方式。

- 1) Cutting condition listed here use TVF insert.
- 2) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 3) When for hole depth more than 3×DC, reduce the rotation and feed by 30%.
- 4) Use on internal coolant.

A-128, A-130, A-132, A-136 ◀ ▶ 尺寸表 Stocked Sized

AQDEXVF 8D + TVF | AQUA EX VF 钻头 8D + 刀片

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 SCM440 NAK Alloy Steel		不锈钢 SUS304 SUS316 Stainless Steel		灰口铸铁 FC250 FC300 Cast Iron		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
14.0	1820	410	1460	270	900	200	1820	550	1280	320
16.0	1580	410	1260	260	800	190	1580	480	1100	270
18.0	1400	410	1120	260	700	180	1400	460	980	240
20.0	1270	360	1020	230	640	160	1270	400	890	240
22.0	1160	360	930	230	580	150	1160	400	810	220
24.0	1060	360	850	230	530	140	1060	360	740	220
26.0	980	330	780	210	490	140	980	340	680	200
28.0	900	330	720	210	450	130	900	340	630	190
30.0	850	280	680	190	420	130	850	340	600	180
32.0	800	260	640	180	400	120	800	320	560	170

AQDEXVF8D + TVF

- 1) 本切削条件为使用 TVF 刀片时的条件。
- 2) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 3) 请预先加工导向孔。孔深为 1DC ~ 2DC。
- 4) 请采用内部冷却方式。

- 1) Cutting condition listed here use TVF insert.
- 2) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 3) Recommend pre-drilling of guide hole. Depth is 1 ~ 2×DC.
- 4) Use on internal coolant.

A-134, A-136 ◀ ▶ 尺寸表 Stocked Sized

AQDEXVF 1.5D + TVFZ | AQUA EX VF 钻头 1.5D + 平头刀片

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 SCM440 NAK Alloy Steel		不锈钢 SUS304 SUS316 Stainless Steel		灰口铸铁 FC250 FC300 Cast Iron		球墨铸铁 FCD400 Ductile Cast Iron	
	~ 200HB		20 ~ 30HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
14.0	1140	150	1140	50	2270	100	1140	210	800	120
16.0	1000	150	1000	50	2000	100	1100	200	760	110
18.0	880	150	880	50	1770	100	1100	200	710	110
20.0	880	150	880	50	1600	90	1100	200	710	110
22.0	800	150	800	50	1450	90	1000	200	640	110
24.0	730	150	730	50	1330	90	930	180	640	110
26.0	670	130	670	40	1230	80	860	180	610	100
28.0	630	130	630	40	1140	80	800	170	530	100
30.0	630	120	630	40	1060	80	740	170	530	100
32.0	600	120	600	40	1000	80	700	170	500	100

AQDEXVF 1.5D + TVFZ

- 1) 请使用 AQUA EX VF 钻头 1.5D 的钻杆。
- 2) 请采用分级加工方式。分级量的大致标准，不锈钢请设定为 0.05DC，其他钢材请设定为 0.25DC。
- 3) 3DC 以上的钻杆搭配 TVF 刀片使用，可进行孔底加工和通孔加工。
- 4) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 5) 请采用内部冷却方式。
- 6) 对孔底进行一定时间（0.5 秒）的抛光加工，可得到更加高质量的加工面。

- 1) Use the AQUA Drills EX VF 1.5D holder.
- 2) Do step drilling. As a guideline, drill Stainless Steel to 0.05 × DC, and other metals to 0.25 × DC.
- 3) It is possible to drill the bottom of the hole or a through hole by using a combination of a TVF insert and a 3 × DC or deeper holder.
- 4) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 5) Use on internal coolant.
- 6) Better finished surface achieved by flat drilling bottom surface for set time (0.5s). In the case of drilling for Stainless Steel, please flat drilling bottom surface for set time (0.2s).

A-128, A-137 ◀ ▶ 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AQDEXVF 1.5D/3D/5D + TVFDLC | AQUA EX VF 钻头 1.5D/3D/5D + DLC刀片

被削材 Work Material	纯铝 A1070 Aluminum			铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si			铝合金 Mg 类 A5052 Aluminum Alloy Mg			铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg			铝合金铸件 AC ADC Aluminum Alloy Casting			铜合金 C1100 Copper Alloy		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
14.0	6400	2200	4050	1400	5400	2000	5400	2100	4300	1600	2700	1000						
16.0	5650	2200	3500	1400	4700	2000	4700	2100	3750	1600	2350	1000						
18.0	5000	2200	3150	1400	4200	2000	4200	2100	3350	1600	2100	1000						
20.0	4500	2000	2850	1260	3800	1800	3800	1900	3050	1450	1900	900						
22.0	4100	2000	2600	1260	3450	1800	3450	1900	2750	1450	1730	900						
24.0	3700	2000	2400	1260	3200	1800	3200	1900	2550	1450	1600	900						
26.0	3400	1800	2200	1100	2900	1600	2900	1700	2300	1280	1450	800						
28.0	3200	1800	2000	1100	2700	1600	2700	1700	2150	1280	1350	800						
30.0	3000	1800	1900	1100	2500	1600	2500	1700	2000	1280	1250	800						
32.0	2800	1800	1750	1100	2350	1600	2350	1700	1900	1280	1180	800						

AQDEXVF1.5D/3D/5D + TVFDLC

- 1) 本切削条件为使用 TVFDLC 刀片时的条件。
- 2) TVFDLC 刀片是铝合金、铜合金等有色金属用刀片。不适用于高硬度被削。
- 3) 因机械刚性、工装夹具、加工部位等的形状导致出现振动和异常声响时, 请根据情况变更切削条件。

- 4) 开孔深度超过 3×DC 时, 请将转速及进给速度降低 30%。
- 5) 请采用内部冷却方式。

A-128, A-130, A-132, A-138 ◀ ▶ 尺寸表 Stocked Sized

AQDEXVF 8D + TVFDLC | AQUA EX VF 钻头 8D + DLC刀片

被削材 Work Material	纯铝 A1070 Aluminum			铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si			铝合金 Mg 类 A5052 Aluminum Alloy Mg			铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg			铝合金铸件 AC ADC Aluminum Alloy Casting			铜合金 C1100 Copper Alloy		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
14.0	4150	1400	2600	900	3500	1300	3500	1350	2800	1050	1750	650						
16.0	3650	1400	2250	900	3050	1300	3050	1350	2450	1050	1500	650						
18.0	3250	1400	2050	900	2700	1300	2700	1350	2200	1050	1350	650						
20.0	2900	1300	1850	800	2450	1150	2450	1200	2000	950	1200	550						
22.0	2650	1300	1700	800	2250	1150	2250	1200	1800	950	1100	550						
24.0	2400	1300	1550	800	2050	1150	2050	1200	1650	950	1000	550						
26.0	2200	1150	1400	700	1900	1000	1900	1050	1500	800	900	500						
28.0	2100	1150	1300	700	1750	1000	1750	1050	1400	800	850	500						
30.0	1950	1150	1200	700	1600	1000	1600	1050	1300	800	800	500						
32.0	1800	1150	1100	700	1500	1000	1500	1050	1200	800	750	500						

AQDEXVF8D + TVFDLC

- 1) 本切削条件为使用 TVFDLC 刀片时的条件。
- 2) TVFDLC 刀片是铝合金、铜合金等有色金属用刀片。不适用于高硬度被削。
- 3) 因机械刚性、工装夹具、加工部位等的形状导致出现振动和异常声响时, 请根据情况变更切削条件。

- 4) 请预先加工导向孔。孔深为 1~2×DC。
- 5) 请采用内部冷却方式。

A-134, A-138 ◀ ▶ 尺寸表 Stocked Sized

AQDEXVF 1.5D + TVFZDLC | AQUA EX VF 钻头 1.5D + DLC平头刀片

被削材 Work Material	纯铝 A1070 Aluminum			铝合金 Si、Mg-Si 类 A4032 A6061 Aluminum Alloy Si、Mg-Si			铝合金 Mg 类 A5052 Aluminum Alloy Mg			铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg			铝合金铸件 AC ADC Aluminum Alloy Casting			铜合金 C1100 Copper Alloy		
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
14.0	2650	530	1750	340	2300	480	2300	500	1850	380	1150	240						
16.0	2400	530	1500	340	2000	480	2000	500	1600	380	1000	240						
18.0	2150	500	1350	320	1800	450	1800	470	1450	360	900	230						
20.0	1900	500	1200	320	1600	450	1600	470	1300	360	800	230						
22.0	1700	460	1050	290	1400	420	1400	440	1100	340	700	210						
24.0	1550	440	1000	280	1300	400	1300	420	1050	320	650	200						
26.0	1450	440	900	280	1200	400	1200	420	950	320	600	200						
28.0	1300	410	850	260	1100	370	1100	390	900	300	550	190						
30.0	1150	400	700	250	950	360	950	380	750	290	500	180						
32.0	1100	390	700	250	900	350	900	370	700	280	450	180						

AQDEXVF1.5D/3D/5D + TVFZDLC

- 1) 本切削条件为在 AQUA EX VF 钻头 1.5D 的钻杆上使用 TVFZDLC 刀片时的条件。AQUA EX VF 钻头 3D/5D/8D 倍径的钻杆, 仅在加工孔底或加工通孔时可使用 TVFZDLC 刀片。
- 2) 加工铝合金、铜合金时可进行无阶梯加工。关于纯铝等切屑容易变长的材料, 请按 0.25×DC 的大致标准进行分级加工。
- 3) TVFZDLC 刀片是铝合金、铜合金等有色金属用刀片。不适用于高硬度被削。

- 4) 因机械刚性、工装夹具、加工部位等的形状导致出现振动和异常声响时, 请根据情况变更切削条件。
- 5) 请采用内部冷却方式。
- 6) 对孔底进行一定时间的抛光加工, 可得到更加高质量的加工面。500 转以下: 0.7 秒, 超过 500 转~1500 转以下: 0.5 秒, 超过 1500 转: 0.3 秒

A-128, A-139 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具



技术资料
索引



高速钢钻头

HSS Drills

商品一览 Product List	B-2
各类被削材选型基准表 Selection Chart According to Work Materials	B-4
尺寸表 Size List	B-8
高速钢钻头的基准切削条件 Standard Cutting Condition for HSS Drills	B-154

页 Page	商品编码 Code	品名 Product Name		表面处理 Coating	尺寸 Size
新品	B-8	SG-ESS 钻头 SG-ESS Drills		SG	φ 0.5 ~ φ 20
	B-14	SG-ESR 钻头 SG-ESR Drills		SG	φ 2 ~ φ 32
	B-21	SG-ES 钻头 SG-ES Drills		SG	φ 2 ~ φ 32
硬质合金钻头	B-23	SG 平头钻 SG FLAT Drills		SG	φ 16 ~ φ 50
	B-24	AG-ESS 钻头 AG-ESS Drills		AG	φ 1 ~ φ 20
	B-28	AG-ES 钻头 AG-ES Drills		AG	φ 2 ~ φ 20
高速钢钻头	B-30	AG-ES 钻头 中长型 AG-ES Drills Semi-Long		AG	φ 2 ~ φ 10
	B-31	AG-SUS 短刃型钻头 AG-SUS Drills Short		AG	φ 0.5 ~ φ 32
	B-37	AG-SUS 钻头 标准型 AG-SUS Drills Regular		AG	φ 1 ~ φ 20
丝锥	B-41	AG 定心钻 AG Starting Drills		AG	φ 3 ~ φ 20
	B-42	AG 定心钻 长柄型 AG Starting Drills Long Shank		AG	φ 3 ~ φ 12
	B-43	SG 短钻头 SG Short Drills		SG	φ 1 ~ φ 20
硬质合金立铣刀	B-44	SG 直柄钻头 SG Straight Shank Drills		SG	φ 1 ~ φ 13
	B-45	AG 强力钻 AG Power Drills		AG	φ 1 ~ φ 13
	B-46	G 涂层 短刃型钻头 G Short Drills		G	φ 1 ~ φ 20
高速钢立铣刀	B-48	G 涂层 标准钻头 G Standard Drills		G	φ 0.5 ~ φ 13
	B-49	G 涂层 含钴直柄钻头 G Straight Shank Cobalt Drills		G	φ 1 ~ φ 13
	B-51	侧固柄大直径钻头 Side Lock Straight Shank Drills Larger Shank		—	φ 13 ~ φ 30
切削工具	B-52	MC 钻头 MC Drills		—	φ 2.5 ~ φ 60
	B-54	含钴直柄钻头 Straight Shank Cobalt Drills		—	φ 0.2 ~ φ 13
	B-55	直柄钻头 Straight Shank Drills		—	φ 0.2 ~ φ 17.5
套装商品 其它	B-58	YKS 强力钻头 标准型 Parabolic Flute Drills Regular		—	φ 1 ~ φ 13
	B-59	G 涂层 含钴微型长钻头 G Micro-Long Drills		G	φ 0.5 ~ φ 1.99
	B-60	含钴微型长钻头 Micro-Long Drills		—	φ 0.1 ~ φ 1.99
精密工具	B-61	AG 强力中长刃钻 AG Power Semi-Long Drills		AG	φ 1 ~ φ 13
	B-62	AG 强力长刃钻 AG Power Long Drills		AG	φ 1 ~ φ 20
	B-65	G 涂层 长钻头 G Non-Step Straight Shank Long Drills		G	φ 1 ~ φ 20
技术资料 索引	B-69	G 涂层 不分段加工长刃型长钻头 G Non-Step Straight Shank Long Drills with Longer Flute		G	φ 1 ~ φ 20
	B-74	G 涂层 直柄长钻头 G Straight Shank Long Drills		G	φ 1 ~ φ 20
	B-76	直柄长钻头 Straight Shank Long Drills		—	φ 1 ~ φ 22
	B-84	含钴直柄长钻头 Straight Shank Cobalt Long Drills		—	φ 1 ~ φ 13
	B-86	不分段加工长刃型长钻头 Non-Step Straight Shank Long Drills		—	φ 2 ~ φ 13
	B-87	YKL 强力钻头 长型 Parabolic Flute Drills Long		—	φ 1 ~ φ 13
	B-89	KLE 强力钻头 加长型 Parabolic Flute Drills Extra Long		—	φ 2 ~ φ 13
	B-90	SG 直柄油孔钻 3D SG Oil-Hole Straight Shank Drills (3D)		SG	φ 5 ~ φ 20

页 Page	商品编码 Code	品名 Product Name		表面处理 Coating	尺寸 Size
B-91	SGOH5D	SG 直柄油孔钻 5D SG Oil-Hole Straight Shank Drills (5D)		SG	$\phi 5 \sim \phi 32$
B-92	SGOH7D	SG 直柄油孔钻 7D SG Oil-Hole Straight Shank Drills (7D)		SG	$\phi 5 \sim \phi 32$
B-93	SGOH9D	SG 直柄油孔钻 9D SG Oil-Hole Straight Shank Drills (9D)		SG	$\phi 7 \sim \phi 32$
B-94	SGOH	SG-FAX 油孔钻 SG-FAX Oil-Hole Drills		SG	$\phi 8 \sim \phi 30$
B-96	GOH	G 涂层 油孔钻 G Oil-Hole Drills		G	$\phi 8 \sim \phi 52$
B-98	GOHL	G 涂层 油孔长钻头 G Oil-Hole Long Drills		G	$\phi 5 \sim \phi 40$
B-99	DLCHD	DLC 高速钢钻头 DLC-HSS Drills		DLC	$\phi 1 \sim \phi 20$
B-101	DLCHDSL	DLC 高速钢钻头 中长型 DLC-HSS Drills Semi-Long		DLC	$\phi 1 \sim \phi 13$
B-103	RGASD	涂层直柄铝用钻头 Coated Straight Shank Drills for Aluminum		CrN	$\phi 1 \sim \phi 13$
B-105	KSA	KSA 强力钻头 铝用标准型 Parabolic Flute Drills for Aluminum Regular		—	$\phi 2 \sim \phi 13$
B-106	RGALSD	涂层直柄铝用长钻头 Coated Straight Shank Long Drills for Aluminum		CrN	$\phi 1 \sim \phi 13$
B-107	DLCPLSD	DLC 强力长刃钻 DLC Power Long Drills		DLC	$\phi 1 \sim \phi 13$
B-109	LASD	直柄铝用长钻头 Straight Shank Long Drills for Aluminum		—	$\phi 1 \sim \phi 13$
B-110	KLA	KLA 强力钻头 铝用长型 Parabolic Flute Drills for Aluminum Long		—	$\phi 2 \sim \phi 13$
B-112	NOS	NOS 钻头 Noss Drills		—	$\phi 7 \sim \phi 32$
B-114	SNOS	含钴 NOS 不锈钢用钻头 Cobalt Noss Drills for Stainless Steel		—	$\phi 10 \sim \phi 20$
B-115	HCD	平头小螺丝 沉孔专用钻头 Machine screw counter bore Drills		—	M3 ~ M8
B-115	SCD	盘头小螺丝 沉孔专用钻头 Machine screw counter sink Drills		—	M3 ~ M8
B-115	RCD	六角螺栓 沉孔专用钻头 Counter bore Drills for hexagon socket head bolts		—	M3 ~ M18
B-116	SGTDK	SG-FAX 锥柄钻头 SG-FAX Taper Shank Drills		SG	$\phi 5 \sim \phi 32$
B-117	GTS	G 涂层 锥柄短钻头 G Taper Shank Short Drills		G	$\phi 7 \sim \phi 50$
B-119	GTD	G 涂层 锥柄标准钻头 G Taper Shank Standard Drills		G	$\phi 2 \sim \phi 75$
B-122	COTD	含钴锥柄钻头 Taper Shank Cobalt Drills		—	$\phi 5 \sim \phi 50$
B-125	TD	锥柄钻头 Taper Shank Drills		—	$\phi 7 \sim \phi 120$
B-129	GTTD	G 涂层 铸铁用锥柄钻头 G Taper Shank Drills for Iron Frame		G	$\phi 175 \sim \phi 26.5$
B-129	TTD	铸铁用锥柄钻头 Taper Shank Drills for Iron Frame		—	$\phi 12.5 \sim \phi 33.5$
B-130	GLTD	G 涂层 锥柄长钻头 G Taper Shank Long Drills		G	$\phi 4 \sim \phi 50$
B-133	COLTD	含钴锥柄长钻头 Taper Shank Cobalt Long Drills		—	$\phi 2 \sim \phi 12$
B-134	LTD	锥柄长钻头 Taper Shank Long Drills		—	$\phi 4 \sim \phi 85$
B-148	GNLTD	G 涂层 不分段加工锥柄长钻头 G Non-Step Taper Shank Long Drills		G	$\phi 5 \sim \phi 20$
B-149	NLTD	不分段加工锥柄长钻头 Non-Step Taper Shank Long Drills		—	$\phi 5 \sim \phi 40$
B-150	GTDOH	G 涂层 锥柄油孔钻 G Taper Shank Drills with Oil-Hole		G	$\phi 5 \sim \phi 50$
B-151	COTDOH	含钴锥柄油孔钻 Taper Shank Cobalt Drills with Oil-Hole		—	$\phi 5 \sim \phi 50$
B-152	GLTDOH	G 涂层 锥柄加长油孔钻 G Taper Shank Long Drills with Oil-Hole		G	$\phi 5 \sim \phi 50$

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表

Selection Chart According to Work Materials

高速钢钻头

HSS Drills

* 1 开孔深度以 L/D 的值为大致标准。不同种类的钻头直径不同，其数值可能有变化。
* 1 Some sizes does not meet this preference. Please make sure of flute length of each sizes before use.

	商品编码 Code	品名 Product Name	刊载页数 Page		带油孔 Internal Coolant	* 1 钻孔 深度 L/D	尺寸 Size	表面 处理 Coating	用途 · 特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition							
新商品											
硬质合金钻头	SGESS	SG-ESS 钻头 SG-ESS Drills	B-8	B-154		3	φ05~φ20	SG		●□	
	SGESR	SG-ESR 钻头 SG-ESR Drills	B-14	B-154		5	φ2~φ32	SG		●□	
	SGES	SG-ES 钻头 SG-ES Drills	B-21	B-154		5	φ2~φ32	SG		●□	
高速钢钻头	SGEZ	SG 平头钻 SG FLAT Drills	B-23	B-155		1	φ16~φ50	SG	平头 Flat	●□	
	AGESS	AG-ESS 钻头 AG-ESS Drills	B-24	B-156		3	φ1~φ20	AG		●□	
	AGES	AG-ES 钻头 AG-ES Drills	B-28	B-156		5	φ2~φ20	AG		●□	
	AGESSL	AG-ES 钻头 中长型 AG-ES Drills Semi-long	B-30	B-156		10	φ2~φ10	AG		□	
丝锥	AGSUSS	AG-SUS 短刃型钻头 AG-SUS Drills Short	B-31	B-158		3	φ05~φ32	AG	不锈钢用 For Stainless Steel	●□	
	AGSUSR	AG-SUS 钻头 标准型 AG-SUS Drills Regular	B-37	B-158		5	φ1~φ20	AG		●□	
	AGSTD	AG 定心钻 AG Starting Drills	B-41	B-157		—	φ3~φ20	AG	定心 Centering	●	
	AGSTDLS	AG 定心钻 长柄型 AG Starting Drills Long Shank	B-42	B-157		—	φ3~φ12	AG		●	
硬质合金立铣刀	SGSS	SG 短钻头 SG Short Drills	B-43	B-154		3	φ1~φ20	SG		□	
	SGSD	SG 直柄钻头 SG Straight Shank Drills	B-44	B-154		5	φ1~φ13	SG		□	
	AGPSD	AG 强力钻 AG Power Drills	B-45	B-158		5	φ1~φ13	AG		●	
高速钢立铣刀	GSS	G 涂层 短刃型钻头 G Short Drills	B-46	B-160		3	φ1~φ20	G		●□	
	GSD	G 涂层 标准钻头 G Standard Drills	B-48	B-160		5	φ05~φ13	G		●	
	GCOSD	G 涂层 含钴直柄钻头 G Straight Shank Cobalt Drills	B-49	B-160		5	φ1~φ13	G		□	
切削工具	SLDR	侧固柄大直径钻头 Side Lock Straight Shank Drills Larger Shank	B-51	B-161		5	φ13~φ30	—		□	
	MCD	MC 钻头 MC Drills	B-52	B-161		5	φ25~φ60	—		□	
	COSD	含钴直柄钻头 Straight Shank Cobalt Drills	B-54	B-161		5	φ02~φ13	—		●	
	SD	直柄钻头 Straight Shank Drills	B-55	B-161		7	φ02~φ175	—		●	
套装商品	YKS	YKS 强力钻头 标准型 Parabolic Flute Drills Regular	B-58	B-164		7	φ1~φ13	—		□	
其它	GCOSDML	G 涂层 含钴微型长钻头 G Micro-Long Drills	B-59	B-160		10	φ05~φ1.99	G		□	
	COSDML	含钴微型长钻头 Micro-Long Drills	B-60	B-161		10	φ01~φ1.99	—		□	
	AGPSLSD	AG 强力中长刃钻 AG Power Semi-long Drills	B-61	B-159		10	φ1~φ13	AG		●	
精密工具	AGPLSD	AG 强力长刃钻 AG Power Long Drills	B-62	B-159		10~	φ1~φ20	AG		●□	
	GLSD	G 涂层 长钻头 G Non-Step Straight Shank Long Drills	B-65	B-162		10~	φ1~φ20	G		●□	
	GNLSD	G 涂层 不分段加工长刃型长钻头 G Non-Step Straight Shank Long Drills with Longer Flute	B-69	B-162		10~	φ1~φ20	G		□	
	GLD	G 涂层 直柄长钻头 G Straight Shank Long Drills	B-74	B-162		10~	φ1~φ20	G		□	
技术资料	LSD	直柄长钻头 Straight Shank Long Drills	B-76	B-163		10~	φ1~φ22	—		●□	
索引	COLSD	含钴直柄长钻头 Straight Shank Cobalt Long Drills	B-84	B-163		10~	φ1~φ13	—		□	
	NLSD	不分段加工长刃型长钻头 Non-Step Straight Shank Long Drills	B-86	B-163		10~	φ2~φ13	—		□	
	YKL	YKL 强力钻头 长型 Parabolic Flute Drills Long	B-87	B-164		7~	φ1~φ13	—		□	
	KLE	KLE 强力钻头 加长型 Parabolic Flute Drills Extra Long	B-89	B-165		7~	φ2~φ13	—		□	

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

商品照片 Product Photography	被削材 Work Materials											
	一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢・调质钢 Alloy Steel Heat Treated Steel	模具钢・预硬钢 Mold Steel Pre-Hardened Steel	高硬度钢 Hardened Steel		不锈钢 Stainless Steel		钛合金・耐热合金 Titanium Alloy, Heat-Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy
					40~50 HRC	50~65 HRC	SUS304 SUS316	SUS420				
	SS400	S45C S50C	SCM NAK	30~40 HRC						FC FCD	AC ADC	Cu
	◎	◎	◎	◎	×	×	◎	◎	◎	◎	○	○
	◎	◎	◎	○	×	×	◎	◎	○	◎	○	○
	—	○	◎	◎	×	×	×	◎	○	○	—	—
	◎	◎	◎	◎	×	×	○	○	○	◎	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	◎	◎	◎	◎	×	×	○	○	—	○	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	◎	○	—	×	×	×	◎	◎	○	—	○	○
	◎	○	—	×	×	×	◎	◎	—	—	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	◎	◎	◎	◎	—	×	○	○	◎	○	○	○
	◎	◎	◎	◎	—	×	×	◎	○	○	○	○
	—	◎	◎	◎	×	×	×	○	○	◎	—	—
	◎	◎	◎	○	×	×	○	○	○	○	○	○
	◎	◎	◎	○	×	×	○	○	—	○	○	○
	◎	◎	◎	○	×	×	○	○	—	○	○	○
	○	○	○	○	×	×	○	○	—	○	○	○
	○	○	○	○	×	×	○	○	—	○	○	○
	○	○	○	○	×	×	○	○	—	○	○	○
	○	○	○	—	×	×	—	—	—	○	○	○
	○	◎	◎	◎	○	—	○	○	—	◎	○	—
	◎	◎	◎	◎	×	×	○	○	—	○	○	○
	◎	◎	◎	◎	×	×	○	○	—	○	○	○
	○	○	○	○	×	×	○	○	—	○	○	○
	—	◎	◎	◎	×	×	×	—	—	◎	—	—
	—	◎	◎	◎	×	×	×	—	—	◎	—	—
	◎	◎	◎	◎	×	×	○	○	—	○	○	○
	◎	◎	◎	◎	×	×	○	○	—	○	○	○
	◎	◎	◎	○	×	×	○	○	—	○	○	○
	○	○	○	—	×	×	—	—	—	○	○	○
	○	○	○	○	×	×	○	○	—	○	○	○
	○	○	○	○	×	×	—	○	—	○	○	○
	○	◎	◎	◎	○	—	○	○	—	◎	○	—
	○	◎	◎	◎	○	—	○	○	—	—	—	—

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表

Selection Chart According to Work Materials



高速钢钻头

HSS Drills

* 1 开孔深度以 L/D 的值为大致标准。不同种类的钻头直径不同，其数值可能有变化。
* 1 Some sizes does not meet this preference. Please make sure of flute length of each sizes before use.

	商品编码 Code	品名 Product Name	刊载页数 Page		带油孔 Internal Coolant	* 1 钻孔 深度 L/D	尺寸 Size	表面 处理 Coating	用途 · 特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition							
新商品											
硬质合金钻头	SG0H3D	SG 直柄油孔钻 3D SG Oil-Hole Straight Shank Drills (3D)	B-90	B-155	带油孔	3	φ5~φ20	SG		☐	
	SG0H5D	SG 直柄油孔钻 5D SG Oil-Hole Straight Shank Drills (5D)	B-91	B-155		5	φ5~φ32	SG		☐	
	SG0H7D	SG 直柄油孔钻 7D SG Oil-Hole Straight Shank Drills (7D)	B-92	B-154		7	φ5~φ32	SG		☐	
	SG0H9D	SG 直柄油孔钻 9D SG Oil-Hole Straight Shank Drills (9D)	B-93	B-154		9	φ7~φ32	SG		☐	
高速钢钻头	SG0H	SG-FAX 油孔钻 SG-FAX Oil-Hole Drills	B-94	B-154		5	φ8~φ30	SG		☒	
	GOH	G 涂层 油孔钻 G Oil-Hole Drills	B-96	B-160		3	φ8~φ52	G		☒	
	GOHL	G 涂层 油孔长钻头 G Oil-Hole Long Drills	B-98	B-160		10 ~	φ5~φ40	G		☐	
丝锥	DLCHD	DLC 高速钢钻头 DLC-HSS Drills	B-99	B-165	—	5	φ1~φ20	DLC	铝、有色金属用 For Aluminum · Non-iron Alloy	☒	
	DLCHDSL	DLC 高速钢钻头 中长型 DLC-HSS Drills Semi-long	B-101	B-166		8	φ1~φ13	DLC		☐	
	RGASD	涂层直柄铝用钻头 Coated Straight Shank Drills for Aluminum	B-103	B-167		5	φ1~φ13	CrN		☐	
	KSA	KSA 强力钻头 铝用标准型 Parabolic Flute Drills for Aluminum Regular	B-105	B-164		7 ~	φ2~φ13	—		☐	
	RGALSD	涂层直柄铝用长钻头 Coated Straight Shank Long Drills for Aluminum	B-106	B-167		7	φ1~φ13	CrN		☐	
	DLCPLSD	DLC 强力长刃钻 DLC Power Long Drills	B-107	B-165		10 ~	φ1~φ13	DLC		☐	
	LASD	直柄铝用长钻头 Straight Shank Long Drills for Aluminum	B-109	B-163		10	φ1~φ13	—		☐	
	KLA	KLA 强力钻头 铝用长型 Parabolic Flute Drills for Aluminum Long	B-110	B-164		7	φ2~φ13	—		☐	
高速 钢立铣刀	NOS	NOS 钻头 Noss Drills	B-112	B-161		3	φ7~φ32	—	NOS 钻头 Nos Drill	☒	
	SNOS	含钴 NOS 不锈钢用钻头 Cobalt Noss Drills for Stainless Steel	B-114	B-161		3	φ10~φ20	—		☒	
	HCD	平头小螺丝 沉孔专用钻头 Machine screw counter bore Drills	B-115	B-168	—	—	M3~M8	—	螺丝、螺栓、沉孔用 Screw and bolt counter bore	☒	
切削工具	SCD	盘头小螺丝 沉孔专用钻头 Machine screw counter sink Drills	B-115	B-168		—	M3~M8	—		☒	
	RCD	六角螺栓 沉孔专用钻头 Counter bore Drills for hexagon socket head bolts	B-115	B-168		—	M3~M18	—		☒	
	SGTDK	SG-FAX 锥柄钻头 SG-FAX Taper Shank Drills	B-116	B-154		5	φ5~φ32	SG		☐	
	GTS	G 涂层 锥柄短钻头 G Taper Shank Short Drills	B-117	B-160		3	φ7~φ50	G		☒	
套装商品 其它	GTD	G 涂层 锥柄标准钻头 G Taper Shank Standard Drills	B-119	B-160		5	φ2~φ75	G		☒	
	COTD	含钴锥柄钻头 Taper Shank Cobalt Drills	B-122	B-161		5	φ5~φ50	—		☒	
	TD	锥柄钻头 Taper Shank Drills	B-125	B-161		5	φ7~φ120	—		☒	
	GTTD	G 涂层 铸铁用锥柄钻头 G Taper Shank Drills for Iron Frame	B-129	B-160		5	φ175~φ265	G	钢筋用 Iron Frame	☒	
精密工具	TTD	铸铁用锥柄钻头 Taper Shank Drills for Iron Frame	B-129	B-161		5	φ125~φ335	—		☒	
	GLTD	G 涂层 锥柄长钻头 G Taper Shank Long Drills	B-130	B-162		10 ~	φ4~φ50	G		☐	
	COLTD	含钴锥柄长钻头 Taper Shank Cobalt Long Drills	B-133	B-163		10 ~	φ2~φ12	—		☐	
	LTD	锥柄长钻头 Taper Shank Long Drills	B-134	B-163		10 ~	φ4~φ85	—		☒	
技术资料 索引	GNLTD	G 涂层 不分段加工锥柄长钻头 G Non-Step Taper Shank Long Drills	B-148	B-162	带油孔	10 ~	φ5~φ20	G		☐	
	NLTD	不分段加工锥柄长钻头 Non-Step Taper Shank Long Drills	B-149	B-163		10 ~	φ5~φ40	—		☐	
	GTD0H	G 涂层 锥柄油孔钻 G Taper Shank Drills with Oil-Hole	B-150	B-160		5	φ5~φ50	G		☐	
	COTD0H	含钴锥柄油孔钻 Taper Shank Cobalt Drills with Oil-Hole	B-151	B-161		5	φ5~φ50	—		☐	
	GLTD0H	G 涂层 锥柄加长油孔钻 G Taper Shank Long Drills with Oil-Hole	B-152	B-160		10 ~	φ5~φ50	G		☐	

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

商品照片 Product Photography	被削材 Work Materials											
	一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢・调质钢 Alloy Steel Heat Treated Steel	模具钢・预硬钢 Mold Steel Pre-Hardened Steel	高硬度钢 Hardened Steel		不锈钢 Stainless Steel		钛合金・耐热合金 Titanium Alloy, Heat-Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy
					40~50 HRC	50~65 HRC	SUS304 SUS316	SUS420				
	SS400	S45C S50C	SCM NAK	30~40 HRC						FC FCD	AC ADC	Cu
	◎	◎	◎	◎	—	×	○	○	◎	○	○	○
	◎	◎	◎	◎	—	×	○	○	◎	○	○	○
	◎	◎	◎	◎	—	×	○	○	○	○	○	○
	◎	◎	◎	◎	—	×	○	○	○	○	○	○
	◎	◎	◎	◎	—	×	○	○	◎	○	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	—	×	×	×	×	×	—	×	×	—	◎	○
	—	×	×	×	×	×	—	×	×	—	◎	○
	—	—	×	×	×	×	—	×	×	—	◎	◎
	—	—	—	—	—	—	—	—	—	—	◎	—
	—	—	×	×	×	×	—	×	×	—	◎	◎
	—	×	×	×	×	×	×	×	×	×	◎	○
	—	×	×	×	×	×	×	×	×	×	◎	○
	—	—	—	—	—	—	—	—	—	—	◎	—
	○	○	—	—	×	×	—	—	—	○	○	○
	○	○	○	—	×	×	○	○	—	○	○	○
	○	◎	◎	○	—	—	—	—	—	◎	○	—
	○	◎	◎	○	—	—	—	—	—	◎	○	—
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○
	◎	◎	◎	○	×	×	○	○	○	○	○	○
	○	○	○	—	×	×	—	—	—	○	○	○
	◎	◎	—	—	×	×	—	—	—	—	○	○
	○	○	—	—	×	×	—	—	—	—	○	○
	◎	◎	◎	○	×	×	○	○	○	○	○	○
	○	○	○	○	×	×	○	○	○	○	○	○
	○	○	○	—	×	×	—	—	—	○	○	○
	◎	◎	◎	○	×	×	○	○	○	○	○	○
	○	○	○	○	×	×	○	○	○	○	○	○
	○	○	○	○	×	×	○	○	○	○	○	○
	○	○	○	○	×	×	○	○	○	○	○	○
	◎	◎	◎	◎	×	×	○	○	○	○	○	○

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

●从普通钢到不锈钢以及铝，一般都能高速、高效率地加工，并实现高精度的开孔。

This drill having stub length is useful in material from Steel and Stainless Steel to Aluminum.

High speed, high efficiency and high precision drilling is possible.

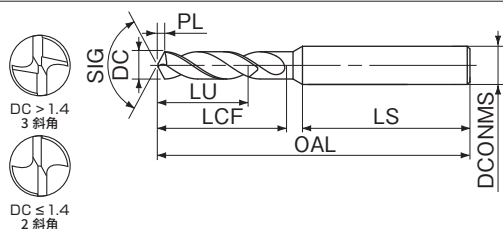

LIST 7572P

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESS0.5	0.50	1.5						
SGESS0.51	0.51			29.3				
SGESS0.52	0.52							
SGESS0.53	0.53	1.6						
SGESS0.54	0.54		3.0					
SGESS0.55	0.55			29.4				
SGESS0.56	0.56	1.7						
SGESS0.57	0.57							
SGESS0.58	0.58							
SGESS0.59	0.59	1.8						
SGESS0.6	0.60			29.0				
SGESS0.61	0.61							
SGESS0.62	0.62							
SGESS0.63	0.63	1.9						
SGESS0.64	0.64		3.5					
SGESS0.65	0.65			29.1				
SGESS0.66	0.66	2.0				0.2		
SGESS0.67	0.67							
SGESS0.68	0.68							
SGESS0.69	0.69	2.1						
SGESS0.7	0.70			28.2				
SGESS0.71	0.71							
SGESS0.72	0.72	2.2						
SGESS0.73	0.73		4.5					
SGESS0.74	0.74			28.3				
SGESS0.75	0.75	2.3			38			
SGESS0.76	0.76					3		
SGESS0.77	0.77							
SGESS0.78	0.78							
SGESS0.79	0.79	2.4						
SGESS0.8	0.80			27.9				
SGESS0.81	0.81							
SGESS0.82	0.82	2.5						
SGESS0.83	0.83		5.0					
SGESS0.84	0.84			28.0				
SGESS0.85	0.85	2.6						
SGESS0.86	0.86							
SGESS0.87	0.87							
SGESS0.88	0.88	2.7						
SGESS0.89	0.89			27.6				
SGESS0.9	0.90							
SGESS0.91	0.91	2.8						
SGESS0.92	0.92							
SGESS0.93	0.93		5.5					
SGESS0.94	0.94	2.9						
SGESS0.95	0.95			27.7		0.3		
SGESS0.96	0.96							
SGESS0.97	0.97							
SGESS0.98	0.98	3.0						
SGESS0.99	0.99							
SGESS1.0	1.00			28.0				
SGESS1.01	1.01							
SGESS1.02	1.02	3.1						
SGESS1.03	1.03		6.0					
SGESS1.04	1.04							
SGESS1.05	1.05							
SGESS1.06	1.06	3.2						
SGESS1.07	1.07				39			
SGESS1.08	1.08		7.0					
SGESS1.09	1.09	3.3						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESS1.1	1.10	3.3						
SGESS1.11	1.11							
SGESS1.12	1.12							
SGESS1.13	1.13	3.4						
SGESS1.14	1.14		7.0		39		0.3	
SGESS1.15	1.15							
SGESS1.16	1.16							
SGESS1.17	1.17	3.5						
SGESS1.18	1.18							
SGESS1.19	1.19							
SGESS1.2	1.20	3.6						
SGESS1.21	1.21							
SGESS1.22	1.22							
SGESS1.23	1.23	3.7						
SGESS1.24	1.24							
SGESS1.25	1.25		8.0		40			
SGESS1.26	1.26	3.8						
SGESS1.27	1.27							
SGESS1.28	1.28							
SGESS1.29	1.29	3.9						
SGESS1.3	1.30							
SGESS1.31	1.31							
SGESS1.32	1.32	4.0						
SGESS1.33	1.33						0.4	
SGESS1.34	1.34							
SGESS1.35	1.35							
SGESS1.36	1.36	4.1						
SGESS1.37	1.37							
SGESS1.38	1.38							
SGESS1.39	1.39	4.2						
SGESS1.4	1.40			28.0		3		
SGESS1.41	1.41		9.0		41			
SGESS1.42	1.42							
SGESS1.43	1.43	4.3						
SGESS1.44	1.44							
SGESS1.45	1.45							
SGESS1.46	1.46	4.4						
SGESS1.47	1.47							
SGESS1.48	1.48							
SGESS1.49	1.49	4.5						
SGESS1.5	1.50							
SGESS1.51	1.51							
SGESS1.52	1.52							
SGESS1.53	1.53	4.6						
SGESS1.54	1.54							
SGESS1.55	1.55							
SGESS1.56	1.56	4.7						
SGESS1.57	1.57							
SGESS1.58	1.58							
SGESS1.59	1.59							
SGESS1.6	1.60	4.8	10.0		42		0.5	
SGESS1.61	1.61							
SGESS1.62	1.62							
SGESS1.63	1.63	4.9						
SGESS1.64	1.64							
SGESS1.65	1.65							
SGESS1.66	1.66							
SGESS1.67	1.67	5.0						
SGESS1.68	1.68							
SGESS1.69	1.69	5.1						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
SGESS1.7	1.70	5.1	10.0		42			
SGESS1.71	1.71							
SGESS1.72	1.72							
SGESS1.73	1.73	5.2						
SGESS1.74	1.74							
SGESS1.75	1.75							
SGESS1.76	1.76	5.3					0.5	
SGESS1.77	1.77							
SGESS1.78	1.78							
SGESS1.79	1.79							
SGESS1.8	1.80	5.4			43			
SGESS1.81	1.81							
SGESS1.82	1.82							
SGESS1.83	1.83	5.5						
SGESS1.84	1.84							
SGESS1.85	1.85							
SGESS1.86	1.86	5.6					0.6	
SGESS1.87	1.87							
SGESS1.88	1.88							
SGESS1.89	1.89							
SGESS1.9	1.90	5.7						
SGESS1.91	1.91							
SGESS1.92	1.92							
SGESS1.93	1.93	5.8						
SGESS1.94	1.94							
SGESS1.95	1.95							
SGESS1.96	1.96	5.9						
SGESS1.97	1.97							
SGESS1.98	1.98							
SGESS1.99	1.99							
SGESS2.0	2.00	6.0		28.0		3	●	
SGESS2.01	2.01							
SGESS2.02	2.02		12.0		44			
SGESS2.03	2.03	6.1						
SGESS2.04	2.04						0.4	
SGESS2.05	2.05	6.2						
SGESS2.06	2.06							
SGESS2.07	2.07	6.3						
SGESS2.08	2.08							
SGESS2.09	2.09							
SGESS2.1	2.10	6.4						
SGESS2.11	2.11							
SGESS2.12	2.12							
SGESS2.13	2.13	6.5						
SGESS2.14	2.14							
SGESS2.15	2.15							
SGESS2.16	2.16	6.6						
SGESS2.17	2.17							
SGESS2.18	2.18							
SGESS2.19	2.19	6.7					0.5	
SGESS2.2	2.20							
SGESS2.21	2.21		13.0		45			
SGESS2.22	2.22	6.8						
SGESS2.23	2.23							
SGESS2.24	2.24							
SGESS2.25	2.25	6.9						
SGESS2.26	2.26							
SGESS2.27	2.27							
SGESS2.28	2.28							
SGESS2.29	2.29							

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
SGESS2.3	2.30	6.9						
SGESS2.31	2.31							
SGESS2.32	2.32							
SGESS2.33	2.33	7.0	13.0		45			
SGESS2.34	2.34							
SGESS2.35	2.35							
SGESS2.36	2.36	7.1						
SGESS2.37	2.37							
SGESS2.38	2.38							
SGESS2.39	2.39	7.2						
SGESS2.4	2.40							
SGESS2.41	2.41							
SGESS2.42	2.42	7.3						
SGESS2.43	2.43							
SGESS2.44	2.44							
SGESS2.45	2.45	7.4					0.5	
SGESS2.46	2.46							
SGESS2.47	2.47							
SGESS2.48	2.48	7.5						
SGESS2.49	2.49							
SGESS2.5	2.50		14.0		46			
SGESS2.51	2.51	7.6						
SGESS2.52	2.52							
SGESS2.53	2.53							
SGESS2.54	2.54	7.7						
SGESS2.55	2.55							
SGESS2.56	2.56							
SGESS2.57	2.57	7.8						
SGESS2.58	2.58							
SGESS2.59	2.59							
SGESS2.6	2.60	7.9		28.0		3	●	
SGESS2.61	2.61							
SGESS2.62	2.62							
SGESS2.63	2.63	8.0						
SGESS2.64	2.64							
SGESS2.65	2.65							
SGESS2.66	2.66	8.1						
SGESS2.67	2.67							
SGESS2.68	2.68							
SGESS2.69	2.69	8.2						
SGESS2.7	2.70							
SGESS2.71	2.71	8.3						
SGESS2.72	2.72							
SGESS2.73	2.73							
SGESS2.74	2.74	8.4						
SGESS2.75	2.75							
SGESS2.76	2.76							
SGESS2.77	2.77	8.5					0.6	
SGESS2.78	2.78							
SGESS2.79	2.79							
SGESS2.8	2.80	8.6						
SGESS2.81	2.81							
SGESS2.82	2.82							
SGESS2.83	2.83	8.7						
SGESS2.84	2.84							
SGESS2.85	2.85							
SGESS2.86	2.86							
SGESS2.87	2.87							
SGESS2.88	2.88							
SGESS2.89	2.89							

新商品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESS2.9	2.90	8.7	16.0	28.0	48	3		
SGESS2.91	2.91							
SGESS2.92	2.92	8.8						
SGESS2.93	2.93							
SGESS2.94	2.94	8.9						
SGESS2.95	2.95							
SGESS2.96	2.96							
SGESS2.97	2.97							
SGESS2.98	2.98	9.0						
SGESS2.99	2.99							
SGESS3.0	3.00	9.1	18.0		50	4	0.6	
SGESS3.01	3.01							
SGESS3.02	3.02	9.2						
SGESS3.03	3.03							
SGESS3.04	3.04							
SGESS3.05	3.05							
SGESS3.06	3.06	9.3						
SGESS3.07	3.07							
SGESS3.08	3.08							
SGESS3.09	3.09							
SGESS3.1	3.10	9.4						
SGESS3.11	3.11							
SGESS3.12	3.12	9.5						
SGESS3.13	3.13							
SGESS3.14	3.14							
SGESS3.15	3.15							
SGESS3.16	3.16	9.6						
SGESS3.17	3.17							
SGESS3.18	3.18							
SGESS3.19	3.19							
SGESS3.2	3.20	9.7						
SGESS3.21	3.21							
SGESS3.22	3.22	9.8						
SGESS3.23	3.23							
SGESS3.24	3.24							
SGESS3.25	3.25							
SGESS3.26	3.26	9.9						
SGESS3.27	3.27							
SGESS3.28	3.28							
SGESS3.29	3.29							
SGESS3.3	3.30	10.0						
SGESS3.31	3.31							
SGESS3.32	3.32	10.1						
SGESS3.33	3.33							
SGESS3.34	3.34							
SGESS3.35	3.35							
SGESS3.36	3.36	10.2						
SGESS3.37	3.37							
SGESS3.38	3.38							
SGESS3.39	3.39							
SGESS3.4	3.40	10.3						
SGESS3.41	3.41							
SGESS3.42	3.42	10.4						
SGESS3.43	3.43							
SGESS3.44	3.44							
SGESS3.45	3.45							
SGESS3.46	3.46	10.5						
SGESS3.47	3.47							
SGESS3.48	3.48							
SGESS3.49	3.49							

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock		
SGESS3.5	3.50	10.5	20.0		52		0.7			
SGESS3.51	3.51									
SGESS3.52	3.52	10.6								
SGESS3.53	3.53									
SGESS3.54	3.54	10.7								
SGESS3.55	3.55									
SGESS3.56	3.56									
SGESS3.57	3.57									
SGESS3.58	3.58	10.8								
SGESS3.59	3.59									
SGESS3.6	3.60	10.9					4			
SGESS3.61	3.61									
SGESS3.62	3.62	11.0								
SGESS3.63	3.63									
SGESS3.64	3.64									
SGESS3.65	3.65									
SGESS3.66	3.66	11.1								
SGESS3.67	3.67									
SGESS3.68	3.68	11.2								
SGESS3.69	3.69									
SGESS3.7	3.70	11.3	30.0		54	4	0.8			
SGESS3.71	3.71									
SGESS3.72	3.72	11.4								
SGESS3.73	3.73									
SGESS3.74	3.74	11.5								
SGESS3.75	3.75									
SGESS3.76	3.76	11.6								
SGESS3.77	3.77									
SGESS3.78	3.78	11.7								
SGESS3.79	3.79									
SGESS3.8	3.80	11.8								
SGESS3.81	3.81									
SGESS3.82	3.82	11.9								
SGESS3.83	3.83									
SGESS3.84	3.84	12.0								
SGESS3.85	3.85									
SGESS3.86	3.86	12.1								
SGESS3.87	3.87									
SGESS3.88	3.88	12.2								
SGESS3.89	3.89									
SGESS3.9	3.90	12.3								
SGESS3.91	3.91									
SGESS3.92	3.92	12.4								
SGESS3.93	3.93									
SGESS3.94	3.94	12.5								
SGESS3.95	3.95									
SGESS3.96	3.96	12.6								
SGESS3.97	3.97									
SGESS3.98	3.98	12.7								
SGESS3.99	3.99									
SGESS4.0	4.00	12.8						38.0	66	6
SGESS4.01	4.01									
SGESS4.02	4.02	12.1								
SGESS4.03	4.03									
SGESS4.04	4.04	12.2								
SGESS4.05	4.05									
SGESS4.06	4.06	12.3								
SGESS4.07	4.07									
SGESS4.08	4.08									
SGESS4.09	4.09									

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DC/NMS	先端 PL	库存 Stock															
SGESS4.1	4.10	12.3	22.0	66	66		0.8																
SGESS4.11	4.11	12.4																					
SGESS4.12	4.12																						
SGESS4.13	4.13	12.5																					
SGESS4.14	4.14																						
SGESS4.15	4.15	12.6																					
SGESS4.16	4.16																						
SGESS4.17	4.17	12.7																					
SGESS4.18	4.18																						
SGESS4.19	4.19	12.8																					
SGESS4.2	4.20																						
SGESS4.21	4.21	12.9																					
SGESS4.22	4.22																						
SGESS4.23	4.23	13.0																					
SGESS4.24	4.24																						
SGESS4.25	4.25	13.1																					
SGESS4.26	4.26																						
SGESS4.27	4.27	13.2																					
SGESS4.28	4.28																						
SGESS4.29	4.29	13.3																					
SGESS4.3	4.30																						
SGESS4.31	4.31	13.4																					
SGESS4.32	4.32																						
SGESS4.33	4.33	13.5																					
SGESS4.34	4.34																						
SGESS4.35	4.35	13.6																					
SGESS4.36	4.36																						
SGESS4.37	4.37	13.7																					
SGESS4.38	4.38																						
SGESS4.39	4.39	13.8																					
SGESS4.4	4.40																						
SGESS4.41	4.41	13.9																					
SGESS4.42	4.42																						
SGESS4.43	4.43	14.0																					
SGESS4.44	4.44																						
SGESS4.45	4.45	14.1																					
SGESS4.46	4.46																						
SGESS4.47	4.47	14.2																					
SGESS4.48	4.48																						
SGESS4.49	4.49	14.3																					
SGESS4.5	4.50																						
SGESS4.51	4.51	14.4																					
SGESS4.52	4.52																						
SGESS4.53	4.53	14.5																					
SGESS4.54	4.54																						
SGESS4.55	4.55	14.6																					
SGESS4.56	4.56																						
SGESS4.57	4.57	14.7																					
SGESS4.58	4.58																						
SGESS4.59	4.59	14.8																					
SGESS4.6	4.60																						
SGESS4.61	4.61	14.9																					
SGESS4.62	4.62																						
SGESS4.63	4.63	15.0																					
SGESS4.64	4.64																						
SGESS4.65	4.65	15.1																					
SGESS4.66	4.66																						
SGESS4.67	4.67	15.2																					
SGESS4.68	4.68																						
SGESS4.69	4.69	14.1																					

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DC/NMS	先端 PL	库存 Stock
SGESS4.7	4.70	14.1	24.0	68	68		1.0	
SGESS4.71	4.71	14.2						
SGESS4.72	4.72							
SGESS4.73	4.73	14.3						
SGESS4.74	4.74							
SGESS4.75	4.75	14.4						
SGESS4.76	4.76							
SGESS4.77	4.77	14.5						
SGESS4.78	4.78							
SGESS4.79	4.79	14.6						
SGESS4.8	4.80							
SGESS4.81	4.81	14.7						
SGESS4.82	4.82							
SGESS4.83	4.83	14.8						
SGESS4.84	4.84							
SGESS4.85	4.85	14.9						
SGESS4.86	4.86							
SGESS4.87	4.87	15.0						
SGESS4.88	4.88							
SGESS4.89	4.89	15.1						
SGESS4.9	4.90							
SGESS4.91	4.91	15.2						
SGESS4.92	4.92							
SGESS4.93	4.93	15.3						
SGESS4.94	4.94							
SGESS4.95	4.95	15.4						
SGESS4.96	4.96							
SGESS4.97	4.97	15.5						
SGESS4.98	4.98							
SGESS4.99	4.99	15.6						
SGESS5.0	5.00							
SGESS5.01	5.01	15.7						
SGESS5.02	5.02							
SGESS5.03	5.03	15.8						
SGESS5.04	5.04							
SGESS5.05	5.05	15.9						
SGESS5.06	5.06							
SGESS5.07	5.07	16.0						
SGESS5.08	5.08							
SGESS5.09	5.09	16.1						
SGESS5.1	5.10							
SGESS5.11	5.11	16.2						
SGESS5.12	5.12							
SGESS5.13	5.13	16.3						
SGESS5.14	5.14							
SGESS5.15	5.15	16.4						
SGESS5.16	5.16							
SGESS5.17	5.17	16.5						
SGESS5.18	5.18							
SGESS5.19	5.19	16.6						
SGESS5.2	5.20							
SGESS5.21	5.21	16.7						
SGESS5.22	5.22							
SGESS5.23	5.23	16.8						
SGESS5.24	5.24							
SGESS5.25	5.25	16.9						
SGESS5.26	5.26							
SGESS5.27	5.27	17.0						
SGESS5.28	5.28							
SGESS5.29	5.29	17.1						



工具材料

涂层

直径公差

直径 ≤ 1.9

直径 > 1.9

螺旋角

柄直径公差

直径范围

新商品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESS5.3	5.30	15.9	26.0		70			
SGESS5.31	5.31							
SGESS5.32	5.32	16.0						
SGESS5.33	5.33							
SGESS5.34	5.34							
SGESS5.35	5.35							
SGESS5.36	5.36	16.1						
SGESS5.37	5.37							
SGESS5.38	5.38							
SGESS5.39	5.39	16.2						
SGESS5.4	5.40							
SGESS5.41	5.41							
SGESS5.42	5.42							
SGESS5.43	5.43	16.3					1.1	
SGESS5.44	5.44							
SGESS5.45	5.45							
SGESS5.46	5.46	16.4						
SGESS5.47	5.47							
SGESS5.48	5.48							
SGESS5.49	5.49							
SGESS5.5	5.50	16.5						
SGESS5.51	5.51							
SGESS5.52	5.52							
SGESS5.53	5.53	16.6						
SGESS5.54	5.54							
SGESS5.55	5.55							
SGESS5.56	5.56	16.7						
SGESS5.57	5.57							
SGESS5.58	5.58							
SGESS5.59	5.59							
SGESS5.6	5.60	16.8	28.0	38.0	72	6		●
SGESS5.61	5.61							
SGESS5.62	5.62							
SGESS5.63	5.63	16.9						
SGESS5.64	5.64							
SGESS5.65	5.65							
SGESS5.66	5.66	17.0						
SGESS5.67	5.67							
SGESS5.68	5.68							
SGESS5.69	5.69							
SGESS5.7	5.70	17.1						
SGESS5.71	5.71							
SGESS5.72	5.72							
SGESS5.73	5.73	17.2					1.2	
SGESS5.74	5.74							
SGESS5.75	5.75							
SGESS5.76	5.76	17.3						
SGESS5.77	5.77							
SGESS5.78	5.78							
SGESS5.79	5.79							
SGESS5.8	5.80	17.4						
SGESS5.81	5.81							
SGESS5.82	5.82							
SGESS5.83	5.83	17.5						
SGESS5.84	5.84							
SGESS5.85	5.85							
SGESS5.86	5.86	17.6						
SGESS5.87	5.87							
SGESS5.88	5.88							
SGESS5.89	5.89	17.7						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESS5.9	5.90	17.7						
SGESS5.91	5.91							
SGESS5.92	5.92							
SGESS5.93	5.93	17.8						
SGESS5.94	5.94							
SGESS5.95	5.95		28.0		72	6	1.2	
SGESS5.96	5.96							
SGESS5.97	5.97	17.9						
SGESS5.98	5.98							
SGESS5.99	5.99	18.0						
SGESS6.0	6.00							
SGESS6.1	6.10	18.3						
SGESS6.2	6.20	18.6						
SGESS6.3	6.30	18.9					1.3	
SGESS6.4	6.40	19.2						
SGESS6.5	6.50	19.5						
SGESS6.6	6.60	19.8						
SGESS6.7	6.70	20.1						
SGESS6.8	6.80	20.4					1.4	
SGESS6.9	6.90	20.7						
SGESS7.0	7.00	21.0						
SGESS7.1	7.10	21.3					8	
SGESS7.2	7.20	21.6						
SGESS7.3	7.30	21.9						
SGESS7.4	7.40	22.2						
SGESS7.5	7.50	22.5						
SGESS7.6	7.60	22.8						
SGESS7.7	7.70	23.1					1.6	
SGESS7.8	7.80	23.4						
SGESS7.9	7.90	23.7						
SGESS8.0	8.00	24.0						●
SGESS8.1	8.10	24.3						
SGESS8.2	8.20	24.6					1.7	
SGESS8.3	8.30	24.9						
SGESS8.4	8.40	25.2						
SGESS8.5	8.50	25.5						
SGESS8.6	8.60	25.8					1.8	
SGESS8.7	8.70	26.1						
SGESS8.8	8.80	26.4						
SGESS8.9	8.90	26.7						
SGESS9.0	9.00	27.0						
SGESS9.1	9.10	27.3						
SGESS9.2	9.20	27.6					1.9	
SGESS9.3	9.30	27.9						
SGESS9.4	9.40	28.2						
SGESS9.5	9.50	28.5						
SGESS9.6	9.60	28.8					2.0	
SGESS9.7	9.70	29.1						
SGESS9.8	9.80	29.4						
SGESS9.9	9.90	29.7						
SGESS10.0	10.00	30.0						
SGESS10.1	10.10	30.3					2.1	
SGESS10.2	10.20	30.6						
SGESS10.3	10.30	30.9						
SGESS10.4	10.40	31.2						
SGESS10.5	10.50	31.5						
SGESS10.6	10.60	31.8					2.2	
SGESS10.7	10.70	32.1						
SGESS10.8	10.80	32.4						
SGESS10.9	10.90	32.7					2.3	

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DC/NMS	先端 PL	库存 Stock
SGESS11.0	11.00	33.0	47.0	46.0	104	12	2.3	●
SGESS11.1	11.10	33.3						
SGESS11.2	11.20	33.6						
SGESS11.3	11.30	33.9						
SGESS11.4	11.40	34.2						
SGESS11.5	11.50	34.5						
SGESS11.6	11.60	34.8						
SGESS11.7	11.70	35.1						
SGESS11.8	11.80	35.4						
SGESS11.9	11.90	35.7	51.0	108	12	2.5	●	●
SGESS12.0	12.00	36.0						
SGESS12.1	12.10	36.3						
SGESS12.2	12.20	36.6						
SGESS12.3	12.30	36.9						
SGESS12.4	12.40	37.2						
SGESS12.5	12.50	37.5						
SGESS12.6	12.60	37.8						
SGESS12.7	12.70	38.1						
SGESS12.8	12.80	38.4	72.0	132	16	2.7	●	●
SGESS12.9	12.90	38.7						
SGESS13.0	13.00	39.0						
SGESS13.1	13.10	39.3						
SGESS13.2	13.20	39.6						
SGESS13.3	13.30	39.9						
SGESS13.4	13.40	40.2						
SGESS13.5	13.50	40.5						
SGESS13.6	13.60	40.8						
SGESS13.7	13.70	41.1	76.0	142	20	2.9	●	●
SGESS13.8	13.80	41.4						
SGESS13.9	13.90	41.7						
SGESS14.0	14.00	42.0						
SGESS14.1	14.10	42.3						
SGESS14.2	14.20	42.6						
SGESS14.3	14.30	42.9						
SGESS14.4	14.40	43.2						
SGESS14.5	14.50	43.5						
SGESS14.6	14.60	43.8	80.0	146	20	3.1	●	●
SGESS14.7	14.70	44.1						
SGESS14.8	14.80	44.4						
SGESS14.9	14.90	44.7						
SGESS15.0	15.00	45.0						
SGESS15.1	15.10	45.3						
SGESS15.2	15.20	45.6						
SGESS15.3	15.30	45.9						
SGESS15.4	15.40	46.2						
SGESS15.5	15.50	46.5	84.0	150	20	3.2	●	●
SGESS15.6	15.60	46.8						
SGESS15.7	15.70	47.1						
SGESS15.8	15.80	47.4						
SGESS15.9	15.90	47.7						
SGESS16.0	16.00	48.0						
SGESS16.1	16.10	48.3						
SGESS16.2	16.20	48.6						
SGESS16.3	16.30	48.9						
SGESS16.4	16.40	49.2	88.0	154	20	3.3	●	●
SGESS16.5	16.50	49.5						
SGESS16.6	16.60	49.8						
SGESS16.7	16.70	50.1						
SGESS16.8	16.80	50.4						
SGESS16.9	16.90	50.7						


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DC/NMS	先端 PL	库存 Stock
SGESS17.0	17.00	51.0	84.0	52.0	150	20	3.5	●
SGESS17.1	17.10	51.3						
SGESS17.2	17.20	51.6						
SGESS17.3	17.30	51.9						
SGESS17.4	17.40	52.2						
SGESS17.5	17.50	52.5						
SGESS17.6	17.60	52.8						
SGESS17.7	17.70	53.1						
SGESS17.8	17.80	53.4						
SGESS17.9	17.90	53.7	90.0	156	164	25	3.7	●
SGESS18.0	18.00	54.0						
SGESS18.1	18.10	54.3						
SGESS18.2	18.20	54.6						
SGESS18.3	18.30	54.9						
SGESS18.4	18.40	55.2						
SGESS18.5	18.50	55.5						
SGESS18.6	18.60	55.8						
SGESS18.7	18.70	56.1						
SGESS18.8	18.80	56.4	94.0	168	172	25	3.9	●
SGESS18.9	18.90	56.7						
SGESS19.0	19.00	57.0						
SGESS19.1	19.10	57.3						
SGESS19.2	19.20	57.6						
SGESS19.3	19.30	57.9						
SGESS19.4	19.40	58.2						
SGESS19.5	19.50	58.5						
SGESS19.6	19.60	58.8						
SGESS19.7	19.70	59.1	98.0	176	180	25	4.1	●
SGESS19.8	19.80	59.4						
SGESS19.9	19.90	59.7						
SGESS20.0	20.00	60.0	100.0	180	184	25	4.3	●
SGESS20.1	20.10	60.3						
SGESS20.2	20.20	60.6						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	◎	◎	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

●本钻头是可用于从普通钢到不锈钢以及铝等多种被削材的泛用钻头。

Super general purpose drill handles a wide range for work materials ranging from Aluminum, to Steel and Stainless Steel.

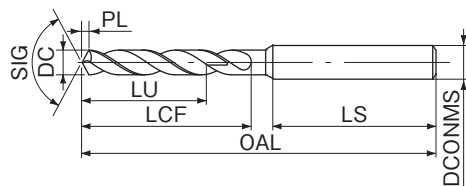

LIST 7574

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESR2.0	2.00	10.0						●
SGESR2.01	2.01							
SGESR2.02	2.02	10.1						
SGESR2.03	2.03							□
SGESR2.04	2.04	10.2						
SGESR2.05	2.05	10.3						
SGESR2.06	2.06							●
SGESR2.07	2.07	10.4						
SGESR2.08	2.08							
SGESR2.09	2.09	10.5						
SGESR2.1	2.10							
SGESR2.11	2.11	10.6						
SGESR2.12	2.12							●
SGESR2.13	2.13	10.7						
SGESR2.14	2.14							□
SGESR2.15	2.15	10.8						
SGESR2.16	2.16							
SGESR2.17	2.17	10.9						
SGESR2.18	2.18							□
SGESR2.19	2.19	11.0						
SGESR2.2	2.20							●
SGESR2.21	2.21	11.1						
SGESR2.22	2.22							□
SGESR2.23	2.23	11.2						
SGESR2.24	2.24							●
SGESR2.25	2.25	11.3						
SGESR2.26	2.26							□
SGESR2.27	2.27	11.4						
SGESR2.28	2.28							□
SGESR2.29	2.29	11.5						●
SGESR2.3	2.30							
SGESR2.31	2.31	11.6						□
SGESR2.32	2.32							
SGESR2.33	2.33	11.7						
SGESR2.34	2.34							●
SGESR2.35	2.35	11.8						
SGESR2.36	2.36							□
SGESR2.37	2.37	11.9						
SGESR2.38	2.38							□
SGESR2.39	2.39	12.0						●
SGESR2.4	2.40							
SGESR2.41	2.41	12.1						
SGESR2.42	2.42							□
SGESR2.43	2.43	12.2						
SGESR2.44	2.44							□
SGESR2.45	2.45	12.3						
SGESR2.46	2.46							□
SGESR2.47	2.47	12.4						
SGESR2.48	2.48							●
SGESR2.49	2.49	12.5						
SGESR2.5	2.50							□
SGESR2.51	2.51	12.6						
SGESR2.52	2.52							□
SGESR2.53	2.53	12.7						
SGESR2.54	2.54							□
SGESR2.55	2.55	12.8						
SGESR2.56	2.56							●
SGESR2.57	2.57	12.9						
SGESR2.58	2.58							□
SGESR2.59	2.59	13.0						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESR2.6	2.60	13.0						●
SGESR2.61	2.61							
SGESR2.62	2.62	13.1						
SGESR2.63	2.63							□
SGESR2.64	2.64	13.2						
SGESR2.65	2.65	13.3						
SGESR2.66	2.66							●
SGESR2.67	2.67	13.4						
SGESR2.68	2.68							□
SGESR2.69	2.69	13.5						
SGESR2.7	2.70							●
SGESR2.71	2.71	13.6						
SGESR2.72	2.72							□
SGESR2.73	2.73	13.7						
SGESR2.74	2.74							□
SGESR2.75	2.75	13.8						
SGESR2.76	2.76							□
SGESR2.77	2.77	13.9						
SGESR2.78	2.78							□
SGESR2.79	2.79	14.0						
SGESR2.8	2.80							●
SGESR2.81	2.81	14.1						
SGESR2.82	2.82							□
SGESR2.83	2.83	14.2						
SGESR2.84	2.84							□
SGESR2.85	2.85	14.3						
SGESR2.86	2.86							□
SGESR2.87	2.87	14.4						
SGESR2.88	2.88							□
SGESR2.89	2.89	14.5						●
SGESR2.9	2.90							
SGESR2.91	2.91	14.6						□
SGESR2.92	2.92							
SGESR2.93	2.93	14.7						
SGESR2.94	2.94							□
SGESR2.95	2.95	14.8						
SGESR2.96	2.96							□
SGESR2.97	2.97	14.9						
SGESR2.98	2.98							□
SGESR2.99	2.99	15.0						●
SGESR3.0	3.00							
SGESR3.01	3.01	15.1						
SGESR3.02	3.02							□
SGESR3.03	3.03	15.2						
SGESR3.04	3.04							□
SGESR3.05	3.05	15.3						
SGESR3.06	3.06							□
SGESR3.07	3.07	15.4						
SGESR3.08	3.08							●
SGESR3.09	3.09	15.5						
SGESR3.1	3.10							□
SGESR3.11	3.11	15.6						
SGESR3.12	3.12							□
SGESR3.13	3.13	15.7						
SGESR3.14	3.14							□
SGESR3.15	3.15	15.8						
SGESR3.16	3.16							●
SGESR3.17	3.17	15.9						
SGESR3.18	3.18							□
SGESR3.19	3.19	16.0						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESR3.2	3.20	16.0	36	68				●
SGESR3.21	3.21	16.1						
SGESR3.22	3.22	16.1						
SGESR3.23	3.23	16.2						
SGESR3.24	3.24	16.2						
SGESR3.25	3.25	16.3						□
SGESR3.26	3.26	16.3						
SGESR3.27	3.27	16.4						
SGESR3.28	3.28	16.4						
SGESR3.29	3.29	16.5						●
SGESR3.3	3.30	16.5	39	71				●
SGESR3.31	3.31	16.6						
SGESR3.32	3.32	16.6						
SGESR3.33	3.33	16.7						□
SGESR3.34	3.34	16.8						
SGESR3.35	3.35	16.8						
SGESR3.36	3.36	16.9						
SGESR3.37	3.37	16.9						
SGESR3.38	3.38	17.0						●
SGESR3.39	3.39	17.1						
SGESR3.4	3.40	17.1	43	75				●
SGESR3.41	3.41	17.2						
SGESR3.42	3.42	17.2						
SGESR3.43	3.43	17.3						□
SGESR3.44	3.44	17.4						
SGESR3.45	3.45	17.5						
SGESR3.46	3.46	17.5						●
SGESR3.47	3.47	17.6						
SGESR3.48	3.48	17.7						
SGESR3.49	3.49	17.7						□
SGESR3.5	3.50	17.8	47	89				●
SGESR3.51	3.51	17.8						
SGESR3.52	3.52	17.9						
SGESR3.53	3.53	18.0						
SGESR3.54	3.54	18.1						□
SGESR3.55	3.55	18.2						
SGESR3.56	3.56	18.3						
SGESR3.57	3.57	18.4						
SGESR3.58	3.58	18.5						●
SGESR3.59	3.59	18.6						
SGESR3.6	3.60	18.7	43	75				●
SGESR3.61	3.61	18.8						
SGESR3.62	3.62	18.9						
SGESR3.63	3.63	19.0						□
SGESR3.64	3.64	19.1						
SGESR3.65	3.65	19.2						
SGESR3.66	3.66	19.3						
SGESR3.67	3.67	19.4						●
SGESR3.68	3.68	19.4						
SGESR3.69	3.69	19.4						
SGESR3.7	3.70	19.4	43	75				●
SGESR3.71	3.71	19.4						
SGESR3.72	3.72	19.4						
SGESR3.73	3.73	19.4						□
SGESR3.74	3.74	19.4						
SGESR3.75	3.75	19.4						
SGESR3.76	3.76	19.4						●
SGESR3.77	3.77	19.4						
SGESR3.78	3.78	19.4						
SGESR3.79	3.79	19.4						□
SGESR3.8	3.80	19.4	43	75				●
SGESR3.81	3.81	19.4						
SGESR3.82	3.82	19.4						
SGESR3.83	3.83	19.4						□
SGESR3.84	3.84	19.4						
SGESR3.85	3.85	19.4						
SGESR3.86	3.86	19.4						●
SGESR3.87	3.87	19.4						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESR3.88	3.88	19.4	43	75	85	4	0.8	□
SGESR3.89	3.89	19.5						●
SGESR3.9	3.90	19.5						
SGESR3.91	3.91	19.6						
SGESR3.92	3.92	19.7						□
SGESR3.93	3.93	19.8						
SGESR3.94	3.94	19.9						
SGESR3.95	3.95	20.0						●
SGESR3.96	3.96	20.1						
SGESR3.97	3.97	20.2						
SGESR3.98	3.98	20.3	47	89	6	0.9		□
SGESR3.99	3.99	20.4						
SGESR4.0	4.00	20.5						●
SGESR4.01	4.01	20.6						
SGESR4.02	4.02	20.7						
SGESR4.03	4.03	20.8						□
SGESR4.04	4.04	20.9						
SGESR4.05	4.05	21.0						
SGESR4.06	4.06	21.1						●
SGESR4.07	4.07	21.2						
SGESR4.08	4.08	21.3	47	89	6	0.9		□
SGESR4.09	4.09	21.4						
SGESR4.1	4.10	21.5						●
SGESR4.11	4.11	21.6						
SGESR4.12	4.12	21.7						
SGESR4.13	4.13	21.8						□
SGESR4.14	4.14	21.9						
SGESR4.15	4.15	22.0						
SGESR4.16	4.16	22.1						●
SGESR4.17	4.17	22.2						
SGESR4.18	4.18	22.3	47	89	6	0.9		□
SGESR4.19	4.19	22.4						
SGESR4.2	4.20	22.5						●
SGESR4.21	4.21	22.6						
SGESR4.22	4.22	22.7						
SGESR4.23	4.23	22.8						□
SGESR4.24	4.24	22.9						
SGESR4.25	4.25	23.0						
SGESR4.26	4.26	23.1						●
SGESR4.27	4.27	23.2						
SGESR4.28	4.28	23.3	47	89	6	0.9		□
SGESR4.29	4.29	23.4						
SGESR4.3	4.30	23.5						●
SGESR4.31	4.31	23.6						
SGESR4.32	4.32	23.7						
SGESR4.33	4.33	23.8						□
SGESR4.34	4.34	23.9						
SGESR4.35	4.35	24.0						
SGESR4.36	4.36	24.1						●
SGESR4.37	4.37	24.2						
SGESR4.38	4.38	24.3	47	89	6	0.9		□
SGESR4.39	4.39	24.4						
SGESR4.4	4.40	24.5						●
SGESR4.41	4.41	24.6						
SGESR4.42	4.42	24.7						
SGESR4.43	4.43	24.8						□
SGESR4.44	4.44	24.9						
SGESR4.45	4.45	25.0						
SGESR4.46	4.46	25.1						●
SGESR4.47	4.47	25.2						
SGESR4.48	4.48	25.3	47	89	6	0.9		□
SGESR4.49	4.49	25.4						
SGESR4.5	4.50	25.5						●
SGESR4.51	4.51	25.6						
SGESR4.52	4.52	25.7						
SGESR4.53	4.53	25.8						□
SGESR4.54	4.54	25.9						
SGESR4.55	4.55	26.0						●

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀


切削工具

套装商品
其它

精密工具

技术资料
索引

Next 下一页 ➡



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差

直径范围

← 上一页 Previous Page

单位 (Unit) : mm

新商品

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESR4.56	4.56	22.8	47	89	89		0.9	●
SGESR4.57	4.57	22.9						
SGESR4.58	4.58							
SGESR4.59	4.59	23.0						□
SGESR4.6	4.60							●
SGESR4.61	4.61							
SGESR4.62	4.62	23.1						
SGESR4.63	4.63							
SGESR4.64	4.64	23.2						
SGESR4.65	4.65	23.3						□
SGESR4.66	4.66							
SGESR4.67	4.67	23.4						
SGESR4.68	4.68							
SGESR4.69	4.69	23.5						
SGESR4.7	4.70							
SGESR4.71	4.71	23.6						●
SGESR4.72	4.72							
SGESR4.73	4.73	23.7						
SGESR4.74	4.74							
SGESR4.75	4.75	23.8	52	94	94		1.0	□
SGESR4.76	4.76							
SGESR4.77	4.77	23.9						●
SGESR4.78	4.78							
SGESR4.79	4.79	24.0						□
SGESR4.8	4.80							●
SGESR4.81	4.81	24.1						
SGESR4.82	4.82							
SGESR4.83	4.83	24.2						
SGESR4.84	4.84							
SGESR4.85	4.85	24.3						□
SGESR4.86	4.86							
SGESR4.87	4.87	24.4						
SGESR4.88	4.88							
SGESR4.89	4.89	24.5						●
SGESR4.9	4.90							
SGESR4.91	4.91	24.6						
SGESR4.92	4.92							
SGESR4.93	4.93	24.7	57	99	99		1.1	□
SGESR4.94	4.94							
SGESR4.95	4.95	24.8						
SGESR4.96	4.96							
SGESR4.97	4.97	24.9						
SGESR4.98	4.98							
SGESR4.99	4.99	25.0						●
SGESR5.0	5.00							
SGESR5.01	5.01	25.1						
SGESR5.02	5.02							
SGESR5.03	5.03	25.2						
SGESR5.04	5.04							□
SGESR5.05	5.05	25.3						
SGESR5.06	5.06							
SGESR5.07	5.07	25.4						
SGESR5.08	5.08							
SGESR5.09	5.09	25.5						●
SGESR5.1	5.10							
SGESR5.11	5.11	25.6	52	94	94		1.1	
SGESR5.12	5.12							
SGESR5.13	5.13	25.7						
SGESR5.14	5.14							□
SGESR5.15	5.15	25.8						
SGESR5.16	5.16							
SGESR5.17	5.17	25.9						
SGESR5.18	5.18							
SGESR5.19	5.19	26.0						●
SGESR5.2	5.20							
SGESR5.21	5.21	26.1						
SGESR5.22	5.22							□
SGESR5.23	5.23	26.2						
SGESR5.24	5.24							
SGESR5.25	5.25	26.3						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESR5.26	5.26	26.3	52	94	94		1.1	
SGESR5.27	5.27	26.4						□
SGESR5.28	5.28							
SGESR5.29	5.29	26.5						●
SGESR5.3	5.30							
SGESR5.31	5.31	26.6						
SGESR5.32	5.32							□
SGESR5.33	5.33	26.7						
SGESR5.34	5.34							
SGESR5.35	5.35	26.8						
SGESR5.36	5.36							
SGESR5.37	5.37	26.9						
SGESR5.38	5.38							
SGESR5.39	5.39	27.0						●
SGESR5.4	5.40							□
SGESR5.41	5.41	27.1						
SGESR5.42	5.42							
SGESR5.43	5.43	27.2						
SGESR5.44	5.44							
SGESR5.45	5.45	27.3	57	99	99		1.2	●
SGESR5.46	5.46							
SGESR5.47	5.47	27.4						□
SGESR5.48	5.48							
SGESR5.49	5.49	27.5						□
SGESR5.5	5.50							●
SGESR5.51	5.51	27.6						
SGESR5.52	5.52							
SGESR5.53	5.53	27.7						□
SGESR5.54	5.54							
SGESR5.55	5.55	27.8						
SGESR5.56	5.56							
SGESR5.57	5.57	27.9						
SGESR5.58	5.58							
SGESR5.59	5.59	28.0						●
SGESR5.6	5.60							
SGESR5.61	5.61	28.1						
SGESR5.62	5.62							
SGESR5.63	5.63	28.2	52	94	94		1.1	
SGESR5.64	5.64							
SGESR5.65	5.65	28.3						□
SGESR5.66	5.66							
SGESR5.67	5.67	28.4						
SGESR5.68	5.68							
SGESR5.69	5.69	28.5						●
SGESR5.7	5.70							
SGESR5.71	5.71	28.6						
SGESR5.72	5.72							●
SGESR5.73	5.73	28.7						
SGESR5.74	5.74							
SGESR5.75	5.75	28.8						□
SGESR5.76	5.76							
SGESR5.77	5.77	28.9						
SGESR5.78	5.78							
SGESR5.79	5.79	29.0						●
SGESR5.8	5.80							
SGESR5.81	5.81	29.1	52	94	94		1.1	
SGESR5.82	5.82							
SGESR5.83	5.83	29.2						
SGESR5.84	5.84							□
SGESR5.85	5.85	29.3						
SGESR5.86	5.86							
SGESR5.87	5.87	29.4						
SGESR5.88	5.88							
SGESR5.89	5.89	29.5						●
SGESR5.9	5.90							
SGESR5.91	5.91	29.6						
SGESR5.92	5.92							□
SGESR5.93	5.93	29.7						
SGESR5.94	5.94							
SGESR5.95	5.95	29.8						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀


切割工具

套装商品
其它

精密工具

技术资料
索引

Next Page 下一页 



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差

直径范围

← 上一页 Previous Page

单位 (Unit) : mm

新商品

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 CONMS	先端 PL	库存 Stock
SGESR7.36	7.36	36.8	69	113			1.5	●
SGESR7.37	7.37	36.9						□
SGESR7.38	7.38	37.0						●
SGESR7.39	7.39	37.1						□
SGESR7.4	7.40	37.2						●
SGESR7.41	7.41	37.3						□
SGESR7.42	7.42	37.4						●
SGESR7.43	7.43	37.5						□
SGESR7.44	7.44	37.6						●
SGESR7.45	7.45	37.7						□
SGESR7.46	7.46	37.8						●
SGESR7.47	7.47	37.9						□
SGESR7.48	7.48	38.0						●
SGESR7.49	7.49	38.1						□
SGESR7.5	7.50	38.2	●					
SGESR7.51	7.51	38.3	38.0			8	□	
SGESR7.52	7.52	38.4					●	
SGESR7.53	7.53	38.5					□	
SGESR7.54	7.54	38.6					●	
SGESR7.55	7.55	38.7					□	
SGESR7.56	7.56	38.8					●	
SGESR7.57	7.57	38.9					□	
SGESR7.58	7.58	39.0					●	
SGESR7.59	7.59	39.1					□	
SGESR7.6	7.60	39.2					●	
SGESR7.61	7.61	39.3					□	
SGESR7.62	7.62	39.4					●	
SGESR7.63	7.63	39.5					□	
SGESR7.64	7.64	39.6					●	
SGESR7.65	7.65	39.7	75			119	□	
SGESR7.66	7.66	39.8					●	
SGESR7.67	7.67	39.9					□	
SGESR7.68	7.68	40.0					●	
SGESR7.69	7.69	40.1					□	
SGESR7.7	7.70	40.2					●	
SGESR7.71	7.71	40.3					□	
SGESR7.72	7.72	40.4					●	
SGESR7.73	7.73	40.5					□	
SGESR7.74	7.74	40.6					●	
SGESR7.75	7.75	40.7					□	
SGESR7.76	7.76	40.8					●	
SGESR7.77	7.77	40.9					□	
SGESR7.78	7.78	41.0					●	
SGESR7.79	7.79	41.1	□					
SGESR7.8	7.80	41.2	43.5	125	10	1.7	●	
SGESR7.81	7.81	41.3					□	
SGESR7.82	7.82	41.4					●	
SGESR7.83	7.83	41.5					□	
SGESR7.84	7.84	41.6					●	
SGESR7.85	7.85	41.7					□	
SGESR7.86	7.86	41.8					●	
SGESR7.87	7.87	41.9					□	
SGESR7.88	7.88	42.0					●	
SGESR7.89	7.89	42.1					□	
SGESR7.9	7.90	42.2					●	
SGESR7.91	7.91	42.3					□	
SGESR7.92	7.92	42.4					●	
SGESR7.93	7.93	42.5					□	
SGESR7.94	7.94	42.6	●					
SGESR7.95	7.95	42.7	□					
SGESR7.96	7.96	42.8	●					
SGESR7.97	7.97	42.9	□					
SGESR7.98	7.98	43.0	●					
SGESR7.99	7.99	43.1	□					
SGESR8.0	8.00	43.2	●					
SGESR8.01	8.01	43.3	□					
SGESR8.02	8.02	43.4	●					
SGESR8.03	8.03	43.5	□					
SGESR8.04	8.04	43.6	●					
SGESR8.05	8.05	43.7	□					

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock	
SGESR8.06	8.06	40.3	75	125	1.7	10	1.7	□	
SGESR8.07	8.07	40.4							
SGESR8.08	8.08	40.5							●
SGESR8.09	8.09								
SGESR8.1	8.10	40.6							□
SGESR8.11	8.11								
SGESR8.12	8.12	40.7							●
SGESR8.13	8.13								
SGESR8.14	8.14	40.8							□
SGESR8.15	8.15								
SGESR8.16	8.16	40.9							●
SGESR8.17	8.17								
SGESR8.18	8.18	41.0							□
SGESR8.19	8.19								
SGESR8.2	8.20	41.1							●
SGESR8.21	8.21								
SGESR8.22	8.22	41.2							□
SGESR8.23	8.23								
SGESR8.24	8.24	41.3							●
SGESR8.25	8.25								
SGESR8.26	8.26	41.4							□
SGESR8.27	8.27								
SGESR8.28	8.28	41.5							●
SGESR8.29	8.29								
SGESR8.3	8.30	41.6							□
SGESR8.31	8.31								
SGESR8.32	8.32	41.7							●
SGESR8.33	8.33								
SGESR8.34	8.34	41.8							□
SGESR8.35	8.35								
SGESR8.36	8.36	41.9	●						
SGESR8.37	8.37								
SGESR8.38	8.38	42.0	□						
SGESR8.39	8.39								
SGESR8.4	8.40	42.1	●						
SGESR8.41	8.41								
SGESR8.42	8.42	42.2	□						
SGESR8.43	8.43								
SGESR8.44	8.44	42.3	●						
SGESR8.45	8.45								
SGESR8.46	8.46	42.4	□						
SGESR8.47	8.47								
SGESR8.48	8.48	42.5	●						
SGESR8.49	8.49								
SGESR8.5	8.50	42.6	□						
SGESR8.51	8.51								
SGESR8.52	8.52	42.7	●						
SGESR8.53	8.53								
SGESR8.54	8.54	42.8	□						
SGESR8.55	8.55								
SGESR8.56	8.56	42.9	●						
SGESR8.57	8.57								
SGESR8.58	8.58	43.0	□						
SGESR8.59	8.59								
SGESR8.6	8.60	43.1	●						
SGESR8.61	8.61								
SGESR8.62	8.62	43.2	□						
SGESR8.63	8.63								
SGESR8.64	8.64	43.3	●						
SGESR8.65	8.65								
SGESR8.66	8.66	43.4	□						
SGESR8.67	8.67								
SGESR8.68	8.68	43.5	●						
SGESR8.69	8.69								
SGESR8.7	8.70	43.6	□						
SGESR8.71	8.71								
SGESR8.72	8.72	43.7	●						
SGESR8.73	8.73								
SGESR8.74	8.74	43.8	□						
SGESR8.75	8.75								

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
SGESR8.76	8.76	43.8	81	43.5	131	10	1.8	●
SGESR8.77	8.77	43.9						
SGESR8.78	8.78	44.0						
SGESR8.79	8.79	44.1						
SGESR8.8	8.80	44.2						
SGESR8.81	8.81	44.3						
SGESR8.82	8.82	44.4						
SGESR8.83	8.83	44.5						
SGESR8.84	8.84	44.6						
SGESR8.85	8.85	44.7						
SGESR8.86	8.86	44.8						
SGESR8.87	8.87	44.9						
SGESR8.88	8.88	45.0						
SGESR8.89	8.89	45.1						
SGESR8.9	8.90	45.2						
SGESR8.91	8.91	45.3						
SGESR8.92	8.92	45.4						
SGESR8.93	8.93	45.5						
SGESR8.94	8.94	45.6						
SGESR8.95	8.95	45.7						
SGESR8.96	8.96	45.8						
SGESR8.97	8.97	45.9						
SGESR8.98	8.98	46.0						
SGESR8.99	8.99	46.1						
SGESR9.0	9.00	46.2						
SGESR9.01	9.01	46.3						
SGESR9.02	9.02	46.4						
SGESR9.03	9.03	46.5						
SGESR9.04	9.04	46.6						
SGESR9.05	9.05	46.7						
SGESR9.06	9.06	46.8						
SGESR9.07	9.07	46.9						
SGESR9.08	9.08	47.0						
SGESR9.09	9.09	47.1						
SGESR9.1	9.10	47.2						
SGESR9.11	9.11	47.3						
SGESR9.12	9.12	47.4						
SGESR9.13	9.13	47.5						
SGESR9.14	9.14	47.6						
SGESR9.15	9.15	47.7						
SGESR9.16	9.16	47.8						
SGESR9.17	9.17	47.9						
SGESR9.18	9.18	48.0						
SGESR9.19	9.19	48.1						
SGESR9.2	9.20	48.2						
SGESR9.21	9.21	48.3						
SGESR9.22	9.22	48.4						
SGESR9.23	9.23	48.5						
SGESR9.24	9.24	48.6						
SGESR9.25	9.25	48.7						
SGESR9.26	9.26	48.8						
SGESR9.27	9.27	48.9						
SGESR9.28	9.28	49.0						
SGESR9.29	9.29	49.1						
SGESR9.3	9.30	49.2						
SGESR9.31	9.31	49.3						
SGESR9.32	9.32	49.4						
SGESR9.33	9.33	49.5						
SGESR9.34	9.34	49.6						
SGESR9.35	9.35	49.7						
SGESR9.36	9.36	49.8						
SGESR9.37	9.37	49.9						
SGESR9.38	9.38	50.0						
SGESR9.39	9.39	50.1						
SGESR9.4	9.40	50.2						
SGESR9.41	9.41	50.3						
SGESR9.42	9.42	50.4						
SGESR9.43	9.43	50.5						
SGESR9.44	9.44	50.6						
SGESR9.45	9.45	50.7						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
SGESR9.46	9.46	47.3	81	131	10	10	2.0	●
SGESR9.47	9.47	47.4						
SGESR9.48	9.48	47.5						
SGESR9.49	9.49	47.6						
SGESR9.5	9.50	47.7						
SGESR9.51	9.51	47.8						
SGESR9.52	9.52	47.9						
SGESR9.53	9.53	48.0						
SGESR9.54	9.54	48.1						
SGESR9.55	9.55	48.2						
SGESR9.56	9.56	48.3						
SGESR9.57	9.57	48.4						
SGESR9.58	9.58	48.5	87	43.5	137	10	2.1	●
SGESR9.59	9.59	48.6						
SGESR9.6	9.60	48.7						
SGESR9.61	9.61	48.8						
SGESR9.62	9.62	48.9						
SGESR9.63	9.63	49.0						
SGESR9.64	9.64	49.1						
SGESR9.65	9.65	49.2						
SGESR9.66	9.66	49.3						
SGESR9.67	9.67	49.4						
SGESR9.68	9.68	49.5						
SGESR9.69	9.69	49.6						
SGESR9.7	9.70	49.7						
SGESR9.71	9.71	49.8						
SGESR9.72	9.72	49.9						
SGESR9.73	9.73	50.0						
SGESR9.74	9.74	50.1						
SGESR9.75	9.75	50.2						
SGESR9.76	9.76	50.3						
SGESR9.77	9.77	50.4						
SGESR9.78	9.78	50.5						
SGESR9.79	9.79	50.6						
SGESR9.8	9.80	50.7						
SGESR9.81	9.81	50.8						
SGESR9.82	9.82	50.9						
SGESR9.83	9.83	51.0						
SGESR9.84	9.84	51.1						
SGESR9.85	9.85	51.2						
SGESR9.86	9.86	51.3						
SGESR9.87	9.87	51.4						
SGESR9.88	9.88	51.5						
SGESR9.89	9.89	51.6						
SGESR9.9	9.90	51.7						
SGESR9.91	9.91	51.8						
SGESR9.92	9.92	51.9						
SGESR9.93	9.93	52.0						
SGESR9.94	9.94	52.1						
SGESR9.95	9.95	52.2						
SGESR9.96	9.96	52.3						
SGESR9.97	9.97	52.4						
SGESR9.98	9.98	52.5						
SGESR9.99	9.99	52.6						
SGESR10.0	10.00	52.7						
SGESR10.1	10.10	52.8						
SGESR10.2	10.20	52.9						
SGESR10.3	10.30	53.0						
SGESR10.4	10.40	53.1						
SGESR10.5	10.50	53.2						
SGESR10.6	10.60	53.3						
SGESR10.7	10.70	53.4						
SGESR10.8	10.80	53.5						
SGESR10.9	10.90	53.6						
SGESR11.0	11.00	53.7						
SGESR11.1	11.10	53.8						
SGESR11.2	11.20	53.9						
SGESR11.3	11.30	54.0						
SGESR11.4	11.40	54.1						
SGESR11.5	11.50	54.2						

新商品


硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差

直径范围

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESR11.6	11.60	58.0						
SGESR11.7	11.70	58.5	94		151		2.4	
SGESR11.8	11.80	59.0		46.0				
SGESR11.9	11.90	59.5						
SGESR12.0	12.00	60.0						
SGESR12.1	12.10	60.5				12	2.5	●
SGESR12.2	12.20	61.0						
SGESR12.3	12.30	61.5						
SGESR12.4	12.40	62.0						
SGESR12.5	12.50	62.5						
SGESR12.6	12.60	63.0						
SGESR12.7	12.70	63.5						
SGESR12.8	12.80	64.0						
SGESR12.9	12.90	64.5						
SGESR13.0	13.00	65.0					2.7	
SGESR13.1	13.10	65.5						
SGESR13.2	13.20	66.0						
SGESR13.3	13.30	66.5						
SGESR13.4	13.40	67.0						
SGESR13.5	13.50	67.5					2.8	●
SGESR13.6	13.60	68.0						
SGESR13.7	13.70	68.5						
SGESR13.8	13.80	69.0						
SGESR13.9	13.90	69.5						
SGESR14.0	14.00	70.0					2.9	●
SGESR14.1	14.10	70.5						
SGESR14.2	14.20	71.0						
SGESR14.3	14.30	71.5						
SGESR14.4	14.40	72.0						
SGESR14.5	14.50	72.5					3.0	●
SGESR14.6	14.60	73.0						
SGESR14.7	14.70	73.5						
SGESR14.8	14.80	74.0						
SGESR14.9	14.90	74.5					3.1	●
SGESR15.0	15.00	75.0						
SGESR15.1	15.10	75.5						
SGESR15.2	15.20	76.0						
SGESR15.3	15.30	76.5						
SGESR15.4	15.40	77.0					3.2	●
SGESR15.5	15.50	77.5						
SGESR15.6	15.60	78.0						
SGESR15.7	15.70	78.5						
SGESR15.8	15.80	79.0						
SGESR15.9	15.90	79.5					3.3	●
SGESR16.0	16.00	80.0						
SGESR16.1	16.10	80.5						
SGESR16.2	16.20	81.0						
SGESR16.3	16.30	81.5						
SGESR16.4	16.40	82.0					3.4	●
SGESR16.5	16.50	82.5						
SGESR16.6	16.60	83.0						
SGESR16.7	16.70	83.5						
SGESR16.8	16.80	84.0					3.5	●
SGESR16.9	16.90	84.5						
SGESR17.0	17.00	85.0						
SGESR17.1	17.10	85.5						
SGESR17.2	17.20	86.0						
SGESR17.3	17.30	86.5					3.6	●
SGESR17.4	17.40	87.0						
SGESR17.5	17.50	87.5						
SGESR17.6	17.60	88.0						
SGESR17.7	17.70	88.5					3.7	●
SGESR17.8	17.80	89.0						
SGESR17.9	17.90	89.5						
SGESR18.0	18.00	90.0						
SGESR18.1	18.10	90.5						
SGESR18.2	18.20	91.0					3.8	●
SGESR18.3	18.30	91.5						
SGESR18.4	18.40	92.0						
SGESR18.5	18.50	92.5						


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGESR18.6	18.60	93.0						
SGESR18.7	18.70	93.5						
SGESR18.8	18.80	94.0	135		206		3.9	□
SGESR18.9	18.90	94.5						
SGESR19.0	19.00	95.0						●
SGESR19.1	19.10	95.5						
SGESR19.2	19.20	96.0					4.0	□
SGESR19.3	19.30	96.5						
SGESR19.4	19.40	97.0						●
SGESR19.5	19.50	97.5						
SGESR19.6	19.60	98.0					4.1	□
SGESR19.7	19.70	98.5						
SGESR19.8	19.80	99.0						
SGESR19.9	19.90	99.5						
SGESR20.0	20.00	100.0						
SGESR20.5	20.50	102.5					4.2	
SGESR21.0	21.00	105.0			214		4.3	
SGESR21.5	21.50	107.5					4.5	
SGESR22.0	22.00	110.0			218		4.6	
SGESR22.5	22.50	112.5					4.7	
SGESR23.0	23.00	115.0			223		4.8	
SGESR23.5	23.50	117.5					4.9	
SGESR24.0	24.00	120.0					5.0	
SGESR24.5	24.50	122.5			237		5.1	
SGESR25.0	25.00	125.0					5.2	
SGESR25.5	25.50	127.5					5.3	
SGESR26.0	26.00	130.0			241		5.4	●
SGESR26.5	26.50	132.5					5.5	
SGESR27.0	27.00	135.0			245		5.6	
SGESR27.5	27.50	137.5					5.7	
SGESR28.0	28.00	140.0					5.8	
SGESR28.5	28.50	142.5					5.9	
SGESR29.0	29.00	145.0			248		6.0	
SGESR29.5	29.50	147.5					6.1	
SGESR30.0	30.00	150.0					6.2	
SGESR30.5	30.50	152.5					6.3	
SGESR31.0	31.00	155.0			252		6.4	
SGESR31.5	31.50	157.5					6.5	
SGESR32.0	32.00	160.0			255		6.6	

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	○	◎	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used 一: 不推荐 Not recommended

- 可以对普通钢、型钢和铸铁进行高速、高效率加工。
- 不适用于奥氏体不锈钢的加工。

This Drill having jobbers length is useful in material from Steel and Die Steel to Cast Iron. This drill is not applied to Austenitic Stainless Steel.

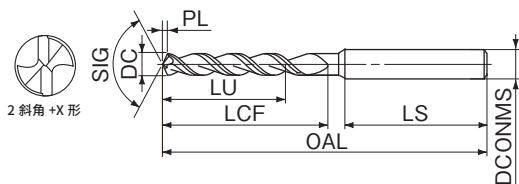

新商品

LIST 7570P

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGES2.0	2.0	10.0	24	28.0	56	3	0.4	
SGES2.1	2.1	10.5						
SGES2.2	2.2	11.0						
SGES2.3	2.3	11.5	25		61		0.5	
SGES2.4	2.4	12.0						
SGES2.5	2.5	12.5	30				64	
SGES2.6	2.6	13.0						
SGES2.7	2.7	13.5	33	68	0.7			
SGES2.8	2.8	14.0						
SGES2.9	2.9	14.5	36		71	0.8		
SGES3.0	3.0	15.0						
SGES3.1	3.1	15.5	39	75		0.9		
SGES3.2	3.2	16.0						
SGES3.3	3.3	16.5	43		85	1.0		
SGES3.4	3.4	17.0						
SGES3.5	3.5	17.5	47	89		1.1		
SGES3.6	3.6	18.0						
SGES3.7	3.7	18.5	52		94	1.2		
SGES3.8	3.8	19.0						
SGES3.9	3.9	19.5	57	99		1.3		
SGES4.0	4.0	20.0						
SGES4.1	4.1	20.5	63		107	1.4		
SGES4.2	4.2	21.0						
SGES4.3	4.3	21.5	69	113		1.5		
SGES4.4	4.4	22.0						
SGES4.5	4.5	22.5	75		119	1.6		
SGES4.6	4.6	23.0						
SGES4.7	4.7	23.5						
SGES4.8	4.8	24.0						
SGES4.9	4.9	24.5						
SGES5.0	5.0	25.0						
SGES5.1	5.1	25.5						
SGES5.2	5.2	26.0						
SGES5.3	5.3	26.5						
SGES5.4	5.4	27.0						
SGES5.5	5.5	27.5						
SGES5.6	5.6	28.0						
SGES5.7	5.7	28.5						
SGES5.8	5.8	29.0						
SGES5.9	5.9	29.5						
SGES6.0	6.0	30.0						
SGES6.1	6.1	30.5						
SGES6.2	6.2	31.0						
SGES6.3	6.3	31.5						
SGES6.4	6.4	32.0						
SGES6.5	6.5	32.5						
SGES6.6	6.6	33.0						
SGES6.7	6.7	33.5						
SGES6.8	6.8	34.0						
SGES6.9	6.9	34.5						
SGES7.0	7.0	35.0						
SGES7.1	7.1	35.5						
SGES7.2	7.2	36.0						
SGES7.3	7.3	36.5						
SGES7.4	7.4	37.0						
SGES7.5	7.5	37.5						
SGES7.6	7.6	38.0						
SGES7.7	7.7	38.5						
SGES7.8	7.8	39.0						
SGES7.9	7.9	39.5						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
SGES8.0	8.0	40.0	75	38.0	119	8	1.7	
SGES8.1	8.1	40.5		125				
SGES8.2	8.2	41.0						
SGES8.3	8.3	41.5						
SGES8.4	8.4	42.0						
SGES8.5	8.5	42.5	131		10	1.8		
SGES8.6	8.6	43.0						
SGES8.7	8.7	43.5						
SGES8.8	8.8	44.0						
SGES8.9	8.9	44.5		81			43.5	1.9
SGES9.0	9.0	45.0						
SGES9.1	9.1	45.5						
SGES9.2	9.2	46.0						
SGES9.3	9.3	46.5	87		137	2.0		
SGES9.4	9.4	47.0						
SGES9.5	9.5	47.5						
SGES9.6	9.6	48.0						
SGES9.7	9.7	48.5		94			144	2.1
SGES9.8	9.8	49.0						
SGES9.9	9.9	49.5						
SGES10.0	10.0	50.0						
SGES10.1	10.1	50.5	101		151	2.2		
SGES10.2	10.2	51.0						
SGES10.3	10.3	51.5						
SGES10.4	10.4	52.0						
SGES10.5	10.5	52.5		94			46.0	151
SGES10.6	10.6	53.0						
SGES10.7	10.7	53.5						
SGES10.8	10.8	54.0						
SGES10.9	10.9	54.5						
SGES11.0	11.0	55.0	101	50.0	158	2.3		
SGES11.1	11.1	55.5						
SGES11.2	11.2	56.0						
SGES11.3	11.3	56.5						
SGES11.4	11.4	57.0						
SGES11.5	11.5	57.5	108	168	16	2.4		
SGES11.6	11.6	58.0						
SGES11.7	11.7	58.5						
SGES11.8	11.8	59.0						
SGES11.9	11.9	59.5						
SGES12.0	12.0	60.0	101	50.0	158	2.5		
SGES12.1	12.1	60.5						
SGES12.2	12.2	61.0						
SGES12.3	12.3	61.5						
SGES12.4	12.4	62.0						
SGES12.5	12.5	62.5	108	168	16	2.6		
SGES12.6	12.6	63.0						
SGES12.7	12.7	63.5						
SGES12.8	12.8	64.0						
SGES12.9	12.9	64.5						
SGES13.0	13.0	65.0	101	50.0	158	2.7		
SGES13.1	13.1	65.5						
SGES13.2	13.2	66.0						
SGES13.3	13.3	66.5						
SGES13.4	13.4	67.0						
SGES13.5	13.5	67.5	108	168	16	2.8		
SGES13.6	13.6	68.0						
SGES13.7	13.7	68.5						
SGES13.8	13.8	69.0						
SGES13.9	13.9	69.5						

新商品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock	
SGES14.0	14.0	70.0	108	50.0	168	16	2.9	●	
SGES14.1	14.1	70.5	114		173		3.0	□	
SGES14.2	14.2	71.0						3.1	●
SGES14.3	14.3	71.5							□
SGES14.4	14.4	72.0							
SGES14.5	14.5	72.5							
SGES14.6	14.6	73.0							
SGES14.7	14.7	73.5		180	3.2	●			
SGES14.8	14.8	74.0				□			
SGES14.9	14.9	74.5							
SGES15.0	15.0	75.0							
SGES15.1	15.1	75.5							
SGES15.2	15.2	76.0	120	185	3.3		●		
SGES15.3	15.3	76.5				□			
SGES15.4	15.4	77.0							
SGES15.5	15.5	77.5							
SGES15.6	15.6	78.0							
SGES15.7	15.7	78.5		3.4	●				
SGES15.8	15.8	79.0			□				
SGES15.9	15.9	79.5							
SGES16.0	16.0	80.0							
SGES16.1	16.1	80.5							
SGES16.2	16.2	81.0		125		189	20	3.5	●
SGES16.3	16.3	81.5	3.6		□				
SGES16.4	16.4	82.0							
SGES16.5	16.5	82.5							
SGES16.6	16.6	83.0							
SGES16.7	16.7	83.5			3.7	●			
SGES16.8	16.8	84.0	□						
SGES16.9	16.9	84.5							
SGES17.0	17.0	85.0							
SGES17.1	17.1	85.5							
SGES17.2	17.2	86.0			130	194	3.8	●	
SGES17.3	17.3	86.5	□						
SGES17.4	17.4	87.0							
SGES17.5	17.5	87.5							
SGES17.6	17.6	88.0							
SGES17.7	17.7	88.5		3.9		●			
SGES17.8	17.8	89.0	□						
SGES17.9	17.9	89.5							
SGES18.0	18.0	90.0							
SGES18.1	18.1	90.5							
SGES18.2	18.2	91.0		135		198	4.0	●	
SGES18.3	18.3	91.5	□						
SGES18.4	18.4	92.0							
SGES18.5	18.5	92.5							
SGES18.6	18.6	93.0							
SGES18.7	18.7	93.5			206	3.9	□		
SGES18.8	18.8	94.0							
SGES18.9	18.9	94.5							
SGES19.0	19.0	95.0							
SGES19.1	19.1	95.5							
SGES19.2	19.2	96.0	140		210	4.1	●		
SGES19.3	19.3	96.5		□					
SGES19.4	19.4	97.0							
SGES19.5	19.5	97.5							
SGES19.6	19.6	98.0							
SGES19.7	19.7	98.5			4.1	□			
SGES19.8	19.8	99.0							
SGES19.9	19.9	99.5							

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 CONMS	先端 PL	库存 Stock
SGES20.0	20.0	100.0	140	60.0	210	25	4.1	●
SGES20.5	20.5	102.5	145		214		4.2	
SGES21.0	21.0	105.0					4.3	
SGES21.5	21.5	107.5					4.5	
SGES22.0	22.0	110.0					4.6	
SGES22.5	22.5	112.5	150	62.0	218	4.7		
SGES23.0	23.0	115.0				4.8		
SGES23.5	23.5	117.5				4.9		
SGES24.0	24.0	120.0	160		237	32	5.0	
SGES24.5	24.5	122.5					5.1	
SGES25.0	25.0	125.0					5.2	
SGES25.5	25.5	127.5					5.3	
SGES26.0	26.0	130.0	165		241	5.4		
SGES26.5	26.5	132.5				5.5		
SGES27.0	27.0	135.0		5.6				
SGES27.5	27.5	137.5		5.7				
SGES28.0	28.0	140.0	170	245		5.8		
SGES28.5	28.5	142.5			5.9			
SGES29.0	29.0	145.0			6.0			
SGES29.5	29.5	147.5	175		248	6.1		
SGES30.0	30.0	150.0				6.2		
SGES30.5	30.5	152.5		6.3				
SGES31.0	31.0	155.0	180	252		6.4		
SGES31.5	31.5	157.5			6.5			
SGES32.0	32.0	160.0	185		255	6.6		

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	○	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	◎	○	○	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●具有倾斜面沉孔、丝锥盲孔等多种功能的大直径平头钻。

Large diameter flat drill handles countersinking angled surfaces and tapping blind holes.

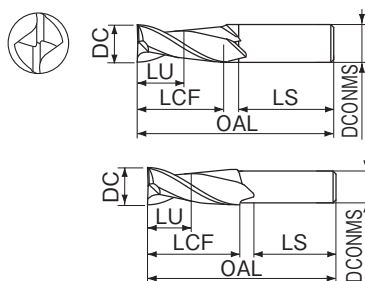

LIST 6544

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	库存 Stock
SGEZ16.0	16.0	16.0	34	98	16	16	□
SGEZ16.5	16.5	16.5					
SGEZ17.0	17.0	17.0	39	103	16	16	□
SGEZ17.5	17.5	17.5					
SGEZ18.0	18.0	18.0	44	113	20	20	□
SGEZ18.5	18.5	18.5					
SGEZ19.0	19.0	19.0	49	120	20	20	□
SGEZ19.5	19.5	19.5					
SGEZ20.0	20.0	20.0	54	134	25	25	□
SGEZ20.5	20.5	20.5					
SGEZ21.0	21.0	21.0	58	142	25	25	□
SGEZ21.5	21.5	21.5					
SGEZ22.0	22.0	22.0	63	147	32	32	□
SGEZ22.5	22.5	22.5					
SGEZ23.0	23.0	23.0	68	158	32	32	□
SGEZ23.5	23.5	23.5					
SGEZ24.0	24.0	24.0	73	166	32	32	□
SGEZ24.5	24.5	24.5					
SGEZ25.0	25.0	25.0	78	173	32	32	□
SGEZ25.5	25.5	25.5					
SGEZ26.0	26.0	26.0	83	180	32	32	□
SGEZ26.5	26.5	26.5					
SGEZ27.0	27.0	27.0	88	197	32	32	□
SGEZ27.5	27.5	27.5					
SGEZ28.0	28.0	28.0	93	208	32	32	□
SGEZ28.5	28.5	28.5					
SGEZ29.0	29.0	29.0	98	219	32	32	□
SGEZ29.5	29.5	29.5					
SGEZ30.0	30.0	30.0	103	230	32	32	□
SGEZ30.5	30.5	30.5					
SGEZ31.0	31.0	31.0	108	241	32	32	□
SGEZ31.5	31.5	31.5					
SGEZ32.0	32.0	32.0	113	252	32	32	□
SGEZ32.5	32.5	32.5					
SGEZ33.0	33.0	33.0	118	263	32	32	□
SGEZ33.5	33.5	33.5					
SGEZ34.0	34.0	34.0	123	274	32	32	□
SGEZ34.5	34.5	34.5					
SGEZ35.0	35.0	35.0	128	285	32	32	□
SGEZ35.5	35.5	35.5					
SGEZ36.0	36.0	36.0	133	296	32	32	□
SGEZ36.5	36.5	36.5					
SGEZ37.0	37.0	37.0	138	307	32	32	□
SGEZ37.5	37.5	37.5					
SGEZ38.0	38.0	38.0	143	318	32	32	□
SGEZ38.5	38.5	38.5					
SGEZ39.0	39.0	39.0	148	329	32	32	□
SGEZ39.5	39.5	39.5					
SGEZ40.0	40.0	40.0	153	340	32	32	□
SGEZ40.5	40.5	40.5					
SGEZ41.0	41.0	41.0	158	351	32	32	□
SGEZ41.5	41.5	41.5					
SGEZ42.0	42.0	42.0	163	362	32	32	□
SGEZ42.5	42.5	42.5					
SGEZ43.0	43.0	43.0	168	373	32	32	□
SGEZ43.5	43.5	43.5					
SGEZ44.0	44.0	44.0	173	384	32	32	□
SGEZ44.5	44.5	44.5					
SGEZ45.0	45.0	45.0	178	395	32	32	□
SGEZ45.5	45.5	45.5					

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	库存 Stock
SGEZ46.0	46.0	46.0	93	208	208	42	□
SGEZ46.5	46.5	46.5					
SGEZ47.0	47.0	47.0	98	213	213	42	□
SGEZ47.5	47.5	47.5					
SGEZ48.0	48.0	48.0	100	220	220	42	□
SGEZ48.5	48.5	48.5					
SGEZ49.0	49.0	49.0	100	220	220	42	□
SGEZ49.5	49.5	49.5					
SGEZ50.0	50.0	50.0	100	220	220	42	□
SGEZ50.5	50.5	50.5					

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般结构用钢	碳钢	合金钢调质钢	模具钢预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	◎	◎	◎	◎

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

- 可以对从普通钢到不锈钢以及铝，进行高速、高效率加工。

This drill having stub length is useful in material from Steel and Stainless Steel to Aluminum.

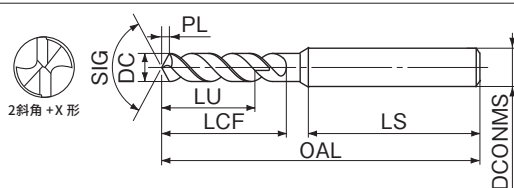

LIST 6548

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 CONMS	先端 PL	库存 Stock		
AGESS1.0	1.00	3.0	6	28.0	40	3	0.2	●		
AGESS1.01	1.01									
AGESS1.02	1.02									
AGESS1.03	1.03	3.1								
AGESS1.04	1.04									
AGESS1.05	1.05									
AGESS1.06	1.06	3.2								
AGESS1.07	1.07									
AGESS1.08	1.08									
AGESS1.09	1.09	3.3								
AGESS1.1	1.10									
AGESS1.11	1.11									
AGESS1.12	1.12	3.4	7							
AGESS1.13	1.13									
AGESS1.14	1.14									
AGESS1.15	1.15	3.5								
AGESS1.16	1.16									
AGESS1.17	1.17									
AGESS1.18	1.18	3.6								
AGESS1.19	1.19									
AGESS1.2	1.20		8				40	3	0.3	●
AGESS1.21	1.21									
AGESS1.22	1.22	3.7								
AGESS1.23	1.23									
AGESS1.24	1.24									
AGESS1.25	1.25	3.8								
AGESS1.26	1.26									
AGESS1.27	1.27									
AGESS1.28	1.28	3.9								
AGESS1.29	1.29									
AGESS1.3	1.30		4.0							
AGESS1.31	1.31									
AGESS1.32	1.32									
AGESS1.33	1.33	4.1								
AGESS1.34	1.34									
AGESS1.35	1.35									
AGESS1.36	1.36	4.2	9							
AGESS1.37	1.37									
AGESS1.38	1.38									
AGESS1.39	1.39	4.3								
AGESS1.4	1.40									
AGESS1.41	1.41									
AGESS1.42	1.42	4.4								
AGESS1.43	1.43									
AGESS1.44	1.44									
AGESS1.45	1.45	4.5								
AGESS1.46	1.46									
AGESS1.47	1.47									
AGESS1.48	1.48	4.6								
AGESS1.49	1.49									
AGESS1.5	1.50						4.7	10	44	0.3
AGESS1.51	1.51									
AGESS1.52	1.52									
AGESS1.53	1.53	4.8								
AGESS1.54	1.54									
AGESS1.55	1.55									
AGESS1.56	1.56	4.9								
AGESS1.57	1.57									
AGESS1.58	1.58									
AGESS1.59	1.59									

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock																						
AGESS1.6	1.60	4.8	10	28.0	44	3	0.3	●																						
AGESS1.61	1.61							●																						
AGESS1.62	1.62							4.9	11	12	13	14	15																	
AGESS1.63	1.63													5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.7	5.8	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6
AGESS1.64	1.64																													
AGESS1.65	1.65																													
AGESS1.66	1.66																													
AGESS1.67	1.67	5.1						5.2	5.3	5.4	5.5	5.6	5.7	5.8	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6								
AGESS1.68	1.68																													
AGESS1.69	1.69																													
AGESS1.7	1.70																													
AGESS1.71	1.71																													
AGESS1.72	1.72	5.2						5.3	5.4	5.5	5.6	5.7	5.8	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6									
AGESS1.73	1.73																													
AGESS1.74	1.74																													
AGESS1.75	1.75																													
AGESS1.76	1.76																													
AGESS1.77	1.77	5.3	5.4				5.5	5.6	5.7	5.8	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6												
AGESS1.78	1.78																													
AGESS1.79	1.79																													
AGESS1.8	1.80																													
AGESS1.81	1.81																													
AGESS1.82	1.82	5.4	5.5				5.6	5.7	5.8	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6													
AGESS1.83	1.83																													
AGESS1.84	1.84																													
AGESS1.85	1.85																													
AGESS1.86	1.86																													
AGESS1.87	1.87	5.5	5.6				5.7	5.8	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6														
AGESS1.88	1.88																													
AGESS1.89	1.89																													
AGESS1.9	1.90																													
AGESS1.91	1.91																													
AGESS1.92	1.92	5.6	5.7				5.8	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6															
AGESS1.93	1.93																													
AGESS1.94	1.94																													
AGESS1.95	1.95																													
AGESS1.96	1.96																													
AGESS1.97	1.97	5.7	5.8				5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6																
AGESS1.98	1.98																													
AGESS1.99	1.99																													
AGESS2.0	2.00																													
AGESS2.01	2.01																													
AGESS2.02	2.02	6.0	6.1				6.2	6.3	6.4	6.5	6.6																			
AGESS2.03	2.03																													
AGESS2.04	2.04																													
AGESS2.05	2.05																													
AGESS2.06	2.06																													
AGESS2.07	2.07	6.1	6.2				6.3	6.4	6.5	6.6																				
AGESS2.08	2.08																													
AGESS2.09	2.09																													
AGESS2.1	2.10																													
AGESS2.11	2.11																													
AGESS2.12	2.12	6.2	6.3				6.4	6.5	6.6																					
AGESS2.13	2.13																													
AGESS2.14	2.14																													
AGESS2.15	2.15																													
AGESS2.16	2.16																													
AGESS2.17	2.17	6.3	6.4				6.5	6.6																						
AGESS2.18	2.18																													
AGESS2.19	2.19																													
AGESS2.2	2.20																													
AGESS2.21	2.21																													

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock				
AGESS2.2	2.20	6.6	13	28.0	44		0.5	●				
AGESS2.21	2.21											
AGESS2.22	2.22	6.7										
AGESS2.23	2.23											
AGESS2.24	2.24	6.8										
AGESS2.25	2.25											
AGESS2.26	2.26	6.9										
AGESS2.27	2.27											
AGESS2.28	2.28	7.0										
AGESS2.29	2.29											
AGESS2.3	2.30	7.1	14		48	3	0.6	●				
AGESS2.31	2.31											
AGESS2.32	2.32	7.2										
AGESS2.33	2.33											
AGESS2.34	2.34	7.3										
AGESS2.35	2.35											
AGESS2.36	2.36	7.4										
AGESS2.37	2.37											
AGESS2.38	2.38	7.5										
AGESS2.39	2.39											
AGESS2.4	2.40	7.6	16							●		
AGESS2.41	2.41											
AGESS2.42	2.42	7.7										
AGESS2.43	2.43											
AGESS2.44	2.44	7.8										
AGESS2.45	2.45											
AGESS2.46	2.46	7.9										
AGESS2.47	2.47											
AGESS2.48	2.48	8.0										
AGESS2.49	2.49											
AGESS2.5	2.50	8.1										●
AGESS2.51	2.51											
AGESS2.52	2.52	8.2										
AGESS2.53	2.53											
AGESS2.54	2.54	8.3										
AGESS2.55	2.55											
AGESS2.56	2.56	8.4										
AGESS2.57	2.57											
AGESS2.58	2.58											
AGESS2.59	2.59											
AGESS2.6	2.60							●				
AGESS2.61	2.61											
AGESS2.62	2.62	8.0						□				
AGESS2.63	2.63											
AGESS2.64	2.64	8.1						●				
AGESS2.65	2.65											
AGESS2.66	2.66	8.2						□				
AGESS2.67	2.67											
AGESS2.68	2.68	8.3						●				
AGESS2.69	2.69											
AGESS2.7	2.70	8.4					□					
AGESS2.71	2.71											
AGESS2.72	2.72						●					
AGESS2.73	2.73											
AGESS2.74	2.74						□					
AGESS2.75	2.75											
AGESS2.76	2.76						●					
AGESS2.77	2.77											
AGESS2.78	2.78						□					
AGESS2.79	2.79											

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGESS2.8	2.80	8.4	16	28.0	48	3	0.6	●
AGESS2.81	2.81							
AGESS2.82	2.82	8.5						
AGESS2.83	2.83							
AGESS2.84	2.84	8.6						
AGESS2.85	2.85							
AGESS2.86	2.86							
AGESS2.87	2.87							
AGESS2.88	2.88	8.7						
AGESS2.89	2.89							
AGESS2.9	2.90	8.8						
AGESS2.91	2.91							
AGESS2.92	2.92	8.9						
AGESS2.93	2.93							
AGESS2.94	2.94	9.0						
AGESS2.95	2.95							
AGESS2.96	2.96	9.1						
AGESS2.97	2.97							
AGESS2.98	2.98	9.2						
AGESS2.99	2.99							
AGESS3.0	3.00	9.3	18	30.0	54	4	●	
AGESS3.01	3.01							
AGESS3.02	3.02	9.4						
AGESS3.03	3.03							
AGESS3.04	3.04	9.5						
AGESS3.05	3.05							
AGESS3.06	3.06	9.6						
AGESS3.07	3.07							
AGESS3.08	3.08	9.7						
AGESS3.09	3.09							
AGESS3.1	3.10	9.8						
AGESS3.11	3.11							
AGESS3.12	3.12	9.9						
AGESS3.13	3.13							
AGESS3.14	3.14	10.0						
AGESS3.15	3.15							
AGESS3.16	3.16	10.1						
AGESS3.17	3.17							
AGESS3.18	3.18	10.2						
AGESS3.19	3.19							
AGESS3.2	3.20	10.3						
AGESS3.21	3.21							
AGESS3.22	3.22	10.4						
AGESS3.23	3.23							
AGESS3.24	3.24	10.5						
AGESS3.25	3.25							
AGESS3.26	3.26	10.6						
AGESS3.27	3.27							
AGESS3.28	3.28	10.7						
AGESS3.29	3.29							
AGESS3.3	3.30	10.8						
AGESS3.31	3.31							
AGESS3.32	3.32	10.9						
AGESS3.33	3.33							
AGESS3.34	3.34	11.0						
AGESS3.35	3.35							
AGESS3.36	3.36	11.1						
AGESS3.37	3.37							
AGESS3.38	3.38	11.2						
AGESS3.39	3.39							

新商品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品 其它

精密工具

技术资料 索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGESS3.4	3.40	10.2	20	30.0	54	4	0.7	●
AGESS3.41	3.41							
AGESS3.42	3.42							
AGESS3.43	3.43	10.3						
AGESS3.44	3.44							
AGESS3.45	3.45							□
AGESS3.46	3.46							
AGESS3.47	3.47	10.4						
AGESS3.48	3.48							
AGESS3.49	3.49							
AGESS3.5	3.50	10.5						●
AGESS3.51	3.51							
AGESS3.52	3.52							
AGESS3.53	3.53	10.6						
AGESS3.54	3.54							
AGESS3.55	3.55							□
AGESS3.56	3.56							
AGESS3.57	3.57	10.7						
AGESS3.58	3.58							
AGESS3.59	3.59							
AGESS3.6	3.60	10.8	22	30.0	54	4	0.8	●
AGESS3.61	3.61							
AGESS3.62	3.62							
AGESS3.63	3.63	10.9						
AGESS3.64	3.64							
AGESS3.65	3.65							□
AGESS3.66	3.66							
AGESS3.67	3.67	11.0						
AGESS3.68	3.68							
AGESS3.69	3.69							
AGESS3.7	3.70	11.1						●
AGESS3.71	3.71							
AGESS3.72	3.72							
AGESS3.73	3.73	11.2						
AGESS3.74	3.74							
AGESS3.75	3.75							□
AGESS3.76	3.76	11.3						
AGESS3.77	3.77							
AGESS3.78	3.78							
AGESS3.79	3.79							
AGESS3.8	3.80	11.4	22	30.0	54	4	0.8	●
AGESS3.81	3.81							
AGESS3.82	3.82							
AGESS3.83	3.83	11.5						
AGESS3.84	3.84							
AGESS3.85	3.85							□
AGESS3.86	3.86							
AGESS3.87	3.87	11.6						
AGESS3.88	3.88							
AGESS3.89	3.89							
AGESS3.9	3.90	11.7						●
AGESS3.91	3.91							
AGESS3.92	3.92							
AGESS3.93	3.93	11.8						
AGESS3.94	3.94							
AGESS3.95	3.95							□
AGESS3.96	3.96							
AGESS3.97	3.97	11.9						
AGESS3.98	3.98							
AGESS3.99	3.99	12.0						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGESS4.0	4.00	12.0	22	30.0	54	4	0.8	●
AGESS4.1	4.10	12.3			66			
AGESS4.2	4.20	12.6						
AGESS4.3	4.30	12.9	24	68	70	6	0.9	
AGESS4.4	4.40	13.2						
AGESS4.5	4.50	13.5						
AGESS4.6	4.60	13.8	26	70	72	6	1.0	
AGESS4.7	4.70	14.1						
AGESS4.8	4.80	14.4						
AGESS4.9	4.90	14.7	28	72	75	6	1.1	
AGESS5.0	5.00	15.0						
AGESS5.1	5.10	15.3						
AGESS5.2	5.20	15.6	30	75	78	6	1.2	
AGESS5.3	5.30	15.9						
AGESS5.4	5.40	16.2						
AGESS5.5	5.50	16.5	31	75	81	6	1.3	
AGESS5.6	5.60	16.8						
AGESS5.7	5.70	17.1						
AGESS5.8	5.80	17.4	32	78	84	6	1.4	
AGESS5.9	5.90	17.7						
AGESS6.0	6.00	18.0						
AGESS6.1	6.10	18.3	33	81	87	6	1.5	
AGESS6.2	6.20	18.6						
AGESS6.3	6.30	18.9						
AGESS6.4	6.40	19.2	34	81	90	6	1.6	
AGESS6.5	6.50	19.5						
AGESS6.6	6.60	19.8						
AGESS6.7	6.70	20.1	35	84	93	6	1.7	
AGESS6.8	6.80	20.4						
AGESS6.9	6.90	20.7						
AGESS7.0	7.00	21.0	36	87	96	6	1.8	
AGESS7.1	7.10	21.3						
AGESS7.2	7.20	21.6						
AGESS7.3	7.30	21.9	37	90	99	6	1.9	
AGESS7.4	7.40	22.2						
AGESS7.5	7.50	22.5						
AGESS7.6	7.60	22.8	38	93	102	6	2.0	
AGESS7.7	7.70	23.1						
AGESS7.8	7.80	23.4						
AGESS7.9	7.90	23.7	39	96	105	6	2.1	
AGESS8.0	8.00	24.0						
AGESS8.1	8.10	24.3						
AGESS8.2	8.20	24.6	40	99	108	6	2.2	
AGESS8.3	8.30	24.9						
AGESS8.4	8.40	25.2						
AGESS8.5	8.50	25.5	41	102	111	6	2.3	
AGESS8.6	8.60	25.8						
AGESS8.7	8.70	26.1						
AGESS8.8	8.80	26.4	42	105	114	6	2.4	
AGESS8.9	8.90	26.7						
AGESS9.0	9.00	27.0						
AGESS9.1	9.10	27.3	43	108	117	6	2.5	
AGESS9.2	9.20	27.6						
AGESS9.3	9.30	27.9						
AGESS9.4	9.40	28.2	44	111	120	6	2.6	
AGESS9.5	9.50	28.5						
AGESS9.6	9.60	28.8						
AGESS9.7	9.70	29.1	45	114	123	6	2.7	
AGESS9.8	9.80	29.4						
AGESS9.9	9.90	29.7						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock	
AGESS10.0	10.00	30.0	43	43.5	93	10	2.1		
AGESS10.1	10.10	30.3		100	46.0	104			12
AGESS10.2	10.20	30.6							
AGESS10.3	10.30	30.9							
AGESS10.4	10.40	31.2							
AGESS10.5	10.50	31.5							
AGESS10.6	10.60	31.8	47	46.0	104	12	2.2		
AGESS10.7	10.70	32.1							
AGESS10.8	10.80	32.4							
AGESS10.9	10.90	32.7							
AGESS11.0	11.00	33.0							
AGESS11.1	11.10	33.3	51	50.0	132	16	2.3		
AGESS11.2	11.20	33.6							
AGESS11.3	11.30	33.9							
AGESS11.4	11.40	34.2							
AGESS11.5	11.50	34.5							
AGESS11.6	11.60	34.8	55	50.0	132	16	2.4		
AGESS11.7	11.70	35.1							
AGESS11.8	11.80	35.4							
AGESS11.9	11.90	35.7							
AGESS12.0	12.00	36.0							
AGESS12.1	12.10	36.3	59	50.0	136	16	2.5		
AGESS12.2	12.20	36.6							
AGESS12.3	12.30	36.9							
AGESS12.4	12.40	37.2							
AGESS12.5	12.50	37.5							
AGESS12.6	12.60	37.8	63	50.0	140	16	2.6		
AGESS12.7	12.70	38.1							
AGESS12.8	12.80	38.4							
AGESS12.9	12.90	38.7							
AGESS13.0	13.00	39.0							
AGESS13.1	13.10	39.3	67	52.0	142	20	2.7		
AGESS13.2	13.20	39.6							
AGESS13.3	13.30	39.9							
AGESS13.4	13.40	40.2							
AGESS13.5	13.50	40.5							
AGESS13.6	13.60	40.8	71	52.0	142	20	2.8		
AGESS13.7	13.70	41.1							
AGESS13.8	13.80	41.4							
AGESS13.9	13.90	41.7							
AGESS14.0	14.00	42.0							
AGESS14.1	14.10	42.3	75	52.0	146	20	2.9		
AGESS14.2	14.20	42.6							
AGESS14.3	14.30	42.9							
AGESS14.4	14.40	43.2							
AGESS14.5	14.50	43.5							
AGESS14.6	14.60	43.8	79	52.0	146	20	3.0		
AGESS14.7	14.70	44.1							
AGESS14.8	14.80	44.4							
AGESS14.9	14.90	44.7							
AGESS15.0	15.00	45.0							
AGESS15.1	15.10	45.3	80	52.0	146	20	3.1		
AGESS15.2	15.20	45.6							
AGESS15.3	15.30	45.9							
AGESS15.4	15.40	46.2							
AGESS15.5	15.50	46.5							
AGESS15.6	15.60	46.8	80	52.0	146	20	3.2		
AGESS15.7	15.70	47.1							
AGESS15.8	15.80	47.4							
AGESS15.9	15.90	47.7							


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock		
AGESS16.0	16.00	48.0	80	146	150	20	3.3	●		
AGESS16.1	16.10	48.3	84				150	20	3.3	□
AGESS16.2	16.20	48.6								
AGESS16.3	16.30	48.9								
AGESS16.4	16.40	49.2								
AGESS16.5	16.50	49.5								
AGESS16.6	16.60	49.8	84	150	20	3.4	●			
AGESS16.7	16.70	50.1								
AGESS16.8	16.80	50.4								
AGESS16.9	16.90	50.7								
AGESS17.0	17.00	51.0								
AGESS17.1	17.10	51.3	87	153	20	3.5	●			
AGESS17.2	17.20	51.6								
AGESS17.3	17.30	51.9								
AGESS17.4	17.40	52.2								
AGESS17.5	17.50	52.5								
AGESS17.6	17.60	52.8	87	153	20	3.6	□			
AGESS17.7	17.70	53.1								
AGESS17.8	17.80	53.4								
AGESS17.9	17.90	53.7								
AGESS18.0	18.00	54.0								
AGESS18.1	18.10	54.3	90	156	20	3.7	●			
AGESS18.2	18.20	54.6								
AGESS18.3	18.30	54.9								
AGESS18.4	18.40	55.2								
AGESS18.5	18.50	55.5								
AGESS18.6	18.60	55.8	90	164	25	3.8	□			
AGESS18.7	18.70	56.1								
AGESS18.8	18.80	56.4								
AGESS18.9	18.90	56.7								
AGESS19.0	19.00	57.0								
AGESS19.1	19.10	57.3	94	168	25	3.9	●			
AGESS19.2	19.20	57.6								
AGESS19.3	19.30	57.9								
AGESS19.4	19.40	58.2								
AGESS19.5	19.50	58.5								
AGESS19.6	19.60	58.8	94	168	25	4.0	□			
AGESS19.7	19.70	59.1								
AGESS19.8	19.80	59.4								
AGESS19.9	19.90	59.7								
AGESS20.0	20.00	60.0								

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used 一:不推荐 Not recommended

- 可以对从普通钢到不锈钢以及铝，进行高速、高效率加工。

This drill having regular length is useful in material from Steel and Stainless Steel to Aluminum.

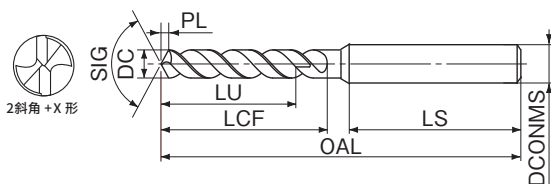

LIST 6546

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGES2.0	2.0	10.0	24				0.4	
AGES2.1	2.1	10.5			56			
AGES2.2	2.2	11.0	25				0.5	
AGES2.3	2.3	11.5				3		
AGES2.4	2.4	12.0	30	28.0				
AGES2.5	2.5	12.5					0.6	
AGES2.6	2.6	13.0			64			
AGES2.7	2.7	13.5						
AGES2.8	2.8	14.0	33				0.7	
AGES2.9	2.9	14.5				4		
AGES3.0	3.0	15.0						
AGES3.1	3.1	15.5	36		71			
AGES3.2	3.2	16.0					0.8	
AGES3.3	3.3	16.5						
AGES3.4	3.4	17.0	39	30.0				
AGES3.5	3.5	17.5					0.9	
AGES3.6	3.6	18.0			75			
AGES3.7	3.7	18.5						
AGES3.8	3.8	19.0	43				1.0	
AGES3.9	3.9	19.5				6		
AGES4.0	4.0	20.0						
AGES4.1	4.1	20.5			89			
AGES4.2	4.2	21.0					1.1	
AGES4.3	4.3	21.5						
AGES4.4	4.4	22.0	47					
AGES4.5	4.5	22.5			94			
AGES4.6	4.6	23.0					1.2	
AGES4.7	4.7	23.5						
AGES4.8	4.8	24.0	52					
AGES4.9	4.9	24.5			99			
AGES5.0	5.0	25.0					1.3	
AGES5.1	5.1	25.5						
AGES5.2	5.2	26.0						
AGES5.3	5.3	26.5					1.4	
AGES5.4	5.4	27.0						
AGES5.5	5.5	27.5	57					
AGES5.6	5.6	28.0			107			
AGES5.7	5.7	28.5					1.5	
AGES5.8	5.8	29.0						
AGES5.9	5.9	29.5						
AGES6.0	6.0	30.0					1.6	
AGES6.1	6.1	30.5						
AGES6.2	6.2	31.0						
AGES6.3	6.3	31.5						
AGES6.4	6.4	32.0						
AGES6.5	6.5	32.5						
AGES6.6	6.6	33.0						
AGES6.7	6.7	33.5						
AGES6.8	6.8	34.0						
AGES6.9	6.9	34.5						
AGES7.0	7.0	35.0						
AGES7.1	7.1	35.5						
AGES7.2	7.2	36.0						
AGES7.3	7.3	36.5						
AGES7.4	7.4	37.0						
AGES7.5	7.5	37.5						
AGES7.6	7.6	38.0						
AGES7.7	7.7	38.5						
AGES7.8	7.8	39.0						
AGES7.9	7.9	39.5						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGES8.0	8.0	40.0		38.0	119	8		
AGES8.1	8.1	40.5						
AGES8.2	8.2	41.0	75		125		1.7	
AGES8.3	8.3	41.5						
AGES8.4	8.4	42.0					1.8	
AGES8.5	8.5	42.5						
AGES8.6	8.6	43.0						
AGES8.7	8.7	43.5					1.9	
AGES8.8	8.8	44.0						
AGES8.9	8.9	44.5						
AGES9.0	9.0	45.0		43.5	131	10		
AGES9.1	9.1	45.5					2.0	
AGES9.2	9.2	46.0						
AGES9.3	9.3	46.5						
AGES9.4	9.4	47.0						
AGES9.5	9.5	47.5						
AGES9.6	9.6	48.0						
AGES9.7	9.7	48.5						
AGES9.8	9.8	49.0			137			
AGES9.9	9.9	49.5						
AGES10.0	10.0	50.0					2.1	
AGES10.1	10.1	50.5						
AGES10.2	10.2	51.0						
AGES10.3	10.3	51.5			144			
AGES10.4	10.4	52.0					2.2	
AGES10.5	10.5	52.5						
AGES10.6	10.6	53.0						
AGES10.7	10.7	53.5						
AGES10.8	10.8	54.0						
AGES10.9	10.9	54.5						
AGES11.0	11.0	55.0					2.3	
AGES11.1	11.1	55.5						
AGES11.2	11.2	56.0			151			
AGES11.3	11.3	56.5						
AGES11.4	11.4	57.0					2.4	
AGES11.5	11.5	57.5						
AGES11.6	11.6	58.0						
AGES11.7	11.7	58.5						
AGES11.8	11.8	59.0						
AGES11.9	11.9	59.5						
AGES12.0	12.0	60.0					2.5	
AGES12.1	12.1	60.5						
AGES12.2	12.2	61.0						
AGES12.3	12.3	61.5						
AGES12.4	12.4	62.0						
AGES12.5	12.5	62.5						
AGES12.6	12.6	63.0						
AGES12.7	12.7	63.5						
AGES12.8	12.8	64.0						
AGES12.9	12.9	64.5						
AGES13.0	13.0	65.0						
AGES13.1	13.1	65.5						
AGES13.2	13.2	66.0						
AGES13.3	13.3	66.5						
AGES13.4	13.4	67.0						
AGES13.5	13.5	67.5						
AGES13.6	13.6	68.0						
AGES13.7	13.7	68.5						
AGES13.8	13.8	69.0						
AGES13.9	13.9	69.5						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock							
AGES14.0	14.0	70.0	108	50.0	168	16	2.9	●							
AGES14.1	14.1	70.5	114		173		16	3.0	□						
AGES14.2	14.2	71.0							180	185	3.1	●			
AGES14.3	14.3	71.5										120	185	3.2	□
AGES14.4	14.4	72.0													125
AGES14.5	14.5	72.5	130	194	3.4		□								
AGES14.6	14.6	73.0					135	198	3.5	●					
AGES14.7	14.7	73.5								140	206	25	4.0	□	
AGES14.8	14.8	74.0												140	210
AGES14.9	14.9	74.5	140	210	25										
AGES15.0	15.0	75.0				140	210	25	4.1						
AGES15.1	15.1	75.5								140	210	25	4.1		
AGES15.2	15.2	76.0												140	210
AGES15.3	15.3	76.5	140	210	25										
AGES15.4	15.4	77.0				140	210	25	4.1						
AGES15.5	15.5	77.5								140	210	25	4.1		
AGES15.6	15.6	78.0												140	210
AGES15.7	15.7	78.5	140	210	25										
AGES15.8	15.8	79.0				140	210	25	4.1						
AGES15.9	15.9	79.5								140	210	25	4.1		
AGES16.0	16.0	80.0												140	210
AGES16.1	16.1	80.5	140	210	25										
AGES16.2	16.2	81.0				140	210	25	4.1						
AGES16.3	16.3	81.5								140	210	25	4.1		
AGES16.4	16.4	82.0												140	210
AGES16.5	16.5	82.5	140	210	25										
AGES16.6	16.6	83.0				140	210	25	4.1						
AGES16.7	16.7	83.5								140	210	25	4.1		
AGES16.8	16.8	84.0												140	210
AGES16.9	16.9	84.5	140	210	25										
AGES17.0	17.0	85.0				140	210	25	4.1						
AGES17.1	17.1	85.5								140	210	25	4.1		
AGES17.2	17.2	86.0												140	210
AGES17.3	17.3	86.5	140	210	25										
AGES17.4	17.4	87.0				140	210	25	4.1						
AGES17.5	17.5	87.5								140	210	25	4.1		
AGES17.6	17.6	88.0												140	210
AGES17.7	17.7	88.5	140	210	25										
AGES17.8	17.8	89.0				140	210	25	4.1						
AGES17.9	17.9	89.5								140	210	25	4.1		
AGES18.0	18.0	90.0												140	210
AGES18.1	18.1	90.5	140	210	25										
AGES18.2	18.2	91.0				140	210	25	4.1						
AGES18.3	18.3	91.5								140	210	25	4.1		
AGES18.4	18.4	92.0												140	210
AGES18.5	18.5	92.5	140	210	25										
AGES18.6	18.6	93.0				140	210	25	4.1						
AGES18.7	18.7	93.5								140	210	25	4.1		
AGES18.8	18.8	94.0												140	210
AGES18.9	18.9	94.5	140	210	25										
AGES19.0	19.0	95.0				140	210	25	4.1						
AGES19.1	19.1	95.5								140	210	25	4.1		
AGES19.2	19.2	96.0												140	210
AGES19.3	19.3	96.5	140	210	25										
AGES19.4	19.4	97.0				140	210	25	4.1						
AGES19.5	19.5	97.5								140	210	25	4.1		
AGES19.6	19.6	98.0												140	210
AGES19.7	19.7	98.5	140	210	25										
AGES19.8	19.8	99.0				140	210	25	4.1						
AGES19.9	19.9	99.5								140	210	25	4.1		


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
AGES20.0	20.0	100.0	140	60.0	210	25	4.1	●

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●可以对从普通钢到不锈钢以及铝，进行高效率深孔加工。

This drill having semi-long length is useful in material from Steel and Stainless Steel to Aluminum.

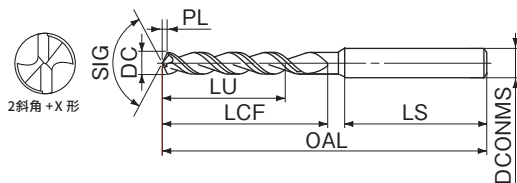

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGESSL2.0	2.0	20.0	41		73		0.4	
AGESSL2.1	2.1	21.0						
AGESSL2.2	2.2	22.0	44		75			
AGESSL2.3	2.3	23.0						
AGESSL2.4	2.4	24.0						
AGESSL2.5	2.5	25.0	47	28.0	78	3	0.5	
AGESSL2.6	2.6	26.0						
AGESSL2.7	2.7	27.0						
AGESSL2.8	2.8	28.0						
AGESSL2.9	2.9	29.0	51		82		0.6	
AGESSL3.0	3.0	30.0						
AGESSL3.1	3.1	31.0						
AGESSL3.2	3.2	32.0	55		87			
AGESSL3.3	3.3	33.0						
AGESSL3.4	3.4	34.0						
AGESSL3.5	3.5	35.0						
AGESSL3.6	3.6	36.0	60	30.0	92	4	0.7	
AGESSL3.7	3.7	37.0						
AGESSL3.8	3.8	38.0						
AGESSL3.9	3.9	39.0						
AGESSL4.0	4.0	40.0	64		106		0.8	
AGESSL4.1	4.1	41.0						
AGESSL4.2	4.2	42.0						
AGESSL4.3	4.3	43.0						
AGESSL4.4	4.4	44.0						
AGESSL4.5	4.5	45.0	69		111		0.9	
AGESSL4.6	4.6	46.0						
AGESSL4.7	4.7	47.0						
AGESSL4.8	4.8	48.0						
AGESSL4.9	4.9	49.0						
AGESSL5.0	5.0	50.0	74		116	6	1.0	
AGESSL5.1	5.1	51.0						
AGESSL5.2	5.2	52.0						
AGESSL5.3	5.3	53.0						
AGESSL5.4	5.4	54.0						
AGESSL5.5	5.5	55.0						
AGESSL5.6	5.6	56.0						
AGESSL5.7	5.7	57.0	80		122		1.1	
AGESSL5.8	5.8	58.0						
AGESSL5.9	5.9	59.0						
AGESSL6.0	6.0	60.0						
AGESSL6.1	6.1	61.0						
AGESSL6.2	6.2	62.0						
AGESSL6.3	6.3	63.0						
AGESSL6.4	6.4	64.0						
AGESSL6.5	6.5	65.0						
AGESSL6.6	6.6	66.0						
AGESSL6.7	6.7	67.0						
AGESSL6.8	6.8	68.0						
AGESSL6.9	6.9	69.0						
AGESSL7.0	7.0	70.0						
AGESSL7.1	7.1	71.0	86		130		1.2	
AGESSL7.2	7.2	72.0						
AGESSL7.3	7.3	73.0						
AGESSL7.4	7.4	74.0						
AGESSL7.5	7.5	75.0						
AGESSL7.6	7.6	76.0						
AGESSL7.7	7.7	77.0						
AGESSL7.8	7.8	78.0						
AGESSL7.9	7.9	79.0						

单位 (Unit) : mm


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGESSL8.0	8.0	80.0		38.0	144	8		
AGESSL8.1	8.1	81.0						
AGESSL8.2	8.2	82.0	100		150		1.7	
AGESSL8.3	8.3	83.0						
AGESSL8.4	8.4	84.0						
AGESSL8.5	8.5	85.0						
AGESSL8.6	8.6	86.0						
AGESSL8.7	8.7	87.0						
AGESSL8.8	8.8	88.0						
AGESSL8.9	8.9	89.0						
AGESSL9.0	9.0	90.0	107	43.5	157	10	1.8	
AGESSL9.1	9.1	91.0						
AGESSL9.2	9.2	92.0						
AGESSL9.3	9.3	93.0						
AGESSL9.4	9.4	94.0						
AGESSL9.5	9.5	95.0						
AGESSL9.6	9.6	96.0						
AGESSL9.7	9.7	97.0						
AGESSL9.8	9.8	98.0	116		166		1.9	
AGESSL9.9	9.9	99.0						
AGESSL10.0	10.0	100.0					2.0	

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used 一: 不推荐 Not recommended

●适用于不锈钢的钻头。凭借耐热性出色的AG涂层，可实现稳定的孔加工。

This drill meets stable drilling by AG coat, and is very suitable for drilling of Stainless Steel.

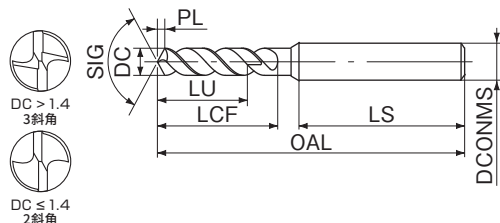

新商品

LIST 6596P

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGSUSS0.50	0.50	1.5						
AGSUSS0.51	0.51							
AGSUSS0.52	0.52							
AGSUSS0.53	0.53	1.6						
AGSUSS0.54	0.54		3.0					
AGSUSS0.55	0.55							
AGSUSS0.56	0.56	1.7						
AGSUSS0.57	0.57							
AGSUSS0.58	0.58							
AGSUSS0.59	0.59							
AGSUSS0.60	0.60	1.8					0.1	
AGSUSS0.61	0.61							
AGSUSS0.62	0.62							
AGSUSS0.63	0.63	1.9						
AGSUSS0.64	0.64		3.5					
AGSUSS0.65	0.65							
AGSUSS0.66	0.66	2.0						
AGSUSS0.67	0.67							
AGSUSS0.68	0.68							
AGSUSS0.69	0.69	2.1						
AGSUSS0.70	0.70							
AGSUSS0.71	0.71							
AGSUSS0.72	0.72	2.2						
AGSUSS0.73	0.73		4.5		38			□
AGSUSS0.74	0.74							
AGSUSS0.75	0.75	2.3						
AGSUSS0.76	0.76							
AGSUSS0.77	0.77							
AGSUSS0.78	0.78	2.4			28.0	3		
AGSUSS0.79	0.79							
AGSUSS0.80	0.80							
AGSUSS0.81	0.81	2.5						
AGSUSS0.82	0.82		5.0					
AGSUSS0.83	0.83							
AGSUSS0.84	0.84	2.6						
AGSUSS0.85	0.85							
AGSUSS0.86	0.86	2.7						
AGSUSS0.87	0.87							
AGSUSS0.88	0.88							
AGSUSS0.89	0.89	2.8					0.2	
AGSUSS0.90	0.90							
AGSUSS0.91	0.91							
AGSUSS0.92	0.92	2.9						
AGSUSS0.93	0.93		5.5					
AGSUSS0.94	0.94							
AGSUSS0.95	0.95							
AGSUSS0.96	0.96	3.0						
AGSUSS0.97	0.97							
AGSUSS0.98	0.98							
AGSUSS0.99	0.99							
AGSUSS1.0	1.00							
AGSUSS1.01	1.01	3.1						●
AGSUSS1.02	1.02		6.0					
AGSUSS1.03	1.03				40			
AGSUSS1.04	1.04							
AGSUSS1.05	1.05	3.2						
AGSUSS1.06	1.06							
AGSUSS1.07	1.07		7.0					
AGSUSS1.08	1.08							
AGSUSS1.09	1.09	3.3						

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGSUSS1.1	1.10	3.3						
AGSUSS1.11	1.11							
AGSUSS1.12	1.12							
AGSUSS1.13	1.13	3.4						
AGSUSS1.14	1.14		7.0				0.2	
AGSUSS1.15	1.15							
AGSUSS1.16	1.16	3.5						
AGSUSS1.17	1.17							
AGSUSS1.18	1.18							
AGSUSS1.19	1.19							
AGSUSS1.2	1.20	3.6						
AGSUSS1.21	1.21							
AGSUSS1.22	1.22							
AGSUSS1.23	1.23	3.7						
AGSUSS1.24	1.24							
AGSUSS1.25	1.25	3.8						
AGSUSS1.26	1.26		8.0					
AGSUSS1.27	1.27							
AGSUSS1.28	1.28	3.9			40			
AGSUSS1.29	1.29							
AGSUSS1.3	1.30							
AGSUSS1.31	1.31	4.0						
AGSUSS1.32	1.32							
AGSUSS1.33	1.33							
AGSUSS1.34	1.34	4.1						
AGSUSS1.35	1.35							
AGSUSS1.36	1.36	4.2						
AGSUSS1.37	1.37							
AGSUSS1.38	1.38	4.3						
AGSUSS1.39	1.39							
AGSUSS1.4	1.40							
AGSUSS1.41	1.41	4.4						
AGSUSS1.42	1.42		9.0			3	●	
AGSUSS1.43	1.43							
AGSUSS1.44	1.44	4.5						
AGSUSS1.45	1.45							
AGSUSS1.46	1.46	4.6					0.3	
AGSUSS1.47	1.47							
AGSUSS1.48	1.48	4.7						
AGSUSS1.49	1.49							
AGSUSS1.5	1.50	4.8						
AGSUSS1.51	1.51							
AGSUSS1.52	1.52	4.9						
AGSUSS1.53	1.53							
AGSUSS1.54	1.54							
AGSUSS1.55	1.55	5.0						
AGSUSS1.56	1.56							
AGSUSS1.57	1.57							
AGSUSS1.58	1.58	5.1						
AGSUSS1.59	1.59							
AGSUSS1.6	1.60		10.0		44			
AGSUSS1.61	1.61							
AGSUSS1.62	1.62							
AGSUSS1.63	1.63							
AGSUSS1.64	1.64							
AGSUSS1.65	1.65							
AGSUSS1.66	1.66							
AGSUSS1.67	1.67							
AGSUSS1.68	1.68							
AGSUSS1.69	1.69						0.4	

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

Next Page 下一页 ➡

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 ODINMS	先端 PL	库存 Stock
AGSUSS2.4	2.40	7.2	14.0	28.0	48	3	0.5	
AGSUSS2.41	2.41							
AGSUSS2.42	2.42	7.3						
AGSUSS2.43	2.43							
AGSUSS2.44	2.44	7.4						
AGSUSS2.45	2.45							
AGSUSS2.46	2.46	7.5						
AGSUSS2.47	2.47							
AGSUSS2.48	2.48	7.6						
AGSUSS2.49	2.49							
AGSUSS2.5	2.50	7.7						
AGSUSS2.51	2.51							
AGSUSS2.52	2.52	7.8						
AGSUSS2.53	2.53							
AGSUSS2.54	2.54	7.9						
AGSUSS2.55	2.55							
AGSUSS2.56	2.56	8.0						
AGSUSS2.57	2.57							
AGSUSS2.58	2.58	8.1						
AGSUSS2.59	2.59							
AGSUSS2.6	2.60	8.2						
AGSUSS2.61	2.61							
AGSUSS2.62	2.62	8.3						
AGSUSS2.63	2.63							
AGSUSS2.64	2.64	8.4						
AGSUSS2.65	2.65							
AGSUSS2.66	2.66	8.5						
AGSUSS2.67	2.67							
AGSUSS2.68	2.68	8.6						
AGSUSS2.69	2.69							
AGSUSS2.7	2.70	8.7						
AGSUSS2.71	2.71							
AGSUSS2.72	2.72	8.8						
AGSUSS2.73	2.73							
AGSUSS2.74	2.74	8.9						
AGSUSS2.75	2.75							
AGSUSS2.76	2.76	9.0						
AGSUSS2.77	2.77							
AGSUSS2.78	2.78	9.1						
AGSUSS2.79	2.79							
AGSUSS2.8	2.80	9.2						
AGSUSS2.81	2.81							
AGSUSS2.82	2.82	9.3						
AGSUSS2.83	2.83							
AGSUSS2.84	2.84	9.4						
AGSUSS2.85	2.85							
AGSUSS2.86	2.86	9.5						
AGSUSS2.87	2.87							
AGSUSS2.88	2.88	9.6						
AGSUSS2.89	2.89							
AGSUSS2.9	2.90	9.7						
AGSUSS2.91	2.91							
AGSUSS2.92	2.92	9.8						
AGSUSS2.93	2.93							
AGSUSS2.94	2.94	9.9						
AGSUSS2.95	2.95							
AGSUSS2.96	2.96	10.0						
AGSUSS2.97	2.97							
AGSUSS2.98	2.98	10.1						
AGSUSS2.99	2.99							
AGSUSS3.0	3.00	10.2						
AGSUSS3.01	3.01							
AGSUSS3.02	3.02	10.3						
AGSUSS3.03	3.03							
AGSUSS3.04	3.04	10.4						
AGSUSS3.05	3.05							
AGSUSS3.06	3.06	10.5						
AGSUSS3.07	3.07							
AGSUSS3.08	3.08	10.6						
AGSUSS3.09	3.09							

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 ODOWNS	先端 PL	库存 Stock
AGSUS\$5.2	5.20	15.6	26.0	70	70	6	1.1	
AGSUS\$5.21	5.21							
AGSUS\$5.22	5.22							
AGSUS\$5.23	5.23	15.7						
AGSUS\$5.24	5.24							
AGSUS\$5.25	5.25							
AGSUS\$5.26	5.26	15.8						
AGSUS\$5.27	5.27							
AGSUS\$5.28	5.28							
AGSUS\$5.29	5.29	15.9						
AGSUS\$5.3	5.30							
AGSUS\$5.31	5.31							
AGSUS\$5.32	5.32	16.0						
AGSUS\$5.33	5.33							
AGSUS\$5.34	5.34							
AGSUS\$5.35	5.35	16.1						
AGSUS\$5.36	5.36							
AGSUS\$5.37	5.37							
AGSUS\$5.38	5.38	16.2						
AGSUS\$5.39	5.39							
AGSUS\$5.4	5.40							
AGSUS\$5.41	5.41	16.3						
AGSUS\$5.42	5.42							
AGSUS\$5.43	5.43							
AGSUS\$5.44	5.44	16.4						
AGSUS\$5.45	5.45							
AGSUS\$5.46	5.46							
AGSUS\$5.47	5.47	16.5						
AGSUS\$5.48	5.48							
AGSUS\$5.49	5.49							
AGSUS\$5.5	5.50	16.6						
AGSUS\$5.51	5.51							
AGSUS\$5.52	5.52							
AGSUS\$5.53	5.53	16.7						
AGSUS\$5.54	5.54							
AGSUS\$5.55	5.55							
AGSUS\$5.56	5.56	16.8						
AGSUS\$5.57	5.57							
AGSUS\$5.58	5.58							
AGSUS\$5.59	5.59	16.9						
AGSUS\$5.6	5.60							
AGSUS\$5.61	5.61							
AGSUS\$5.62	5.62	17.0						
AGSUS\$5.63	5.63							
AGSUS\$5.64	5.64							
AGSUS\$5.65	5.65	17.1						
AGSUS\$5.66	5.66							
AGSUS\$5.67	5.67							
AGSUS\$5.68	5.68	17.2						
AGSUS\$5.69	5.69							
AGSUS\$5.7	5.70							
AGSUS\$5.71	5.71	17.3						
AGSUS\$5.72	5.72							
AGSUS\$5.73	5.73							
AGSUS\$5.74	5.74	17.4						
AGSUS\$5.75	5.75							
AGSUS\$5.76	5.76							
AGSUS\$5.77	5.77	17.5						
AGSUS\$5.78	5.78							
AGSUS\$5.79	5.79							
AGSUS\$5.8	5.80	17.6						
AGSUS\$5.81	5.81							
AGSUS\$5.82	5.82							
AGSUS\$5.83	5.83	17.7						
AGSUS\$5.84	5.84							
AGSUS\$5.85	5.85							
AGSUS\$5.86	5.86	17.8						
AGSUS\$5.87	5.87							
AGSUS\$5.88	5.88							
AGSUS\$5.89	5.89	17.9						
AGSUS\$5.9	5.90							
AGSUS\$5.91	5.91							



工具材料

涂层

直径公差

先端角

螺旋角

柄直径公差

直径范围

← 上一页 Previous Page

单位 (Unit) : mm

新商品

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D20MM	先端 PL	库存 Stock
AGSUSS11.7	11.70	35.1						●
AGSUSS11.75	11.75	35.3	47.0		104		2.4	□
AGSUSS11.8	11.80	35.4		46.0				●
AGSUSS11.9	11.90	35.7						□
AGSUSS11.95	11.95	35.9						●
AGSUSS12.0	12.00	36.0						□
AGSUSS12.05	12.05	36.2						●
AGSUSS12.1	12.10	36.3					2.5	□
AGSUSS12.15	12.15	36.5						●
AGSUSS12.2	12.20	36.6						□
AGSUSS12.25	12.25	36.8						●
AGSUSS12.3	12.30	36.9						□
AGSUSS12.4	12.40	37.2	51.0		108			●
AGSUSS12.45	12.45	37.4						□
AGSUSS12.5	12.50	37.5					2.6	●
AGSUSS12.6	12.60	37.8						□
AGSUSS12.7	12.70	38.1						●
AGSUSS12.75	12.75	38.3						□
AGSUSS12.8	12.80	38.4						●
AGSUSS12.9	12.90	38.7					2.7	□
AGSUSS13.0	13.00	39.0		50.0				●
AGSUSS13.1	13.10	39.3						□
AGSUSS13.2	13.20	39.6						●
AGSUSS13.3	13.30	39.9					2.8	□
AGSUSS13.4	13.40	40.2						●
AGSUSS13.5	13.50	40.5						□
AGSUSS13.6	13.60	40.8	72.0		132			●
AGSUSS13.7	13.70	41.1						□
AGSUSS13.8	13.80	41.4					2.9	●
AGSUSS13.9	13.90	41.7				16		□
AGSUSS14.0	14.00	42.0						●
AGSUSS14.1	14.10	42.3						□
AGSUSS14.2	14.20	42.6						●
AGSUSS14.3	14.30	42.9						□
AGSUSS14.4	14.40	43.2	76.0		136		3.0	●
AGSUSS14.5	14.50	43.5						□
AGSUSS14.6	14.60	43.8						●
AGSUSS14.7	14.70	44.1						□
AGSUSS14.8	14.80	44.4						●
AGSUSS14.9	14.90	44.7						□
AGSUSS15.0	15.00	45.0					3.1	●
AGSUSS15.1	15.10	45.3						□
AGSUSS15.2	15.20	45.6						●
AGSUSS15.3	15.30	45.9						□
AGSUSS15.4	15.40	46.2					3.2	●
AGSUSS15.5	15.50	46.5						□
AGSUSS15.6	15.60	46.8	80.0		146			●
AGSUSS15.7	15.70	47.1						□
AGSUSS15.8	15.80	47.4					3.3	●
AGSUSS15.9	15.90	47.7						□
AGSUSS16.0	16.00	48.0						●
AGSUSS16.1	16.10	48.3						□
AGSUSS16.2	16.20	48.6						●
AGSUSS16.3	16.30	48.9						□
AGSUSS16.4	16.40	49.2					3.4	●
AGSUSS16.5	16.50	49.5						□
AGSUSS16.6	16.60	49.8	84.0		150			●
AGSUSS16.7	16.70	50.1						□
AGSUSS16.8	16.80	50.4						●
AGSUSS16.9	16.90	50.7					3.5	□
AGSUSS17.0	17.00	51.0						●
AGSUSS17.3	17.30	51.9						□
AGSUSS17.4	17.40	52.2					3.6	●
AGSUSS17.5	17.50	52.5						□
AGSUSS17.6	17.60	52.8						●
AGSUSS17.7	17.70	53.1	87.0		153			□
AGSUSS17.8	17.80	53.4						●
AGSUSS17.9	17.90	53.7					3.7	□
AGSUSS18.0	18.00	54.0						●
AGSUSS18.2	18.20	54.6	90.0		156		3.8	□


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 D20MM	先端 PL	库存 Stock
AGSUSS18.5	18.50	55.5		52.0	156	20	3.8	●
AGSUSS19.0	19.00	57.0	90.0		164		3.9	□
AGSUSS19.1	19.10	57.3					4.0	□
AGSUSS19.2	19.20	57.6						●
AGSUSS19.5	19.50	58.5						□
AGSUSS19.6	19.60	58.8	94.0		168		4.1	□
AGSUSS19.7	19.70	59.1						●
AGSUSS19.8	19.80	59.4						□
AGSUSS19.9	19.90	59.7						●
AGSUSS20.0	20.00	60.0		60.0		25		□
AGSUSS20.5	20.50	61.5					4.2	□
AGSUSS21.0	21.00	63.0	97.0		171		4.3	□
AGSUSS21.5	21.50	64.5	100.0		174		4.5	□
AGSUSS22.0	22.00	66.0					4.6	□
AGSUSS22.5	22.50	67.5					4.7	□
AGSUSS23.0	23.00	69.0	104.0		178		4.8	□
AGSUSS23.5	23.50	70.5					4.9	□
AGSUSS24.0	24.00	72.0					5.0	□
AGSUSS24.5	24.50	73.5	107.0		187		5.1	□
AGSUSS25.0	25.00	75.0					5.2	□
AGSUSS25.5	25.50	76.5					5.3	□
AGSUSS26.0	26.00	78.0	110.0		190		5.4	□
AGSUSS26.5	26.50	79.5					5.5	□
AGSUSS27.0	27.00	81.0					5.6	□
AGSUSS27.5	27.50	82.5	114.0		194	32	5.7	□
AGSUSS28.0	28.00	84.0					5.8	□
AGSUSS28.5	28.50	85.5					5.9	□
AGSUSS29.0	29.00	87.0	117.0		197		6.0	□
AGSUSS29.5	29.50	88.5					6.1	□
AGSUSS30.0	30.00	90.0					6.2	□
AGSUSS30.5	30.50	91.5					6.3	□
AGSUSS31.0	31.00	93.0	120.0		200		6.4	□
AGSUSS31.5	31.50	94.5					6.5	□
AGSUSS32.0	32.00	96.0	124.0		204		6.6	□

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	○	—	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
◎	◎	○	—	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●适合于不锈钢的钻头。凭借耐热性出色的 AG 涂层，可实现稳定的孔加工。

This drill meets stable drilling by AG coat, and is very suitable for drilling of Stainless Steel.

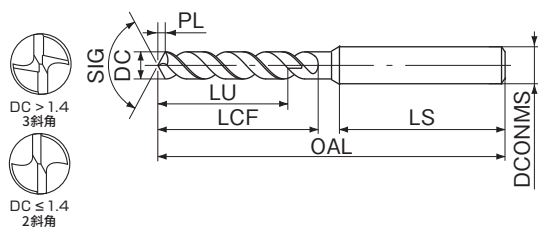

LIST 6594P

订货方式 商品编码

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGSUSR1.0	1.00	5.0					●	
AGSUSR1.01	1.01							
AGSUSR1.02	1.02	5.1						
AGSUSR1.03	1.03							
AGSUSR1.04	1.04	5.2						
AGSUSR1.05	1.05							
AGSUSR1.06	1.06	5.3						□
AGSUSR1.07	1.07							
AGSUSR1.08	1.08	5.4						
AGSUSR1.09	1.09							
AGSUSR1.1	1.10	5.5					0.2	●
AGSUSR1.11	1.11							
AGSUSR1.12	1.12	5.6						
AGSUSR1.13	1.13							
AGSUSR1.14	1.14	5.7						□
AGSUSR1.15	1.15							
AGSUSR1.16	1.16	5.8						
AGSUSR1.17	1.17	5.9						
AGSUSR1.18	1.18							
AGSUSR1.19	1.19	6.0						●
AGSUSR1.2	1.20							
AGSUSR1.21	1.21	6.1						
AGSUSR1.22	1.22							
AGSUSR1.23	1.23	6.2						
AGSUSR1.24	1.24							□
AGSUSR1.25	1.25	6.3			50			
AGSUSR1.26	1.26							
AGSUSR1.27	1.27	6.4						
AGSUSR1.28	1.28							
AGSUSR1.29	1.29	6.5						●
AGSUSR1.3	1.30					3		
AGSUSR1.31	1.31	6.6						
AGSUSR1.32	1.32							
AGSUSR1.33	1.33	6.7						
AGSUSR1.34	1.34							□
AGSUSR1.35	1.35	6.8						
AGSUSR1.36	1.36							
AGSUSR1.37	1.37	6.9						
AGSUSR1.38	1.38							
AGSUSR1.39	1.39	7.0						●
AGSUSR1.4	1.40							
AGSUSR1.41	1.41	7.1					0.3	
AGSUSR1.42	1.42							
AGSUSR1.43	1.43	7.2						
AGSUSR1.44	1.44							□
AGSUSR1.45	1.45	7.3						
AGSUSR1.46	1.46							
AGSUSR1.47	1.47	7.4						
AGSUSR1.48	1.48							
AGSUSR1.49	1.49	7.5						●
AGSUSR1.5	1.50							
AGSUSR1.51	1.51	7.6						
AGSUSR1.52	1.52							
AGSUSR1.53	1.53	7.7						□
AGSUSR1.54	1.54							
AGSUSR1.55	1.55	7.8						
AGSUSR1.56	1.56				56			
AGSUSR1.57	1.57	7.9						
AGSUSR1.58	1.58							
AGSUSR1.59	1.59	8.0						●
AGSUSR1.6	1.60							
AGSUSR1.61	1.61	8.1						□

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
AGSUSR1.62	1.62	8.1						
AGSUSR1.63	1.63							
AGSUSR1.64	1.64	8.2						
AGSUSR1.65	1.65							
AGSUSR1.66	1.66	8.3					0.3	□
AGSUSR1.67	1.67							
AGSUSR1.68	1.68	8.4						
AGSUSR1.69	1.69							
AGSUSR1.7	1.70	8.5						●
AGSUSR1.71	1.71							
AGSUSR1.72	1.72	8.6						
AGSUSR1.73	1.73							
AGSUSR1.74	1.74	8.7						
AGSUSR1.75	1.75							□
AGSUSR1.76	1.76	8.8						
AGSUSR1.77	1.77							
AGSUSR1.78	1.78	8.9						
AGSUSR1.79	1.79							
AGSUSR1.8	1.80	9.0						●
AGSUSR1.81	1.81							
AGSUSR1.82	1.82	9.1						
AGSUSR1.83	1.83							
AGSUSR1.84	1.84	9.2						□
AGSUSR1.85	1.85							
AGSUSR1.86	1.86	9.3						
AGSUSR1.87	1.87							
AGSUSR1.88	1.88	9.4						
AGSUSR1.89	1.89							●
AGSUSR1.9	1.90							
AGSUSR1.91	1.91	9.6					0.4	
AGSUSR1.92	1.92							
AGSUSR1.93	1.93	9.7						
AGSUSR1.94	1.94							□
AGSUSR1.95	1.95							
AGSUSR1.96	1.96	9.8						
AGSUSR1.97	1.97							
AGSUSR1.98	1.98	9.9						
AGSUSR1.99	1.99							●
AGSUSR2.0	2.00	10.0						
AGSUSR2.01	2.01							
AGSUSR2.02	2.02	10.1						
AGSUSR2.03	2.03							
AGSUSR2.04	2.04	10.2						□
AGSUSR2.05	2.05							
AGSUSR2.06	2.06	10.3						
AGSUSR2.07	2.07							
AGSUSR2.08	2.08	10.4						
AGSUSR2.09	2.09							●
AGSUSR2.1	2.10	10.5						
AGSUSR2.11	2.11							
AGSUSR2.12	2.12	10.6						
AGSUSR2.13	2.13							
AGSUSR2.14	2.14	10.7						□
AGSUSR2.15	2.15							
AGSUSR2.16	2.16	10.8						
AGSUSR2.17	2.17							
AGSUSR2.18	2.18	10.9						
AGSUSR2.19	2.19							●
AGSUSR2.2	2.20	11.0						
AGSUSR2.21	2.21						0.5	
AGSUSR2.22	2.22	11.1						□
AGSUSR2.23	2.23							

开孔深度在 3D 以下的不锈钢加工中，推荐使用 AGSUSS(B-31)。注重锋利度的高精度钻头。

无刚性的机械、工装夹具等，在低刚性的情况下使用时，推荐使用 SGESH(B-14)。

直径公差：h7 但 0.01mm 尺寸的为 0 ~ -0.009mm (0.05mm 尺寸为 h7)

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCDMS	先端 PL	库存 Stock
AGSUSR2.24	2.24	11.2	25	56				□
AGSUSR2.25	2.25	11.3						
AGSUSR2.26	2.26							
AGSUSR2.27	2.27	11.4						
AGSUSR2.28	2.28							
AGSUSR2.29	2.29	11.5						
AGSUSR2.3	2.30							
AGSUSR2.31	2.31	11.6						
AGSUSR2.32	2.32							
AGSUSR2.33	2.33	11.7						
AGSUSR2.34	2.34		30	28.0	64	3	0.5	□
AGSUSR2.35	2.35	11.8						
AGSUSR2.36	2.36							
AGSUSR2.37	2.37	11.9						
AGSUSR2.38	2.38							
AGSUSR2.39	2.39	12.0						
AGSUSR2.4	2.40							
AGSUSR2.41	2.41	12.1						
AGSUSR2.42	2.42							
AGSUSR2.43	2.43	12.2						
AGSUSR2.44	2.44		33	64			0.6	□
AGSUSR2.45	2.45	12.3						
AGSUSR2.46	2.46							
AGSUSR2.47	2.47	12.4						
AGSUSR2.48	2.48							
AGSUSR2.49	2.49	12.5						
AGSUSR2.5	2.50							
AGSUSR2.51	2.51	12.6						
AGSUSR2.52	2.52							
AGSUSR2.53	2.53	12.7						
AGSUSR2.54	2.54		33	64			0.6	□
AGSUSR2.55	2.55	12.8						
AGSUSR2.56	2.56							
AGSUSR2.57	2.57	12.9						
AGSUSR2.58	2.58							
AGSUSR2.59	2.59	13.0						
AGSUSR2.6	2.60							
AGSUSR2.61	2.61	13.1						
AGSUSR2.62	2.62							
AGSUSR2.63	2.63	13.2						
AGSUSR2.64	2.64		33	64			0.6	□
AGSUSR2.65	2.65	13.3						
AGSUSR2.66	2.66							
AGSUSR2.67	2.67	13.4						
AGSUSR2.68	2.68							
AGSUSR2.69	2.69	13.5						
AGSUSR2.7	2.70							
AGSUSR2.71	2.71	13.6						
AGSUSR2.72	2.72							
AGSUSR2.73	2.73	13.7						
AGSUSR2.74	2.74		33	64			0.6	□
AGSUSR2.75	2.75	13.8						
AGSUSR2.76	2.76							
AGSUSR2.77	2.77	13.9						
AGSUSR2.78	2.78							
AGSUSR2.79	2.79	14.0						
AGSUSR2.8	2.80							
AGSUSR2.81	2.81	14.1						
AGSUSR2.82	2.82							
AGSUSR2.83	2.83	14.2						
AGSUSR2.84	2.84		33	64			0.6	□
AGSUSR2.85	2.85	14.3						
AGSUSR2.86	2.86							
AGSUSR2.87	2.87	14.4						
AGSUSR2.88	2.88							
AGSUSR2.89	2.89	14.5						
AGSUSR2.9	2.90							
AGSUSR2.91	2.91	14.6						
AGSUSR2.92	2.92							
AGSUSR2.93	2.93	14.7						
AGSUSR2.94	2.94		33	64			0.6	□
AGSUSR2.95	2.95	14.8						

商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCCONS	先端 PL	库存 Stock
AGSUSR2.96	2.96	14.8	33	28.0	64	3	0.6	□
AGSUSR2.97	2.97	14.9						
AGSUSR2.98	2.98	15.0						
AGSUSR2.99	2.99							
AGSUSR3.0	3.00	15.1	36	30.0	71	4	0.7	●
AGSUSR3.01	3.01							
AGSUSR3.02	3.02	15.2						
AGSUSR3.03	3.03							
AGSUSR3.04	3.04	15.3						
AGSUSR3.05	3.05							
AGSUSR3.06	3.06	15.4						
AGSUSR3.07	3.07							
AGSUSR3.08	3.08	15.5						
AGSUSR3.09	3.09							
AGSUSR3.1	3.10	15.6						
AGSUSR3.11	3.11							
AGSUSR3.12	3.12	15.7						
AGSUSR3.13	3.13							
AGSUSR3.14	3.14	15.8						
AGSUSR3.15	3.15							
AGSUSR3.16	3.16	15.9						
AGSUSR3.17	3.17							
AGSUSR3.18	3.18	16.0						
AGSUSR3.19	3.19							
AGSUSR3.2	3.20	16.1						
AGSUSR3.21	3.21							
AGSUSR3.22	3.22	16.2						
AGSUSR3.23	3.23							
AGSUSR3.24	3.24	16.3						
AGSUSR3.25	3.25							
AGSUSR3.26	3.26	16.4						
AGSUSR3.27	3.27							
AGSUSR3.28	3.28	16.5						
AGSUSR3.29	3.29							
AGSUSR3.3	3.30	16.6						
AGSUSR3.31	3.31							
AGSUSR3.32	3.32	16.7						
AGSUSR3.33	3.33							
AGSUSR3.34	3.34	16.8						
AGSUSR3.35	3.35							
AGSUSR3.36	3.36	16.9						
AGSUSR3.37	3.37							
AGSUSR3.38	3.38	17.0						
AGSUSR3.39	3.39							
AGSUSR3.4	3.40	17.1						
AGSUSR3.41	3.41							
AGSUSR3.42	3.42	17.2						
AGSUSR3.43	3.43							
AGSUSR3.44	3.44	17.3						
AGSUSR3.45	3.45							
AGSUSR3.46	3.46	17.4						
AGSUSR3.47	3.47							
AGSUSR3.48	3.48	17.5						
AGSUSR3.49	3.49							
AGSUSR3.5	3.50	17.6						
AGSUSR3.51	3.51							
AGSUSR3.52	3.52	17.7						
AGSUSR3.53	3.53							
AGSUSR3.54	3.54	17.8						
AGSUSR3.55	3.55							
AGSUSR3.56	3.56	17.9						
AGSUSR3.57	3.57							
AGSUSR3.58	3.58	18.0						
AGSUSR3.59	3.59							
AGSUSR3.6	3.60	18.1						
AGSUSR3.61	3.61							
AGSUSR3.62	3.62	18.2						
AGSUSR3.63	3.63							
AGSUSR3.64	3.64	18.3						
AGSUSR3.65	3.65							
AGSUSR3.66	3.66	18.4						
AGSUSR3.67	3.67							

← 上一页 Previous Page

单位 (Unit) : mm

	商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMIS	先端 PL	库存 Stock
新商品	AGSUSR6.25	6.25	31.3	63	107	107	1.3	1.3	□
	AGSUSR6.3	6.30	31.5						●
	AGSUSR6.35	6.35	31.8						□
	AGSUSR6.4	6.40	32.0						●
	AGSUSR6.45	6.45	32.3						□
	AGSUSR6.5	6.50	32.5						●
硬质合金钻头	AGSUSR6.55	6.55	32.8	69	113	113	1.4	1.4	□
	AGSUSR6.6	6.60	33.0						●
	AGSUSR6.65	6.65	33.3						□
	AGSUSR6.7	6.70	33.5						●
	AGSUSR6.75	6.75	33.8						□
	AGSUSR6.8	6.80	34.0						●
高速钢钻头	AGSUSR6.85	6.85	34.3	69	113	113	1.5	1.5	□
	AGSUSR6.9	6.90	34.5						●
	AGSUSR6.95	6.95	34.8						□
	AGSUSR7.0	7.00	35.0						●
	AGSUSR7.05	7.05	35.3						□
	AGSUSR7.1	7.10	35.5						●
丝锥	AGSUSR7.15	7.15	35.8	75	119	119	1.6	1.6	□
	AGSUSR7.2	7.20	36.0						●
	AGSUSR7.25	7.25	36.3						□
	AGSUSR7.3	7.30	36.5						●
	AGSUSR7.35	7.35	36.8						□
	AGSUSR7.4	7.40	37.0						●
硬质合金立铣刀	AGSUSR7.45	7.45	37.3	75	125	125	1.7	1.7	□
	AGSUSR7.5	7.50	37.5						●
	AGSUSR7.55	7.55	37.8						□
	AGSUSR7.6	7.60	38.0						●
	AGSUSR7.7	7.70	38.5						□
	AGSUSR7.75	7.75	38.8						●
高速钢立铣刀	AGSUSR7.8	7.80	39.0	81	131	131	1.8	1.8	□
	AGSUSR7.9	7.90	39.5						●
	AGSUSR7.95	7.95	39.8						□
	AGSUSR8.0	8.00	40.0						●
	AGSUSR8.05	8.05	40.3						□
	AGSUSR8.1	8.10	40.5						●
切削工具	AGSUSR8.15	8.15	40.8	81	137	137	1.9	1.9	□
	AGSUSR8.2	8.20	41.0						●
	AGSUSR8.25	8.25	41.3						□
	AGSUSR8.3	8.30	41.5						●
	AGSUSR8.35	8.35	41.8						□
	AGSUSR8.4	8.40	42.0						●
套装商品 其它	AGSUSR8.5	8.50	42.5	87	144	144	2.0	2.0	□
	AGSUSR8.6	8.60	43.0						●
	AGSUSR8.65	8.65	43.3						□
	AGSUSR8.7	8.70	43.5						●
	AGSUSR8.75	8.75	43.8						□
	AGSUSR8.8	8.80	44.0						●
精密工具	AGSUSR8.85	8.85	44.3	87	144	144	2.1	2.1	□
	AGSUSR8.9	8.90	44.5						●
	AGSUSR9.0	9.00	45.0						□
	AGSUSR9.05	9.05	45.3						●
	AGSUSR9.1	9.10	45.5						□
	AGSUSR9.15	9.15	45.8						●
技术资料 索引	AGSUSR9.2	9.20	46.0	87	144	144	2.2	2.2	□
	AGSUSR9.3	9.30	46.5						●
	AGSUSR9.35	9.35	46.8						□
	AGSUSR9.4	9.40	47.0						●
	AGSUSR9.45	9.45	47.3						□
	AGSUSR9.5	9.50	47.5						●
	AGSUSR9.55	9.55	47.8	87	144	144	2.3	2.3	□
	AGSUSR9.6	9.60	48.0						●
	AGSUSR9.7	9.70	48.5						□
	AGSUSR9.8	9.80	49.0						●
	AGSUSR9.85	9.85	49.3						□
	AGSUSR9.9	9.90	49.5						●
	AGSUSR9.95	9.95	49.8	87	144	144	2.4	2.4	□
	AGSUSR10.0	10.00	50.0						●
	AGSUSR10.05	10.05	50.3						□
	AGSUSR10.1	10.10	50.5						●
	AGSUSR10.15	10.15	50.8	87	144	144	2.5	2.5	□
	AGSUSR10.2	10.20	51.0						●


商品编码 Code	直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMIS	先端 PL	库存 Stock
AGSUSR10.25	10.25	51.3	87	144	144	1.3	1.3	□
AGSUSR10.3	10.30	51.5						●
AGSUSR10.35	10.35	51.8						□
AGSUSR10.4	10.40	52.0						●
AGSUSR10.5	10.50	52.5						□
AGSUSR10.6	10.60	53.0						●
AGSUSR10.7	10.70	53.5	94	151	151	1.4	1.4	□
AGSUSR10.8	10.80	54.0						●
AGSUSR10.9	10.90	54.5						□
AGSUSR10.95	10.95	54.8						●
AGSUSR11.0	11.00	55.0						□
AGSUSR11.05	11.05	55.3						●
AGSUSR11.1	11.10	55.5	101	158	158	1.5	1.5	□
AGSUSR11.2	11.20	56.0						●
AGSUSR11.25	11.25	56.3						□
AGSUSR11.3	11.30	56.5						●
AGSUSR11.4	11.40	57.0						□
AGSUSR11.5	11.50	57.5						●
AGSUSR11.6	11.60	58.0	108	168	168	1.6	1.6	□
AGSUSR11.7	11.70	58.5						●
AGSUSR11.8	11.80	59.0						□
AGSUSR11.9	11.90	59.5						●
AGSUSR11.95	11.95	59.8						□
AGSUSR12.0	12.00	60.0						●
AGSUSR12.05	12.05	60.3	114	173	173	1.7	1.7	□
AGSUSR12.1	12.10	60.5						●
AGSUSR12.15	12.15	60.8						□
AGSUSR12.2	12.20	61.0						●
AGSUSR12.3	12.30	61.5						□
AGSUSR12.4	12.40	62.0						●
AGSUSR12.5	12.50	62.5	120	180	180	1.8	1.8	□
AGSUSR12.6	12.60	63.0						●
AGSUSR12.7	12.70	63.5						□
AGSUSR12.8	12.80	64.0						●
AGSUSR12.9	12.90	64.5						□
AGSUSR13.0	13.00	65.0						●
AGSUSR13.5	13.50	67.5	125	185	185	1.9	1.9	□
AGSUSR14.0	14.00	70.0						●
AGSUSR14.5	14.50	72.5						□
AGSUSR15.0	15.00	75.0						●
AGSUSR15.5	15.50	77.5						□
AGSUSR16.0	16.00	80.0						●
AGSUSR16.5	16.50	82.5	130	194	194	2.0	2.0	□
AGSUSR17.0	17.00	85.0						●
AGSUSR17.5	17.50	87.5						□
AGSUSR18.0	18.00	90.0						●
AGSUSR18.5	18.50	92.5						□
AGSUSR19.0	19.00	95.0						●
AGSUSR19.5	19.50	97.5	140	206	206	2.1	2.1	□
AGSUSR20.0	20.00	100.0						●

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	○	—	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu

- 本钻头是定位用的定心钻。
- 可实现从定心到倒角、V槽加工的多种加工。

This drill is for centering.

Supports centering, chamfering, and V-grooving.



LIST 6502

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	直径 DC	倒角角度 SIG	槽长 LCF	全长 OAL	钻头直径 D1	先端 PL	库存 Stock
AGSTD3.0-60	3	60°	9	48	0.75	2.2	
AGSTD4.0-60	4		12	52	1.00	2.9	
AGSTD5.0-60	5		14	60	1.25	3.6	
AGSTD6.0-60	6		15	66	1.50	4.3	
AGSTD8.0-60	8		20	79	2.00	5.8	
AGSTD10.0-60	10		25	89	2.50	7.2	
AGSTD12.0-60	12		30	102	3.00	8.7	
AGSTD16.0-60	16		35	115	4.00	11.5	
AGSTD20.0-60	20		40	131	5.00	14.4	
AGSTD3.0-90	3	90°	9	48		1.5	
AGSTD4.0-90	4		12	52		2.0	
AGSTD5.0-90	5		14	60		2.5	
AGSTD6.0-90	6		15	66		3.0	
AGSTD8.0-90	8		20	79		4.0	
AGSTD10.0-90	10		25	89		5.0	
AGSTD12.0-90	12		30	102		6.0	
AGSTD16.0-90	16		35	115		8.0	
AGSTD20.0-90	20		40	131		10.0	
AGSTD3.0-120	3	120°	9	48		0.9	
AGSTD4.0-120	4		12	52		1.2	
AGSTD5.0-120	5		14	60		1.4	
AGSTD6.0-120	6		15	66		1.7	
AGSTD8.0-120	8		20	79		2.3	
AGSTD10.0-120	10		25	89		2.9	
AGSTD12.0-120	12		30	102		3.5	
AGSTD16.0-120	16		35	115		4.6	
AGSTD20.0-120	20		40	131		5.8	
AGSTD3.0-140	3	140°	9	48		0.5	
AGSTD4.0-140	4		12	52		0.7	
AGSTD5.0-140	5		14	60		0.9	
AGSTD6.0-140	6		15	66		1.1	
AGSTD8.0-140	8		20	79		1.5	
AGSTD10.0-140	10		25	89		1.8	
AGSTD12.0-140	12		30	102		2.2	
AGSTD16.0-140	16		35	115		2.9	
AGSTD20.0-140	20		40	131		3.6	

定心的倒角角度选定 Selecting centering angle



先端角 ≤ 倒角角度
Drill point angle ≤ Centering angle



先端角 > 倒角角度
Drill point angle > Centering angle


- 不推荐用于设定了公差的倒角加工。
Not recommended for chamfering to set tolerances.
- 钻头直径与柄直径相同。
Drill diameter and shank diameter is same size.
- 在定心以及V槽加工时，会留出0.12~0.15Dc的平面。
Flat surface of 0.12 to 0.15 Dc remains after centering work or cutting V grooves.




定心 Centering

请在曲面开孔或者切入性不稳定的钻头的预加工时使用。

For pre-drilling for drills that have inconsistent bite and drilling holes on curved surfaces.



曲面的定心
Centering on a curved surface




定心倒角同时加工
Centering and chamfering at the same time


倒角加工 Chamfering

请在开孔或刃尖倒角时使用。


For chamfering holes or edges.



倒角加工
Chamfering



刃尖倒角加工
Chamfering edges




大直径孔的倒角加工
Chamfering large diameter holes

V槽加工 Cutting V grooves

请在直线、曲线、平面及曲面的V槽加工时使用。



For cutting V grooves in straight or curved lines on flat or curved surfaces.



V槽加工
Cutting V grooves

●是一种用于深位置、回避干涉的长柄型定心钻头。

Long shank type centering drill for avoiding interference when drilling deep holes.





LIST 6504

订货方式 商品编码

单位 (Unit): mm

商品编码 Code	直径 DC	倒角角度 SIG	槽长 LCF	全长 OAL	钻头直径 D1	先端 PL	库存 Stock
AGSTDLS3.0-60	3	60°	9	75	0.75	2.2	
AGSTDLS4.0-60	4		12	100	1.00	2.9	
AGSTDLS5.0-60	5		14	100	1.25	3.6	
AGSTDLS6.0-60	6		15	150	1.50	4.3	
AGSTDLS8.0-60	8		20	200	2.00	5.8	
AGSTDLS10.0-60	10		25	200	2.50	7.2	
AGSTDLS12.0-60	12		30	200	3.00	8.7	
AGSTDLS3.0-90	3	90°	9	75	—	1.5	
AGSTDLS4.0-90	4		12	100		2.0	
AGSTDLS5.0-90	5		14	100		2.5	
AGSTDLS6.0-90	6		15	150		3.0	
AGSTDLS8.0-90	8		20	200		4.0	
AGSTDLS10.0-90	10		25	200		5.0	
AGSTDLS12.0-90	12		30	200		6.0	
AGSTDLS3.0-120	3	120°	9	75	—	0.9	
AGSTDLS4.0-120	4		12	100		1.2	
AGSTDLS5.0-120	5		14	100		1.4	
AGSTDLS6.0-120	6		15	150		1.7	
AGSTDLS8.0-120	8		20	200		2.3	
AGSTDLS10.0-120	10		25	200		2.9	
AGSTDLS12.0-120	12		30	200		3.5	
AGSTDLS3.0-140	3	140°	9	75	—	0.5	
AGSTDLS4.0-140	4		12	100		0.7	
AGSTDLS5.0-140	5		14	100		0.9	
AGSTDLS6.0-140	6		15	150		1.1	
AGSTDLS8.0-140	8		20	200		1.5	
AGSTDLS10.0-140	10		25	200		1.8	
AGSTDLS12.0-140	12		30	200		2.2	

定心的倒角角度选定
Selecting centering angle先端角 ≤ 倒角角度
Drill point angle ≤ Centering angle先端角 > 倒角角度
Drill point angle > Centering angle

- 不推荐用于设定了公差倒角加工。
Not recommended for chamfering to set tolerances.
- 钻头直径与柄直径相同。
Drill diameter and shank diameter is same size.
- 在定心以及V槽加工时，会留出0.12~0.15Dc的平面。
Flat surface of 0.12 to 0.15 Dc remains after centering work or cutting V grooves.




一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●可以对普通钢、型钢和铝进行高速、高效率加工。

This drill having short length is suitable for workpiece materials from Steel and Die Steel to Aluminum.

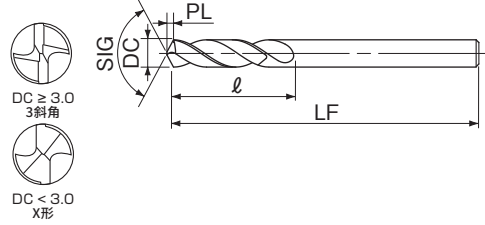

新商品

订货方式 **SGSS** 直径

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
1.0	8	33		
1.05				
1.1	9	34	0.2	
1.15				
1.2	10	35		
1.25				
1.3				
1.35				
1.4	12	37	0.3	
1.45				
1.5				
1.55				
1.6	13	39		
1.65				
1.7				
1.75				
1.8	15	42	0.4	
1.85				
1.9				
1.95				
2.0	16	44		
2.05				
2.1				
2.15	18	47		
2.2				
2.25				
2.3				
2.35	20	50	0.5	□
2.4				
2.45				
2.5	22	54		
2.55				
2.6				
2.65				
2.7				
2.75				
2.8	24	57	0.6	
2.85				
2.9				
2.95				
3.0				
3.05				
3.1	26	61		
3.15				
3.2				
3.25				
3.3				
3.35				
3.4				
3.45				
3.5	28	65	0.7	
3.55				
3.6				
3.65				
3.7				
3.75				
3.8				
3.85	29	65	0.8	
3.9				
3.95				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
4.0				
4.05				
4.1	29	65	0.8	
4.15				
4.2				
4.25				
4.3				
4.35				
4.4	32	69	0.9	
4.45				
4.5				
4.55				
4.6				
4.65				
4.7				
4.75				
4.8				
4.85				
4.9				
4.95				
5.0	35	74	1.0	
5.05				
5.1				
5.15				
5.2				
5.25				
5.3				
5.35				
5.4				
5.45				
5.5	38	80	1.1	□
5.55				
5.6				
5.65				
5.7				
5.75				
5.8				
5.85				
5.9				
5.95				
6.0				
6.05				
6.1				
6.15				
6.2				
6.25				
6.3	42	86	1.2	
6.35				
6.4				
6.45				
6.5				
6.55				
6.6				
6.65				
6.7				
6.75				
6.8				
6.85	46	92	1.3	
6.9				
6.95				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
7.0				
7.1				
7.2	46	92	1.4	
7.3				
7.4				
7.5				
7.6				
7.7				
7.8				
7.9				
8.0				
8.1	50	98	1.5	
8.2				
8.3				
8.4				
8.5				
8.6				
8.7				
8.8				
8.9				
9.0				
9.1	54	105	1.6	
9.2				
9.3				
9.4				
9.5				
9.6				
9.7				
9.8				
9.9				
10.0				
10.1	58	111	1.7	
10.2				
10.3				
10.4				
10.5				
10.6				
10.7				
10.8				
10.9				
11.0				
11.1				
11.2				
11.3	63	119	1.8	
11.4				
11.5				
11.6				
11.7				
11.8				
11.9	68	127	1.9	

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
12.0				
12.1				
12.2				
12.3	68	127	2.0	
12.4				
12.5				
12.6				
12.7				
12.8				
12.9				
13.0				
13.1				
13.2				
13.3				
13.4				
13.5	72	134	2.1	
13.6				
13.7				
13.8				
13.9				
14.0				
14.1				
14.2				
14.3				
14.4				
14.5	76	140	2.2	
14.6				
14.7				
14.8				
14.9				
15.0				
15.1				
15.2				
15.3				
15.4				
15.5				
15.6	80	147	2.3	
15.7				
15.8				
15.9				
16.0				
16.5	84	152	2.4	
17.0				
17.5				
18.0	87	157	2.5	
18.5				
19.0	90	163	2.6	
19.5				
20.0	94	168	2.7	

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	○	—	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 可以对普通钢、型钢和铝进行高速、高效率加工。
- 不适用于奥氏体不锈钢的加工。

This drill having jobbers length is suitable for workpiece materials from Steel and Die Steel to Aluminum. This drill is not applied to Austenitic Stainless Steel.



新品

订货方式 **SGSD** 直径

单位 (Unit) : mm

直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
1.0	12	34	0.2	□
1.1	14	36		
1.2	16	38		
1.3	18	40	0.3	
1.4				
1.5				
1.6	20	43	0.4	
1.7				
1.8				
1.9	22	46		
2.0				
2.1				
2.2	24	49	0.5	
2.3				
2.4				
2.5	30	57		
2.6				
2.7				
2.8	33	61	0.6	
2.9				
3.0				
3.1	36	65	0.7	
3.2				
3.3				
3.4	39	70		
3.5				
3.6				
3.7	43	75	0.8	
3.8				
3.9				
4.0	47	80	0.9	
4.1				
4.2				
4.3	52	86	1.0	
4.4				
4.5				
4.6	57	93	1.1	
4.7				
4.8				
4.9	63	101	1.2	
5.0				
5.1				
5.2	69	109	1.3	
5.3				
5.4				
5.5	69	109	1.4	
5.6				
5.7				
5.8	69	109	1.5	
5.9				
6.0				

直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
7.0	69	109	1.4	□
7.1			1.5	
7.2				
7.3				
7.4				
7.5	1.6			
7.6				
7.7				
7.8				
7.9		1.7		
8.0				
8.1				
8.2				
8.3	1.8			
8.4				
8.5				
8.6				
8.7		1.9		
8.8				
8.9				
9.0				
9.1	2.0			
9.2				
9.3				
9.4				
9.5		2.1		
9.6				
9.7				
9.8				
9.9	2.2			
10.0				
10.1				
10.2				
10.3		2.3		
10.4				
10.5				
10.6	94	142	2.2	
10.7				
10.8				
10.9				


直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
11.0	94	142	2.3	□
11.1				
11.2				
11.3			2.4	
11.4				
11.5				
11.6				
11.7				
11.8	101	151	2.5	
11.9				
12.0				
12.1				
12.2			2.6	
12.3				
12.4				
12.5				
12.6	2.7			
12.7				
12.8				
12.9				
13.0				

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65 HRC
◎	◎	◎	◎	—	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	◎	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 可以对钢、铸铁进行高效率加工。可不分段加工深度达 5D 的深孔。

Able to handle drilling in Steel and Cast Iron efficiently. Can handle non-step drilling up to 5 diameters.

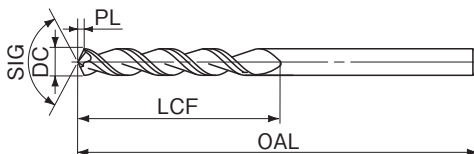

新商品

LIST 6536

订货方式 商品编码

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
AGPSD1.0	1.0	12	34	0.3	●
AGPSD1.1	1.1	14	36		
AGPSD1.2	1.2	16	38		
AGPSD1.3	1.3	18	40	0.4	
AGPSD1.4	1.4				
AGPSD1.5	1.5				
AGPSD1.6	1.6	20	43	0.5	
AGPSD1.7	1.7				
AGPSD1.8	1.8				
AGPSD1.9	1.9	22	46	0.6	
AGPSD2.0	2.0				
AGPSD2.1	2.1				
AGPSD2.2	2.2	24	49	0.7	
AGPSD2.3	2.3				
AGPSD2.4	2.4				
AGPSD2.5	2.5	30	57	0.8	
AGPSD2.6	2.6				
AGPSD2.7	2.7				
AGPSD2.8	2.8	33	61	0.9	
AGPSD2.9	2.9				
AGPSD3.0	3.0				
AGPSD3.1	3.1	36	65	1.0	
AGPSD3.2	3.2				
AGPSD3.3	3.3				
AGPSD3.4	3.4	39	70	1.1	
AGPSD3.5	3.5				
AGPSD3.6	3.6				
AGPSD3.7	3.7	43	75	1.2	
AGPSD3.8	3.8				
AGPSD3.9	3.9				
AGPSD4.0	4.0	47	80	1.3	
AGPSD4.1	4.1				
AGPSD4.2	4.2				
AGPSD4.3	4.3	52	86	1.4	
AGPSD4.4	4.4				
AGPSD4.5	4.5				
AGPSD4.6	4.6	57	93	1.5	
AGPSD4.7	4.7				
AGPSD4.8	4.8				
AGPSD4.9	4.9	63	101	1.6	
AGPSD5.0	5.0				
AGPSD5.1	5.1				
AGPSD5.2	5.2	69	109	1.7	
AGPSD5.3	5.3				
AGPSD5.4	5.4				
AGPSD5.5	5.5	75	116	1.8	
AGPSD5.6	5.6				
AGPSD5.7	5.7				
AGPSD5.8	5.8	81	123	1.9	
AGPSD5.9	5.9				
AGPSD6.0	6.0				
AGPSD6.1	6.1	87	130	2.0	
AGPSD6.2	6.2				
AGPSD6.3	6.3				
AGPSD6.4	6.4	93	137	2.1	
AGPSD6.5	6.5				
AGPSD6.6	6.6				
AGPSD6.7	6.7	99	144	2.2	
AGPSD6.8	6.8				
AGPSD6.9	6.9				
AGPSD7.0	7.0	105	151	2.3	
AGPSD7.1	7.1				

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
AGPSD7.2	7.2	69	109	2.2	●
AGPSD7.3	7.3				
AGPSD7.4	7.4				
AGPSD7.5	7.5	75	117	2.3	
AGPSD7.6	7.6				
AGPSD7.7	7.7				
AGPSD7.8	7.8				
AGPSD7.9	7.9				
AGPSD8.0	8.0				
AGPSD8.1	8.1			2.4	
AGPSD8.2	8.2				
AGPSD8.3	8.3				
AGPSD8.4	8.4	2.5			
AGPSD8.5	8.5				
AGPSD8.6	8.6				
AGPSD8.7	8.7	81	125	2.6	
AGPSD8.8	8.8				
AGPSD8.9	8.9				
AGPSD9.0	9.0			2.7	
AGPSD9.1	9.1				
AGPSD9.2	9.2				
AGPSD9.3	9.3			2.8	
AGPSD9.4	9.4				
AGPSD9.5	9.5				
AGPSD9.6	9.6	87	133	2.9	
AGPSD9.7	9.7				
AGPSD9.8	9.8				
AGPSD9.9	9.9			3.0	
AGPSD10.0	10.0				
AGPSD10.1	10.1				
AGPSD10.2	10.2			3.1	
AGPSD10.3	10.3				
AGPSD10.4	10.4				
AGPSD10.5	10.5	3.2			
AGPSD10.6	10.6				
AGPSD10.7	10.7				
AGPSD10.8	10.8	94	142	3.3	
AGPSD10.9	10.9				
AGPSD11.0	11.0				
AGPSD11.1	11.1			3.4	
AGPSD11.2	11.2				
AGPSD11.3	11.3				
AGPSD11.4	11.4			3.5	
AGPSD11.5	11.5				
AGPSD11.6	11.6				
AGPSD11.7	11.7	101	151	3.6	
AGPSD11.8	11.8				
AGPSD11.9	11.9				
AGPSD12.0	12.0			3.7	
AGPSD12.1	12.1				
AGPSD12.2	12.2				
AGPSD12.3	12.3			3.8	
AGPSD12.4	12.4				
AGPSD12.5	12.5				
AGPSD12.6	12.6	3.9			
AGPSD12.7	12.7				
AGPSD12.8	12.8				
AGPSD12.9	12.9			3.9	
AGPSD13.0	13.0				

※ 1 支包装 (不足 2.0mm 为 10 支包装)

※ Sold one per package (10 per package if below 2.0mm)

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 可以对从普通钢到不锈钢以及铝进行高效率加工。
可得到高精度的孔位置。

This drill having short length is suitable for high-speed drilling of most material from Steel and Stainless Steel to Aluminum.

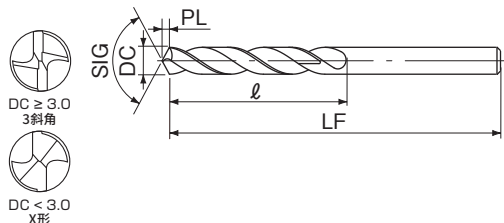

LIST 6568P

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
GSS1.0	1.0	8	33	0.2	
GSS1.1	1.1	9	34		
GSS1.2	1.2	10	35		
GSS1.3	1.3				
GSS1.4	1.4	12	37	0.3	
GSS1.5	1.5				
GSS1.6	1.6	13	39	0.4	
GSS1.7	1.7				
GSS1.8	1.8	15	42		
GSS1.9	1.9				
GSS2.0	2.0	16	44		
GSS2.1	2.1				
GSS2.2	2.2	18	47	0.5	
GSS2.3	2.3				
GSS2.4	2.4	20	50		
GSS2.5	2.5				
GSS2.6	2.6	22	54	0.6	
GSS2.7	2.7				
GSS2.8	2.8				
GSS2.9	2.9				
GSS3.0	3.0				
GSS3.1	3.1	24	57	0.7	
GSS3.2	3.2				
GSS3.3	3.3				
GSS3.4	3.4	26	61		
GSS3.5	3.5				
GSS3.6	3.6				
GSS3.7	3.7	29	65	0.8	
GSS3.8	3.8				
GSS3.9	3.9				
GSS4.0	4.0				
GSS4.1	4.1				
GSS4.2	4.2	32	69	0.9	
GSS4.3	4.3				
GSS4.4	4.4				
GSS4.5	4.5	35	74	1.0	
GSS4.6	4.6				
GSS4.7	4.7				
GSS4.8	4.8	38	80		
GSS4.9	4.9				
GSS5.0	5.0				
GSS5.1	5.1	42	86	1.1	
GSS5.2	5.2				
GSS5.3	5.3				
GSS5.4	5.4	46	92	1.2	
GSS5.5	5.5				
GSS5.6	5.6				
GSS5.7	5.7				
GSS5.8	5.8				
GSS5.9	5.9	48	98	1.3	
GSS6.0	6.0				
GSS6.1	6.1				
GSS6.2	6.2	52	104	1.4	
GSS6.3	6.3				
GSS6.4	6.4				
GSS6.5	6.5	56	110	1.5	
GSS6.6	6.6				
GSS6.7	6.7				
GSS6.8	6.8	60	116	1.6	
GSS6.9	6.9				

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
GSS7.0	7.0	46	92	1.4	
GSS7.1	7.1			1.5	
GSS7.2	7.2	48	96	1.6	
GSS7.3	7.3			1.7	
GSS7.4	7.4	50	100	1.8	
GSS7.5	7.5			1.9	
GSS7.6	7.6	52	104	2.0	
GSS7.7	7.7			2.1	
GSS7.8	7.8	54	108	2.2	
GSS7.9	7.9			2.3	
GSS8.0	8.0	56	112	2.4	
GSS8.1	8.1			2.5	
GSS8.2	8.2	58	116	2.6	
GSS8.3	8.3			2.7	
GSS8.4	8.4	60	120	2.8	
GSS8.5	8.5			2.9	
GSS8.6	8.6	62	124	3.0	
GSS8.7	8.7			3.1	
GSS8.8	8.8	64	128	3.2	
GSS8.9	8.9			3.3	
GSS9.0	9.0	66	132	3.4	
GSS9.1	9.1			3.5	
GSS9.2	9.2	68	136	3.6	
GSS9.3	9.3			3.7	
GSS9.4	9.4	70	140	3.8	
GSS9.5	9.5			3.9	
GSS9.6	9.6	72	144	4.0	
GSS9.7	9.7			4.1	
GSS9.8	9.8	74	148	4.2	
GSS9.9	9.9			4.3	
GSS10.0	10.0	76	152	4.4	
GSS10.1	10.1			4.5	
GSS10.2	10.2	78	156	4.6	
GSS10.3	10.3			4.7	
GSS10.4	10.4	80	160	4.8	
GSS10.5	10.5			4.9	
GSS10.6	10.6	82	164	5.0	
GSS10.7	10.7			5.1	
GSS10.8	10.8	84	168	5.2	
GSS10.9	10.9			5.3	
GSS11.0	11.0	86	172	5.4	
GSS11.1	11.1			5.5	
GSS11.2	11.2	88	176	5.6	
GSS11.3	11.3			5.7	
GSS11.4	11.4	90	180	5.8	
GSS11.5	11.5			5.9	
GSS11.6	11.6	92	184	6.0	
GSS11.7	11.7			6.1	
GSS11.8	11.8	94	188	6.2	
GSS11.9	11.9			6.3	
GSS12.0	12.0	96	192	6.4	
GSS12.1	12.1			6.5	
GSS12.2	12.2	98	196	6.6	
GSS12.3	12.3			6.7	
GSS12.4	12.4	100	200	6.8	
GSS12.5	12.5			6.9	
GSS12.6	12.6	102	204	7.0	
GSS12.7	12.7			7.1	
GSS12.8	12.8	104	208	7.2	
GSS12.9	12.9			7.3	

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock	
GSS13.0	13.0	72	127	2.7	●	
GSS13.1	13.1				□	
GSS13.2	13.2			2.8	●	
GSS13.3	13.3				□	
GSS13.4	13.4				●	
GSS13.5	13.5				□	
GSS13.6	13.6			2.9	●	
GSS13.7	13.7				□	
GSS13.8	13.8			3.0	●	
GSS13.9	13.9				□	
GSS14.0	14.0	76	140		●	
GSS14.1	14.1				□	
GSS14.2	14.2		3.1	●		
GSS14.3	14.3			□		
GSS14.4	14.4			●		
GSS14.5	14.5			□		
GSS14.6	14.6		3.2	●		
GSS14.7	14.7			□		
GSS14.8	14.8		3.3	●		
GSS14.9	14.9			□		
GSS15.0	15.0	80		147		●
GSS15.1	15.1					□
GSS15.2	15.2		3.4	●		
GSS15.3	15.3			□		
GSS15.4	15.4			●		
GSS15.5	15.5			□		
GSS15.6	15.6		3.5	●		
GSS15.7	15.7			□		
GSS15.8	15.8		3.6	●		
GSS15.9	15.9			□		
GSS16.0	16.0	84		152		●
GSS16.1	* 16.1					□
GSS16.2	* 16.2		3.7	●		
GSS16.3	* 16.3			□		
GSS16.4	* 16.4			●		
GSS16.5	16.5			□		
GSS16.6	* 16.6		3.8	●		
GSS16.7	* 16.7			□		
GSS16.8	* 16.8		3.9	●		
GSS16.9	* 16.9			□		
GSS17.0	17.0	87		157		●
GSS17.1	* 17.1					□
GSS17.2	* 17.2		3.8	●		
GSS17.3	* 17.3			□		
GSS17.4	* 17.4			●		
GSS17.5	17.5			□		
GSS17.6	* 17.6		3.9	●		
GSS17.7	* 17.7			□		
GSS17.8	* 17.8		3.8	●		
GSS17.9	* 17.9			□		
GSS18.0	18.0	90		163		●
GSS18.1	* 18.1					□
GSS18.2	* 18.2		3.9	●		
GSS18.3	* 18.3			□		
GSS18.4	* 18.4			●		
GSS18.5	18.5			□		
GSS18.6	* 18.6		3.8	●		
GSS18.7	* 18.7			□		
GSS18.8	* 18.8		3.7	●		
GSS18.9	* 18.9			□		

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
GSS19.0	19.0	94	163	3.9	●
GSS19.5	19.5			4.0	
GSS20.0	20.0			4.1	


※ 1 支包装 (不足 2.0mm 为 10 支包装)
※ Sold one per package (10 per package if below 2.0mm)

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

●本钻头是可用于从普通钢到不锈钢以及铝的泛用涂层钻头。

This is general coated drills having jobbers length.

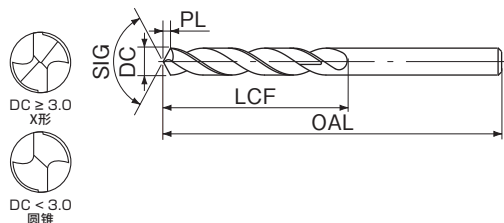

LIST 520P

订货方式 商品编码

单位 (Unit) : mm


商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
GSD0.5	0.5	6	22	0.2	
GSD0.6	0.6	7	24		
GSD0.7	0.7	9	28		
GSD0.8	0.8	10	30	0.3	
GSD0.9	0.9	11	32		
GSD1.0	1.0	12	34		
GSD1.1	1.1	14	36	0.4	
GSD1.2	1.2	16	38		
GSD1.3	1.3				
GSD1.4	1.4	18	40	0.5	
GSD1.5	1.5				
GSD1.6	1.6	20	43		
GSD1.7	1.7				
GSD1.8	1.8	22	46	0.6	
GSD1.9	1.9				
GSD2.0	2.0	24	49		
GSD2.1	2.1				
GSD2.2	2.2	27	53	0.7	
GSD2.3	2.3				
GSD2.4	2.4	30	57		
GSD2.5	2.5				
GSD2.6	2.6	33	61		
GSD2.7	2.7				
GSD2.8	2.8	36	65	0.9	
GSD2.9	2.9				
GSD3.0	3.0	39	70		
GSD3.1	3.1				
GSD3.2	3.2	43	75	1.1	
GSD3.3	3.3				
GSD3.4	3.4	47	80		
GSD3.5	3.5				
GSD3.6	3.6	52	86	1.2	
GSD3.7	3.7				
GSD3.8	3.8	57	93		
GSD3.9	3.9				
GSD4.0	4.0	63	101	1.3	
GSD4.1	4.1				
GSD4.2	4.2	69	109		
GSD4.3	4.3				
GSD4.4	4.4	75	117	1.5	
GSD4.5	4.5				
GSD4.6	4.6	81	125		
GSD4.7	4.7				
GSD4.8	4.8	87	133	1.7	
GSD4.9	4.9				
GSD5.0	5.0	93	141		
GSD5.1	5.1				
GSD5.2	5.2	99	149	1.9	
GSD5.3	5.3				
GSD5.4	5.4	105	157		
GSD5.5	5.5				
GSD5.6	5.6	111	165	2.1	
GSD5.7	5.7				
GSD5.8	5.8	117	173		
GSD5.9	5.9				
GSD6.0	6.0	123	181	2.3	
GSD6.1	6.1				
GSD6.2	6.2	129	189		
GSD6.3	6.3				
GSD6.4	6.4	135	197	2.5	
GSD6.5	6.5				
GSD6.6	6.6	141	205		
GSD6.7	6.7				
GSD6.8	6.8	147	213	2.7	
GSD6.9	6.9				
GSD7.0	7.0	153	221		

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
GSD6.9	6.9	69	109	2.1	
GSD7.0	7.0			2.2	
GSD7.1	7.1			2.3	
GSD7.2	7.2	75	117	2.4	
GSD7.3	7.3			2.5	
GSD7.4	7.4			2.6	
GSD7.5	7.5	81	125	2.7	
GSD7.6	7.6			2.8	
GSD7.7	7.7			2.9	
GSD7.8	7.8	87	133	3.0	
GSD7.9	7.9			3.1	
GSD8.0	8.0			3.2	
GSD8.1	8.1	94	142	3.3	
GSD8.2	8.2			3.4	
GSD8.3	8.3			3.5	
GSD8.4	8.4	101	151	3.6	
GSD8.5	8.5			3.7	
GSD8.6	8.6			3.8	
GSD8.7	8.7	107	157	3.9	
GSD8.8	8.8			4.0	
GSD8.9	8.9			4.1	
GSD9.0	9.0	114	164	4.2	
GSD9.1	9.1			4.3	
GSD9.2	9.2			4.4	
GSD9.3	9.3	121	171	4.5	
GSD9.4	9.4			4.6	
GSD9.5	9.5			4.7	
GSD9.6	9.6	128	178	4.8	
GSD9.7	9.7			4.9	
GSD9.8	9.8			5.0	
GSD9.9	9.9	135	185	5.1	
GSD10.0	10.0			5.2	
GSD10.1	10.1			5.3	
GSD10.2	10.2	142	192	5.4	
GSD10.3	10.3			5.5	
GSD10.4	10.4			5.6	
GSD10.5	10.5	149	199	5.7	
GSD10.6	10.6			5.8	
GSD10.7	10.7			5.9	
GSD10.8	10.8	156	206	6.0	
GSD10.9	10.9			6.1	
GSD11.0	11.0			6.2	
GSD11.1	11.1	163	213	6.3	
GSD11.2	11.2			6.4	
GSD11.3	11.3			6.5	
GSD11.4	11.4	170	220	6.6	
GSD11.5	11.5			6.7	
GSD11.6	11.6			6.8	
GSD11.7	11.7	177	227	6.9	
GSD11.8	11.8			7.0	
GSD11.9	11.9			7.1	
GSD12.0	12.0	184	234	7.2	
GSD12.1	12.1			7.3	
GSD12.2	12.2			7.4	
GSD12.3	12.3	191	241	7.5	
GSD12.4	12.4			7.6	
GSD12.5	12.5			7.7	
GSD12.6	12.6	198	248	7.8	
GSD12.7	12.7			7.9	
GSD12.8	12.8			8.0	
GSD12.9	12.9	205	255	8.1	
GSD13.0	13.0			8.2	
GSD13.1	13.1			8.3	

※ 1 支包装 (不足 2.0mm 为 10 支包装)
※ Sold one per package (10 per package if below 2.0mm)

●本钻头是泛用涂层含钴钻头。

This is general coated cobalt HSS drills having jobbers length.

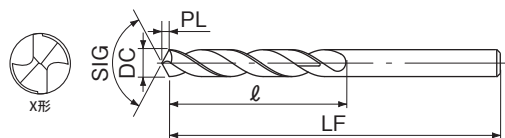

新商品

订货方式 GCOSD 直径

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
1.0	12	34		
1.01				
1.02				
1.03				
1.04				
1.05				
1.06		36		
1.07				
1.08				
1.09				
1.1				
1.11	13		0.2	
1.12				
1.13				
1.14				
1.15				
1.16				
1.17				
1.18				
1.19				
1.2		38		
1.21				
1.22				
1.23				
1.24	14			
1.25				
1.26				
1.27				
1.28				
1.29				
1.3				□
1.31				
1.32				
1.33				
1.34				
1.35				
1.36				
1.37				
1.38				
1.39				
1.4	15	40	0.3	
1.41				
1.42				
1.43				
1.44				
1.45				
1.46				
1.47				
1.48				
1.49				
1.5				
1.51				
1.52				
1.53				
1.54	16	43		
1.55				
1.56				
1.57				
1.58				
1.59				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
1.6				
1.61				
1.62				
1.63				
1.64				
1.65	16	43	0.3	
1.66				
1.67				
1.68				
1.69				
1.7				
1.71				
1.72				
1.73				
1.74				
1.75				
1.76				
1.77				
1.78				
1.79				
1.8	18	46		
1.81				
1.82				
1.83				
1.84				
1.85				
1.86				
1.87				
1.88				
1.89				□
1.9				
1.91				
1.92				
1.93				
1.94				
1.95		49	0.4	
1.96				
1.97				
1.98				
1.99				
2.0				
2.01				
2.02				
2.03				
2.04	19			
2.05				
2.06				
2.07				
2.08				
2.09		55		
2.1				
2.11				
2.12				
2.13				
2.14				
2.15				
2.16				
2.17				
2.18			0.5	
2.19				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
2.2				
2.21				
2.22				
2.23				
2.24				
2.25				
2.26				
2.27				
2.28				
2.29	21	58		
2.3				
2.31				
2.32				
2.33				
2.34				
2.35				
2.36				
2.37				
2.38				
2.39				
2.4				
2.41			0.5	
2.42				
2.43				
2.44				
2.45				
2.46	23	61		
2.47				
2.48				
2.49				□
2.5				
2.51				
2.52				
2.53				
2.54				
2.55				
2.56				
2.57				
2.58				
2.59				
2.6				
2.61				
2.62	24	64		
2.63				
2.64				
2.65				
2.66				
2.67				
2.68				
2.69			0.6	
2.7				
2.71				
2.72				
2.73				
2.74	25	67		
2.75				
2.76				
2.77				
2.78				
2.79				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
2.8				
2.81				
2.82				
2.83	25	67		
2.84				
2.85				
2.86				
2.87				
2.88				
2.89				
2.9				
2.91				
2.92				
2.93				
2.94				
2.95				
2.96			0.6	
2.97				
2.98				
2.99				
3.0				
3.01				
3.02				
3.03				
3.04				
3.05				
3.06	27	71		
3.07				
3.08				
3.09				□
3.1				
3.11				
3.12				
3.13				
3.14				
3.15				
3.16				
3.17				
3.18				
3.19				
3.2				
3.21				
3.22				
3.23				
3.24				
3.25				
3.26				
3.27			0.7	
3.28				
3.29				
3.3				
3.31				
3.32				
3.33	29	73		
3.34				
3.35				
3.36				
3.37				
3.38				
3.39				

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Next 下一页 ➔

← 上一页 Previous Page

单位 (Unit) : mm

新品

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
3.4	29	73	0.7	
3.41				
3.42				
3.43				
3.44				
3.45				
3.46				
3.47				
3.48				
3.49				
3.5				
3.51				
3.52				
3.53				
3.54				
3.55				
3.56	31	76	0.8	
3.57				
3.58				
3.59				
3.6				
3.61				
3.62				
3.63				
3.64				
3.65				
3.66				
3.67				
3.68				
3.69				
3.7				
3.71	33	79	0.9	
3.72				
3.73				
3.74				
3.75				
3.76				
3.77				
3.78				
3.79				
3.8				
3.81				
3.82				
3.83				
3.84				
3.85				
3.86				
3.87	35	83	1.0	
3.89				
3.9				
3.91				
3.92				
3.93				
3.94				
3.95				
3.96				
3.97				
3.98				
3.99				
4.0				
4.05				
4.1				
4.15	36	86	1.1	
4.2				
4.25				
4.3				
4.35				
4.4				
4.45				
4.5				

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
4.55	36	86	0.9	
4.6				
4.65				
4.7				
4.75	38	89	1.0	
4.8				
4.85				
4.9				
4.95	40	92	1.1	
5.0				
5.05				
5.1				
5.15	42	95	1.2	
5.2				
5.25				
5.3				
5.35	44	98	1.3	
5.4				
5.45				
5.5				
5.55	46	102	1.4	
5.6				
5.65				
5.7				
5.75	47	105	1.5	
5.8				
5.85				
5.9				
5.95	49	108	1.6	
6.0				
6.05				
6.1				
6.15	51	111	1.7	
6.2				
6.25				
6.3				
6.35	53	114	1.8	
6.4				
6.45				
6.5				
6.55	55	117	1.9	
6.6				
6.65				
6.7				
6.75	57	121	2.0	
6.8				
6.85				
6.9				
6.95	58	124	2.1	
7.0				
7.05				
7.1				
7.15	60	127	2.2	
7.2				
7.25				
7.3				
7.35	62	130	2.3	
7.4				
7.45				
7.5				
7.55	64	133	2.4	
7.6				
7.65				
7.7				
7.75	65	137	2.5	
7.8				
7.85				
7.9				
7.95	66	140	2.6	
8.0				
8.05				
8.1				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
8.05	55	117	1.7	
8.1				
8.15				
8.2				
8.25	57	121	1.8	
8.3				
8.35				
8.4				
8.45	58	124	1.9	
8.5				
8.55				
8.6				
8.65	60	127	2.0	
8.7				
8.75				
8.8				
8.85	62	130	2.1	
8.9				
8.95				
9.0				
9.05	64	133	2.2	
9.1				
9.15				
9.2				
9.25	65	137	2.3	
9.3				
9.35				
9.4				
9.45	66	140	2.4	
9.5				
9.55				
9.6				
9.65	67	143	2.5	
9.7				
9.75				
9.8				
9.85	68	146	2.6	
9.9				
9.95				
10.0				
10.05	69	149	2.7	
10.1				
10.15				
10.2				
10.25	70	152	2.8	
10.3				
10.35				
10.4				
10.45	71	155	2.9	
10.5				
10.55				
10.6				
10.65	72	158	3.0	
10.7				
10.75				
10.8				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
10.75	67	140	2.2	□
10.8				
10.85				
10.9				
10.95				
11.0	69	143	2.3	
11.05				
11.1				
11.15				
11.2				
11.25	71	146	2.4	
11.3				
11.35				
11.4				
11.45				
11.5	72	149	2.5	
11.55				
11.6				
11.65				
11.7				
11.75	74	152	2.6	
11.8				
11.85				
11.9				
11.95				
12.0	75	155	2.7	
12.05				
12.1				
12.15				
12.2				
12.25	76	158	2.8	
12.3				
12.35				
12.4				
12.45				
12.5	77	161	2.9	
12.55				
12.6				
12.65				
12.7				
12.75	78	164	3.0	
12.8				
12.85				
12.9				
12.95				
13.0	79	167	3.1	
13.05				
13.1				
13.15				
13.2				

●本钻头是侧固柄的含钴钻头。

This is general cobalt HSS drills having side lock shank.

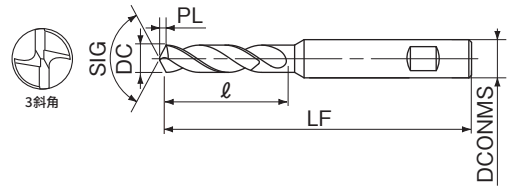

LIST 6620

订货方式 SLDR 直径

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
13.0	80	150	16	2.7	
13.1					
13.2					
13.3					
13.4					
13.5				2.8	
13.6					
13.7					
13.8					
13.9				2.9	
14.0					
14.1					
14.2					
14.3					
14.4					
14.5				3.0	
14.6	100	170	20		□
14.7					
14.8					
14.9				3.1	
15.0					
15.1					
15.2					
15.3				3.2	
15.4					
15.5					
15.6					
15.7				3.3	
15.8					
15.9					
16.0					
16.1	110	180	20		
16.2					
16.3					
16.4				3.4	
16.5					
16.6					
16.7					
16.8					
16.9				3.5	
17.0					
17.1					
17.2					
17.3				3.6	
17.4					
17.5					
17.6					
17.7					
17.8				3.7	
17.9					
18.0					
18.1					
18.2					
18.3				3.8	
18.4					
18.5					
18.6					
18.7				3.9	
18.8					
18.9					

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
19.0	120	200	25	3.9	□
19.1					
19.2					
19.3				4.0	
19.4					
19.5					
19.6					
19.7				4.1	
19.8					
19.9					
20.0					
20.1					
20.2				4.2	
20.3					
20.4					
20.5					
20.6	130	220	32		
20.7				4.3	
20.8					
20.9					
21.0					
21.1				4.4	
21.2					
21.3					
21.4				4.5	
21.5					
21.6					
21.7					
21.8					
21.9				4.6	
22.0					
22.1					
22.2					
22.3				4.7	
22.4					
22.5					
22.6					
22.7				4.8	
22.8					
22.9					
23.0					
23.1				4.9	
23.2					
23.3					
23.4					
23.5				5.0	
23.6					
23.7					
23.8					
23.9				5.1	
24.0					
24.1					
24.2					
24.3					
24.4					
24.5				5.2	
24.6					
24.7					
24.8					
24.9					

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
25.0	140	230	32	5.2	□
25.1					
25.2					
25.3					
25.4				5.3	
25.5					
25.6					
25.7					
25.8					
25.9				5.4	
26.0					
26.1					
26.2					
26.3				5.5	
26.4					
26.5					
26.6	150	250	32		
26.7				5.6	
26.8					
26.9					
27.0					
27.1				5.7	
27.2					
27.3					
27.4					
27.5				5.8	
27.6					
27.7					
27.8					
27.9					
28.0				5.9	
28.1					
28.2					
28.3					
28.4				6.0	
28.5					
28.6					
28.7					
28.8				6.1	
28.9					
29.0					
29.1					
29.2				6.2	
29.3					
29.4					
29.5					
29.6					
29.7					
29.8					
29.9					
30.0					

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

●短刃长、高刚性的钻头。


This side lock drill having short length is very stable.



照片 1
Picture 1



照片 2
Picture 2

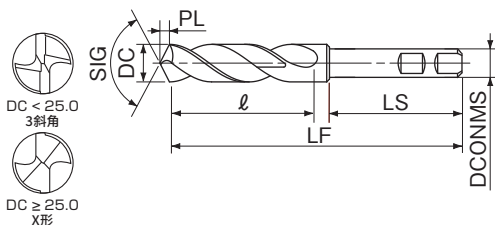

订货方式 **MCD** 直径

(带 * 标记的商品 : MCD 直径 × 柄径)

单位 (Unit) : mm

直径 DC	柄径 DCONMS	槽长 ℓ	全长 LF	先端 PL	照片 Picture	库存 Stock
2.5	6	22	64	0.8	1	□
2.6						
2.7						
2.8						
2.9						
* 3.0	3	24	58	0.9		
3.0	6		64			
3.1	6		66			
* 3.2	3		60			
3.2	6		66			
* 3.3	3	26	60	1.0		
3.3	6		66			
3.4	6		68			
* 3.5	3		62			
3.5	6		68			
3.6	6		68			
* 3.7	3	29	65	1.1		
3.7	6		68			
3.8	6		71			
3.9	6		71			
* 4.0	3		65			
4.0	6	29	71	1.2		
4.1						
4.2						
4.3						
4.4						
4.5		32	74	1.3		
4.6						
4.7						
4.8						
4.9						
5.0		35	77	1.4		
5.1						
5.2						
5.3						
5.4						
5.5		38	80	1.5		
5.6						
5.7						
5.8						
5.9						
6.0	42	87	1.6			
6.1						
6.2						
6.3						
6.4						
6.5	46	91	1.7			
6.6						
6.7						
6.8						
6.9						
7.0	50	95	1.8			
7.1						
7.2						
7.3						
7.4						
7.5	54	99	1.9			
7.6						
7.7						
7.8						

直径 DC	柄径 DCONMS	槽长 ℓ	全长 LF	先端 PL	照片 Picture	库存 Stock
7.9	6	50	95	2.4	1	□
8.0						
8.1						
8.2						
8.3						
8.4	8	54	100	2.5		
8.5						
8.6						
8.7						
8.8						
8.9						
9.0						
9.1						
9.2						
9.3						
9.4	10	58	111	2.6		
9.5						
9.6						
9.7						
9.8						
9.9						
10.0						
10.1						
10.2						
10.3						
10.4	12	63	116	2.7		
10.5						
10.6						
10.7						
10.8						
10.9						
11.0						
11.1						
11.2						
11.3						
11.4	14	68	121	2.8		
11.5						
11.6						
11.7						
11.8						
11.9						
12.0						
12.1						
12.2						
12.3						
12.4	16	72	125	2.9		
12.5						
12.6						
12.7						
12.8						
12.9						
13.0						
13.1						
13.5						
13.6						
13.8						
14.0						
14.1						
14.2						
14.5						
14.6						
14.7						
14.8						
14.9						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

直径 DC	柄径 DCONMS	槽长 ℓ	全长 LF	先端 PL	照片 Picture	库存 Stock
14.6	12	76	129	4.4	1	□
14.8				4.5		
15.0		80	133	4.7		
15.5				4.8		
15.6				5.0		
15.8	16	84	142	5.1		
16.0				5.3		
16.5		87	145	5.4		
16.6				5.5		
16.8				5.6		
17.0	90	148	5.7			
17.5			5.9			
17.6	94	152	6.0			
17.8			6.2			
18.0	20	97	167	6.3		
18.2				6.5		
18.5		100	170	6.6		
18.6				6.8		
18.8				6.9		
19.0	104	174	7.1			
19.5			7.2			
19.6	107	177	7.4			
19.8			7.5			
20.0			7.7			
20.5	25	110	183	7.8		
20.8				8.0		
21.0		114	187	8.1		
21.5				8.3		
21.8				8.4		
22.0	118	191	8.6			
22.5			8.7			
22.8	122	195	8.9			
23.0			9.0			
23.5	125	202	9.2			
23.8			9.3			
24.0	32	130	207	9.5		
24.5				9.6		
24.8		134	211	9.8		
25.0				9.9		
25.5				10.1		
26.0	138	215	10.2			
26.5			10.4			
27.0	142	219	10.5			
27.5			10.7			
28.0	42	146	233	10.8		
28.5				11.0		
29.0		150	237	11.1		
29.5				11.3		
30.0				11.4		
30.5		154	241	11.6		
31.0				11.7		
31.5		158	245	11.9		
32.0				12.0		
32.5		162	250	12.3		
33.0	12.6					
33.5	60.0	166	255	12.9		
34.0				13.2		
34.5		170	260	13.5		
35.0				13.8		
35.5				14.1		
36.0		174	264	14.4		
36.5				14.7		
37.0		178	268	15.0		
37.5				15.3		
38.0		80.0	182	272	15.6	
38.5	15.9					
39.0	186		276	16.2		
39.5				16.5		
40.0				16.8		
40.5	190		280	17.1		
41.0				17.4		
41.5	194		284	17.7		
42.0				18.0		
42.5	198		288	18.3		

直径 DC	柄径 DCONMS	槽长 ℓ	全长 LF	先端 PL	照片 Picture	库存 Stock
36.0	32	134	211	10.8	2	□
36.5				11.0		
37.0		138	215	11.1		
37.5				11.3		
38.0				11.4		
38.5	42	142	219	11.6		
39.0				11.7		
39.5		146	233	11.9		
40.0				12.0		
41.0				12.3		
42.0		150	237	12.6		
43.0				12.9		
44.0		154	241	13.2		
45.0				13.5		
46.0	60.0	158	245	13.8	2	□
47.0				14.1		
48.0		162	250	14.4		
49.0				14.7		
50.0				15.0		
51.0		166	255	15.3		
52.0				15.6		
53.0		170	260	15.9		
54.0				16.2		
55.0				16.5		
56.0	80.0	174	264	16.8		
57.0				17.1		
58.0		178	268	17.4		
59.0				17.7		
60.0				18.0		


柄径 DCONMS	柄长 ℓs
3	29
6, 8	35
10, 12	43
16	48
20	60
25	63
32	67
42	77

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	○	○	○


◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●本钻头是可用于从普通钢到不锈钢的泛用含钴钻头。

This is general cobalt HSS drills.



直径不足 2.0mm 的表面为白色 (未染色)。
Less than 2.0mm in the diameter is the
bright finishes.

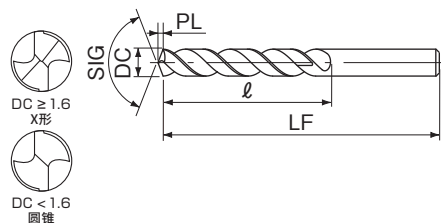

LIST 6520

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
COSD0.2	0.2	2.0	19	0.04	□
COSD0.3	0.3	2.5	20		
COSD0.4	0.4	4.0	24		
COSD0.5	0.5	5.0	27		
COSD0.6	0.6	5.5	30		
COSD0.7	0.7	7.5	32		
COSD0.8	0.8	8.0	34	0.1	
COSD0.9	0.9	9.0	36		
COSD1.0	1.0	10.0	40		
COSD1.1	1.1	11.0	42		
COSD1.2	1.2	13.0			
COSD1.3	1.3		45		
COSD1.4	1.4	14.5	48		
COSD1.5	1.5				
COSD1.6	1.6	16.0	50		
COSD1.7	1.7				
COSD1.8	1.8	17.5	52		
COSD1.9	1.9				
COSD2.0	2.0	20.0	55		
COSD2.1	2.1				
COSD2.2	2.2	23.0	58		
COSD2.3	2.3				
COSD2.4	2.4	24.5	61		
COSD2.5	2.5				
COSD2.6	2.6	26.0	64		
COSD2.7	2.7				
COSD2.8	2.8	27.0	67		
COSD2.9	2.9				
COSD3.0	3.0	29.5	71		
COSD3.1	3.1				
COSD3.2	3.2				
COSD3.3	3.3				
COSD3.4	3.4	31.5	73		
COSD3.5	3.5				
COSD3.6	3.6	33.5	76		
COSD3.7	3.7				
COSD3.8	3.8	36.0	79		
COSD3.9	3.9				
COSD4.0	4.0	38.0	83		
COSD4.1	4.1				
COSD4.2	4.2	39.0	86		
COSD4.3	4.3				
COSD4.4	4.4	41.0	89		
COSD4.5	4.5				
COSD4.6	4.6	43.0	92		
COSD4.7	4.7				
COSD4.8	4.8	44.0	95		
COSD4.9	4.9				
COSD5.0	5.0	45.0	98		
COSD5.1	5.1				
COSD5.2	5.2	47.0	102		
COSD5.3	5.3				
COSD5.4	5.4	49.0	105		
COSD5.5	5.5				
COSD5.6	5.6	51.0	108		
COSD5.7	5.7				
COSD5.8	5.8	53.0	111		
COSD5.9	5.9				
COSD6.0	6.0	55.0	114		
COSD6.1	6.1				
COSD6.2	6.2	57.0	117		
COSD6.3	6.3				
COSD6.4	6.4	59.0	121		
COSD6.5	6.5				
COSD6.6	6.6	61.0	124		
COSD6.7	6.7				

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
COSD6.8	6.8	51.0	105	1.4	●
COSD6.9	6.9				
COSD7.0	7.0				
COSD7.1	7.1	53.0	108	1.5	
COSD7.2	7.2				
COSD7.3	7.3				
COSD7.4	7.4	55.0	111	1.6	
COSD7.5	7.5				
COSD7.6	7.6				
COSD7.7	7.7	57.0	114	1.7	
COSD7.8	7.8				
COSD7.9	7.9				
COSD8.0	8.0	59.0	117	1.8	
COSD8.1	8.1				
COSD8.2	8.2				
COSD8.3	8.3	61.0	121	1.9	
COSD8.4	8.4				
COSD8.5	8.5				
COSD8.6	8.6	63.0	124	2.0	
COSD8.7	8.7				
COSD8.8	8.8				
COSD8.9	8.9	65.0	127	2.1	
COSD9.0	9.0				
COSD9.1	9.1				
COSD9.2	9.2	67.0	130	2.2	
COSD9.3	9.3				
COSD9.4	9.4				
COSD9.5	9.5	69.0	133	2.3	
COSD9.6	9.6				
COSD9.7	9.7				
COSD9.8	9.8	70.0	137	2.4	
COSD9.9	9.9				
COSD10.0	10.0				
COSD10.1	10.1	72.0	140	2.5	
COSD10.2	10.2				
COSD10.3	10.3				
COSD10.4	10.4	75.0	143	2.6	
COSD10.5	10.5				
COSD10.6	10.6				
COSD10.7	10.7	77.0	146	2.7	
COSD10.8	10.8				
COSD10.9	10.9				
COSD11.0	11.0	78.0	149	2.8	
COSD11.1	11.1				
COSD11.2	11.2				
COSD11.3	11.3	80.0	152	2.9	
COSD11.4	11.4				
COSD11.5	11.5				
COSD11.6	11.6				
COSD11.7	11.7				
COSD11.8	11.8				
COSD11.9	11.9				
COSD12.0	12.0				
COSD12.1	12.1				
COSD12.2	12.2				
COSD12.3	12.3				
COSD12.4	12.4				
COSD12.5	12.5				
COSD12.6	12.6				
COSD12.7	12.7				
COSD12.8	12.8				
COSD12.9	12.9				
COSD13.0	13.0				


包装数量 : 8.0mm 以下 10 支包装, 超过 8.0mm 为 5 支包装
Number of drill bits per package: 10 per package if below 8.0 mm, 5 per package if over 8.0 mm.

●本钻头是用途较广的泛用钻头。

This drill is applied for general purpose.



直径不足 2.0mm 的表面为白色 (未染色)。
Less than 2.0mm in the diameter is the
bright finishes.

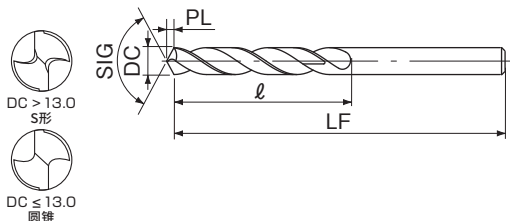

新商品

LIST 500

订货方式 **SD** 直径

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
0.2	3.0	19		
0.21				
0.22				
0.23				
0.24				
0.25				
0.26	3.5	20		
0.27				
0.28				
0.29				
0.3				
0.31				
0.32				
0.33				
0.34				
0.35	5.5	24	0.1	
0.36				
0.37				
0.38				
0.39				
0.4				
0.41				
0.42				
0.43				
0.44	7.5	27		
0.45				
0.46				
0.47				
0.48				
0.49				
0.5				
0.51				
0.52				
0.53				
0.54				
0.55	8.5	30		
0.56				
0.57				
0.58				
0.59				
0.6				
0.61				
0.62				
0.63				
0.64				
0.65	10.0	32	0.2	
0.66				
0.67				
0.68				
0.69				
0.7				
0.71				
0.72				
0.73				
0.74				
0.75	11.0	34		
0.76				
0.77				
0.78				
0.79				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
0.8	11.0	34		
0.81				
0.82			0.2	
0.83				
0.84				
0.85	13.0	36		
0.86				
0.87				
0.88				
0.89				
0.9				
0.91				
0.92				
0.93				
0.94				
0.95	18.0	40		
0.96				
0.97				
0.98				
0.99				
1.0			0.3	
1.01				
1.02				
1.03				
1.04				
1.05				
1.06				
1.07				
1.08				
1.09				
1.1	20.0	42		
1.11				
1.12				
1.13				
1.14				
1.15				
1.16				
1.17				
1.18				
1.19				
1.2				
1.21				
1.22				
1.23				
1.24				
1.25	22.0	45		
1.26				
1.27				
1.28				
1.29			0.4	
1.3				
1.31				
1.32				
1.33				
1.34				
1.35	23.0	48		
1.36				
1.37				
1.38				
1.39				

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
1.4				
1.41				
1.42				
1.43				
1.44	23.0	48	0.4	
1.45				
1.46				
1.47				
1.48				
1.49				
1.5				
1.51				
1.52				
1.53				
1.54				
1.55				
1.56				
1.57				
1.58				
1.59				
1.6	25.0	50		
1.61				
1.62				
1.63				
1.64				
1.65				
1.66			0.5	
1.67				
1.68				
1.69				
1.7				
1.71				
1.72				
1.73				
1.74				
1.75				
1.76				
1.77				
1.78				
1.79				
1.8	28.0	52		
1.81				
1.82				
1.83				
1.84				
1.85				
1.86				
1.87				
1.88				
1.89				
1.9				
1.91				
1.92			0.6	
1.93				
1.94				
1.95	29.0	55		
1.96				
1.97				
1.98				
1.99				

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

包装数量：8.0mm 以下为 10 支包装，超过 8.0mm、13.0mm 以下为 5 支包装，超过 13.0mm 为 2 支包装。
Number of drill bits per package: 10 per package if below 8.0 mm, 5 per package if between 8.0 and 13.0 mm, 2 per package if over 13.0 mm.

Next Page 下一页 ➔

直径公差：h8 (0.01mm 尺寸的公差为 0 ~ -0.008mm。但 0.05mm 尺寸的为 h8) 直径不足 1mm 的为 0 ~ -0.01mm
也可使用 1 支包装的铁加工用钻头 **SDP (G-6)**。但 **SDP** 直径在 4mm 以下的为 2 支包装。

新品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
2.0	29.0	55	0.6	
2.01				
2.02				
2.03				
2.04				
2.05				
2.06				
2.07				
2.08				
2.09				
2.1				
2.11				
2.12				
2.13				
2.14				
2.15				
2.16				
2.17	33.0	58	0.7	●
2.18				
2.19				
2.2				
2.21				
2.22				
2.23				
2.24				
2.25				
2.26				
2.27				
2.28				
2.29				
2.3				
2.31				
2.32	35.0	61	0.8	
2.33				
2.34				
2.35				
2.36				
2.37				
2.38				
2.39				
2.4				
2.41				
2.42				
2.43				
2.44				
2.45				
2.46				
2.47	37.0	64	0.8	
2.48				
2.49				
2.5				
2.51				
2.52				
2.53				
2.54				
2.55				
2.56				
2.57				
2.58				
2.59				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
2.6	37.0	64	0.8	
2.61				
2.62				
2.63				
2.64				
2.65				
2.66				
2.67				
2.68				
2.69				
2.7				
2.71				
2.72	39.0	67		
2.73				
2.74				
2.75				
2.76				
2.77				
2.78				
2.79				
2.8				
2.81				
2.82				
2.83				
2.84				
2.85				
2.86	42.0	71	0.9	●
2.87				
2.88				
2.89				
2.9				
2.91				
2.92				
2.93				
2.94				
2.95				
2.96				
2.97				
2.98				
2.99				
3.0	45.0	73	1.0	
3.05				
3.1				
3.15				
3.2				
3.25				
3.3				
3.35				
3.4				
3.45				
3.5				
3.55				
3.6				
3.65				
3.7	48.0	76	1.1	
3.75				
3.8				
3.85				
3.9				
3.95				
4.0	51.0	79	1.2	
4.05				
4.1				
4.15				
4.2				
4.25				
4.3				
4.35				
4.4				
4.45				
4.5				
4.55				
4.6				
4.65				
4.7				
4.75				
4.8	54.0	83	1.2	
4.85				
4.9				
4.95				
5.0				
5.05				
5.1				
5.15				
5.2				
5.25				
5.3				
5.35				
5.4				
5.45				
5.5				
5.55	56.0	86	1.3	
5.6				
5.65				
5.7				
5.75				
5.8				
5.85				
5.9				
5.95				
6.0				
6.05				
6.1				
6.15				
6.2				
6.25				
6.3	59.0	89	1.4	
6.35				
6.4				
6.45				
6.5				
6.55				
6.6				
6.65				
6.7				
6.75				
6.8				
6.85				
6.9				
6.95				

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
4.0	54.0	83	1.2	
4.05				
4.1				
4.15				
4.2			1.3	
4.25				
4.3				
4.35				
4.4	56.0	86	1.4	
4.45				
4.5				
4.55				
4.6			1.5	
4.65				
4.7				
4.75				
4.8	59.0	89	1.6	
4.85				
4.9				
4.95				
5.0			1.7	
5.05				
5.1				
5.15				
5.2	62.0	92	1.8	
5.25				
5.3				
5.35				
5.4			1.9	
5.45				
5.5				
5.55				
5.6	64.0	95	2.0	
5.65				
5.7				
5.75				
5.8			2.1	
5.85				
5.9				
5.95				
6.0	67.0	98	2.2	
6.05				
6.1				
6.15				
6.2			2.3	
6.25				
6.3				
6.35				
6.4	70.0	102	2.4	
6.45				
6.5				
6.55				
6.6			2.5	
6.65				
6.7				
6.75				
6.8	73.0	105	2.6	
6.85				
6.9				
6.95				

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
7.0	73.0	105	2.1	●
7.05	75.0	108		
7.1				
7.15				
7.2				
7.25	78.0	111	2.2	
7.3				
7.35				
7.4				
7.45	81.0	114	2.3	
7.5				
7.55				
7.6				
7.65	84.0	117	2.4	
7.7				
7.75				
7.8				
7.85	87.0	121	2.5	
7.9				
7.95				
8.0				
8.05	89.0	124	2.6	
8.1				
8.15				
8.2				
8.25	92.0	127	2.7	
8.3				
8.35				
8.4				
8.45	95.0	130	2.8	
8.5				
8.55				
8.6				
8.65			2.9	
8.7				
8.75				
8.8				
8.85			3.0	
8.9				
8.95				
9.0				
9.05				
9.1				
9.15				
9.2				
9.25				
9.3				
9.35				
9.4				
9.45				
9.5				
9.55				
9.6				
9.65				
9.7				
9.75				
9.8				
9.85				
9.9				
9.95				

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
10.0	95.0	130	3.0	●
10.05				
10.1				
10.15				
10.2	98.0	133	3.1	
10.25				
10.3				
10.35				
10.4	100.0	137	3.2	
10.45				
10.5				
10.55				
10.6	103.0	140	3.3	
10.65				
10.7				
10.75				
10.8	106.0	143	3.4	
10.85				
10.9				
10.95				
11.0	109.0	146	3.5	
11.05				
11.1				
11.15				
11.2	111.0	149	3.6	
11.25				
11.3				
11.35				
11.4	111.0	149	3.6	
11.45				
11.5				
11.55				
11.6	111.0	149	3.6	
11.65				
11.7				
11.75				
11.8	111.0	149	3.6	
11.85				
11.9				
11.95				


直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
12.0	111.0	149	3.6	
12.05				
12.1				
12.15			3.7	
12.2				
12.25				
12.3	114.0	152	3.8	
12.35				
12.4				
12.45				
12.5				
12.55				
12.6	122.0	168	3.9	
12.65				
12.7				
12.75				
12.8				
12.85				
12.9	132.0	181	4.1	
12.95				
13.0				
13.5				
13.7				
14.0				
14.5	143.0	194	4.2	
15.0				
15.5				
16.0				
16.5				
16.7				
17.0	152.0	207	4.4	
17.5				
18.0	168.0	225	4.5	
18.5				
19.0	181.0	243	4.7	
19.5				
20.0	194.0	261	4.8	
20.5				
21.0	207.0	279	5.0	
21.5				
22.0	225.0	303	5.1	
22.5				
23.0	243.0	327	5.3	
23.5				
24.0	261.0	351	5.5	
24.5				
25.0	279.0	375	5.7	
25.5				
26.0	297.0	405	5.9	
26.5				
27.0	315.0	429	6.1	
27.5				
28.0	333.0	453	6.3	
28.5				
29.0	351.0	477	6.5	
29.5				
30.0	369.0	501	6.7	
30.5				
31.0	387.0	525	6.9	
31.5				
32.0	405.0	549	7.1	
32.5				
33.0	423.0	573	7.3	
33.5				
34.0	441.0	597	7.5	
34.5				
35.0	459.0	621	7.7	
35.5				
36.0	477.0	645	7.9	
36.5				
37.0	495.0	669	8.1	
37.5				
38.0	513.0	693	8.3	
38.5				
39.0	531.0	717	8.5	
39.5				
40.0	549.0	741	8.7	
40.5				
41.0	567.0	765	8.9	
41.5				
42.0	585.0	789	9.1	
42.5				
43.0	603.0	813	9.3	
43.5				
44.0	621.0	837	9.5	
44.5				
45.0	639.0	861	9.7	
45.5				
46.0	657.0	885	9.9	
46.5				
47.0	675.0	909	10.1	
47.5				
48.0	693.0	933	10.3	
48.5				
49.0	711.0	957	10.5	
49.5				
50.0	729.0	981	10.7	
50.5				
51.0	747.0	1005	10.9	
51.5				
52.0	765.0	1029	11.1	
52.5				
53.0	783.0	1053	11.3	
53.5				
54.0	801.0	1077	11.5	
54.5				
55.0	819.0	1101	11.7	
55.5				
56.0	837.0	1125	11.9	
56.5				
57.0	855.0	1149	12.1	
57.5				
58.0	873.0	1173	12.3	
58.5				
59.0	891.0	1197	12.5	
59.5				
60.0	909.0	1221	12.7	
60.5				
61.0	927.0	1245	12.9	
61.5				
62.0	945.0	1269	13.1	
62.5				
63.0	963.0	1293	13.3	
63.5				
64.0	981.0	1317	13.5	
64.5				
65.0	1000.0	1341	13.7	
65.5				
66.0	1018.0	1365	13.9	
66.5				
67.0	1036.0	1389	14.1	
67.5				
68.0	1054.0	1413	14.3	
68.5				
69.0	1072.0	1437	14.5	
69.5				
70.0	1090.0	1461	14.7	
70.5				
71.0	1108.0	1485	14.9	
71.5				
72.0	1126.0	1509	15.1	
72.5				
73.0	1144.0	1533	15.3	
73.5				
74.0	1162.0	1557	15.5	
74.5				
75.0	1180.0	1581	15.7	
75.5				
76.0	1198.0	1605	15.9	
76.5				
77.0	1216.0	1629	16.1	
77.5				
78.0	1234.0	1653	16.3	
78.5				
79.0	1252.0	1677	16.5	
79.5				
80.0	1270.0	1701	16.7	
80.5				
81.0	1288.0	1725	16.9	
81.5				
82.0	1306.0	1749	17.1	
82.5				
83.0	1324.0	1773	17.3	
83.5				
84.0	1342.0	1797	17.5	
84.5				
85.0	1360.0	1821	17.7	
85.5				
86.0	1378.0	1845	17.9	
86.5				
87.0	1396.0	1869	18.1	
87.5				
88.0	1414.0	1893	18.3	
88.5				
89.0	1432.0	1917	18.5	
89.5				
90.0	1450.0	1941	18.7	
90.5				
91.0	1468.0	1965	18.9	
91.5				
92.0	1486.0	1989	19.1	
92.5				
93.0	1504.0	2013	19.3	
93.5				
94.0	1522.0	2037	19.5	
94.5				
95.0	1540.0	2061	19.7	
95.5				
96.0	1558.0	2085	19.9	
96.5				
97.0	1576.0	2109	20.1	
97.5				
98.0	1594.0	2133	20.3	
98.5				
99.0	1612.0	2157	20.5	
99.5				
100.0	1630.0	2181	20.7	
100.5				
101.0	1648.0	2205	20.9	
101.5				
102.0	1666.0	2229	21.1	
102.5				
103.0	1684.0	2253	21.3	
103.5				
104.0	1702.0	2277	21.5	
104.5				
105.0	1720.0	2301	21.7	
105.5				
106.0	1738.0	2325	21.9	
106.5				
107.0	1756.0	2349	22.1	
107.5				
108.0	1774.0	2373	22.3	
108.5				
109.0	1792.0	2397	22.5	
109.5				
110.0	1810.0	2421	22.7	
110.5				
111.0	1828.0	2445	22.9	
111.5				
112.0	1846.0	2469	23.1	
112.5				
113.0	1864.0	2493	23.3	
113.5				
114.0	1882.0	2517	23.5	
114.5				
115.0	1900.0	2541	23.7	
115.5				
116.0	1918.0	2565	23.9	
116.5				
117.0	1936.0	2589	24.1	
117.5				
118.0	1954.0	2613	24.3	
118.5				
119.0	1972.0	2637	24.5	
119.5				
120.0	1990.0	2661	24.7	
120.5				
121.0	2008.0	2685	24.9	
121.5				
122.0	2026.0	2709	25.1	
122.5				
123.0	2044.0	2733	25.3	
123.5				
124.0	2062.0	2757	25.5	
124.5				
125.0	2080.0	2781	25.7	
125.5				
126.0	2098.0	2805	25.9	
126.5				
127.0	2116.0	2829	26.1	
127.5				
128.0	2134.0	2853	26.3	
128.5				
129.0	2152.0	2877	26.5	
129.5				
130.0	2170.0	2901	26.7	
130.5				
131.0	2188.0	2925	26.9	
131.5				
132.0	2206.0	2949	27.1	
132.5				
133.0	2224.0	2973	27.3	
133.5				
134.0	2242.0	2997	27.5	
134.5				
135.0	2260.0	3021	27.7	
135.5				
136.0	2278.0	3045	27.9	
136.5				
137.0	2296.0	3069	28.1	
137.5				
138.0	2314.0	3093	28.3	
138.5				
139.0	2332.0	3117	28.5	
139.5				
140.0	2350.0	3141	28.7	
140.5				
141.0	2368.0	3165	28.9	
141.5				
142.0	2386.0	3189	29.1	
142.5				
143.0	2404.0	3213	29.3	
143.5				
144.0	2422.0	3237	29.5	
144.5				
145.0	2440.0	3261	29.7	
145.5				
146.0	2458.0	3285	29.9	
146.5				
147.0	2476.0	3309	30.1	
147.5				
148.0	2494.0	3333	30.3	
148.5				
149.0	2512.0	3357	30.5	
149.5				
150.0	2530.0	3381	30.7	
150.5				
151.0	2548.0	3405	30.9	
151.5				
152.0	2566.0	3429	31.1	
152.5				
153.0	2584.0	3453	31.3	
153.5				
154.0	2602.0	3477	31.5	
154.5				
155.0	2620.0	3501	31.7	
155.5				
156.0	2638.0	3525	31.9	
156.5				
157.0	2656.0	3549	32.1	
157.5				
158.0	2674.0	3573	32.3	
158.5				
159.0	2692.0	3597	32.5	
159.5				
160.0	2710.0	3621	32.7	
160.5				
161.0	2728.0	3645	32.9	
161.5				
162.0	2746.0	3669	33.1	
162.5				
163.0	2764.0	3693	33.3	
163.5				
164.0	2782.0	3717	33.5	
164.5				
165.0	2800.0	3741	33.7	
165.5				
166.0	2818.0	3765	33.9	
166.5				
167.0	2836.0	3789	34.1	
167.5				
168.0	2854.0	3813	34.3	
168.5				
169.0	2872.0	3837	34.5	
169.5				
170.0	2890.0	3861	34.7	
170.5				
171.0	2908.0	3885	34.9	
171.5				
172.0	2926.0	3909	35.1	
172.5				
173.0	2944.0	3933	35.3	
173.5				
174.0	2962.0	3957	35.5	
174.5				
175.0	2980.0	3981	35.7	
175.5				
176.0	2998.0	4005	35.9	
176.5				
177.0	3016.0	4029	36.1	
177.5				
178.0	3034.0	4053	36.3	
178.5				
179.0	3052.0	4077	36.5	
179.5				
180.0	3070.0	4101	36.7	
180.5				
181.0	3088.0	4125	36.9	
181.5				
182.0	3106.0	4149	37.1	
182.5				
183.0	3124.0	4173	37.3	
183.5				
184.0	3142.0	4197	37.5	
184.5				
185.0	3160.0	4221	37.7	
185.5				
186.0	3178.0	4245	37.9	
186.5				
187.0	3196.0	4269	38.1	
187.5				
188.0	3214.0	4293	38.3	
188.5				
189.0	3232.0	4317	38.5	
189.5				
190.0	3250.0	4341	38.7	
190.5				
191.0	3268.0	4365	38.9	
191.5				
192.0	3286.0	4389	39.1	
192.5				
193.0	3304.0	4413	39.3	
193.5				
194.0	3322.0	4437	39.5	
194.5				
195.0	3340.0	4461	39.7	
195.5				
196.0	3358.0	4485	39.9	
196.5				
197.0	3376.0	4509	40.1	
197.5				
198.0	3394.0	4533	40.3	
198.5				

包装数量 : 8.0mm 以下为 10 支包装, 超过 8.0mm、13.0mm 以下为 5 支包装, 超过 13.0mm 为 2 支包装。
Number of drill bits per package: 10 per package if below 8.0 mm, 5 per package if between 8.0 and 13.0 mm, 2 per package if over 13.0 mm.

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	—	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 容屑槽设计得比较大，因此，可顺利排出切屑，避免切屑堵塞导致钻头折断。



订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
YKS1.0	1.0	30	70	0.3	□
YKS1.1	1.1			0.4	
YKS1.2	1.2			0.5	
YKS1.3	1.3			0.6	
YKS1.4	1.4			0.7	
YKS1.5	1.5			0.8	
YKS1.6	1.6	35	80	0.9	
YKS1.7	1.7			1.0	
YKS1.8	1.8			1.1	
YKS1.9	1.9			1.2	
YKS2.0	2.0			1.3	
YKS2.1	2.1			1.4	
YKS2.2	2.2	45	90	1.5	
YKS2.3	2.3			1.6	
YKS2.4	2.4			1.7	
YKS2.5	2.5			1.8	
YKS2.6	2.6			1.9	
YKS2.7	2.7	55	100	2.0	
YKS2.8	2.8			2.1	
YKS2.9	2.9			2.2	
YKS3.0	3.0			2.3	
YKS3.1	3.1			2.4	
YKS3.2	3.2	65	110	2.5	
YKS3.3	3.3			2.6	
YKS3.4	3.4			2.7	
YKS3.5	3.5			2.8	
YKS3.6	3.6			2.9	
YKS3.7	3.7	75	115	3.0	
YKS3.8	3.8			3.1	
YKS3.9	3.9			3.2	
YKS4.0	4.0			3.3	
YKS4.1	4.1			3.4	
YKS4.2	4.2	80	120	3.5	
YKS4.3	4.3			3.6	
YKS4.4	4.4			3.7	
YKS4.5	4.5			3.8	
YKS4.6	4.6			3.9	
YKS4.7	4.7	90	130	4.0	
YKS4.8	4.8			4.1	
YKS4.9	4.9			4.2	
YKS5.0	5.0			4.3	
YKS5.1	5.1			4.4	
YKS5.2	5.2	100	140	4.5	
YKS5.3	5.3			4.6	
YKS5.4	5.4			4.7	
YKS5.5	5.5			4.8	
YKS5.6	5.6			4.9	
YKS5.7	5.7	110	150	5.0	
YKS5.8	5.8			5.1	
YKS5.9	5.9			5.2	
YKS6.0	6.0			5.3	
YKS6.1	6.1			5.4	
YKS6.2	6.2	120	160	5.5	
YKS6.3	6.3			5.6	
YKS6.4	6.4			5.7	
YKS6.5	6.5			5.8	
YKS6.6	6.6			5.9	
YKS6.7	6.7	130	170	6.0	
YKS6.8	6.8			6.1	
YKS6.9	6.9			6.2	
YKS7.0	7.0			6.3	
YKS7.1	7.1			6.4	

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
YKS7.2	7.2	80	115	2.2	□
YKS7.3	7.3			2.3	
YKS7.4	7.4			2.4	
YKS7.5	7.5			2.5	
YKS7.6	7.6			2.6	
YKS7.7	7.7	85	125	2.7	
YKS7.8	7.8			2.8	
YKS7.9	7.9			2.9	
YKS8.0	8.0			3.0	
YKS8.1	8.1			3.1	
YKS8.2	8.2	90	130	3.2	
YKS8.3	8.3			3.3	
YKS8.4	8.4			3.4	
YKS8.5	8.5			3.5	
YKS8.6	8.6			3.6	
YKS8.7	8.7	100	140	3.7	
YKS8.8	8.8			3.8	
YKS8.9	8.9			3.9	
YKS9.0	9.0			4.0	
YKS9.1	9.1			4.1	
YKS9.2	9.2	105	145	4.2	
YKS9.3	9.3			4.3	
YKS9.4	9.4			4.4	
YKS9.5	9.5			4.5	
YKS9.6	9.6			4.6	
YKS9.7	9.7	115	155	4.7	
YKS9.8	9.8			4.8	
YKS9.9	9.9			4.9	
YKS10.0	10.0			5.0	
YKS10.1	10.1			5.1	
YKS10.2	10.2	120	160	5.2	
YKS10.3	10.3			5.3	
YKS10.4	10.4			5.4	
YKS10.5	10.5			5.5	
YKS10.6	10.6			5.6	
YKS10.7	10.7	130	170	5.7	
YKS10.8	10.8			5.8	
YKS10.9	10.9			5.9	
YKS11.0	11.0			6.0	
YKS11.1	11.1			6.1	
YKS11.2	11.2	140	180	6.2	
YKS11.3	11.3			6.3	
YKS11.4	11.4			6.4	
YKS11.5	11.5			6.5	
YKS11.6	11.6			6.6	
YKS11.7	11.7	150	190	6.7	
YKS11.8	11.8			6.8	
YKS11.9	11.9			6.9	
YKS12.0	12.0			7.0	
YKS12.1	12.1			7.1	
YKS12.2	12.2	160	200	7.2	
YKS12.3	12.3			7.3	
YKS12.4	12.4			7.4	
YKS12.5	12.5			7.5	
YKS12.6	12.6			7.6	
YKS12.7	12.7	170	210	7.7	
YKS12.8	12.8			7.8	
YKS12.9	12.9			7.9	
YKS13.0	13.0			8.0	



工具材料

涂层

直径公差

先端角


螺旋角

柄直径公差

直径范围

●本钻头是小直径深孔加工用的涂层钻头。

This is general coated drill and is suitable for micro and long hole.

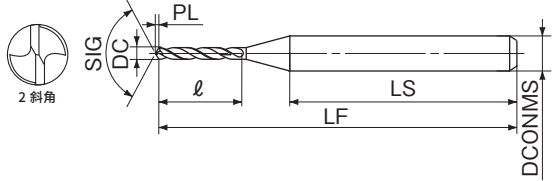

新商品

订货方式 GCOSDML 直径

单位 (Unit) : mm

直径 DC	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
0.50	8	16.3	25	1.0		
0.51						
0.52						
0.53						
0.54						
0.55						
0.56						
0.57						
0.58						
0.59						
0.60	9	19.9				
0.61						
0.62						
0.63						
0.64						
0.65						
0.66						
0.67						
0.68						
0.69						
0.70						
0.71						
0.72						
0.73						
0.74						
0.75						
0.76						
0.77						
0.78						
0.79						
0.80	10	19.0				
0.81						
0.82						
0.83						
0.84						
0.85						
0.86						
0.87						
0.88						
0.89						
0.90						
0.91						
0.92						
0.93						
0.94						
0.95						
0.96						
0.97						
0.98						
0.99						
1.00						
1.01						
1.02						
1.03						
1.04						
1.05						
1.06						
1.07						
1.08						
1.09						

直径 DC	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
1.10					0.3	
1.11						
1.12						
1.13						
1.14						
1.15						
1.16						
1.17						
1.18						
1.19						
1.20						
1.21						
1.22						
1.23						
1.24						
1.25						
1.26						
1.27						
1.28						
1.29						
1.30	15			1.5		
1.31						
1.32						
1.33						
1.34						
1.35						
1.36						
1.37						
1.38						
1.39						
1.40					0.4	
1.41						
1.42						
1.43						
1.44						
1.45						
1.46						
1.47						
1.48						
1.49						
1.50						
1.51						
1.52						
1.53						
1.54						
1.55						

直径 DC	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
1.56		15.8				
1.57						
1.58						
1.59						
1.60						
1.61						
1.62						
1.63						
1.64						
1.65						
1.66					0.5	
1.67						
1.68						
1.69						
1.70						
1.71						
1.72						
1.73						
1.74						
1.75						
1.76	18		35	2.0		
1.77						
1.78						
1.79						
1.80						
1.81						
1.82						
1.83						
1.84						
1.85						
1.86					0.6	
1.87						
1.88						
1.89						
1.90						
1.91						
1.92						
1.93						
1.94						
1.95						
1.96	16.0					
1.97						
1.98						
1.99						

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 在小直径深孔加工中也能展现高刚性、长寿命的特长。

This drill is very suited for micro and long hole.

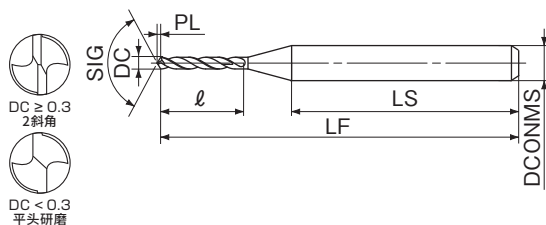

订货方式 COSDML 直径

单位 (Unit) : mm


直径 DC	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
0.10 0.11	2.0	15.8	18.6		0.03	
0.12 0.13 0.14					0.04	
0.15 0.16 0.17					0.05	
0.18 0.19	2.5	15.3				
0.20 0.21	3.0	17.2	21.0			
0.22 0.23 0.24						
0.25 0.26 0.27				4.0	16.2	
0.28 0.29						
0.30 0.31	6.0	18.2	1.0			0.1
0.32 0.33 0.34				18.3		
0.35 0.36 0.37						
0.38 0.39 0.40	7.0	17.3	25.0			
0.41 0.42 0.43						
0.44 0.45 0.46						
0.47 0.48 0.49	8.0	16.3				
0.50 0.51 0.52						
0.53 0.54 0.55						
0.56 0.57 0.58	9.0	19.9	30.0	1.5	0.2	
0.59 0.60 0.61						
0.62 0.63 0.64						
0.65 0.66 0.67	10.0	19.0				
0.68 0.69 0.70						
0.71 0.72 0.73						

直径 DC	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
0.74					0.2	
0.75						
0.76						
0.77						
0.78	10.0	19.0	30.0			
0.79						
0.80						
0.81						
0.82						
0.83						
0.84						
0.85						
0.86						
0.87						
0.88						
0.89						
0.90						
0.91						
0.92						
0.93						
0.94	12.0					
0.95						
0.96						
0.97						
0.98		22.1				
0.99						
1.00						
1.01						
1.02					0.3	
1.03						
1.04						
1.05						
1.06				1.5		
1.07						
1.08						
1.09						
1.10		19.1				
1.11						
1.12						
1.13						
1.14			35.0			
1.15						
1.16						
1.17						
1.18	15.0					
1.19						
1.20						
1.21						
1.22						
1.23						
1.24						
1.25						
1.26					0.4	
1.27						
1.28						
1.29						
1.30		19.2				
1.31						
1.32						
1.33						
1.34						
1.35						
1.36						
1.37						

直径 DC	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
1.38	15.0	19.2		1.5	0.4	
1.39						
1.40						
1.41						
1.42						
1.43						
1.44						
1.45						
1.46						
1.47						
1.48						
1.49						
1.50						
1.51						
1.52						
1.53						
1.54						
1.55						
1.56	15.8					
1.57						
1.58						
1.59						
1.60						
1.61						
1.62						
1.63						
1.64						
1.65			35.0		□	
1.66						
1.67						
1.68						
1.69						
1.70						
1.71						
1.72						
1.73						
1.74	18.0	15.9		2.0		
1.75						
1.76						
1.77						
1.78						
1.79						
1.80						
1.81						
1.82						
1.83						
1.84						
1.85						
1.86						
1.87						
1.88						
1.89						
1.90						
1.91						
1.92	16.0				0.6	
1.93						
1.94						
1.95						
1.96						
1.97						
1.98						
1.99						

●适合用于新材到型钢的深孔加工。

Ideal for deep hole drilling from Unhardened Steel to Die Steel.



新商品

LIST 6538

订货方式 商品编码

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
AGPSLSD1.0	1.0	26	48	0.3	●
AGPSLSD1.1	1.1	28	50		
AGPSLSD1.2	1.2	30	52	0.4	
AGPSLSD1.3	1.3				
AGPSLSD1.4	1.4	33	55	0.4	
AGPSLSD1.5	1.5				
AGPSLSD1.6	1.6	35	58	0.5	
AGPSLSD1.7	1.7				
AGPSLSD1.8	1.8	38	62	0.5	
AGPSLSD1.9	1.9				
AGPSLSD2.0	2.0	41	66	0.6	
AGPSLSD2.1	2.1				
AGPSLSD2.2	2.2	44	70	0.6	
AGPSLSD2.3	2.3				
AGPSLSD2.4	2.4	47	74	0.7	
AGPSLSD2.5	2.5				
AGPSLSD2.6	2.6	47	74	0.8	
AGPSLSD2.7	2.7				
AGPSLSD2.8	2.8	51	79	0.8	
AGPSLSD2.9	2.9				
AGPSLSD3.0	3.0	51	79	0.9	
AGPSLSD3.1	3.1				
AGPSLSD3.2	3.2	55	84	1.0	
AGPSLSD3.3	3.3				
AGPSLSD3.4	3.4	60	91	1.1	
AGPSLSD3.5	3.5				
AGPSLSD3.6	3.6	60	91	1.1	
AGPSLSD3.7	3.7				
AGPSLSD3.8	3.8	64	96	1.2	
AGPSLSD3.9	3.9				
AGPSLSD4.0	4.0	64	96	1.2	
AGPSLSD4.1	4.1				
AGPSLSD4.2	4.2	69	102	1.3	
AGPSLSD4.3	4.3				
AGPSLSD4.4	4.4	69	102	1.4	
AGPSLSD4.5	4.5				
AGPSLSD4.6	4.6	69	102	1.4	
AGPSLSD4.7	4.7				
AGPSLSD4.8	4.8	74	108	1.5	
AGPSLSD4.9	4.9				
AGPSLSD5.0	5.0	74	108	1.5	
AGPSLSD5.1	5.1				
AGPSLSD5.2	5.2	80	116	1.6	
AGPSLSD5.3	5.3				
AGPSLSD5.4	5.4	80	116	1.7	
AGPSLSD5.5	5.5				
AGPSLSD5.6	5.6	80	116	1.7	
AGPSLSD5.7	5.7				
AGPSLSD5.8	5.8	80	116	1.8	
AGPSLSD5.9	5.9				
AGPSLSD6.0	6.0	86	124	1.8	
AGPSLSD6.1	6.1				
AGPSLSD6.2	6.2	86	124	1.9	
AGPSLSD6.3	6.3				
AGPSLSD6.4	6.4	86	124	2.0	
AGPSLSD6.5	6.5				
AGPSLSD6.6	6.6	86	124	2.0	
AGPSLSD6.7	6.7				
AGPSLSD6.8	6.8	93	133	2.1	
AGPSLSD6.9	6.9				

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
AGPSLSD7.0	7.0	93	133	2.1	●
AGPSLSD7.1	7.1			2.2	
AGPSLSD7.2	7.2			2.3	
AGPSLSD7.3	7.3			2.4	
AGPSLSD7.4	7.4	100	142	2.5	
AGPSLSD7.5	7.5			2.6	
AGPSLSD7.6	7.6			2.7	
AGPSLSD7.7	7.7			2.8	
AGPSLSD7.8	7.8	107	151	2.9	
AGPSLSD7.9	7.9			3.0	
AGPSLSD8.0	8.0			3.1	
AGPSLSD8.1	8.1			3.2	
AGPSLSD8.2	8.2	116	162	3.3	
AGPSLSD8.3	8.3			3.4	
AGPSLSD8.4	8.4			3.5	
AGPSLSD8.5	8.5			3.6	
AGPSLSD8.6	8.6	125	173	3.7	
AGPSLSD8.7	8.7			3.8	
AGPSLSD8.8	8.8			3.9	
AGPSLSD8.9	8.9			4.0	
AGPSLSD9.0	9.0	134	184	4.1	
AGPSLSD9.1	9.1			4.2	
AGPSLSD9.2	9.2			4.3	
AGPSLSD9.3	9.3			4.4	
AGPSLSD9.4	9.4	143	195	4.5	
AGPSLSD9.5	9.5			4.6	
AGPSLSD9.6	9.6			4.7	
AGPSLSD9.7	9.7			4.8	
AGPSLSD9.8	9.8	152	206	4.9	
AGPSLSD9.9	9.9			5.0	
AGPSLSD10.0	10.0			5.1	
AGPSLSD10.5	10.5			5.2	
AGPSLSD11.0	11.0	161	217	5.3	
AGPSLSD11.5	11.5			5.4	
AGPSLSD12.0	12.0			5.5	
AGPSLSD12.5	12.5			5.6	
AGPSLSD13.0	13.0	170	228	5.7	
				5.8	
				5.9	
				6.0	

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	—	—	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●适合用于新材到型钢的深孔加工。

Ideal for deep hole drilling from Unhardened Steel to Die Steel.

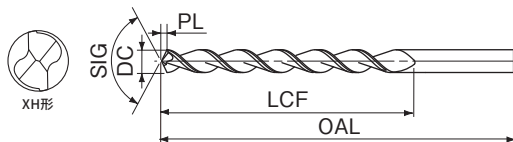

LIST 6540P

订货方式 **AGPLSD** 直径 × 全长

单位 (Unit) : mm

直径 DC	全长 OAL	槽长 LCF	先端 PL	系列 Series	库存 Stock
1.0	56	33		1	
1.0	100	60		2	
1.1	60	37	0.3	1	
1.1	100	60		2	
1.2	65	41		1	
1.2	105	65		2	
1.3	65	41	0.4	1	
1.3	105	65		2	
1.4	70	45		1	
1.4	110	70		2	
1.5	70	45		1	●
1.5	110	70		2	
1.6	76	50		1	
1.6	115	75	0.5	2	
1.7	76	50		1	
1.7	115	75		2	
1.8	80	53		1	
1.8	120	80		2	
1.9	80	53		1	
1.9	120	80		2	
2.0	85	56		1	
2.0	125	85	0.6	2	
2.0	160	110		3	□
2.1	85	56		1	●
2.1	125	85		2	
2.1	160	110		3	□
2.2	90	59		1	
2.2	135	90		2	●
2.2	170	115		3	□
2.3	90	59		1	
2.3	135	90	0.7	2	●
2.3	170	115		3	□
2.4	95	62		1	
2.4	140	95		2	●
2.4	180	120		3	□
2.5	95	62		1	●
2.5	140	95		2	
2.5	180	120		3	□
2.6	95	62		1	●
2.6	140	95		2	
2.6	180	120		3	□
2.7	100	66	0.8	1	●
2.7	150	100		2	
2.7	190	130		3	□
2.8	100	66		1	●
2.8	150	100		2	
2.8	190	130		3	□
2.9	100	66		1	●
2.9	150	100		2	
2.9	190	130		3	□
3.0	100	66		1	
3.0	150	100	0.9	2	●
3.0	190	130		3	
3.0	240	160		4	□
3.1	106	69		1	
3.1	155	105		2	●
3.1	200	135		3	□
3.1	250	170		4	
3.2	106	69	1.0	1	●
3.2	155	105		2	

直径 DC	全长 OAL	槽长 LCF	先端 PL	系列 Series	库存 Stock
3.2	200	135		3	□
3.2	250	170		4	
3.3	106	69		1	●
3.3	155	105		2	
3.3	200	135	1.0	3	□
3.3	250	170		4	
3.4	112	73		1	●
3.4	165	115		2	
3.4	210	145		3	□
3.4	265	180		4	
3.5	112	73		1	
3.5	165	115		2	●
3.5	210	145		3	
3.5	265	180		4	□
3.6	112	73		1	●
3.6	165	115		2	
3.6	210	145		3	□
3.6	265	180	1.1	4	
3.7	112	73		1	●
3.7	165	115		2	
3.7	210	145		3	□
3.7	265	180		4	
3.8	119	78		1	●
3.8	175	120		2	
3.8	220	150		3	□
3.8	280	190		4	
3.9	119	78		1	●
3.9	175	120		2	
3.9	220	150		3	□
3.9	280	190		4	
4.0	119	78		1	●
4.0	175	120	1.2	2	
4.0	220	150		3	□
4.0	280	190		4	
4.1	119	78		1	●
4.1	175	120		2	
4.1	220	150		3	□
4.1	280	190		4	
4.2	119	78		1	●
4.2	175	120		2	
4.2	220	150		3	□
4.2	280	190		4	
4.3	126	82		1	●
4.3	185	125	1.3	2	
4.3	235	160		3	□
4.3	295	200		4	
4.4	126	82		1	●
4.4	185	125		2	
4.4	235	160		3	□
4.4	295	200		4	
4.5	126	82		1	●
4.5	185	125	1.4	2	
4.5	235	160		3	□
4.5	295	200		4	
4.6	126	82		1	●
4.6	185	125		2	
4.6	235	160		3	□
4.6	295	200		4	
4.7	126	82		1	●
4.7	185	125		2	

直径 DC	全长 OAL	槽长 LCF	先端 PL	系列 Series	库存 Stock
4.7	235	160		3	
4.7	295	200		4	□
4.8	132	87		1	●
4.8	195	135	1.4	2	
4.8	245	170		3	□
4.8	315	210		4	
4.9	132	87		1	●
4.9	195	135		2	
4.9	245	170		3	□
4.9	315	210		4	
5.0	132	87		1	●
5.0	195	135	1.5	2	
5.0	245	170		3	□
5.0	315	210		4	
5.1	132	87		1	●
5.1	195	135		2	
5.1	245	170		3	□
5.1	315	210		4	
5.2	132	87		1	●
5.2	195	135		2	
5.2	245	170		3	□
5.2	315	210		4	
5.3	132	87		1	●
5.3	195	135	1.6	2	
5.3	245	170		3	□
5.3	315	210		4	
5.4	139	91		1	●
5.4	205	140		2	
5.4	260	180		3	□
5.4	330	225		4	
5.5	139	91		1	●
5.5	205	140		2	
5.5	260	180		3	□
5.5	330	225		4	
5.6	139	91		1	●
5.6	205	140		2	
5.6	260	180		3	□
5.6	330	225	1.7	4	
5.7	139	91		1	●
5.7	205	140		2	
5.7	260	180		3	□
5.7	330	225		4	
5.8	139	91		1	●
5.8	205	140		2	
5.8	260	180		3	□
5.8	330	225		4	
5.9	139	91		1	●
5.9	205	140		2	
5.9	260	180		3	□
5.9	330	225		4	
6.0	139	91		1	●
6.0	205	140	1.8	2	
6.0	260	180		3	
6.0	330	225		4	□
6.1	148	97		1	
6.1	215	150		2	
6.1	275	190		3	□
6.1	350	235		4	
6.2	148	97	1.9	1	
6.2	215	150		2	

单位 (Unit) : mm

直径 DC	全长 OAL	槽长 LCF	先端 PL	系列 Series	库存 Stock
6.2	275	190	1.9	3	□
6.2	350	235		4	
6.3	148	97		1	
6.3	215	150		2	
6.3	275	190	2.0	3	●
6.3	350	235		4	
6.4	148	97		1	
6.4	215	150		2	
6.4	275	190	2.1	3	□
6.4	350	235		4	
6.5	148	97		1	
6.5	215	150		2	
6.5	275	190	2.2	3	□
6.5	350	235		4	
6.6	148	97		1	
6.6	215	150		2	
6.6	275	190	2.3	3	□
6.6	350	235		4	
6.7	148	97		1	
6.7	215	150		2	
6.7	275	190	2.4	3	●
6.7	350	235		4	
6.8	156	102		1	
6.8	225	155		2	
6.8	290	200	2.5	3	□
6.8	370	250		4	
6.9	156	102		1	
6.9	225	155		2	
6.9	290	200	2.6	3	□
6.9	370	250		4	
7.0	156	102		1	
7.0	225	155		2	
7.0	290	200	2.7	3	●
7.0	370	250		4	
7.1	156	102		1	
7.1	225	155		2	
7.1	290	200	2.8	3	□
7.1	370	250		4	
7.2	156	102		1	
7.2	225	155		2	
7.2	290	200	2.9	3	□
7.2	370	250		4	
7.3	156	102		1	
7.3	225	155		2	
7.3	290	200	3.0	3	●
7.3	370	250		4	
7.4	156	102		1	
7.4	225	155		2	
7.4	290	200	3.1	3	□
7.4	370	250		4	
7.5	156	102		1	
7.5	225	155		2	
7.5	290	200	3.2	3	□
7.5	370	250		4	
7.6	165	109		1	
7.6	240	165		2	
7.6	305	210	3.3	3	□
7.6	390	265		4	
7.7	165	109		1	
7.7	240	165		2	

直径 DC	全长 OAL	槽长 LCF	先端 PL	系列 Series	库存 Stock
7.7	305	210	2.3	3	□
7.7	390	265		4	
7.8	165	109		1	
7.8	240	165		2	
7.8	305	210	2.4	3	●
7.8	390	265		4	
7.9	165	109		1	
7.9	240	165		2	
7.9	305	210	2.5	3	□
7.9	390	265		4	
8.0	165	109		1	
8.0	240	165		2	
8.0	305	210	2.6	3	□
8.0	390	265		4	
8.1	165	109		1	
8.1	240	165		2	
8.1	305	210	2.7	3	□
8.1	390	265		4	
8.2	165	109		1	
8.2	240	165		2	
8.2	305	210	2.8	3	□
8.2	390	265		4	
8.3	165	109		1	
8.3	240	165		2	
8.3	305	210	2.9	3	□
8.3	390	265		4	
8.4	165	109		1	
8.4	240	165		2	
8.4	305	210	3.0	3	●
8.4	390	265		4	
8.5	165	109		1	
8.5	240	165		2	
8.5	305	210	3.1	3	□
8.5	390	265		4	
8.6	175	115		1	
8.6	250	175		2	
8.6	320	220	3.2	3	□
8.6	410	280		4	
8.7	175	115		1	
8.7	250	175		2	
8.7	320	220	3.3	3	□
8.7	410	280		4	
8.8	175	115		1	
8.8	250	175		2	
8.8	320	220	3.4	3	□
8.8	410	280		4	
8.9	175	115		1	
8.9	250	175		2	
8.9	320	220	3.5	3	□
8.9	410	280		4	
9.0	175	115		1	
9.0	250	175		2	
9.0	320	220	3.6	3	□
9.0	410	280		4	
9.1	175	115		1	
9.1	250	175		2	
9.1	320	220	3.7	3	□
9.1	410	280		4	
9.2	175	115		1	
9.2	250	175		2	

直径 DC	全长 OAL	槽长 LCF	先端 PL	系列 Series	库存 Stock
9.2	320	220	2.8	3	□
9.2	410	280		4	
9.3	175	115		1	
9.3	250	175		2	
9.3	320	220	2.9	3	●
9.3	410	280		4	
9.4	175	115		1	
9.4	250	175		2	
9.4	320	220	3.0	3	□
9.4	410	280		4	
9.5	175	115		1	
9.5	250	175		2	
9.5	320	220	3.1	3	□
9.5	410	280		4	
9.6	184	121		1	
9.6	265	185		2	
9.6	340	235	3.2	3	□
9.6	430	295		4	
9.7	184	121		1	
9.7	265	185		2	
9.7	340	235	3.3	3	□
9.7	430	295		4	
9.8	184	121		1	
9.8	265	185		2	
9.8	340	235	3.4	3	□
9.8	430	295		4	
9.9	184	121		1	
9.9	265	185		2	
9.9	340	235	3.5	3	□
9.9	430	295		4	
10.0	184	121		1	
10.0	265	185		2	
10.0	340	235	3.6	3	□
10.0	430	295		4	
10.1	184	121		1	
10.1	265	185		2	
10.1	340	235	3.7	3	□
10.1	430	295		4	
10.2	184	121		1	
10.2	265	185		2	
10.2	340	235	3.8	3	□
10.2	430	295		4	
10.3	184	121		1	
10.3	265	185		2	
10.3	340	235	3.9	3	□
10.3	430	295		4	
10.4	184	121		1	
10.4	265	185		2	
10.4	340	235	4.0	3	□
10.4	430	295		4	
10.5	184	121		1	
10.5	265	185		2	
10.5	340	235	4.1	3	□
10.5	430	295		4	
10.6	184	121		1	
10.6	265	185		2	
10.6	340	235	4.2	3	□
10.6	430	295		4	
10.7	195	128		1	
10.7	280	195		2	
10.7	365	250	4.3	3	□
10.7	450	315		4	
10.8	195	128		1	
10.8	280	195		2	
10.8	365	250	4.4	3	□
10.8	450	315		4	
10.9	195	128		1	
10.9	280	195		2	

Next
Page 下一页

新品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

直径 DC	全长 OAL	槽长 LCF	先端 PL	系列 Series	库存 Stock
10.9	365	250		3	□
11.0	195	128		1	●
11.0	280	195		2	
11.0	365	250	3.3	3	
11.1	195	128		1	
11.1	280	195		2	
11.1	365	250		3	
11.2	195	128		1	
11.2	280	195		2	
11.2	365	250		3	□
11.3	195	128		1	
11.3	280	195	3.4	2	
11.3	365	250		3	
11.4	195	128		1	
11.4	280	195		2	
11.4	365	250		3	
11.5	195	128		1	●
11.5	280	195		2	
11.5	365	250		3	
11.6	195	128		1	
11.6	280	195		2	
11.6	365	250		3	
11.7	195	128	3.5	1	
11.7	280	195		2	□
11.7	365	250		3	
11.8	195	128		1	
11.8	280	195		2	
11.8	365	250		3	
11.9	205	134		1	
11.9	295	205		2	
11.9	375	260		3	
12.0	205	134	3.6	1	●
12.0	295	205		2	
12.0	375	260		3	
12.1	205	134		1	
12.1	295	205		2	
12.1	375	260		3	
12.2	205	134		1	
12.2	295	205		2	□
12.2	375	260		3	
12.3	205	134		1	
12.3	295	205	3.7	2	
12.3	375	260		3	
12.4	205	134		1	
12.4	295	205		2	
12.4	375	260		3	
12.5	205	134		1	●
12.5	295	205		2	
12.5	375	260		3	
12.6	205	134		1	
12.6	295	205		2	
12.6	375	260		3	
12.7	205	134	3.8	1	□
12.7	295	205		2	
12.7	375	260		3	
12.8	205	134		1	
12.8	295	205		2	
12.8	375	260		3	
12.9	205	134	3.9	1	
12.9	295	205		2	


直径 DC	全长 OAL	槽长 LCF	先端 PL	系列 Series	库存 Stock
12.9	375	260		3	□
13.0	205	134		1	●
13.0	295	205	3.9	2	
13.0	375	260		3	
13.5	214		4.1		
14.0	214	140	4.2		
14.5	220		4.4		
15.0	220	144	4.5		
15.5	227		4.7		
16.0	227	149	4.8		
16.5	235		5.0		□
17.0	235	154	5.1		
17.5	241		5.3		
18.0	241	158	5.4		
18.5	247		5.6		
19.0	247	162	5.7		
19.5	254		5.9		
20.0	254	166	6.0		

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	—	—	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 本钻头是深孔用涂层钻头。切屑排出性良好，适合用于深孔加工或深位置开孔。

This is coating drill for deep holes. Chip evacuation is good. It's suitable for drilling deep holes and deep positions.



新商品

LIST 6550P

订货方式 GLSD 直径 × 全长 (□商品: GLSD 直径 × 全长 × 槽长)

单位 (Unit) : mm

直径 DC	全长 LF	槽长 l	先端 PL	库存 Stock
1.0	100	40	●	
1.0	150	60		
1.05	100	40	□	
1.05	150	60		
1.1	100	40	●	
1.15	100	40	□	
1.15	150	60	●	
1.2	100	40	□	
1.2	150	60	●	
1.25	100	40	□	
1.25	150	60	●	
1.3	100	40	□	
1.3	150	60	●	
1.35	100	40	□	
1.35	150	60	●	
1.4	100	40	□	
1.45	100	40	□	
1.45	150	60	●	
1.5	100	40	□	
1.5	150	60	●	
1.55	100	40	□	
1.55	150	60	●	
1.6	100	40	□	
1.6	150	60	●	
1.65	100	40	□	
1.65	150	60	●	
1.7	100	40	□	
1.7	150	60	●	
1.75	100	40	□	
1.75	150	60	●	
1.8	100	40	□	
1.8	150	60	●	
1.85	100	40	□	
1.85	150	60	●	
1.9	100	40	□	
1.9	150	60	●	
1.95	100	40	□	
1.95	150	60	●	
2.0	75	40	□	
2.0	100	40	●	
2.0	100	50	□	
2.0	150	60	●	
2.0	150	75		
2.0	200	80		
2.0	250	100		
2.05	100	40	□	
2.05	150	60	●	
2.1	100	40	□	
2.1	150	60	●	
2.1	200	80		
2.15	100	40	□	
2.15	150	60	●	
2.2	100	40	□	
2.2	150	60	●	
2.2	200	80		
2.25	100	40	□	
2.25	150	60	●	
2.3	100	40	□	
2.3	150	60	●	
2.3	200	80	□	

直径 DC	全长 LF	槽长 l	先端 PL	库存 Stock
2.35	100	40		□
2.35	150	60		
2.4	100	40	●	
2.4	150	60		
2.4	200	80		
2.45	100	40	□	
2.45	150	60	●	
2.5	75	50	□	
2.5	100	55	●	
2.5	150	60	□	
2.5	150	75	●	
2.5	200	80		
2.5	250	100		
2.55	100	50	□	
2.55	150	75	●	
2.6	100	50	□	
2.6	150	75	●	
2.6	200	100		
2.65	100	50	□	
2.65	150	75	●	
2.7	100	50	□	
2.7	150	75	●	
2.7	200	100		
2.75	100	50	□	
2.75	150	75	●	
2.8	100	50	□	
2.8	150	75	●	
2.8	200	100		
2.85	100	50	□	
2.85	150	75	●	
2.9	100	50	□	
2.9	150	75	●	
2.9	200	100		
2.95	100	50	□	
2.95	150	75	●	
3.0	100	50	□	
3.0	100	65	●	
3.0	150	75		
3.0	200	100	●	
3.0	200	135		
3.0	250	150		
3.0	300	180		
3.05	100	65	□	
3.05	150	75	●	
3.1	100	65	□	
3.1	150	75	●	
3.1	200	100		
3.1	200	135		
3.1	250	150		
3.1	300	180		
3.15	100	65	□	
3.15	150	75	●	
3.2	100	65	□	
3.2	150	75	●	
3.2	200	100		
3.2	200	135		
3.2	250	150		
3.2	300	180		
3.25	100	65	□	

直径 DC	全长 LF	槽长 l	先端 PL	库存 Stock
3.25	150	75	0.8	□
3.3	100	65		
3.3	150	75	●	
3.3	200	100		
3.3	200	135		
3.3	250	150		
3.3	300	180		
3.35	100	65	□	
3.35	150	75	●	
3.4	100	65		
3.4	150	75	●	
3.4	200	100		
3.4	200	135		
3.4	250	150		
3.4	300	180		
3.45	100	65	□	
3.45	150	75	●	
3.5	100	65		
3.5	150	75	●	
3.5	200	100		
3.5	200	135		
3.5	250	150		
3.5	300	180		
3.55	100	65	□	
3.55	150	75	●	
3.6	100	65		
3.6	150	75	●	
3.6	200	100		
3.6	200	135		
3.6	250	150		
3.6	300	180		
3.65	100	65	□	
3.65	150	75	●	
3.7	100	65		
3.7	150	75	●	
3.7	200	100		
3.7	200	135		
3.7	250	150		
3.7	300	180		
3.75	100	65	□	
3.75	150	75	●	
3.8	100	65		
3.8	150	75	●	
3.8	200	100		
3.8	200	135		
3.8	250	150		
3.8	300	180		
3.85	100	65	□	
3.85	150	75	●	
3.9	100	65		
3.9	150	75	●	
3.9	200	100		
3.9	200	135		
3.9	250	150		
3.9	300	180		
3.95	100	65	□	
3.95	150	75	●	
4.0	100	65		
4.0	150	75	●	
4.0	200	100		

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

	直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock		直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock		直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
新商品	4.0	200	135	1.0	□		5.1	200	100	1.3	●		6.2	200	135	1.6	□
	4.0	250	120		●		5.1	200	135		□		6.2	250	150		
	4.0	250	150				5.1	250	120		●		6.2	300	175		
	4.0	300	175				5.1	300	175		□		6.2	350	200		
	4.0	350	200		□		5.1	400	250		□		6.2	400	250		
硬质合金钻头	4.0	400	250	1.1			5.2	150	75	1.4	●		6.2	500	350	1.7	□
	4.1	100	65		●		5.2	200	100		□		6.3	150	110		
	4.1	150	75				5.2	200	135		●		6.3	200	135		
	4.1	200	100		□		5.2	250	120		□		6.3	250	150		
	4.1	200	135		●		5.2	300	175		□		6.3	300	175		
高速钢钻头	4.1	250	120	1.2	●		5.2	400	250	1.5	□		6.3	350	200	1.8	□
	4.1	300	175		□		5.3	150	75		●		6.4	150	110		
	4.2	100	65		●		5.3	200	100		□		6.4	200	135		
	4.2	150	75				5.3	200	135		□		6.4	250	150		
	4.2	200	100		□		5.3	250	120		●		6.4	300	175		
	4.2	200	135		□		5.3	300	175		□		6.4	350	200		
	4.2	250	120		●		5.3	400	250		□		6.5	150	110		
	4.2	300	175		□		5.4	150	75		●		6.5	200	100		
	4.3	100	65		□		5.4	200	100		□		6.5	200	135		
	4.3	150	75		●		5.4	200	135		□		6.5	250	120		
丝锥	4.3	200	100	1.3	□		5.4	250	120	1.6	●		6.5	250	150	1.9	□
	4.3	200	135		□		5.4	300	175		□		6.5	300	175		
	4.3	250	120		●		5.4	400	250		□		6.5	300	175		
	4.3	300	175		□		5.5	150	75		●		6.5	350	200		
	4.4	100	65				5.5	200	100		□		6.5	400	250		
硬质合金立铣刀	4.4	150	75	1.4	●		5.5	200	135	1.7	□		6.5	500	350	2.0	□
	4.4	200	100		□		5.5	250	120		●		6.6	150	110		
	4.4	200	135		□		5.5	300	150		□		6.6	200	135		
	4.4	250	120		●		5.5	300	175		□		6.6	250	150		
	4.4	300	175		□		5.5	350	200		□		6.6	300	175		
	4.5	100	65		□		5.5	400	250		□		6.6	350	200		
	4.5	150	75		●		5.6	150	75		●		6.7	150	110		
	4.5	200	100		□		5.6	200	100		□		6.7	200	135		
	4.5	200	135		□		5.6	200	135		□		6.7	250	150		
	4.5	250	120		●		5.6	250	120		●		6.7	300	175		
高速钢立铣刀	4.5	300	175	1.5	□		5.6	300	175	1.8	□		6.7	350	200	2.1	□
	4.5	350	200				5.6	400	250		□		6.7	400	250		
	4.6	100	65		□		5.7	150	75		□		6.7	500	350		
	4.6	150	75		●		5.7	200	100		●		6.8	150	110		
	4.6	200	100		□		5.7	200	135		□		6.8	200	100		
	4.6	200	135		□		5.7	250	120		●		6.8	200	135		
	4.6	250	120		●		5.7	300	175		□		6.8	250	120		
	4.6	300	175		□		5.7	400	250		□		6.8	250	150		
	4.7	100	65		□		5.8	150	75		●		6.8	300	175		
	4.7	150	75		□		5.8	200	100		□		6.8	300	175		
切割工具	4.7	200	100	1.6	●		5.8	200	135	2.0	□		6.8	350	200	2.2	□
	4.7	200	135		□		5.8	250	120		●		6.8	400	250		
	4.7	250	120		●		5.8	300	175		□		6.9	150	110		
	4.7	300	175		□		5.8	400	250		□		6.9	200	135		
	4.8	100	65				5.9	150	75		●		6.9	250	150		
套装商品 其它	4.8	150	75	1.7	●		5.9	200	100	2.1	□		6.9	300	175	2.3	□
	4.8	200	100		□		5.9	200	135		□		6.9	350	200		
	4.8	200	135		□		5.9	250	120		●		6.9	400	250		
	4.8	250	120		●		5.9	300	175		□		6.9	500	350		
	4.8	300	175		□		5.9	400	250		□		7.0	150	110		
精密工具	4.9	100	65	1.8	□		6.0	150	75	2.2	●		7.0	200	100	2.4	□
	4.9	150	75		●		6.0	150	110		□		7.0	200	135		
	4.9	200	100		□		6.0	200	100		●		7.0	250	120		
	4.9	200	135		□		6.0	200	135		□		7.0	250	150		
	4.9	250	120		●		6.0	250	120		●		7.0	300	175		
技术资料 索引	4.9	300	175	1.9	□		6.0	250	150	2.3	□		7.0	300	175	2.5	□
	5.0	125	75		□		6.0	300	175		●		7.0	350	200		
	5.0	150	100		□		6.0	300	200		□		7.0	400	250		
	5.0	200	135		●		6.0	350	200		□		7.0	500	350		
	5.0	200	150		□		6.0	400	250		□		7.1	150	110		
	5.0	250	120		□		6.0	500	350		□		7.1	200	135		
	5.0	250	150		□		6.0	600	450		□		7.1	250	150		
	5.0	300	175		●		6.1	150	110		□		7.1	300	175		
	5.0	300	200		□		6.1	200	135		□		7.2	150	110		
	5.0	350	200		□		6.1	250	150		□		7.2	200	100		
	5.0	400	250	2.0	□		6.1	300	175	2.4	□		7.2	200	135	2.6	□
	5.1	150	75		●		6.1	350	200		□		7.2	250	120		
					□		6.2	150	110		□		7.2	250	150		
					●												

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
7.2	300	150	1.9	●
7.2	300	175		
7.2	350	200		
7.2	400	250		
7.3	150	110		
7.3	200	135		
7.3	250	150		
7.3	300	175		□
7.4	150	110		
7.4	200	135		
7.4	250	150		
7.4	300	175		
7.5	150	110	2.0	●
7.5	200	100		□
7.5	200	135		●
7.5	250	120		□
7.5	250	150		●
7.5	300	175		
7.5	350	200		
7.5	400	250		
7.5	500	350		
7.6	150	110		
7.6	200	135		
7.6	250	150		□
7.6	300	175		
7.7	150	110		
7.7	200	135		
7.7	250	150		
7.7	300	175		
7.8	150	110		●
7.8	200	100		□
7.8	200	135		●
7.8	250	120		□
7.8	250	150		●
7.8	300	175		
7.8	350	200		
7.8	400	250		
7.8	500	350		
7.9	150	110	2.1	□
7.9	200	135		
7.9	250	150		
7.9	300	175		
8.0	150	110		●
8.0	200	100		□
8.0	200	135		●
8.0	250	120		□
8.0	250	150		●
8.0	300	175		
8.0	350	200		
8.0	400	250		
8.0	500	350		
8.0	600	450		
8.1	150	110		□
8.1	200	135		
8.1	250	150		
8.1	300	175		
8.1	350	200		
8.2	150	110		●
8.2	200	100		□
8.2	200	135		●
8.2	250	120		□
8.2	250	150		●
8.2	300	175		
8.2	300	200		
8.2	400	250		
8.2	500	350		□
8.3	150	110	2.2	
8.3	200	135		
8.3	250	150		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
8.3	300	175	2.2	
8.3	350	200		
8.3	400	250		
8.3	500	350		
8.4	150	110		□
8.4	200	135		
8.4	250	150		
8.4	300	175		
8.4	350	200		
8.5	150	110		●
8.5	200	100		□
8.5	200	135		●
8.5	250	120		□
8.5	250	150		●
8.5	300	175		
8.5	350	200		
8.5	400	250		
8.5	500	350		
8.6	150	110	2.3	
8.6	200	135		
8.6	250	150		
8.6	300	175		
8.6	350	200		□
8.7	150	110		
8.7	200	135		
8.7	250	150		
8.7	300	175		
8.7	350	200		
8.7	400	250		
8.7	500	350		
8.8	150	110		●
8.8	200	100		□
8.8	200	135		●
8.8	250	120		□
8.8	250	150		●
8.8	300	175		
8.8	350	200		
8.8	400	250		
8.9	150	110		□
8.9	200	135		
8.9	250	150		
8.9	300	175		
8.9	350	200		
9.0	150	110	2.4	●
9.0	200	100		□
9.0	200	135		●
9.0	250	120		□
9.0	250	150		●
9.0	300	175		
9.0	350	200		
9.0	400	250		
9.0	500	350		
9.1	150	110		□
9.1	200	135		
9.1	250	150		
9.1	300	175		
9.2	150	110		●
9.2	200	100		□
9.2	200	135		●
9.2	250	120		□
9.2	250	150		●
9.2	300	175		
9.2	350	200		
9.2	400	250		
9.3	150	110	2.4	□
9.3	200	135		
9.3	250	150		
9.3	300	175		
9.4	150	110		
9.4	200	135		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
9.4	250	150	2.4	□
9.4	300	175		
9.5	150	110		●
9.5	200	100		□
9.5	200	135		●
9.5	250	120		□
9.5	250	150		●
9.5	300	175		
9.5	300	200		
9.5	350	200		
9.5	400	250	2.5	□
9.5	500	350		
9.6	150	110		
9.6	200	135		
9.6	250	150		
9.6	300	175		□
9.7	150	110		
9.7	200	135		
9.7	250	150		
9.7	300	175		
9.7	400	250		
9.7	500	350		
9.8	150	110	2.6	●
9.8	200	100		□
9.8	200	135		●
9.8	250	120		□
9.8	250	150		●
9.8	300	175		
9.8	350	200		
9.8	400	250		
9.8	500	350		
9.9	150	110		□
9.9	200	135		
9.9	250	150		
9.9	300	175		
10.0	150	110		●
10.0	200	100		□
10.0	200	135		●
10.0	250	120		□
10.0	250	150		●
10.0	300	175		
10.0	350	200		
10.0	400	250		
10.0	500	350		
10.0	600	450		
10.1	200	135	2.7	□
10.1	250	150		
10.1	300	175		
10.1	350	200		
10.1	400	250		
10.2	200	135		
10.2	250	150		
10.2	300	175		
10.2	350	200		
10.2	400	250		
10.3	200	135		
10.3	250	150		
10.3	300	175		
10.3	350	200		
10.3	400	250		
10.3	500	350		
10.4	200	135		
10.4	250	150		
10.4	300	175		
10.4	350	200		
10.4	400	250		
10.5	200	135		●
10.5	250	120		□
10.5	250	150		●
10.5	300	175		□

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Next Page 下一页

← 上一頁 Previous Page

单位 (Unit) : mm

	直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
新商品	10.5	350	200	2.7	
	10.5	400	250		
	10.5	500	350		
	10.6	200	135		
	10.6	250	150		
	10.6	300	175		
硬质合金钻头	10.6	350	200	2.8	□
	10.6	400	250		
	10.7	200	135		
	10.7	250	150		
	10.7	300	175		
	10.7	350	200		
高速钢钻头	10.7	400	250		
	10.8	200	135		
	10.8	250	150		
	10.8	300	175		
	10.8	350	200		
	10.8	400	250		
	10.9	200	135		
	10.9	250	150		
	10.9	300	175		
	10.9	350	200		
	10.9	400	250		
丝锥	11.0	200	135	2.9	●
	11.0	250	150		
	11.0	300	175		
	11.0	350	200		
	11.0	400	250		
	11.0	500	350		
硬质合金立铣刀	11.0	600	450		
	11.1	200	135		
	11.1	250	150		
	11.2	200	135		
	11.2	250	150		
	11.3	200	135		
高速钢立铣刀	11.3	250	150	3.0	●
	11.4	200	135		
	11.4	250	150		
	11.5	200	135		
	11.5	250	120		
	11.5	250	150		
切削工具	11.5	300	150		
	11.5	300	175		
	11.5	350	200		
	11.5	400	250		
	11.6	200	135		
	11.6	250	150		
套装商品 其它	11.7	200	135	3.1	□
	11.7	250	150		
	11.8	200	135		
	11.8	250	150		
	11.8	300	175		
	11.9	200	135		
精密工具	11.9	250	150		
	12.0	200	135		
	12.0	250	120		
	12.0	250	150		
	12.0	300	175		
	12.0	350	200		
	12.0	400	250		
	12.0	500	350		
	12.0	600	450		
	12.1	200	135		
	12.1	250	150		
技术资料 索引	12.2	200	135	3.2	□
	12.2	250	150		
	12.3	200	135		
	12.3	250	150		
	12.4	200	135		
	12.4	250	150		
	12.5	200	135	3.3	

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
12.5	250	120	3.3	●
12.5	250	150		□
12.5	300	175		●
12.5	300	200		
12.5	350	250		
12.5	400	300		
12.6	200	135	3.4	□
12.6	250	150		
12.7	200	135		
12.7	250	150		
12.7	300	175		
12.7	350	200		
12.7	400	250		
12.8	200	135		
12.8	250	150		
12.8	300	175		
12.9	200	135		
12.9	250	150		
13.0	200	135	3.5	●
13.0	250	150		
13.0	300	175		
13.0	350	200		
13.0	400	250		
13.1	200	150		
13.1	250	175		
13.1	300	200		
13.2	200	150		
13.2	250	175		
13.2	300	200		
13.3	200	150		
13.3	300	200	3.6	□
13.4	200	150		
13.4	300	200		
13.5	200	150		
13.5	250	175		
13.5	300	200		
13.6	200	150		
13.6	300	200		
13.7	200	150		
13.7	250	175		
13.7	300	200		
13.8	200	150		
13.8	250	175	3.7	□
13.8	300	200		
13.9	200	150		
13.9	250	175		
13.9	300	200		
14.0	200	150		
14.0	250	175		
14.0	300	200		
14.1	200	150		
14.1	250	175		
14.1	300	200		
14.2	200	150		
14.2	300	200	3.8	□
14.3	200	150		
14.3	300	200		
14.4	200	150		
14.4	300	200		
14.5	200	150		
14.5	250	175		
14.5	300	200		
14.6	200	150		
14.6	300	200		
14.7	200	150		
14.7	300	200		
14.8	200	150	3.9	□
14.8	300	200		
14.9	200	150		
14.9	300	200		
15.0	250	150		
15.0	250	150		


直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
15.0	300	200	3.9	□
15.1	250	150		
15.1	300	200		
15.2	250	150		
15.2	300	200		
15.3	250	150		
15.3	300	200	4.0	□
15.4	250	150		
15.4	300	200		
15.5	250	150		
15.5	300	200		
15.6	250	150		
15.6	300	200		
15.7	250	150		
15.7	300	200		
15.8	250	150		
15.8	300	200		
15.9	250	150	4.1	□
15.9	300	200		
16.0	250	150		
16.0	300	200		
16.1	250	150		
16.1	300	200		
16.2	250	150		
16.2	300	200		
16.3	250	150		
16.3	300	200		
16.4	250	150		
16.5	250	150		
16.5	300	200	4.2	□
16.6	250	150		
16.6	300	200		
16.7	250	150		
16.7	300	200		
16.8	250	150		
16.8	300	200		
16.9	250	150		
17.0	250	150		
17.0	300	200		
17.1	250	150		
17.2	250	150		
17.3	250	150	4.3	□
17.4	250	150		
17.5	250	150		
17.5	300	200		
17.6	250	150		
17.6	300	200		
17.7	250	150		
17.7	300	200		
17.8	250	150		
17.9	250	150		
18.0	250	150		
18.0	300	200		
18.1	250	150	4.4	□
18.2	250	150		
18.3	250	150		
18.4	250	150		
18.5	250	150		
18.5	300	200		
18.6	250	150		
18.7	250	150		
18.8	250	150		
18.9	250	150		
19.0	250	150		
19.0	300	200		
19.1	250	150	4.5	□
19.2	250	150		
19.3	250	150		
19.4	250	150		
19.5	250	150		
19.5	300	200		
19.6	250	150		
19.7	250	150		
19.8	250	150		
19.9	250	150		
20.0	250	150		
20.0	300	200		

●深孔用涂层钻头。有良好的铁屑排出性，适合深孔和深位置孔的加工。

This is coating drill for deep holes. Chip evacuation is good. It's suitable for drilling deep holes and deep positions.



XH形



新商品

订货方式 GNLSD 直径 × 全长 × 槽长

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
1.0	100	40	0.3	□
1.1	100	40		
1.2	100	40		
1.3	100	40		
1.4	100	40		
1.5	100	40	0.4	
1.6	100	40		
1.7	100	40		
1.8	100	40		
1.9	100	40		
2.0	75	40	0.5	
2.0	100	40		
2.0	100	50		
2.0	150	60		
2.0	150	75		
2.0	200	80		
2.0	250	100		
2.1	100	40		
2.1	100	50		
2.1	150	60		
2.1	150	75	0.6	
2.1	200	80		
2.2	100	40		
2.2	100	50		
2.2	150	60		
2.2	150	75		
2.2	200	80		
2.3	100	40		
2.3	100	50		
2.3	150	60		
2.3	150	75	0.7	
2.3	200	80		
2.4	100	40		
2.4	100	50		
2.4	150	60		
2.4	150	75		
2.4	200	80		
2.5	75	50		
2.5	100	50		
2.5	100	55		
2.5	150	60	0.8	
2.5	150	75		
2.5	200	80		
2.5	250	100		
2.6	100	50		
2.6	150	75		
2.6	200	100		
2.7	100	50		
2.7	150	75		
2.7	200	100		
2.8	100	50	0.8	
2.8	150	75		
2.8	200	100		
2.9	100	50		
2.9	150	75		
2.9	200	100		
3.0	100	50		
3.0	100	65		
3.0	150	75		
3.0	200	100		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
3.0	200	125	0.8	□
3.0	200	135		
3.0	250	150		
3.0	300	180		
3.1	100	65		
3.1	150	75		
3.1	200	100		
3.1	200	125		
3.1	200	135		
3.1	250	150		
3.2	100	65	0.9	
3.2	150	75		
3.2	200	100		
3.2	200	125		
3.2	200	135		
3.2	250	150		
3.3	100	65		
3.3	150	75		
3.3	200	100		
3.3	200	125		
3.3	200	135	1.0	
3.3	250	150		
3.4	100	65		
3.4	150	75		
3.4	200	100		
3.4	200	125		
3.4	200	135		
3.4	250	150		
3.5	100	65		
3.5	150	75		
3.5	200	100	1.1	
3.5	200	125		
3.5	200	135		
3.5	250	150		
3.5	300	180		
3.6	100	65		
3.6	150	75		
3.6	200	100		
3.6	200	125		
3.6	200	135		
3.6	250	150	1.2	
3.7	100	65		
3.7	150	75		
3.7	200	100		
3.7	200	125		
3.7	200	135		
3.7	250	150		
3.8	100	65		
3.8	150	75		
3.8	200	100		
3.8	200	125	1.3	
3.8	200	135		
3.8	250	150		
3.9	100	65		
3.9	150	75		
3.9	200	100		
3.9	200	125		
3.9	200	135		
3.9	250	150		
4.0	100	65		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
4.0	150	75	1.0	□
4.0	200	100		
4.0	200	125		
4.0	200	135		
4.0	250	120		
4.0	250	150		
4.0	300	175		
4.0	350	200		
4.0	400	250		
4.1	100	65	1.1	
4.1	150	75		
4.1	150	100		
4.1	200	100		
4.1	200	125		
4.1	200	135		
4.1	250	120		
4.1	250	150		
4.1	300	175		
4.1	350	200		
4.2	100	65		
4.2	150	75		
4.2	150	100		
4.2	200	100		
4.2	200	125		
4.2	200	135		
4.2	250	120		
4.2	250	150		
4.2	300	175		
4.2	350	200		
4.3	100	65		
4.3	150	75		
4.3	150	100		
4.3	200	100		
4.3	200	125		
4.3	200	135		
4.3	250	120		
4.3	250	150		
4.3	300	175		
4.3	350	200		
4.4	100	65	1.2	
4.4	150	75		
4.4	150	100		
4.4	200	100		
4.4	200	125		
4.4	200	135		
4.4	250	120		
4.4	250	150		
4.4	300	175		
4.4	350	200		
4.5	100	65		
4.5	150	75		
4.5	150	100		
4.5	200	100		
4.5	200	125		
4.5	200	135		
4.5	250	120		
4.5	250	150		
4.5	300	175		
4.5	350	200		
4.5	400	250		

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

新商品

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
4.6	100	65	1.2	
4.6	150	75		
4.6	150	100		
4.6	200	100		
4.6	200	125		
4.6	200	135		
4.6	250	120		
4.6	250	150		
4.6	300	175		
4.6	350	200		
4.7	100	65		
4.7	150	75		
4.7	150	100		
4.7	200	100		
4.7	200	125		
4.7	200	135		
4.7	250	120		
4.7	250	150		
4.7	300	175		
4.7	350	200		
4.8	100	65	1.3	
4.8	150	75		
4.8	150	100		
4.8	200	100		
4.8	200	125		
4.8	200	135		
4.8	250	120		
4.8	250	150		
4.8	300	175		
4.8	350	200		
4.9	100	65		
4.9	150	75		
4.9	150	100		
4.9	200	100		
4.9	200	125		
4.9	200	135		
4.9	250	120		
4.9	250	150		
4.9	300	175		
4.9	350	200		
5.0	125	75	1.4	
5.0	150	75		
5.0	150	100		
5.0	200	100		
5.0	200	125		
5.0	200	135		
5.0	250	120		
5.0	250	150		
5.0	300	175		
5.0	350	200		
5.1	150	75		
5.1	150	100		
5.1	200	100		
5.1	200	125		
5.1	200	135		
5.1	250	120		
5.1	250	150		
5.1	300	175		
5.1	350	200		
5.2	150	75		
5.2	150	100		
5.2	200	100		
5.2	200	125		
5.2	200	135		
5.2	250	120		
5.2	250	150		
5.2	300	175		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
5.2	350	200	1.4	
5.2	400	250		
5.3	150	75		
5.3	150	100		
5.3	200	100		
5.3	200	125		
5.3	200	135		
5.3	250	120		
5.3	250	150		
5.3	300	175		
5.3	350	200		
5.3	400	250		
5.4	150	75		
5.4	150	100		
5.4	200	100		
5.4	200	125		
5.4	200	135		
5.4	250	120		
5.4	250	150		
5.4	300	175		
5.4	350	200		
5.4	400	250		
5.5	150	75	1.5	
5.5	150	100		
5.5	200	100		
5.5	200	125		
5.5	200	135		
5.5	250	120		
5.5	250	150		
5.5	300	150		
5.5	300	175		
5.5	350	200		
5.5	400	250		
5.6	150	75		
5.6	150	100		
5.6	200	100		
5.6	200	125		
5.6	200	135		
5.6	250	120		
5.6	250	150		
5.6	300	175		
5.6	350	200		
5.6	400	250		
5.7	150	75		
5.7	150	100		
5.7	200	100		
5.7	200	125		
5.7	200	135		
5.7	250	120		
5.7	250	150		
5.7	300	175		
5.7	350	200		
5.7	400	250		
5.8	150	75	1.5	
5.8	150	100		
5.8	200	100		
5.8	200	125		
5.8	200	135		
5.8	250	120		
5.8	250	150		
5.8	300	175		
5.8	350	200		
5.8	400	250		
5.9	150	75		
5.9	150	100		
5.9	200	100		
5.9	200	125		
5.9	200	135		
5.9	250	120		
5.9	250	150		
5.9	300	175		
5.9	350	200		
5.9	400	250		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
5.9	300	175	1.5	
5.9	350	200		
5.9	400	250		
6.0	150	75		
6.0	150	100		
6.0	150	110		
6.0	200	100		
6.0	200	125		
6.0	200	135		
6.0	200	150		
6.0	200	175		
6.0	250	120		
6.0	250	150		
6.0	300	150		
6.0	300	175		
6.0	350	200		
6.0	400	250		
6.0	500	350		
6.0	600	450		
6.1	150	100	1.6	
6.1	150	110		
6.1	200	125		
6.1	200	135		
6.1	250	150		
6.1	300	175		
6.1	350	200		
6.2	150	100		
6.2	150	110		
6.2	200	125		
6.2	200	135		
6.2	250	150		
6.2	300	175		
6.2	350	200		
6.2	400	250		
6.3	150	100		
6.3	150	110		
6.3	200	125		
6.3	200	135		
6.3	250	150		
6.3	300	175		
6.3	350	200		
6.4	150	100	1.7	
6.4	150	110		
6.4	200	125		
6.4	200	135		
6.4	250	150		
6.4	300	175		
6.4	350	200		
6.5	150	100		
6.5	150	110		
6.5	200	100		
6.5	200	125		
6.5	200	135		
6.5	250	120		
6.5	250	150		
6.5	300	150		
6.5	300	175		
6.5	350	200		
6.5	400	250		
6.5	500	350		
6.6	150	100		
6.6	150	110		
6.6	200	125		
6.6	200	135		
6.6	250	150		
6.6	300	175		
6.6	350	200		
6.7	150	100		
6.7	150	110		
6.7	200	125		
6.7	200	135		
6.7	250	150		

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
6.7	300	175	1.7	
6.7	350	200		
6.8	150	100	1.8	
6.8	150	110		
6.8	200	100		
6.8	200	125		
6.8	200	135		
6.8	250	120		
6.8	250	150		
6.8	300	150		
6.8	300	175		
6.8	350	200		
6.8	400	250		
6.9	150	100		
6.9	150	110		
6.9	200	125		
6.9	200	135		
6.9	250	150		
6.9	300	175		
6.9	350	200		
7.0	150	100		
7.0	150	110		
7.0	200	100		
7.0	200	125		
7.0	200	135		
7.0	250	120		
7.0	250	150		
7.0	300	150		
7.0	300	175		
7.0	350	200		
7.0	400	250		
7.0	500	350		
7.1	150	100	1.9	
7.1	150	110		
7.1	200	125		
7.1	200	135		
7.1	250	150		
7.1	300	175		
7.1	350	200		
7.2	150	100		
7.2	150	110		
7.2	200	100		
7.2	200	125		
7.2	200	135		
7.2	250	120		
7.2	250	150		
7.2	300	150		
7.2	300	175		
7.2	350	200		
7.2	400	250		
7.3	150	100		
7.3	150	110		
7.3	200	125		
7.3	200	135		
7.3	250	150		
7.3	300	175		
7.3	350	200		
7.4	150	100	2.0	
7.4	150	110		
7.4	200	125		
7.4	200	135		
7.4	250	150		
7.4	300	175		
7.4	350	200		
7.5	150	100		
7.5	150	110		
7.5	200	100		
7.5	200	125		
7.5	200	135		
7.5	250	120		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
7.5	250	150	2.0	
7.5	300	150		
7.5	300	175		
7.5	350	200		
7.5	400	250		
7.5	500	350		
7.6	150	100		
7.6	150	110		
7.6	200	125		
7.6	200	135		
7.6	250	150		
7.6	300	175		
7.6	350	200		
7.7	150	100		
7.7	150	110		
7.7	200	125		
7.7	200	135		
7.7	250	150		
7.7	300	175		
7.7	350	200		
7.8	150	100		
7.8	150	110		
7.8	200	100		
7.8	200	125		
7.8	200	135		
7.8	250	120		
7.8	250	150		
7.8	300	150		
7.8	300	175		
7.8	350	200		
7.8	400	250		
7.9	150	100	2.1	
7.9	150	110		
7.9	200	125		
7.9	200	135		
7.9	250	150		
7.9	300	175		
7.9	350	200		
8.0	150	100		
8.0	150	110		
8.0	200	100		
8.0	200	125		
8.0	200	135		
8.0	250	120		
8.0	250	150		
8.0	300	150		
8.0	300	175		
8.0	350	200		
8.0	400	250		
8.0	500	350		
8.0	600	450		
8.1	150	110		
8.1	200	125		
8.1	200	135		
8.1	250	150		
8.1	300	175		
8.1	350	200		
8.2	150	110	2.2	
8.2	200	100		
8.2	200	125		
8.2	200	135		
8.2	250	120		
8.2	250	150		
8.2	300	150		
8.2	300	175		
8.2	350	200		
8.2	400	250		
8.3	150	110		
8.3	200	125		
8.3	200	135		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
8.3	250	150	2.2	
8.3	300	175		
8.3	350	200		
8.4	150	110		
8.4	200	125		
8.4	200	135		
8.4	250	150		
8.4	300	175		
8.4	350	200		
8.5	150	110		
8.5	200	100		
8.5	200	125		
8.5	200	135		
8.5	250	120		
8.5	250	150		
8.5	300	150		
8.5	300	175		
8.5	350	200		
8.5	400	250		
8.5	500	350		
8.6	150	110		
8.6	200	125		
8.6	200	135		
8.6	250	150		
8.6	300	175		
8.6	350	200		
8.7	150	110	2.3	
8.7	200	125		
8.7	200	135		
8.7	250	150		
8.7	300	175		
8.7	350	200		
8.8	150	110		
8.8	200	100		
8.8	200	125		
8.8	200	135		
8.8	250	120		
8.8	250	150		
8.8	300	175		
8.8	350	200		
8.8	400	250		
8.9	150	110		
8.9	200	125		
8.9	200	135		
8.9	250	150		
8.9	300	175		
8.9	350	200		
9.0	150	110		
9.0	200	100		
9.0	200	125		
9.0	200	135		
9.0	250	120		
9.0	250	150		
9.0	250	175		
9.0	300	150		
9.0	300	175		
9.0	350	200		
9.0	400	250		
9.0	500	350		
9.1	150	110	2.4	
9.1	200	125		
9.1	200	135		
9.1	250	150		
9.1	300	175		
9.1	350	200		
9.2	150	110		
9.2	200	100		
9.2	200	125		
9.2	200	135		
9.2	250	120		
9.2	250	150		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Next Page 下一页

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
9.2	300	150	2.4	
9.2	300	175		
9.2	350	200		
9.2	400	250		
9.3	150	110		
9.3	200	125		
9.3	200	135		
9.3	250	150		
9.3	300	175		
9.3	350	200		
9.4	150	110		
9.4	200	125		
9.4	200	135		
9.4	250	150		
9.4	300	175		
9.4	350	200		
9.5	150	110	2.5	
9.5	200	100		
9.5	200	125		
9.5	200	135		
9.5	250	120		
9.5	250	150		
9.5	300	150		
9.5	300	175		
9.5	350	200		
9.5	400	250		
9.5	500	350		
9.6	150	110		
9.6	200	125		
9.6	200	135		
9.6	250	150		
9.6	300	175		
9.6	350	200		
9.7	150	110	2.6	
9.7	200	125		
9.7	200	135		
9.7	250	150		
9.7	300	175		
9.7	350	200		
9.8	150	110		
9.8	200	100		
9.8	200	125		
9.8	200	135		
9.8	250	120		
9.8	250	150		
9.8	300	150		
9.8	300	175		
9.8	350	200		
9.8	400	250		
9.9	150	110		
9.9	200	125		
9.9	200	135		
9.9	250	150		
9.9	300	175		
9.9	350	200		
10.0	150	110		
10.0	200	100		
10.0	200	125		
10.0	200	135		
10.0	250	120		
10.0	250	150		
10.0	300	150		
10.0	300	175		
10.0	350	200		
10.0	400	250		
10.0	500	350		
10.0	600	450		
10.1	200	135		
10.1	250	150		
10.1	300	175		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
10.1	350	200	2.6	
10.1	400	250		
10.2	200	135		
10.2	250	150		
10.2	300	175		
10.2	350	200		
10.2	400	250		
10.3	200	135		
10.3	250	150		
10.3	300	175		
10.3	350	200		
10.3	400	250		
10.3	500	350		
10.4	200	135	2.7	
10.4	250	150		
10.4	300	175		
10.4	350	200		
10.4	400	250		
10.5	200	125		
10.5	200	135		
10.5	250	120		
10.5	250	150		
10.5	300	150		
10.5	300	175		
10.5	350	200		
10.5	400	250		
10.5	500	350		
10.6	200	135	2.8	
10.6	250	150		
10.6	300	175		
10.6	350	200		
10.6	400	250		
10.7	200	135		
10.7	250	150		
10.7	300	175		
10.7	350	200		
10.7	400	250		
10.8	200	135		
10.8	250	150		
10.8	300	175		
10.8	350	200		
10.8	400	250		
10.9	200	135	2.9	
10.9	250	150		
10.9	300	175		
10.9	350	200		
10.9	400	250		
11.0	200	125		
11.0	200	135		
11.0	250	120		
11.0	250	150		
11.0	300	150		
11.0	300	175		
11.0	350	200		
11.0	400	250		
11.0	500	350		
11.0	600	450		
11.1	200	135	3.0	
11.1	250	150		
11.2	200	135		
11.2	250	150		
11.3	200	135		
11.3	250	150		
11.4	200	135		
11.4	250	150		
11.5	200	125		
11.5	200	135		
11.5	250	120		
11.5	250	150		
11.5	300	150		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
11.5	300	175	3.0	
11.5	350	200		
11.5	400	250		
11.6	200	135		
11.6	250	150		
11.7	200	135		
11.7	250	150		
11.8	200	135		
11.8	250	150		
11.8	300	175		
11.9	200	135		
11.9	250	150		
12.0	200	125	3.1	
12.0	200	135		
12.0	250	120		
12.0	250	150		
12.0	300	150		
12.0	300	175		
12.0	350	200		
12.0	400	250		
12.0	500	350		
12.0	600	450		
12.1	200	135		
12.1	250	150		
12.2	200	135	3.2	
12.2	250	150		
12.3	200	135		
12.3	250	150		
12.4	200	135		
12.4	250	150		
12.5	200	125		
12.5	200	135		
12.5	250	120		
12.5	250	150		
12.5	300	150		
12.5	300	175		
12.5	350	200		
12.5	400	250		
12.6	200	135	3.3	
12.6	250	150		
12.7	200	135		
12.7	250	150		
12.7	300	175		
12.7	350	200		
12.7	400	250		
12.8	200	135		
12.8	250	150		
12.8	300	175		
12.9	200	135		
12.9	250	150		
13.0	200	125	3.4	
13.0	200	135		
13.0	250	120		
13.0	250	150		
13.0	300	150		
13.0	300	175		
13.0	350	200		
13.0	400	250		
13.1	200	150		
13.1	300	200		
13.2	200	150		
13.2	300	200		
13.3	200	150	3.5	
13.3	300	200		
13.4	200	150		
13.4	300	200		
13.5	200	150		
13.5	300	200		
13.6	200	150		
13.6	300	200		

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
13.7	200	150	3.6	□
13.7	300	200		
13.8	200	150		
13.8	300	200		
13.9	200	150		
13.9	300	200		
14.0	200	150		
14.0	300	200		
14.1	200	150	3.7	
14.1	300	200		
14.2	200	150		
14.2	300	200		
14.3	200	150		
14.3	300	200		
14.4	200	150		
14.4	300	200		
14.5	200	150	3.8	
14.5	300	200		
14.6	200	150		
14.6	300	200		
14.7	200	150	3.9	
14.7	300	200		
14.8	200	150		
14.8	300	200		
14.9	200	150		
14.9	300	200		
15.0	250	150		
15.0	300	200	4.0	
15.1	250	150		
15.1	300	200		
15.2	250	150		
15.2	300	200		
15.3	250	150		
15.3	300	200		
15.4	250	150	4.1	
15.4	300	200		
15.5	250	150		
15.5	300	200		
15.6	250	150		
15.6	300	200		
15.7	250	150		
15.7	300	200	4.2	
15.8	250	150		
15.8	300	200		
15.9	250	150		
15.9	300	200	4.3	
16.0	250	150		
16.0	300	200		
16.1	250	150		
16.2	250	150	4.4	
16.3	250	150		
16.4	250	150		
16.5	250	150		
16.5	300	200	4.5	
16.6	250	150		
16.7	250	150		
16.8	250	150		
16.9	250	150	4.6	
17.0	250	150		
17.0	300	200		
17.1	250	150		
17.2	250	150	4.7	
17.3	250	150		
17.4	250	150		
17.5	250	150	4.8	
17.5	300	200		
17.6	250	150		
17.7	250	150		
17.8	250	150	4.9	
17.9	250	150		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
18.0	250	150	4.7	□
18.0	300	200		
18.1	250	150		
18.2	250	150		
18.3	250	150	4.8	
18.4	250	150		
18.5	250	150		
18.5	300	200		
18.6	250	150	4.9	
18.7	250	150		
18.8	250	150		
18.9	250	150		
19.0	250	150	5.0	
19.0	300	200		
19.1	250	150		
19.2	250	150		
19.3	250	150	5.1	
19.4	250	150		
19.5	250	150		
19.5	300	200		
19.6	250	150	5.2	
19.7	250	150		
19.8	250	150		
19.9	250	150		
20.0	250	150	5.2	
20.0	300	200		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引


一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

柄部直径小于钻头直径。刃长较长的钻头，柄部直径明显小于钻头直径，因此使用钻头夹套时，请选定过盈量充分的夹套。详情请参照 I-10。

●本钻头是适用于普通钢、不锈钢、铝的深孔加工或深位置开孔的涂层长钻头。

This is coating long drill. It's suitable for drilling deep holes and deep positions.

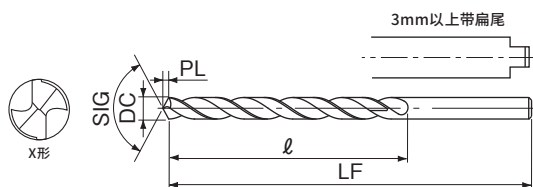

订货方式 GLD 直径 × 全长

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
1.0	100	50		
1.0	150	60		
1.0	200	75		
1.05	100	50		
1.05	150	60		
1.1	100	50		
1.1	150	60		
1.1	200	75		
1.15	100	50		
1.15	150	60		
1.2	100	50		
1.2	150	60		
1.2	200	75		
1.25	100	50		
1.25	150	60		
1.3	100	50		
1.3	150	60		
1.3	200	75		
1.35	100	50		
1.35	150	60		
1.4	100	50		
1.4	150	60		
1.4	200	75		
1.45	100	50		
1.45	150	60		
1.5	100	50		
1.5	150	60		
1.5	200	75		
1.55	100	50		
1.55	150	60		
1.6	100	50		
1.6	150	60		
1.6	200	80		
1.65	100	50		
1.65	150	60		
1.7	100	50		
1.7	150	60		
1.7	200	80		
1.75	100	50		
1.75	150	60		
1.8	100	50		
1.8	150	60		
1.8	200	80		
1.85	100	50		
1.85	150	60		
1.9	100	50		
1.9	150	60		
1.9	200	80		
1.95	100	50		
1.95	150	60		
2.0	100	50		
2.0	125	65		
2.0	150	80		
2.0	200	100		
2.0	300	120		
2.05	100	50		
2.05	150	80		
2.1	100	50		
2.1	125	65		
2.1	150	80		
2.1	200	100		
2.15	100	50		
2.15	150	80		
2.2	100	50		
2.2	125	65		
2.2	150	80		
2.2	200	100		
2.25	100	50		
2.25	150	80		
2.3	100	50		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
2.3	125	65		
2.3	150	80		
2.3	200	100		
2.35	100	50		
2.35	150	80		
2.4	100	50		
2.4	125	65		
2.4	150	80		
2.4	200	100		
2.45	100	50		
2.45	150	80		
2.5	100	50		
2.5	125	65		
2.5	150	80		
2.5	200	100		
2.5	250	120		
2.55	100	60		
2.55	150	80		
2.6	100	60		
2.6	125	65		
2.6	150	80		
2.6	200	105		
2.65	100	60		
2.65	150	80		
2.7	100	60		
2.7	125	65		
2.7	150	80		
2.7	200	105		
2.75	100	60		
2.75	150	80		
2.8	100	60		
2.8	125	65		
2.8	150	80		
2.8	200	105		
2.85	100	60		
2.85	150	80		
2.9	100	60		
2.9	125	65		
2.9	150	80		
2.9	200	105		
2.95	100	60		
2.95	150	80		
3.0	100	60		
3.0	125	70		
3.0	150	80		
3.0	200	105		
3.0	250	125		
3.0	300	175		
3.0	350	200		
3.05	100	60		
3.05	150	85		
3.1	100	60		
3.1	125	70		
3.1	150	85		
3.1	200	125		
3.1	250	150		
3.1	300	175		
3.15	100	60		
3.15	150	85		
3.2	100	60		
3.2	125	70		
3.2	150	85		
3.2	200	125		
3.2	250	150		
3.2	300	175		
3.25	100	60		
3.25	150	85		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
3.3	100	60		
3.3	125	70		
3.3	150	85		
3.3	200	125		
3.3	250	150		
3.3	300	175		
3.35	100	60		
3.35	150	85		
3.4	100	60		
3.4	125	70		
3.4	150	85		
3.4	200	125		
3.4	250	150		
3.4	300	175		
3.45	100	60		
3.45	150	85		
3.5	100	60		
3.5	125	75		
3.5	150	85		
3.5	200	110		
3.5	200	125		
3.5	250	150		
3.5	300	175		
3.5	350	210		
3.5	400	250		
3.55	100	60		
3.55	150	90		
3.6	100	60		
3.6	125	75		
3.6	150	90		
3.6	200	125		
3.6	250	150		
3.6	300	175		
3.65	100	60		
3.65	150	90		
3.7	100	60		
3.7	125	75		
3.7	150	90		
3.7	200	125		
3.7	250	150		
3.7	300	175		
3.75	100	60		
3.75	150	90		
3.8	100	60		
3.8	125	75		
3.8	150	90		
3.8	200	125		
3.8	250	150		
3.8	300	175		
3.85	100	60		
3.85	150	90		
3.9	100	60		
3.9	125	75		
3.9	150	90		
3.9	200	125		
3.9	250	150		
3.9	300	175		
3.95	100	60		
3.95	150	90		
4.0	100	60		
4.0	125	75		
4.0	150	90		
4.0	200	120		
4.0	200	125		
4.0	250	150		
4.0	300	175		
4.0	350	210		
4.0	400	260		
4.05	150	90		
4.1	100	60		
4.1	125	75		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
4.1	150	90		
4.1	200	125		
4.1	250	150		
4.1	300	175		
4.15	150	90		
4.2	100	60		
4.2	125	75		
4.2	150	90		
4.2	200	125		
4.2	250	150		
4.2	300	175		
4.25	150	90		
4.3	100	60		
4.3	125	75		
4.3	150	90		
4.3	200	125		
4.3	250	150		
4.3	300	175		
4.35	150	90		
4.4	100	60		
4.4	125	75		
4.4	150	90		
4.4	200	125		
4.4	250	150		
4.4	300	175		
4.45	150	90		
4.5	100	60		
4.5	125	75		
4.5	150	90		
4.5	200	120		
4.5	200	125		
4.5	250	150		
4.5	300	175		
4.5	350	210		
4.5	400	260		
4.55	150	100		
4.6	100	60		
4.6	125	75		
4.6	150	100		
4.6	200	125		
4.6	250	150		
4.6	300	175		
4.65	150	100		
4.7	100	60		
4.7	125	75		
4.7	150	100		
4.7	200	125		
4.7	250	150		
4.7	300	175		
4.75	150	100		
4.8	100	60		
4.8	125	75		
4.8	150	100		
4.8	200	125		
4.8	250	150		
4.8	300	175		
4.85	150	100		
4.9	100	60		
4.9	125	75		
4.9	150	100		
4.9	200	125		
4.9	250	150		
4.9	300	175		
4.95	150	100		
5.0	125	80		
5.0	150	110		
5.0	200	125		
5.0	250	150		
5.0	300	175		
5.0	350	210		
5.0	400	260		


单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
5.05	150	100	1.5	
5.1	125	80		
5.1	150	110		
5.1	200	125		
5.1	250	150		
5.1	300	175	1.6	
5.2	125	80		
5.2	150	110		
5.2	200	125		
5.2	250	150		
5.2	300	175	1.7	
5.3	125	80		
5.3	150	110		
5.3	200	125		
5.3	250	150		
5.3	300	175	1.8	
5.4	125	80		
5.4	150	110		
5.4	200	125		
5.4	250	150		
5.4	300	175	1.9	
5.5	125	80		
5.5	150	110		
5.5	200	125		
5.5	250	150		
5.5	300	175	2.0	
5.5	350	210		
5.5	400	260		
5.6	125	80		
5.6	150	110		
5.6	200	125	2.1	
5.6	250	150		
5.6	300	175		
5.7	125	80		
5.7	150	110		
5.7	200	125	2.2	
5.7	250	150		
5.7	300	175		
5.8	125	80		
5.8	150	110		
5.8	200	125	2.3	
5.8	250	150		
5.8	300	175		
5.9	125	80		
5.9	150	110		
5.9	200	125	2.4	
5.9	250	150		
5.9	300	175		
6.0	125	90		
6.0	150	110		
6.0	200	125	2.5	
6.0	250	150		
6.0	300	175		
6.0	350	210		
6.0	400	260		
6.1	125	90	2.6	
6.1	150	110		
6.1	200	125		
6.1	250	150		
6.1	300	175		
6.2	125	90	2.7	
6.2	150	110		
6.2	200	125		
6.2	250	150		
6.2	300	175		
6.3	125	90	2.8	
6.3	150	110		
6.3	200	125		
6.3	250	150		
6.3	300	175		
6.4	125	90	2.9	
6.4	150	110		
6.4	200	125		
6.4	250	150		
6.4	300	175		
6.5	125	90	3.0	
6.5	150	110		
6.5	200	125		
6.5	250	150		
6.5	300	175		
6.5	350	210	3.1	
6.5	400	260		
6.6	125	90		
6.6	150	110		
6.6	200	125		
6.6	250	150		
6.6	300	175		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
6.7	125	90	2.0	
6.7	150	110		
6.7	200	125		
6.7	250	150		
6.7	300	175		
6.8	125	90	2.1	
6.8	150	110		
6.8	200	125		
6.8	250	150		
6.8	300	175		
6.9	125	90	2.2	
6.9	150	110		
6.9	200	125		
6.9	250	150		
6.9	300	175		
7.0	125	90	2.3	
7.0	150	110		
7.0	200	125		
7.0	250	150		
7.0	300	175		
7.0	350	210	2.4	
7.0	400	260		
7.1	150	110		
7.1	200	125		
7.1	250	150		
7.1	300	175		
7.2	150	110	2.5	
7.2	200	125		
7.2	250	150		
7.2	300	175		
7.3	150	110		
7.3	200	125	2.6	
7.3	250	150		
7.3	300	175		
7.4	150	110		
7.4	200	125		
7.4	250	150	2.7	
7.4	300	175		
7.5	150	110		
7.5	200	125		
7.5	250	150		
7.5	300	175		
7.5	350	210	2.8	
7.5	400	260		
7.6	150	110		
7.6	200	125		
7.6	250	150		
7.6	300	175		
7.7	150	110	2.9	
7.7	200	125		
7.7	250	150		
7.7	300	175		
7.8	150	110		
7.8	200	125	3.0	
7.8	250	150		
7.8	300	175		
7.9	150	110		
7.9	200	125		
7.9	250	150	3.1	
7.9	300	175		
8.0	150	110		
8.0	200	125		
8.0	250	150		
8.0	300	175	3.2	
8.0	350	210		
8.0	400	260		
8.1	150	110		
8.1	200	125		
8.1	250	150	3.3	
8.1	300	175		
8.2	150	110		
8.2	200	125		
8.2	250	150		
8.2	300	175		
8.3	150	110	3.4	
8.3	200	125		
8.3	250	150		
8.3	300	175		
8.4	150	110		
8.4	200	125	3.5	
8.4	250	150		
8.4	300	175		
8.5	150	110		
8.5	200	125		
8.5	250	150	3.6	
8.5	300	175		
8.5	350	210		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
8.5	400	260	2.6	
8.6	150	110		
8.6	200	125		
8.6	250	150		
8.6	300	175		
8.7	150	110	2.7	
8.7	200	125		
8.7	250	150		
8.7	300	175		
8.8	150	110		
8.8	200	125	2.8	
8.8	250	150		
8.8	300	175		
8.9	150	110		
8.9	200	125		
8.9	250	150	2.9	
8.9	300	175		
9.0	150	110		
9.0	200	125		
9.0	250	150		
9.0	300	175	3.0	
9.0	350	210		
9.0	400	260		
9.1	150	110		
9.1	200	125		
9.1	250	150	3.1	
9.1	300	175		
9.2	150	110		
9.2	200	125		
9.2	250	150		
9.2	300	175	3.2	
9.3	150	110		
9.3	200	125		
9.3	250	150		
9.3	300	175		
9.4	150	110	3.3	
9.4	200	125		
9.4	250	150		
9.4	300	175		
9.5	150	110		
9.5	200	125	3.4	
9.5	250	150		
9.5	300	175		
9.5	350	210		
9.5	400	260		
9.6	150	110	3.5	
9.6	200	125		
9.6	250	150		
9.6	300	175		
9.7	150	110		
9.7	200	125	3.6	
9.7	250	150		
9.7	300	175		
9.8	150	110		
9.8	200	125		
9.8	250	150	3.7	
9.8	300	175		
9.9	150	110		
9.9	200	125		
9.9	250	150		
9.9	300	175	3.8	
9.9	350	210		
10.0	150	110		
10.0	200	125		
10.0	250	150		
10.0	300	175	3.9	
10.0	350	210		
10.0	400	260		
10.1	200	125		
10.1	250	150		
10.1	300	175	4.0	
10.2	200	125		
10.2	250	150		
10.2	300	175		
10.3	200	125		
10.3	250	150	4.1	
10.3	300	175		

●本钻头是用途较广的泛用长钻头。
This is general HSS long drills for deep holes.

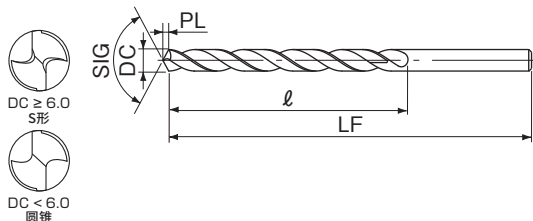

LIST 550

订货方式 **LSD** 直径 × 全长 (□商品: LSD 直径 × 全长 × 槽长)

单位 (Unit): mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
1.0	75	35	●	●
1.0	75	40	□	□
1.0	100	40	●	●
1.0	100	50	□	□
1.0	125	50	□	□
1.0	150	60	□	□
1.0	200	75	□	□
1.05	100	50	●	●
1.05	150	60	●	●
1.1	75	35	●	●
1.1	75	40	□	□
1.1	100	40	●	●
1.1	100	50	□	□
1.1	125	50	□	□
1.1	150	60	□	□
1.1	200	75	□	□
1.15	100	50	●	●
1.15	150	60	●	●
1.2	75	35	●	●
1.2	75	40	□	□
1.2	100	40	●	●
1.2	100	50	□	□
1.2	125	50	□	□
1.2	150	60	□	□
1.2	200	75	□	□
1.25	100	50	●	●
1.25	150	60	●	●
1.3	75	35	●	●
1.3	75	40	□	□
1.3	100	40	●	●
1.3	100	50	□	□
1.3	125	50	□	□
1.3	150	60	□	□
1.3	200	75	□	□
1.35	100	50	●	●
1.35	150	60	●	●
1.4	75	35	●	●
1.4	75	40	□	□
1.4	100	40	●	●
1.4	100	50	□	□
1.4	125	50	□	□
1.4	150	60	□	□
1.4	200	75	□	□
1.45	100	50	●	●
1.45	150	60	●	●
1.5	75	35	●	●
1.5	75	40	□	□
1.5	100	40	●	●
1.5	100	50	□	□
1.5	125	50	□	□
1.5	150	60	□	□
1.5	200	75	□	□
1.55	100	50	●	●
1.55	150	60	●	●
1.6	75	35	●	●
1.6	75	40	□	□
1.6	100	40	●	●
1.6	100	50	□	□
1.6	125	55	□	□
1.6	150	60	□	□
1.6	200	80	□	□
1.6	250	100	□	□
1.65	100	50	●	●
1.65	150	60	●	●
1.7	75	35	●	●
1.7	75	40	□	□

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
1.7	100	40	●	●
1.7	100	50	□	□
1.7	125	55	□	□
1.7	150	60	□	□
1.7	200	80	□	□
1.7	250	100	□	□
1.75	100	50	●	●
1.75	150	60	●	●
1.8	75	35	●	●
1.8	75	40	□	□
1.8	100	40	●	●
1.8	100	50	□	□
1.8	125	55	□	□
1.8	150	60	□	□
1.8	200	80	□	□
1.8	250	100	□	□
1.85	100	50	●	●
1.85	150	60	●	●
1.9	75	35	●	●
1.9	75	40	□	□
1.9	100	40	●	●
1.9	100	50	□	□
1.9	125	55	□	□
1.9	150	60	□	□
1.9	200	80	□	□
1.9	250	100	□	□
1.95	100	50	●	●
1.95	150	60	●	●
2.0	75	40	●	●
2.0	100	40	□	□
2.0	100	50	□	□
2.0	125	65	□	□
2.0	150	60	●	●
2.0	150	75	□	□
2.0	200	80	□	□
2.0	250	100	□	□
2.0	300	120	□	□
2.05	100	50	●	●
2.05	150	80	●	●
2.1	100	40	●	●
2.1	100	50	□	□
2.1	125	65	□	□
2.1	150	60	●	●
2.1	150	75	□	□
2.1	200	80	□	□
2.1	250	100	□	□
2.1	300	120	□	□
2.15	100	50	●	●
2.15	150	80	●	●
2.2	100	40	●	●
2.2	100	50	□	□
2.2	125	65	□	□
2.2	150	60	●	●
2.2	150	75	□	□
2.2	200	80	□	□
2.2	250	100	□	□
2.2	300	120	□	□
2.25	100	50	●	●
2.25	150	80	●	●
2.3	100	40	●	●
2.3	100	50	□	□
2.3	125	65	□	□
2.3	150	60	●	●
2.3	150	75	□	□
2.3	200	80	□	□
2.3	250	100	□	□

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
2.3	300	120	□	□
2.35	100	50	□	□
2.35	150	80	●	●
2.4	100	40	□	□
2.4	100	50	□	□
2.4	125	65	□	□
2.4	150	60	●	●
2.4	150	75	□	□
2.4	200	80	□	□
2.4	250	100	□	□
2.4	300	120	□	□
2.45	100	50	●	●
2.45	150	80	●	●
2.5	100	50	□	□
2.5	125	65	□	□
2.5	150	60	●	●
2.5	150	75	□	□
2.5	200	80	□	□
2.5	200	100	●	●
2.5	250	100	□	□
2.5	300	120	□	□
2.55	100	60	□	□
2.55	150	80	□	□
2.6	100	50	●	●
2.6	100	60	□	□
2.6	125	70	□	□
2.6	150	75	●	●
2.6	150	80	□	□
2.6	200	100	●	●
2.6	200	105	□	□
2.6	250	110	□	□
2.6	300	120	□	□
2.65	100	60	□	□
2.65	150	80	●	●
2.7	100	50	□	□
2.7	100	60	□	□
2.7	125	70	□	□
2.7	150	75	●	●
2.7	150	80	□	□
2.7	200	100	●	●
2.7	200	105	□	□
2.7	250	110	□	□
2.7	300	120	□	□
2.75	100	60	□	□
2.75	150	80	□	□
2.8	100	50	●	●
2.8	100	60	□	□
2.8	125	70	□	□
2.8	150	75	●	●
2.8	150	80	□	□
2.8	200	100	●	●
2.8	200	105	□	□
2.8	250	110	□	□
2.8	300	120	□	□
2.85	100	60	□	□
2.85	150	80	□	□
2.9	100	50	●	●
2.9	100	60	□	□
2.9	125	70	□	□
2.9	150	75	●	●
2.9	150	80	□	□
2.9	200	100	●	●
2.9	200	105	□	□
2.9	250	110	□	□
2.9	300	120	□	□
2.95	100	60	□	□

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	—	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
2.95	150	80	0.9	□
3.0	100	50		●
3.0	100	60		□
3.0	125	70		●
3.0	150	75		●
3.0	150	80		□
3.0	200	100		●
3.0	200	105		□
3.0	250	110		□
3.0	300	120		□
3.0	350	125		□
3.0	400	130		□
3.0	500	140		□
3.05	100	60		□
3.05	150	85		□
3.1	100	60		□
3.1	125	70		●
3.1	150	75		●
3.1	150	85		□
3.1	200	100		●
3.1	200	110		□
3.1	250	120		□
3.1	300	130		□
3.15	100	60	1.0	□
3.15	150	85		□
3.2	100	60		●
3.2	125	70		●
3.2	150	75		□
3.2	150	85		□
3.2	200	100		●
3.2	200	110		●
3.2	250	120		□
3.2	300	130		□
3.25	100	60		□
3.25	150	85		□
3.3	100	60		●
3.3	125	70		□
3.3	150	75		●
3.3	150	85		□
3.3	200	100		●
3.3	200	110		□
3.3	250	120		□
3.3	300	130		□
3.35	100	60		□
3.35	150	85		□
3.4	100	60	1.1	□
3.4	125	70		●
3.4	150	75		□
3.4	150	85		●
3.4	200	100		●
3.4	200	110		□
3.4	250	120		□
3.4	300	130		□
3.45	100	60		□
3.45	150	85		□
3.5	100	60		●
3.5	125	70		●
3.5	150	75		□
3.5	150	85		□
3.5	200	100		●
3.5	200	110		●
3.5	250	120		□
3.5	300	130		□
3.5	350	145		□
3.5	400	160		□
3.5	500	190		□

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
3.5	600	220	1.1	□
3.55	125	75		□
3.55	200	120		□
3.6	100	60		●
3.6	125	75		□
3.6	150	75		●
3.6	150	90		□
3.6	200	100		●
3.6	200	120		□
3.6	250	120		●
3.6	250	130		□
3.6	300	120		●
3.6	300	150		□
3.6	350	165		□
3.6	400	180		□
3.6	500	220		□
3.65	125	75		□
3.65	200	120		□
3.7	100	60		□
3.7	125	75		□
3.7	150	75		●
3.7	150	90		□
3.7	200	100		●
3.7	200	120		□
3.7	250	120		●
3.7	250	130		□
3.7	300	120		●
3.7	300	150	1.2	□
3.7	350	165		□
3.7	400	180		□
3.7	500	220		□
3.75	125	75		□
3.75	200	120		□
3.8	100	60		□
3.8	125	75		●
3.8	150	75		□
3.8	150	90		□
3.8	200	100		●
3.8	200	120		□
3.8	250	120		●
3.8	250	130		□
3.8	300	120		●
3.8	300	150		□
3.8	350	165		□
3.8	400	180		□
3.8	500	220		□
3.85	125	75		□
3.85	200	120		□
3.9	100	60		□
3.9	125	75		●
3.9	150	75		□
3.9	150	90		□
3.9	200	100		●
3.9	200	120		□
3.9	250	120		●
3.9	250	130		□
3.9	300	120		●
3.9	300	150		□
3.9	350	165		□
3.9	400	180		□
3.9	500	220		□
3.95	125	75	1.2	□
3.95	200	120		□
4.0	100	60		●
4.0	125	75		□
4.0	150	75		●

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
4.0	150	90	1.2	□
4.0	200	100		●
4.0	200	120		□
4.0	250	120		●
4.0	250	130		□
4.0	300	120		●
4.0	300	150		□
4.0	350	165		□
4.0	400	180		□
4.0	450	200		□
4.0	500	220		□
4.0	600	250		□
4.0	700	300		□
4.05	125	75		□
4.05	200	120		□
4.1	100	60		□
4.1	125	75		●
4.1	150	75		●
4.1	150	90		□
4.1	200	100		●
4.1	200	120		□
4.1	250	120		●
4.1	250	130		□
4.1	300	120		●
4.1	300	150		□
4.1	350	165		□
4.1	400	180		□
4.15	125	75	1.3	□
4.15	200	120		□
4.2	100	60		□
4.2	125	75		●
4.2	150	75		□
4.2	150	90		□
4.2	200	100		●
4.2	200	120		□
4.2	250	120		□
4.2	250	130		□
4.2	300	120		●
4.2	300	150		□
4.2	350	165		□
4.2	400	180		□
4.2	450	200		□
4.25	125	75		□
4.25	200	120		□
4.3	100	60		□
4.3	125	75		●
4.3	150	75		□
4.3	150	90		□
4.3	200	100		●
4.3	200	120		□
4.3	250	120		●
4.3	250	130		□
4.3	300	120		●
4.3	300	150		□
4.3	350	165		□
4.3	400	180		□
4.3	450	200		□
4.35	125	75		□
4.35	200	120		□
4.4	100	60	1.3	□
4.4	125	75		●
4.4	150	75		□
4.4	150	90		□
4.4	200	100		●
4.4	200	120		□
4.4	250	120		□

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

	直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock		直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock		直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock	
新商品	4.4	250	130	1.3	☐		4.9	200	100	1.5	☒		5.3	350	180	1.6	☐	
	4.4	300	120		☒		5.3	400	150		☒							
	4.4	300	150		☒		5.3	400	200		☐							
	4.4	350	165		☐		5.3	450	220		☐							
	4.4	400	180		☒		5.3	500	230		☐							
硬质合金钻头	4.45	125	75		☐		4.9	300	160		☐		5.3	600	270		☐	
	4.45	200	120		☒		5.35	125	85		☐							
	4.5	100	60		☒		5.35	150	110		☐							
	4.5	125	75		☒		5.35	200	125		☐							
	4.5	150	90		☐		5.4	125	85		☒							
	4.5	150	90		☒		5.4	150	100		☐							
	4.5	200	100		☒		5.4	150	110		☐							
	4.5	200	100		☐		5.4	200	100		☐							
	4.5	250	120		☒		5.4	200	125		☐							
	4.5	250	130		☐		5.4	250	120		☒							
高速钢钻头	4.5	300	120		☒		5.0	150	75		☒		5.4	250	150		☒	
	4.5	300	150		☐		5.0	150	100		☐		5.4	300	130		☒	
	4.5	350	165		☒		5.0	200	125		☐		5.4	300	170		☐	
	4.5	400	180		☐		5.0	200	125		☐		5.4	350	180		☐	
	4.5	450	200		☒		5.0	250	120		☒		5.4	400	150		☒	
	4.5	500	220		☐		5.0	250	140		☐		5.4	400	200		☐	
	4.5	600	260		☐		5.0	300	130		☒		5.4	450	220		☐	
	4.5	700	300		☐		5.0	300	160		☐		5.4	500	230		☐	
	4.55	125	75		☐		5.0	350	175		☐		5.4	600	270		☐	
	4.55	200	120		☒		5.0	400	150		☒		5.45	125	85		☐	
丝锥	4.6	125	75		☒		5.0	400	190	1.5			5.45	150	110		☐	
	4.6	150			☒		5.45	200	125				☐					
	4.6	150	100		☐		5.5	125	85				☐	5.5	125		85	☐
	4.6	200			☒		5.5	150	100				☒	5.5	150		100	☒
	4.6	200	125		☐		5.5	150	110				☐	5.5	150		110	☐
	4.6	250	120		☒		5.5	200	100				☐	5.5	200		100	☒
	4.6	250	140		☐		5.5	200	125				☐	5.5	200		125	☒
	4.6	300	130		☒		5.5	250	120				☐	5.5	250		120	☒
	4.6	300	160		☐		5.5	250	150				☐	5.5	250		150	☐
	4.6	350	175		☐		5.5	300	130				☒	5.5	300		130	☒
硬质合金立铣刀	4.6	400	150		☒		5.1	150	100		☒		5.5	300	175		☐	
	4.6	400	190		☐		5.1	150	110		☐		5.5	350	185		☐	
	4.6	450	210		☒		5.1	200	100		☒		5.5	400	150		☒	
	4.6	500	230		☐		5.1	200	125		☐		5.5	400	200		☐	
	4.6	600	270		☒		5.1	250	120		☒		5.5	450	220		☐	
	4.65	125	75		☐		5.1	250	150		☐		5.5	500	230		☐	
	4.65	200	125		☒		5.1	300	130		☒		5.5	600	270		☐	
	4.7	125	75		☒		5.1	300	170		☐		5.5	700	310		☐	
	4.7	150			☐		5.1	350	180		☐		5.5	800	350		☐	
	4.7	150	100		☐		5.1	400	150		☒		5.55	150	110		☐	
4.7	200	☒		5.1	400	200	☐	5.55	250	150	☐							
切割工具	4.7	200	125		☐		5.1	450	220		☐		5.6	125	85		☒	
	4.7	250	120		☒		5.1	500	230		☐		5.6	150	100		☒	
	4.7	250	140		☐		5.1	600	270		☐		5.6	150	110		☐	
	4.7	300	130		☒		5.15	125	85		☐		5.6	200	100		☒	
	4.7	300	160		☐		5.15	150	110		☐		5.6	200	125		☐	
	4.7	350	175		☒		5.15	200	125		☐		5.6	250	120		☒	
	4.7	400	150		☐		5.2	125	85		☒		5.6	250	150		☐	
	4.7	400	190		☐		5.2	150	100		☒		5.6	300	150		☒	
	4.7	450	210		☐		5.2	150	110		☐		5.6	300	175		☐	
	4.7	500	230		☐		5.2	200	100		☒		5.6	350	185		☐	
套装商品 其它	4.7	600	270		☐		5.2	200	125		☐		5.6	400	180		☒	
	4.75	125	75		☐		5.2	250	120		☒		5.6	400	200		☐	
	4.75	200	125		☐		5.2	250	150		☐		5.6	450	225		☐	
	4.8	125	75		☒		5.2	300	130		☒		5.6	500	180		☒	
	4.8	150	75		☐		5.2	300	170		☐		5.6	500	250		☐	
精密工具	4.8	150	100		☐		5.2	350	180		☐		5.6	600	300		☐	
	4.8	200			☒		5.2	400	150		☒		5.6	600	300		☐	
	4.8	200	125		☐		5.2	400	200		☐		5.65	150	110		☐	
	4.8	250	120		☒		5.2	450	220		☐		5.65	250	150		☐	
	4.8	250	140		☐		5.2	500	230		1.6		☐	5.7	125		85	☒
4.8	300	130	☒	5.2	600	270	☐	5.7	150	100		☐						
4.8	300	160	☐	5.25	125	85	☐	5.7	150	110		☐						
4.8	350	175	☒	5.25	150	110	☐	5.7	200	100		☒						
4.8	400	150	☒	5.25	200	125	☐	5.7	200	125		☐						
4.8	400	190	☐	5.3	125	85	☒	5.7	250	120		☒						
4.8	450	210	☐	5.3	150	100	☒	5.7	250	150		☐						
4.8	500	230	☐	5.3	150	110	☐	5.7	300	175		☐						
技术资料 索引	4.8	600	270		☐		5.3	200	100		☒		5.7	350	185		☐	
	4.85	125	75		☐		5.3	200	125		☐		5.7	400	180		☒	
	4.85	200	125		☐		5.3	250	120		☒		5.7	400	200		☐	
	4.9	125	75		☐		5.3	250	150		☐		5.7	450	225		☐	
	4.9	150	75		☒		5.3	300	130		☒		5.7	500	180		☒	
	4.9	150	100		☐		5.3	300	170		☐		5.7	500	250		☐	

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
5.7	600	300	1.7	
5.75	150	110		
5.75	250	150		□
5.8	125	85		●
5.8	150	100		□
5.8	150	110		●
5.8	200	100		□
5.8	200	125		●
5.8	250	120		□
5.8	250			●
5.8	300	150		●
5.8	300	175	1.7	□
5.8	350	185		□
5.8	400	180		●
5.8	400	200		□
5.8	450	225		●
5.8	500	180		●
5.8	500	250		
5.8	600	300		□
5.85	150	110		□
5.85	250	150		
5.9	125	85	1.7	●
5.9	150	100		□
5.9	150	110		●
5.9	200	100		□
5.9	200	125		●
5.9	250	120		□
5.9	250			●
5.9	300	150		●
5.9	300	175		□
5.9	350	185		●
5.9	400	180	1.8	□
5.9	400	200		●
5.9	450	225		□
5.9	500	180		●
5.9	500	250		
5.9	600	300		□
5.95	150	110		□
5.95	250	150		
6.0	125	90		●
6.0	150	100		□
6.0	150	110	1.8	●
6.0	200	100		□
6.0	200	125		●
6.0	250	120		□
6.0	250			●
6.0	300	150		●
6.0	300	175		□
6.0	350	185		□
6.0	400	180		●
6.0	400	200		□
6.0	450	225	1.8	□
6.0	500	180		●
6.0	500	250		□
6.0	600	200		●
6.0	600	300		
6.0	700	350		
6.0	800	400		□
6.05	150	110		□
6.05	250	150		
6.1	125	90	1.8	●
6.1	150	100		□
6.1	150	110		●
6.1	200	100		□
6.1	200	125		●
6.1	250	120		□
6.1	250	150		●
6.1	300			
6.1	300	175		
6.1	350	185		
6.1	400	200	1.9	□
6.1	450	225		
6.1	500	250		
6.1	600	300		
6.15	150	110		
6.15	250	150		
6.2	125	90		●
6.2	150	100		
6.2	150	110		□

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
6.2	200	100	1.9	●
6.2	200	125		□
6.2	250	120		●
6.2	250	150		□
6.2	300			●
6.2	300	175		
6.2	350	185		
6.2	400	200		
6.2	450	225		□
6.2	500	250		
6.2	600	300	1.9	□
6.25	150	110		
6.25	250	150		
6.3	125	90		●
6.3	150	100		□
6.3	150	110		●
6.3	200	100		□
6.3	200	125		●
6.3	250	120		□
6.3	250			●
6.3	300	150	1.9	●
6.3	300	175		
6.3	350	185		
6.3	400	200		
6.3	450	225		
6.3	500	250		□
6.3	600	300		
6.35	150	110		
6.35	250	150		
6.4	125	90	1.9	●
6.4	150	100		□
6.4	150	110		●
6.4	200	100		□
6.4	200	125		●
6.4	250	120		□
6.4	250	150		●
6.4	300	175		
6.4	350	185		
6.4	400	200	1.9	□
6.4	450	225		
6.4	500	250		
6.4	600	300		
6.45	150	110		
6.45	250	150		
6.5	150	110	2.0	●
6.5	200	100		□
6.5	200	125		●
6.5	250	120		□
6.5	250	150		●
6.5	300			
6.5	300	175		□
6.5	350	185		●
6.5	400	200		□
6.5	450	225	2.0	□
6.5	500	200		●
6.5	500	250		□
6.5	600	200		●
6.5	600	300		
6.5	700	350		
6.5	800	400		□
6.55	150	110		
6.55	250	150		
6.6	150	110	2.0	●
6.6	200	100		□
6.6	200	125		●
6.6	250	120		□
6.6	250	150		●
6.6	300			
6.6	300	175		
6.6	350	185		
6.6	400	200	2.0	□
6.6	450	225		
6.6	500	250		
6.6	600	300		
6.6	700	350		
6.6	800	400		
6.65	150	110		
6.65	250	150		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
6.7	150	110	2.0	□
6.7	200	100		●
6.7	200	125		□
6.7	250	120		●
6.7	250	150		□
6.7	300			●
6.7	300	175		
6.7	350	185		
6.7	400	200		
6.7	450	225	2.0	
6.7	500	250		
6.7	600	300		□
6.7	700	350		
6.7	800	400		
6.75	150	110		
6.75	250	150		
6.8	150	110	2.0	●
6.8	200	100		□
6.8	200	125		●
6.8	250	120		□
6.8	250	150		●
6.8	300			□
6.8	300	175		●
6.8	350	185		
6.8	400	200	2.0	
6.8	450	225		
6.8	500	250		□
6.8	600	300		
6.8	700	350		
6.8	800	400		
6.85	150	110		
6.85	250	150		
6.9	150	110	2.1	□
6.9	200	100		●
6.9	200	125		□
6.9	250	120		●
6.9	250	150		□
6.9	300			●
6.9	300	175		
6.9	350	185		
6.9	400	200	2.1	
6.9	450	225		
6.9	500	250		□
6.9	600	300		
6.9	700	350		
6.9	800	400		
6.95	150	110		
6.95	250	150		
7.0	150	110	2.1	●
7.0	200	100		□
7.0	200	125		●
7.0	250	120		□
7.0	250	150		●
7.0	300			□
7.0	300	175		●
7.0	350	185		
7.0	400	200	2.1	
7.0	450	225		□
7.0	500	200		●
7.0	500	250		□
7.0	600	200		●
7.0	600	300		
7.0	700	350		
7.0	800	400		
7.05	150	110		□
7.05	250	150		
7.1	150	110	2.1	●
7.1	200	100		□
7.1	200	125		●
7.1	250	120		□
7.1	250	150		●
7.1	300			□
7.1	300	175		●
7.1	350	185		
7.1	400	200	2.1	
7.1	450	225		□
7.1	500	250		
7.1	600	300		
7.1	700	350		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

	直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock		直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock		直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
新商品	7.1	800	400	2.1	□		7.6	500	250	2.3	□		8.1	350	185	2.4	□
	7.15	150	110				7.6	600	300				8.1	400	200		
	7.15	250	150				7.6	700	350				8.1	450	250		
	7.2	150	110				7.6	800	400				8.1	500	300		
	7.2	200	100				7.65	150	110				8.1	600	350		
硬质合金钻头	7.2	200	125	2.2	□		7.65	250	150	2.3	□		8.1	700	400	2.5	●
	7.2	250	120				7.7	150	110				8.1	800	450		
	7.2	250	150				7.7	200	100				8.15	150	110		
	7.2	300	175				7.7	200	125				8.15	250	150		
	7.2	300	175				7.7	250	120				8.2	150	110		
	7.2	350	185				7.7	250	150				8.2	200	100		
	7.2	400	200				7.7	300	150				8.2	200	125		
	7.2	450	225				7.7	300	175				8.2	250	120		
	7.2	500	250				7.7	350	185				8.2	250	150		
	7.2	600	300				7.7	400	200				8.2	300	175		
高速钢钻头	7.2	700	350	2.2	□		7.7	450	225	2.3	□		8.2	300	175	2.5	●
	7.2	800	400				7.7	500	250				8.2	350	185		
	7.25	150	110				7.7	600	300				8.2	400	200		
	7.25	250	150				7.7	700	350				8.2	450	250		
	7.3	150	110				7.7	800	400				8.2	500	300		
	7.3	200	100				7.75	150	110				8.2	600	350		
	7.3	200	125				7.75	250	150				8.2	700	400		
	7.3	250	120				7.8	150	110				8.2	800	450		
	7.3	250	150				7.8	200	100				8.25	150	110		
	7.3	300	175				7.8	200	125				8.25	250	150		
丝锥	7.3	300	175	2.2	□		7.8	250	120	2.3	□		8.3	150	110	2.5	●
	7.3	350	185				7.8	250	150				8.3	200	100		
	7.3	400	200				7.8	300	150				8.3	200	125		
	7.3	450	225				7.8	300	175				8.3	250	120		
	7.3	500	250				7.8	350	185				8.3	250	150		
硬质合金立铣刀	7.3	600	300	2.2	□		7.8	400	200	2.3	□		8.3	300	175	2.5	●
	7.3	700	350				7.8	450	225				8.3	300	175		
	7.3	800	400				7.8	500	250				8.3	350	185		
	7.35	150	110				7.8	600	300				8.3	400	200		
	7.35	250	150				7.8	700	350				8.3	450	250		
高速钢立铣刀	7.4	150	110	2.2	□		7.8	800	400	2.3	□		8.3	500	300	2.5	□
	7.4	200	100				7.85	150	110				8.3	600	350		
	7.4	200	125				7.85	250	150				8.3	700	400		
	7.4	250	120				7.9	150	110				8.3	800	450		
	7.4	250	150				7.9	200	100				8.35	150	110		
	7.4	300	175				7.9	200	125				8.35	250	150		
	7.4	300	175				7.9	250	120				8.4	150	110		
	7.4	350	185				7.9	250	150				8.4	200	100		
	7.4	400	200				7.9	300	175				8.4	200	125		
	7.4	450	225				7.9	300	175				8.4	250	120		
切割工具	7.4	500	250	2.2	□		7.9	350	185	2.3	□		8.4	250	150	2.5	●
	7.4	600	300				7.9	400	200				8.4	300	175		
	7.4	700	350				7.9	450	225				8.4	300	175		
	7.4	800	400				7.9	500	250				8.4	350	185		
	7.45	150	110				7.9	600	300				8.4	400	200		
套装商品 其它	7.45	250	150	2.2	□		7.9	700	350	2.3	□		8.4	450	250	2.5	□
	7.5	150	110				7.9	800	400				8.4	500	300		
	7.5	200	100				7.95	150	110				8.4	600	350		
	7.5	200	125				7.95	250	150				8.4	700	400		
	7.5	250	120				8.0	150	110				8.4	800	450		
	7.5	250	150				8.0	200	100				8.45	150	110		
	7.5	300	175				8.0	200	125				8.45	250	150		
	7.5	300	175				8.0	250	120				8.5	150	110		
	7.5	350	185				8.0	250	150				8.5	200	100		
	7.5	400	200				8.0	300	175				8.5	200	125		
精密工具	7.5	450	225	2.3	□		8.0	300	175	2.4	□		8.5	250	120	2.6	●
	7.5	500	200				8.0	350	185				8.5	250	120		
	7.5	500	250				8.0	350	185				8.5	250	150		
	7.5	600	200				8.0	400	200				8.5	300	150		
	7.5	600	200				8.0	450	225				8.5	300	175		
技术资料 索引	7.5	600	300	2.3	□		8.0	500	200	2.4	□		8.5	350	185	2.6	●
	7.5	700	350				8.0	500	300				8.5	400	200		
	7.5	800	400				8.0	600	200				8.5	450	250		
	7.55	150	110				8.0	600	350				8.5	500	200		
	7.55	250	150				8.0	700	400				8.5	500	300		
	7.6	150	110				8.0	800	450				8.5	600	200		
	7.6	200	100				8.05	150	110				8.5	600	350		
	7.6	200	125				8.05	250	150				8.5	700	400		
	7.6	250	120				8.1	150	110				8.5	800	450		
	7.6	250	150				8.1	200	100				8.55	150	110		

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
8.6	250	150		●
8.6	300			●
8.6	300	175		
8.6	350	185		
8.6	400	200		
8.6	450	250		
8.6	500	300		
8.6	600	350	□	
8.6	700	400		
8.6	800	450		
8.65	150	110		
8.65	250	150		
8.7	150	110		●
8.7	200	100	●	
8.7	200	125	□	
8.7	250	120	●	
8.7	250		□	
8.7	300	150	●	
8.7	300	175		
8.7	350	185		
8.7	400	200		
8.7	450	250		
8.7	500	300		
8.7	600	350	□	
8.7	700	400		
8.7	800	450		
8.75	150	110		
8.75	250	150		
8.8	150	110		●
8.8	200	100	□	
8.8	200	125	●	
8.8	250	120	□	
8.8	250		●	
8.8	300	150		
8.8	300	175		
8.8	350	185		
8.8	400	200		
8.8	450	250		
8.8	500	300		
8.8	600	350	□	
8.8	700	400		
8.8	800	450		
8.85	150	110		
8.85	250	150		
8.9	150	110		●
8.9	200	100	□	
8.9	200	125	●	
8.9	250	120	□	
8.9	250	150	●	
8.9	300			
8.9	300	175		
8.9	350	185		
8.9	400	200		
8.9	450	250		
8.9	500	300		
8.9	600	350	□	
8.9	700	400		
8.9	800	450		
8.95	150	110		
8.95	250	150		
9.0	150	110		●
9.0	200	100	□	
9.0	200	125	●	
9.0	250	120	□	
9.0	250	150	●	
9.0	300			
9.0	300	175	□	
9.0	350	185		
9.0	400	200	●	
9.0	450	250	□	
9.0	500	200	●	
9.0	500	300	□	
9.0	600	200	●	
9.0	600	350		
9.0	700	400		
9.0	800	450	□	
9.05	200	125		
9.05	300	175		
9.1	150	110		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
9.1	200	100		●
9.1	200	125	□	
9.1	250	120	●	
9.1	250	150	□	
9.1	300		●	
9.1	300	175		
9.1	350	185		
9.1	400	200		
9.1	450	250		
9.1	500	300		
9.1	600	350	□	
9.1	700	400		
9.1	800	450		
9.15	200	125		
9.15	300	175		
9.2	150	110		●
9.2	200	100	□	
9.2	200	125	●	
9.2	250	120	●	
9.2	250		□	
9.2	300	150	●	
9.2	300	175		
9.2	350	185		
9.2	400	200		
9.2	450	250		
9.2	500	300		
9.2	600	350	□	
9.2	700	400		
9.2	800	450		
9.25	200	125		
9.25	300	175		
9.3	150	110		●
9.3	200	100	□	
9.3	200	125	●	
9.3	250	120	●	
9.3	250	150	□	
9.3	300	175	●	
9.3	350	185		
9.3	400	200		
9.3	450	250		
9.3	500	300		
9.3	600	350	□	
9.3	700	400		
9.3	800	450		
9.35	200	125		
9.35	300	175		
9.4	150	110		●
9.4	200	100	□	
9.4	200	125	●	
9.4	250	120	●	
9.4	250	150	□	
9.4	300	175	●	
9.4	350	185		
9.4	400	200		
9.4	450	250		
9.4	500	300		
9.4	600	350	□	
9.4	700	400		
9.4	800	450		
9.45	200	125		
9.45	300	175		
9.5	150	110		●
9.5	200	100	□	
9.5	200	125	●	
9.5	250	120	●	
9.5	250	150	□	
9.5	300		●	
9.5	300	175	□	
9.5	350	185		
9.5	400	200	●	
9.5	450	250	□	
9.5	500	200	●	
9.5	500	300	□	
9.5	600	200	●	
9.5	600	350		
9.5	700	400	□	
9.5	800	450		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
9.55	200	125		
9.55	300	175		□
9.6	150	110		●
9.6	200	100		□
9.6	200	125		●
9.6	250	120		□
9.6	250	150		●
9.6	300	175		
9.6	350	185		
9.6	400	200		
9.6	500	300		
9.6	600	350		
9.6	700	400	□	
9.6	800	450		
9.6	1000	550		
9.65	200	125		
9.65	300	175		
9.7	150	110		●
9.7	200	100	□	
9.7	200	125	●	
9.7	250	120	□	
9.7	250	150	□	
9.7	300	150	●	
9.7	300	175		
9.7	350	185		
9.7	400	200		
9.7	500	300		
9.7	600	350		
9.7	700	400	□	
9.7	800	450		
9.7	1000	550		
9.75	200	125		
9.75	300	175		
9.8	150	110		●
9.8	200	100	□	
9.8	200	125	●	
9.8	250	120	□	
9.8	250	150	□	
9.8	300	175	●	
9.8	350	185		
9.8	400	200		
9.8	500	300		
9.8	600	350	□	
9.8	700	400		
9.8	800	450		
9.8	1000	550		
9.85	200	125		
9.85	300	175		
9.9	150	110		●
9.9	200	100	□	
9.9	200	125	●	
9.9	250	120	□	
9.9	250	150	□	
9.9	300	175	●	
9.9	350	185		
9.9	400	200		
9.9	500	300		
9.9	600	350		
9.9	700	400	□	
9.9	800	450		
9.9	1000	550		
9.95	200	125		
9.95	300	175		
10.0	150	110		●
10.0	200	100	□	
10.0	200	125	●	
10.0	250	120	□	
10.0	250	150	□	
10.0	300		●	
10.0	300	175	□	
10.0	350	185		
10.0	400	200	●	
10.0	450	250	□	
10.0	500		□	
10.0	500	300	●	
10.0	600			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

[← 上一页](#) Previous Page

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
10.0	600	400	3.0	
10.0	700	450		
10.0	800	500		
10.0	1000	600		
10.05	200	125		
10.05	300	175		
10.1	150	110		
10.1	200	100		
10.1	200	125		
10.1	250	120		
10.1	250	150		
10.1	300			
10.1	300			
10.1	300	175		
10.1	350	185		
10.1	400	200		
10.1	450	250		
10.1	500	300		
10.1	600	400		
10.1	800	500		
10.1	1000	600		
10.15	200	125		
10.15	300	175		
10.2	150	110		
10.2	200	100		
10.2	200	125		
10.2	250	120		
10.2	250	150		
10.2	300			
10.2	300			
10.2	300	175		
10.2	350	185		
10.2	400	200		
10.2	450	250		
10.2	500	300		
10.2	600	400		
10.2	800	500		
10.2	1000	600		
10.25	300	175		
10.3	150	110		
10.3	200	100		
10.3	200	125		
10.3	250	120		
10.3	250	150		
10.3	300			
10.3	300			
10.3	300	175		
10.3	350	185		
10.3	400	200		
10.3	450	250		
10.3	500	300		
10.3	600	400		
10.3	800	500		
10.3	1000	600		
10.35	300	175		
10.4	150	110		
10.4	200	100		
10.4	200	125		
10.4	250	120		
10.4	250	150		
10.4	300			
10.4	300			
10.4	300	175		
10.4	350	185		
10.4	400	200		
10.4	450	250		
10.4	500	300		
10.4	600	400		
10.4	800	500		
10.4	1000	600		
10.45	300	175		
10.5	150	110		
10.5	200	125		
10.5	250	120		
10.5	250	150		
10.5	300			
10.5	300			
10.5	300	175		
10.5	350	185		
10.5	400	200		
10.5	450	250		
10.5	500			
10.5	500			
10.5	500	300		
10.5	600			

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
10.5	600	400	3.2	
10.5	700	450		
10.5	800	500		
10.5	1000	600		
10.55	300	175		
10.6	200	125		
10.6	250	120		
10.6	250	150		
10.6	300			
10.6	300	175		
10.6	350	185		
10.6	400	200		
10.6	450	250		
10.6	500	300		
10.6	600	400		
10.6	800	500		
10.6	1000	600		
10.65	300	175		
10.7	200	125		
10.7	250	120		
10.7	250	150		
10.7	300			
10.7	300	175		
10.7	350	185		
10.7	400	200		
10.7	450	250		
10.7	500	300		
10.7	600	400		
10.7	800	500		
10.7	1000	600		
10.75	300	175		
10.8	200	125		
10.8	250	120		
10.8	250	150		
10.8	300			
10.8	300	175		
10.8	350	185		
10.8	400	200		
10.8	450	250		
10.8	500	300		
10.8	600	400		
10.8	800	500		
10.8	1000	600		
10.85	300	175		
10.9	200	125		
10.9	250	120		
10.9	250	150		
10.9	300			
10.9	300	175		
10.9	350	185		
10.9	400	200		
10.9	450	250		
10.9	500	300		
10.9	600	400		
10.9	800	500		
10.9	1000	600		
10.95	300	175		
11.0	200	125		
11.0	250	120		
11.0	250	150		
11.0	300			
11.0	300	175		
11.0	350	185		
11.0	400	200		
11.0	450	250		
11.0	500			
11.0	500	300		
11.0	600	400		
11.0	700	450		
11.0	800	500		
11.0	1000	600		
11.05	200	125		
11.05	300	175		
11.1	200	125		
11.1	250	120		
11.1	250	150		
11.1	300			
11.1	300	175		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
11.1	400	200	3.3	
11.1	500	300		
11.1	600	400		
11.1	800	500		
11.1	1000	600		
11.15	300	175		
11.2	200	125		
11.2	250	120		
11.2	250	150		
11.2	300			
11.2	300	175		
11.2	400	200		
11.2	500	300		
11.2	600	400		
11.2	800	500		
11.2	1000	600		
11.25	300	175		
11.3	200	125		
11.3	250	120		
11.3	250	150		
11.3	300			
11.3	300	175		
11.3	400	200		
11.3	500	300		
11.3	600	400		
11.3	800	500		
11.3	1000	600		
11.35	300	175		
11.4	200	125		
11.4	250	120		
11.4	250	150		
11.4	300			
11.4	300	175		
11.4	400	200		
11.4	500	300		
11.4	600	400		
11.4	800	500		
11.4	1000	600		
11.45	300	175		
11.5	200	125		
11.5	250	120		
11.5	250	150		
11.5	300			
11.5	300	175		
11.5	350	185		
11.5	400	200		
11.5	450	250		
11.5	500			
11.5	500	300		
11.5	600			
11.5	600	400		
11.5	700	450		
11.5	800	500		
11.5	1000	600		
11.55	300	175		
11.6	200	125		
11.6	250	120		
11.6	250	150		
11.6	300			
11.6	300	175		
11.6	400	200		
11.6	500	300		
11.6	600	400		
11.6	800	500		
11.6	1000	600		
11.65	300	175		
11.7	200	125		
11.7	250	120		
11.7	250	150		
11.7	300			
11.7	300	175		
11.7	400	200		
11.7	500	300		
11.7	600	400		
11.7	800	500		
11.7	1000	600		
11.75	300	175		
11.8	200	125		
11.8	250	120		

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
11.8	250	150	3.5	□
11.8	300			●
11.8	300	175		
11.8	400	200		
11.8	500	300		
11.8	600	400		□
11.8	800	500		
11.8	1000	600		
11.85	300	175		
11.9	200	125		●
11.9	250	120	3.6	□
11.9	250	150		●
11.9	300	175		
11.9	400	200		
11.9	500	300		□
11.9	600	400		
11.9	800	500		
11.9	1000	600		
11.95	300	175		
12.0	200	125		●
12.0	250	120	3.6	□
12.0	250	150		●
12.0	300	175		□
12.0	350	185		●
12.0	400	200		□
12.0	450	250		●
12.0	500			□
12.0	500	300		●
12.0	600	400		
12.0	700	450		
12.0	800	500	3.6	□
12.0	1000	600		
12.05	200	125		
12.05	300	175		
12.1	200	125		●
12.1	250	120		□
12.1	250	150		●
12.1	300	175		
12.1	400	200		
12.1	500	300		□
12.1	600	400	3.7	
12.1	800	500		
12.1	1000	600		
12.2	200	125		●
12.2	250	120		□
12.2	250	150		●
12.2	300	175		
12.2	400	200		
12.2	500	300		□
12.2	600	400		
12.2	800	500	3.7	
12.2	1000	600		
12.3	200	125		●
12.3	250	120		□
12.3	250	150		●
12.3	300	175		
12.3	400	200		
12.3	500	300		□
12.3	600	400		
12.3	800	500		
12.3	1000	600	3.7	
12.4	200	125		●
12.4	250	120		□
12.4	250	150		●
12.4	300	175		
12.4	400	200		
12.4	500	300		□
12.4	600	400		
12.4	800	500		
12.4	1000	600		
12.5	200	125	3.8	●
12.5	250	120		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
12.5	250	150	3.8	□
12.5	300			●
12.5	300	175		□
12.5	350	185		
12.5	400	200		●
12.5	450	250		□
12.5	500			●
12.5	500	300		□
12.5	600	400		●
12.5	700	450		
12.5	800	500	3.8	□
12.5	1000	600		
12.6	200	125		●
12.6	250	120		□
12.6	250	150		●
12.6	300	175		
12.6	400	200		
12.6	500	300		
12.6	600	400		□
12.6	800	500		
12.6	1000	600	3.8	●
12.7	200	125		□
12.7	250	120		●
12.7	250	150		□
12.7	300	175		●
12.7	400	200		
12.7	500	300		
12.7	600	400		□
12.7	800	500		
12.7	1000	600		
12.8	200	125	3.9	●
12.8	250	120		□
12.8	250	150		●
12.8	300	175		
12.8	400	200		
12.8	500	300		□
12.8	600	400		
12.8	800	500		
12.8	1000	600		
12.9	200	125	3.9	●
12.9	250	120		□
12.9	250	150		●
12.9	300	175		
12.9	400	200		
12.9	500	300		□
12.9	600	400		
12.9	800	500		
12.9	1000	600		
13.0	200	125	3.9	●
13.0	250	120		□
13.0	250	150		●
13.0	300	175		
13.0	350	185		□
13.0	400	200		●
13.0	450	250		□
13.0	500	300		●
13.0	600	400		□
13.0	700	450	4.0	●
13.0	800	500		
13.0	1000	600		
* 13.1	250	150		
* 13.1	300	200		
* 13.1	400	250		□
* 13.2	250	150		
* 13.2	300	200		
* 13.2	400	250		
* 13.3	250	150		
* 13.4	250	150	4.1	
* 13.5	250	150		
* 13.5	300	200		
* 13.5	400	250		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
* 13.6	250	150	4.1	
* 13.7	250	150		
* 13.7	300	200		
* 13.7	400	250		
* 13.8	250	150		
* 13.8	300	200		
* 13.8	400	250		
* 13.9	250	150		
* 14.0	250	150	4.2	
* 14.0	300	200		
* 14.0	400	250		
* 14.0	500	350		
* 14.0	600	425		
* 14.1	250	150		
* 14.1	300	200		
* 14.1	400	250		
* 14.2	250	150	4.3	
* 14.2	300	200		
* 14.2	400	250		
* 14.3	250	150		
* 14.4	250	150	4.4	
* 14.5	250	150		
* 14.5	400	250		
* 14.6	250	150		
* 14.7	250	150		
* 14.8	250	150		
* 14.8	300	200		
* 14.8	400	250		
* 14.9	250	150	4.5	
* 15.0	250	150		
* 15.0	300	200		
* 15.0	400	250		
* 15.0	500	350		
* 15.0	600	425		
* 15.1	250	150		
* 15.1	300	200		
* 15.1	400	250		
* 15.2	250	150	4.6	
* 15.2	300	200		
* 15.2	400	250		
* 15.3	250	150		
* 15.4	250	150	4.7	
* 15.5	300	200		
* 15.5	400	250		
* 15.6	300	200		
* 15.7	300	200		
* 15.8	300	200		
* 15.9	300	200	4.8	
* 16.0	300	200		
* 16.0	400	250		
* 16.0	500	350		
* 16.0	600	425		
* 16.5	300	200		5.0
* 17.0	300	200	5.1	
* 17.0	400	250		
* 17.5	300	200	5.3	
* 18.0	300	200	5.4	
* 18.0	400	250		
* 18.0	500	350		
* 18.0	600	425		
* 18.5	300	200		
* 18.5	400	250		5.6
* 18.5	500	350		
* 19.0	300	200		
* 19.0	400	250		5.7
* 19.0	500	350		
* 19.5	300	200	5.9	
* 20.0	300	200	6.0	
* 20.0	400	250		
* 20.0	500	350		
* 20.0	600	425		
* 20.5	300	200		6.2
* 21.0	300	200		6.3
* 21.5	300	200		6.5
* 22.0	300	200	6.6	
* 22.0	400	250		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●本钻头是泛用含钴长钻头

This is general cobalt HSS long drills for deep holes.

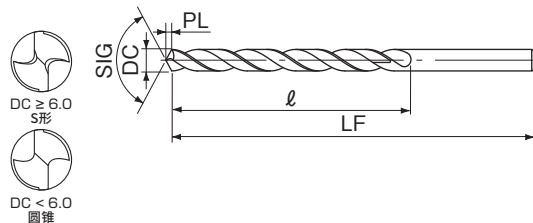

新品

订货方式 COLSD 直径 × 全长

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
1.0	100		0.3	
1.1	100			
1.2	100			
1.3	100	40	0.4	
1.4	100			
1.5	100			
1.6	100			
1.6	150	75		
1.7	100	40	0.5	
1.7	150	75		
1.8	100	40		
1.8	150	75		
1.9	100	40		
1.9	150	75		
2.0	100	40		
2.0	150	75		
2.0	200	150	0.6	
2.1	100	50		
2.1	150	75		
2.1	200	150		
2.2	100	50		
2.2	150	75		
2.2	200	150		
2.3	100	50	0.7	
2.3	150	75		
2.3	200	150		
2.4	100	50		
2.4	150	75		
2.4	200	150		
2.5	100	50		
2.5	150	75		
2.5	200	150		
2.6	100	50		
2.6	150	75		
2.6	200	150	0.8	
2.7	100	50		
2.7	150	75		
2.7	200	150		
2.8	100	50		
2.8	150	75		
2.8	200	150		
2.9	100	50		
2.9	150	75		
2.9	200	150		
3.0	100	50	0.9	
3.0	150	75		
3.0	200	150		
3.0	250	175		
3.0	300	200		
3.1	150	75		
3.1	200	150		
3.1	250	175		
3.1	300	200		
3.2	150	75		
3.2	200	150		
3.2	250	175		
3.2	300	200		
3.3	150	75	1.0	
3.3	200	150		
3.3	250	175		
3.3	300	200		
3.4	150	75		
3.4	200	150		
3.4	250	175		
3.4	300	200		
3.5	150	75	1.1	

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
3.5	200	150		
3.5	250	175		
3.5	300	200		
3.6	150	75		
3.6	200	150	1.1	
3.6	250	175		
3.6	300	200		
3.7	150	75		
3.7	200	150		
3.7	250	175		
3.7	300	200		
3.8	150	75		
3.8	200	150		
3.8	250	175		
3.8	300	200		
3.9	150	75		
3.9	200	150		
3.9	250	175		
3.9	300	200		
4.0	150	100	1.2	
4.0	200	150		
4.0	250	175		
4.0	300	200		
4.0	400	300		
4.1	150	100		
4.1	200	150		
4.1	250	175		
4.1	300	200		
4.2	150	100		
4.2	200	150		
4.2	250	175		
4.2	300	200		
4.3	150	100	1.3	
4.3	200	150		
4.3	250	175		
4.3	300	200		
4.4	150	100		
4.4	200	150		
4.4	250	175		
4.4	300	200		
4.5	150	100		
4.5	200	150		
4.5	250	175		
4.5	300	200		
4.5	400	300		
4.6	150	100	1.4	
4.6	200	150		
4.6	250	175		
4.6	300	200		
4.7	150	100		
4.7	200	150		
4.7	250	175		
4.7	300	200		
4.8	150	100		
4.8	200	150		
4.8	250	175		
4.8	300	200		
4.9	150	100	1.5	
4.9	200	150		
4.9	250	175		
4.9	300	200		
5.0	150	100		
5.0	200	150		
5.0	250	175		
5.0	300	200		
5.0	400	300		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
5.0	500	350		
5.1	150	100	1.5	
5.1	200	150		
5.1	250	175		
5.1	300	200		
5.2	150	100		
5.2	200	150		
5.2	250	175		
5.2	300	200		
5.3	150	100	1.6	
5.3	200	150		
5.3	250	175		
5.3	300	200		
5.4	150	100		
5.4	200	150		
5.4	250	175		
5.4	300	200		
5.5	150	100		
5.5	200	150		
5.5	250	175		
5.5	300	200		
5.5	400	300		
5.5	500	350		
5.6	150	100	1.7	
5.6	200	150		
5.6	250	175		
5.6	300	200		
5.7	150	100		
5.7	200	150		
5.7	250	175		
5.7	300	200		
5.8	150	100		
5.8	200	150		
5.8	250	175		
5.8	300	200		
5.9	150	100	1.8	
5.9	200	150		
5.9	250	175		
5.9	300	200		
6.0	150	100		
6.0	200	150		
6.0	250	175		
6.0	300	200		
6.0	400	300		
6.0	500	350		
6.1	150	100	1.9	
6.1	200	150		
6.1	250	175		
6.1	300	200		
6.1	400	300		
6.2	150	100		
6.2	200	150		
6.2	250	175		
6.2	300	200		
6.2	400	300		
6.3	150	100		
6.3	200	150		
6.3	250	175		
6.3	300	200		
6.3	400	300		
6.4	150	100		
6.4	200	150		
6.4	250	175		
6.4	300	200		
6.4	400	300		
6.5	150	100	2.0	

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
6.5	200	150	2.0	
6.5	250	175		
6.5	300	200		
6.5	400	300		
6.5	500	350		
6.6	150	100		
6.6	200	150		
6.6	250	175		
6.6	300	200		
6.6	400	300		
6.7	150	100		
6.7	200	150		
6.7	250	175		
6.7	300	200		
6.7	400	300		
6.8	150	100		
6.8	200	150		
6.8	250	175		
6.8	300	200		
6.8	400	300		
6.9	150	100	2.1	
6.9	200	150		
6.9	250	175		
6.9	300	200		
6.9	400	300		
7.0	150	100		
7.0	200	150		
7.0	250	175		
7.0	300	200		
7.0	400	300		
7.0	500	350		
7.0	600	400		
7.1	150	100		
7.1	200	150		
7.1	250	175		
7.1	300	200		
7.1	400	300		
7.2	150	100	2.2	
7.2	200	150		
7.2	250	175		
7.2	300	200		
7.2	400	300		
7.3	150	100		
7.3	200	150		
7.3	250	175		
7.3	300	200		
7.3	400	300		
7.4	150	100		
7.4	200	150		
7.4	250	175		
7.4	300	200		
7.4	400	300		
7.5	150	100	2.3	
7.5	200	150		
7.5	250	175		
7.5	300	200		
7.5	400	300		
7.5	500	350		
7.6	150	100		
7.6	200	150		
7.6	250	175		
7.6	300	200		
7.6	400	300		
7.7	150	100		
7.7	200	150		
7.7	250	175		
7.7	300	200		
7.7	400	300		
7.8	150	100	2.4	
7.8	200	150		
7.8	250	175		
7.8	300	200		
7.8	400	300		
7.9	150	100		
7.9	200	150		
7.9	250	175		
7.9	300	200		
7.9	400	300		
8.0	150	100		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
8.0	200	150	2.4	
8.0	250	175		
8.0	300	200		
8.0	400	300		
8.0	500	350		
8.0	600	400		
8.1	200	150		
8.1	250	175		
8.1	300	200		
8.1	400	300		
8.2	200	150		
8.2	250	175		
8.2	300	200		
8.2	400	300		
8.3	200	150		
8.3	250	175		
8.3	300	200	2.5	
8.3	400	300		
8.4	200	150		
8.4	250	175		
8.4	300	200		
8.4	400	300		
8.5	200	150		
8.5	250	175		
8.5	300	200		
8.5	400	300		
8.5	500	350		
8.6	200	150		
8.6	250	175		
8.6	300	200		
8.6	400	300		
8.7	200	150	2.6	
8.7	250	175		
8.7	300	200		
8.7	400	300		
8.8	200	150		
8.8	250	175		
8.8	300	200		
8.8	400	300		
8.9	200	150		
8.9	250	175		
8.9	300	200		
8.9	400	300		
9.0	200	150		
9.0	250	175		
9.0	300	200		
9.0	400	300		
9.0	500	350	2.7	
9.0	600	400		
9.1	200	150		
9.1	250	175		
9.1	300	200		
9.1	400	300		
9.2	200	150		
9.2	250	175		
9.2	300	200		
9.2	400	300		
9.3	200	150		
9.3	250	175		
9.3	300	200		
9.3	400	300		
9.4	200	150		
9.4	250	175		
9.4	300	200	2.8	
9.4	400	300		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
9.5	200	150	2.9	
9.5	250	175		
9.5	300	200		
9.5	400	300		
9.5	500	350		
9.6	200	150		
9.6	250	175		
9.6	300	200		
9.6	400	300		
9.7	200	150		
9.7	250	175		
9.7	300	200		
9.7	400	300		
9.8	200	150		
9.8	250	175		
9.8	300	200		
9.8	400	300	3.0	
9.9	200	150		
9.9	250	175		
9.9	300	200		
9.9	400	300		
10.0	200	150		
10.0	250	175		
10.0	300	200		
10.0	400	300	3.2	
10.0	500	350		
10.0	600	400		
10.5	200	150		
10.5	250	175		
10.5	300	200		
10.5	400	300		
10.5	500	350		
11.0	200	150	3.3	
11.0	250	175		
11.0	300	200		
11.0	400	300		
11.0	500	350		
11.0	600	400		
11.5	200	150		
11.5	250	175		
11.5	300	200	3.5	
11.5	400	300		
11.5	500	350		
12.0	200	150		
12.0	250	175	3.6	
12.0	300	200		
12.0	400	300		
12.0	500	350		
12.0	600	400		
12.5	200	150		
12.5	250	175		
12.5	300	200	3.8	
12.5	400	300		
12.5	500	350		
13.0	200	150		
13.0	250	175	3.9	
13.0	300	200		
13.0	400	300		
13.0	500	350		
13.0	600	400		

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●本钻头是适用于普通钢、不锈钢的含钴长钻头。可进行不分段加工的深孔加工。

This is general cobalt HSS drill and is suitable for non-step drilling of deep holes.



新品

LIST 6550

订货方式 NLSD 直径 × 全长


单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock			
2.0	100	60	0.5	□			
2.0	150	80					
2.0	200	105					
2.1	150	80	0.6				
2.2	150						
2.3	150						
2.3	200	105	0.7				
2.4	150	80					
2.5	100	60					
2.5	150	80	0.8				
2.5	200	105					
2.6	150	80	0.9				
2.7	150						
2.8	150						
2.9	150	60	1.0				
3.0	100						
3.0	150	100					
3.0	250	165	1.1				
3.1	150	100					
3.2	150	165					
3.2	250	100	1.2				
3.3	150	100					
3.4	150	100					
3.5	100	60	1.3				
3.5	150	100					
3.5	200	150					
3.5	250	165	1.4				
3.6	150	100					
3.7	150	100					
3.8	150	165	1.5				
3.8	250	100					
3.9	150	150					
4.0	150						
4.0	200						
4.1	200	100	1.6				
4.2	200						
4.3	200						
4.4	200	100	1.7				
4.5	150						
4.5	200						
4.5	320	215	1.8				
4.6	200						
4.7	200						
4.8	200	150	1.9				
4.9	200						
5.0	150						
5.0	200	100	2.0				
5.1	200						
5.2	200						
5.3	200	150	2.1				
5.4	200						
5.5	150						
5.5	200	100	2.2				
5.6	200						
5.7	200	150			2.3		
5.7	300						
5.8	200	200	2.4				
5.8	300	150					
5.8	300	200					
5.9	200	150	2.5				
6.0	150	100					

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
6.0	200	150	1.6	□
6.0	300	200		
6.1	200	150		
6.2	200			
6.3	200			
6.4	200	100		
6.5	150			
6.5	200			
6.6	200	150		
6.7	200			
6.8	200			
6.9	200	100		
7.0	150			
7.0	200			
7.0	300	150		
7.1	200			
7.1	300			
7.2	200	200		
7.2	300			
7.3	200			
7.3	300	150		
7.4	200			
7.4	300			
7.5	200	200		
7.5	300			
7.6	200			
7.6	300	150		
7.7	200			
7.7	300			
7.8	200	200		
7.8	300			
7.9	200			
7.9	300	150		
8.0	200			
8.0	300			
8.1	200	200		
8.1	300			
8.2	200			
8.2	300	150		
8.3	200			
8.3	300			
8.4	200	200		
8.4	300			
8.5	200			
8.5	300	150		
8.6	200			
8.6	300			
8.7	200	200		
8.7	300			
8.8	200			
8.8	300	150		
8.9	200			
8.9	300			
9.0	200	200		
9.0	300			
9.1	200			
9.1	300	150		
9.2	200			
9.2	300			
9.3	200	200		
9.3	300			

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
9.3	300	200	2.4	□
9.4	200	150		
9.4	300	200		
9.5	200	150	2.5	
9.5	300	200		
9.6	200	150		
9.6	300	200		
9.7	200	150		
9.7	300	200		
9.8	200	150	2.6	
9.8	300	200		
9.9	200	150		
9.9	300	200		
10.0	200	150		
10.0	300	200	2.7	
10.1	300			
10.2	300			
10.3	300			
10.4	300			
10.5	200	150	2.8	
10.5	300	200		
10.6	300			
10.7	300			
10.8	300			
10.9	300		150	
11.0	200			
11.0	300			
11.1	300			
11.2	300			
11.3	300	200	3.0	
11.4	300			
11.5	200			
11.5	300			
11.6	300			
11.7	300	200	3.1	
11.8	300			
11.9	300			
12.0	200			
12.0	300			
12.1	300	200	3.2	
12.2	300			
12.3	300			
12.4	300			
12.5	200			
12.5	300	200	3.3	
12.6	300			
12.7	300			
12.8	300			
12.9	300			
13.0	200	150	3.4	
13.0	300	200		
13.0	300	200		

- 容屑槽设计得比较大，因此，可顺利排出切屑，避免切屑堵塞导致钻头折断。

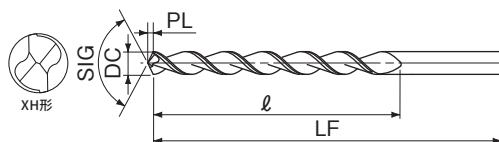

新商品

订货方式 YKL 直径 × 全长

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
1.0	100	50	0.3	□
1.1	100		0.4	
1.2	100			
1.3	100			
1.4	100		0.5	
1.5	100			
1.6	100			
1.7	100		0.6	
1.8	100			
1.9	100			
2.0	100	60	0.6	
2.0	150	80		
2.1	100	60		
2.1	150	80	0.7	
2.2	100	60		
2.2	150	80		
2.3	100	60	0.7	
2.3	150	80		
2.4	100	60		
2.4	150	80	0.8	
2.5	100	60		
2.5	150	80		
2.6	100	60	0.8	
2.6	150	80		
2.7	100	60		
2.7	150	80	0.9	
2.8	100	60		
2.8	150	80		
2.9	100	60	0.9	
2.9	150	80		
3.0	100	60		
3.0	150	100	1.0	
3.1	100	60		
3.1	150	100		
3.2	100	60	1.0	
3.2	150	100		
3.3	100	60		
3.3	150	100	1.1	
3.4	100	60		
3.4	150	100		
3.5	100	60	1.1	
3.5	150	100		
3.6	100	60		
3.6	150	100	1.2	
3.6	200	150		
3.7	100	60		
3.7	150	100	1.2	
3.7	200	150		
3.8	100	60		
3.8	150	100	1.3	
3.8	200	150		
3.9	100	60		
3.9	150	100	1.3	
3.9	200	150		
4.0	100	60		
4.0	150	100	1.3	
4.0	200	150		
4.1	150	100		
4.1	200	150	1.3	
4.2	150	100		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
4.2	200	150	1.3	□
4.3	150	100		
4.3	200	150		
4.4	150	100		
4.4	200	150		
4.5	150	100	1.4	
4.5	200	150		
4.6	150	100		
4.6	200	150		
4.7	150	100		
4.7	200	150	1.5	
4.8	150	100		
4.8	200	150		
4.9	150	100		
4.9	200	150		
5.0	150	100	1.6	
5.0	200	150		
5.0	250	175		
5.1	150	100		
5.1	200	150		
5.1	250	175	1.7	
5.2	150	100		
5.2	200	150		
5.2	250	175		
5.3	150	100		
5.3	200	150	1.8	
5.3	250	175		
5.4	150	100		
5.4	200	150		
5.4	250	175		
5.5	150	100	1.9	
5.5	200	150		
5.5	250	175		
5.6	150	100		
5.6	200	150		
5.6	250	175	2.0	
5.7	150	100		
5.7	200	150		
5.7	250	175		
5.8	150	100		
5.8	200	150	2.1	
5.8	250	175		
5.9	150	100		
5.9	200	150		
5.9	250	175		
6.0	150	100	2.2	
6.0	200	150		
6.0	250	175		
6.0	300	200		
6.1	150	100		
6.1	200	150	2.3	
6.1	250	175		
6.1	300	200		
6.2	150	100		
6.2	200	150		
6.2	250	175	2.4	
6.2	300	200		
6.3	150	100		
6.3	200	150		
6.3	250	175		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
6.3	300	200	1.9	□
6.4	150	100		
6.4	200	150		
6.4	250	175		
6.4	300	200		
6.5	150	100		
6.5	200	150		
6.5	250	175		
6.5	300	200		
6.6	150	100		
6.6	200	150		
6.6	250	175		
6.6	300	200		
6.7	150	100		
6.7	200	150		
6.7	250	175		
6.7	300	200		
6.8	150	100		
6.8	200	150		
6.8	250	175		
6.8	300	200		
6.9	150	100		
6.9	200	150		
6.9	250	175		
6.9	300	200		
7.0	150	100		
7.0	200	150		
7.0	250	175		
7.0	300	200		
7.1	150	100		
7.1	200	150		
7.1	250	175		
7.1	300	200		
7.2	150	100		
7.2	200	150		
7.2	250	175		
7.2	300	200		
7.3	150	100		
7.3	200	150		
7.3	250	175		
7.3	300	200		
7.4	150	100		
7.4	200	150		
7.4	250	175		
7.4	300	200		
7.5	150	100		
7.5	200	150		
7.5	250	175		
7.5	300	200		
7.6	200	150		
7.6	250	175		
7.6	300	200		
7.7	200	150		
7.7	250	175		
7.7	300	200		
7.8	200	150		
7.8	250	175		
7.8	300	200		
7.9	200	150		
7.9	250	175		
7.9	300	200		
7.9	250	175		
7.9	300	200		

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
7.9	300	200	2.4	□
8.0	200	150		
8.0	250	175		
8.0	300	200		
8.1	200	150		
8.1	250	175		
8.1	300	200		
8.2	200	150	2.5	
8.2	250	175		
8.2	300	200		
8.3	200	150		
8.3	250	175		
8.3	300	200		
8.4	200	150	2.6	
8.4	250	175		
8.4	300	200		
8.5	200	150		
8.5	250	175		
8.5	300	200		
8.6	200	150	2.7	
8.6	250	175		
8.6	300	200		
8.7	200	150		
8.7	250	175		
8.7	300	200		
8.8	200	150	2.8	
8.8	250	175		
8.8	300	200		
8.9	200	150		
8.9	250	175		
8.9	300	200		
9.0	200	150	2.9	
9.0	250	175		
9.0	300	200		
9.1	200	150		
9.1	250	175		
9.1	300	200		
9.2	200	150	3.0	
9.2	250	175		
9.2	300	200		
9.3	200	150		
9.3	250	175		
9.3	300	200		
9.4	200	150	3.1	
9.4	250	175		
9.4	300	200		
9.5	200	150		
9.5	250	175		
9.5	300	200		
9.6	200	150	3.2	
9.6	250	175		
9.6	300	200		
9.7	200	150		
9.7	250	175		
9.7	300	200		
9.8	200	150	3.3	
9.8	250	175		
9.8	300	200		
9.9	200	150		
9.9	250	175		
9.9	300	200		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
9.9	300	200	3.0	□
10.0	200	150		
10.0	250	175		
10.0	300	200		
10.1	200	150		
10.1	250	175		
10.1	300	200		
10.2	200	150	3.1	
10.2	250	175		
10.2	300	200		
10.3	200	150		
10.3	250	175		
10.3	300	200		
10.4	200	150	3.2	
10.4	250	175		
10.4	300	200		
10.5	200	150		
10.5	250	175		
10.5	300	200		
10.6	200	150	3.3	
10.6	250	175		
10.6	300	200		
10.7	200	150		
10.7	250	175		
10.7	300	200		
10.8	200	150	3.4	
10.8	250	175		
10.8	300	200		
10.9	200	150		
10.9	250	175		
10.9	300	200		
11.0	200	150	3.5	
11.0	250	175		
11.0	300	200		
11.1	200	150		
11.1	250	175		
11.1	300	200		
11.2	200	150	3.6	
11.2	250	175		
11.2	300	200		
11.3	200	150		
11.3	250	175		
11.3	300	200		
11.4	200	150	3.7	
11.4	250	175		
11.4	300	200		
11.5	200	150		
11.5	250	175		
11.5	300	200		
11.6	200	150	3.8	
11.6	250	175		
11.6	300	200		
11.7	200	150		
11.7	250	175		
11.7	300	200		
11.8	200	150	3.9	
11.8	250	175		
11.8	300	200		
11.9	200	150		
11.9	250	175		
11.9	300	200		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
11.9	300	200	3.6	□
12.0	200	150		
12.0	250	175		
12.0	300	200		
12.1	200	150		
12.1	250	175		
12.1	300	200		
12.2	200	150	3.7	
12.2	250	175		
12.2	300	200		
12.3	200	150		
12.3	250	175		
12.3	300	200		
12.4	200	150		
12.4	250	175		
12.4	300	200		
12.5	200	150		
12.5	250	175		
12.5	300	200		
12.6	200	150		
12.6	250	175		
12.6	300	200		
12.7	200	150		
12.7	250	175		
12.7	300	200		
12.8	200	150	3.9	
12.8	250	175		
12.8	300	200		
12.9	200	150		
12.9	250	175		
12.9	300	200		
13.0	200	150		
13.0	250	175		
13.0	300	200		

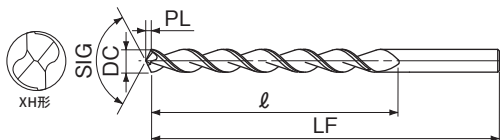

新商品

订货方式 KLE 直径 × 全长

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
2.0	200	150	0.6	□
2.5	200		0.8	
2.5	250			
3.0	200	150	0.9	
3.0	250	175		
3.0	300	200		
3.5	200	150	1.1	
3.5	250	175		
3.5	300	200		
4.0	250	175	1.2	
4.0	300	200		
4.0	350	225		
4.0	400	250	1.4	
4.5	250	175		
4.5	300	200		
4.5	350	225		
4.5	400	250	1.5	
5.0	300	200		
5.0	350	225		
5.0	400	250		
5.0	450	300	1.7	
5.0	500	325		
5.5	300	200		
5.5	350	225	1.8	
5.5	400	250		
5.5	450	300		
5.5	500	325	2	
6.0	350	225		
6.0	400	250		
6.0	450	300		
6.0	500	325	2.1	
6.5	350	225		
6.5	400	250		
6.5	450	300		
6.5	500	325	2.3	
7.0	350	225		
7.0	400	250		
7.0	450	300		
7.0	500	325	2.4	
7.5	350	225		
7.5	400	250		
7.5	450	300		
7.5	500	325	2.6	
8.0	350	225		
8.0	400	250		
8.0	450	300		
8.0	500	325	2.7	
8.5	350	225		
8.5	400	250		
8.5	450	300		
8.5	500	325	2.9	
9.0	350	225		
9.0	400	250		
9.0	450	300		
9.0	500	325	3	
9.5	350	225		
9.5	400	250		
9.5	450	300		
9.5	500	325		
10.0	350	225		

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
10.0	400	250	3	□
10.0	450	300		
10.0	500	325		
10.5	350	225	3.2	
10.5	400	250		
10.5	450	300		
10.5	500	325		
11.0	350	225		
11.0	400	250	3.3	
11.0	450	300		
11.0	500	325		
11.5	350	225		
11.5	400	250	3.5	
11.5	450	300		
11.5	500	325		
12.0	350	225	3.6	
12.0	400	250		
12.0	450	300		
12.0	500	325		
12.5	350	225		
12.5	400	250	3.8	
12.5	450	300		
12.5	500	325		
13.0	350	225	3.9	
13.0	400	250		
13.0	450	300		
13.0	500	325		

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适合用于钢、型钢、铝的油孔钻。可以进行钻头直径 3D 用开孔加工。

This oil hole drill is suitable for workpiece materials from Steel and Shaped steel to Aluminum. It is possible to drill holes up to 3 × Dc.

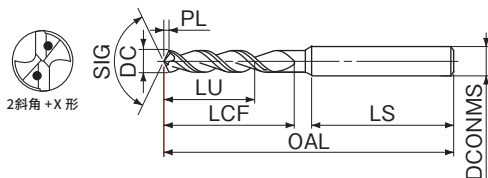

LIST 7588P

订货方式 SGOH3D 直径

单位 (Unit) : mm


直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
5.0	15.0	29.0		83.0		1.0	
5.1	15.3						
5.2	15.6						
5.3	15.9	29.1		83.1		1.1	
5.4	16.2						
5.5	16.5		50		6		
5.6	16.8						
5.7	17.1						
5.8	17.4	31.2		83.2		1.2	
5.9	17.7						
6.0	18.0						
6.1	18.3						
6.2	18.6						
6.3	18.9	34.3		89.3		1.3	
6.4	19.2						
6.5	19.5						
6.6	19.8		51		7		
6.7	20.1						
6.8	20.4	36.4		89.4		1.4	
6.9	20.7						
7.0	21.0						
7.1	21.3						
7.2	21.6						
7.3	21.9	39.5		95.5		1.5	
7.4	22.2						
7.5	22.5	39.6	52		8		
7.6	22.8						
7.7	23.1	41.6		95.6		1.6	
7.8	23.4						
7.9	23.7						
8.0	24.0	41.7		95.7			
8.1	24.3						
8.2	24.6	44.7		101.7		1.7	
8.3	24.9						
8.4	25.2						
8.5	25.5	44.8	53		9		
8.6	25.8						
8.7	26.1	46.8		101.8		1.8	
8.8	26.4						
8.9	26.7						
9.0	27.0	46.9		101.9			
9.1	27.3						
9.2	27.6	49.9		107.9		1.9	
9.3	27.9						
9.4	28.2						
9.5	28.5	50.0	54		10		
9.6	28.8						
9.7	29.1	52.0		108.0		2.0	
9.8	29.4						
9.9	29.7	52.1		108.1			
10.0	30.0						
10.1	30.3					2.1	
10.2	30.6	55.1		118.1			
10.3	30.9						
10.4	31.2						
10.5	31.5	55.2	60		11		
10.6	31.8						
10.7	32.1	57.2		118.2		2.2	
10.8	32.4						
10.9	32.7	57.3		118.3		2.3	

直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
11.0	33.0	57.3		118.3	11		
11.1	33.3						
11.2	33.6	60.3		124.3		2.3	
11.3	33.9						
11.4	34.2						
11.5	34.5	60.4	60		12	2.4	
11.6	34.8						
11.7	35.1	62.4		124.4			
11.8	35.4						
11.9	35.7	62.5		124.5			
12.0	36.0						
12.1	36.3						
12.2	36.6	65.5		130.5		2.5	
12.3	36.9						
12.4	37.2	65.6					
12.5	37.5	67.6	61	130.6	13	2.6	
12.6	37.8						
12.7	38.1						
12.8	38.4	67.7		130.7			
12.9	38.7						
13.0	39.0					2.7	
13.1	39.3	70.7		136.7			
13.2	39.6						
13.3	39.9						
13.4	40.2	70.8		136.8			
13.5	40.5		62		14	2.8	
13.6	40.8	72.8					
13.7	41.1						
13.8	41.4	72.9		136.9			
13.9	41.7						
14.0	42.0					2.9	
14.1	42.3	75.9		142.9			
14.2	42.6						
14.3	42.9						
14.4	43.2	76.0					
14.5	43.5		63	143.0	15	3.0	
14.6	43.8	78.0					
14.7	44.1						
14.8	44.4						
14.9	44.7	78.1		143.1			
15.0	45.0					3.1	
15.1	45.3	81.1		149.1			
15.2	45.6						
15.3	45.9						
15.4	46.2	81.2		149.2		3.2	
15.5	46.5		64		16		
15.6	46.8	83.2					
15.7	47.1						
15.8	47.4	83.3		149.3		3.3	
15.9	47.7						
16.0	48.0						
16.1	48.3	86.3		159.3			
16.2	48.6						
16.3	48.9	86.4		159.4		3.4	
16.4	49.2						
16.5	49.5	88.4	70		17		
16.6	49.8						
16.7	50.1						
16.8	50.4	88.5		159.5		3.5	
16.9	50.7						

直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
17.0	51.0	88.5		159.5	17		
17.1	51.3	91.5		165.5		3.5	
17.2	51.6						
17.3	51.9						
17.4	52.2	91.6		165.6		3.6	
17.5	52.5				18		
17.6	52.8	93.6					
17.7	53.1						
17.8	53.4						
17.9	53.7	93.7		165.7		3.7	
18.0	54.0						
18.1	54.3	96.7		171.7			
18.2	54.6						
18.3	54.9	96.8		171.8		3.8	
18.4	55.2				19		
18.5	55.5		70				
18.6	55.8						
18.7	56.1	98.9		171.9		3.9	
18.8	56.4						
18.9	56.7						
19.0	57.0						
19.1	57.3						
19.2	57.6						
19.3	57.9	102.0		178.0		4.0	
19.4	58.2				20		
19.5	58.5						
19.6	58.8						
19.7	59.1	104.1		178.1		4.1	
19.8	59.4						
19.9	59.7						
20.0	60.0						

●适用于普通钢、不锈钢、铝的油孔钻。可以进行钻头直径 5D 用开孔加工。

This oil hole drill is suitable for workpiece materials from Steel and Stainless Steel to Aluminum. It is possible to drill holes up to 5 × Dc.

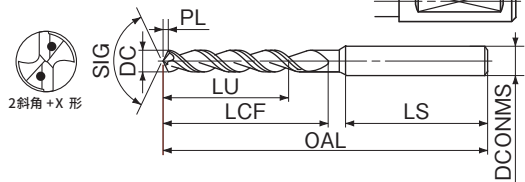

LIST 7590P

订货方式 SGOH5D

直径

(带 * 标记的商品 : SGOH5D 直径 × 柄径)

单位 (Unit) : mm

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
5.0	25.0	40.0			96.0	1.0	
5.1	25.5						
5.2	26.0						
5.3	26.5	40.1			96.1	1.1	
5.4	27.0						
5.5	27.5			50			
5.6	28.0						
5.7	28.5						
5.8	29.0	43.2			96.2	1.2	
5.9	29.5						
6.0	30.0						
6.1	30.5						
6.2	31.0						
6.3	31.5	47.3			104.3	1.3	
6.4	32.0						
6.5	32.5						
6.6	33.0			51			
6.7	33.5						
6.8	34.0	50.4			104.4	1.4	
6.9	34.5						
7.0	35.0						
7.1	35.5						
7.2	36.0	54.5			112.5	1.5	
7.3	36.5						
7.4	37.0						
7.5	37.5	54.6					
7.6	38.0			52			
7.7	38.5				112.6	1.6	
7.8	39.0	57.6					
7.9	39.5						
8.0	40.0	57.7			112.7		
8.1	40.5						
8.2	41.0						
8.3	41.5	61.7			120.7	1.7	
8.4	42.0						
8.5	42.5	61.8					
8.6	43.0			53			
8.7	43.5	64.8			120.8	1.8	
8.8	44.0						
8.9	44.5						
9.0	45.0	64.9			120.9		
9.1	45.5						
9.2	46.0						
9.3	46.5	68.9			128.9	1.9	
9.4	47.0						
9.5	47.5	69.0					
9.6	48.0			54			
9.7	48.5	72.0			129.0	2.0	
9.8	49.0						
9.9	49.5	72.1			129.1		
10.0	50.0						
10.1	50.5					2.1	
10.2	51.0	76.1			142.1		
10.3	51.5						
10.4	52.0						
10.5	52.5	76.2					
10.6	53.0			60			
10.7	53.5	79.2			142.2	2.2	
10.8	54.0						
10.9	54.5	79.3			142.3	2.3	

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
11.0	11	55.0	79.3		142.3		
11.1		55.5				2.3	
11.2		56.0	83.3		150.3		
11.3		56.5					
11.4		57.0					
11.5	12	57.5	83.4	60	150.4	2.4	
11.6		58.0					
11.7		58.5	86.4		150.5		
11.8		59.0					
11.9		59.5	86.5		150.5		
12.0		60.0					
12.1		60.5				2.5	
12.2		61.0	90.5		158.5		
12.3		61.5					
12.4		62.0					
12.5	13	62.5	90.6		158.6	2.6	
12.6		63.0	93.6				
12.7		63.5					
12.8		64.0					
12.9		64.5	93.7		158.7		
13.0		65.0				2.7	
13.1		65.5	97.7		166.7		
13.2		66.0					
13.3		66.5					
13.4		67.0	97.8				
13.5	14	67.5			166.8	2.8	
13.6		68.0					
13.7		68.5	100.8				
13.8		69.0					
13.9		69.5	100.9		166.9		
14.0		70.0				2.9	
14.1		70.5	104.9	61	174.9		
14.2		71.0					
14.3		71.5					
14.4		72.0	105.0				
14.5	15	72.5			175.0	3.0	
14.6		73.0	108.0				
14.7		73.5					
14.8		74.0	108.1		175.1		
14.9		74.5				3.1	
15.0		75.0					
15.1		75.5	112.1		183.1		
15.2		76.0					
15.3		76.5					
15.4		77.0	112.2		183.2	3.2	
15.5	16	77.5					
15.6		78.0	115.2				
15.7		78.5					
15.8		79.0	115.3		183.3	3.3	
15.9		79.5					
16.0		80.0					
16.1		80.5	119.3		196.3		
16.2		81.0					
16.3		81.5	119.4		196.4	3.4	
16.4		82.0					
16.5	17	82.5		72			
16.6		83.0	122.4				
16.7		83.5					
16.8		84.0	122.5		196.5	3.5	
16.9		84.5					

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
17.0	17	85.0	122.5		196.5	3.5	
17.1		85.5	126.5		204.5		
17.2		86.0					
17.3		86.5					
17.4		87.0	126.6		204.6	3.6	
17.5		87.5					
17.6	18	88.0	129.6				
17.7		88.5					
17.8		89.0					
17.9		89.5	129.7		204.7	3.7	
18.0		90.0					
18.1		90.5	133.7		212.7		
18.2		91.0					
18.3		91.5	133.8		212.8	3.8	
18.4		92.0					
18.5	19	92.5		72			
18.6		93.0					
18.7		93.5					
18.8		94.0	136.9		212.9	3.9	
18.9		94.5					
19.0		95.0					
19.1		95.5					
19.2		96.0					
19.3		96.5	141.0		221.0	4.0	
19.4		97.0					
19.5	20	97.5					
19.6		98.0					
19.7		98.5					
19.8		99.0	144.1		221.1	4.1	
19.9		99.5					
20.0		100.0					
20.5		102.5	151.2		232.2	4.2	
21.0		105.0	151.3		232.3	4.3	
21.5	25	107.5	157.5	56	238.5	4.5	
22.0		110.0	157.6		238.6	4.6	
22.5		112.5	164.7		245.7	4.7	
23.0		115.0	164.8		245.8	4.8	
*23.5	32	117.5	171.9	60	256.9	4.9	
23.5				56			
*24.0	25	120.0	172.0	60	257.0	5.0	
24.0				60			
*24.5	25	122.5	178.1	56	263.1	5.1	
24.5				60			
*25.0	32	125.0	178.2	56	263.2	5.2	
25.0							
25.5		127.5	187.3		272.3	5.3	
26.0		130.0	187.4		272.4	5.4	
26.5		132.5	194.5		279.5	5.5	
27.0		135.0	194.6		279.6	5.6	
27.5		137.5	201.7		286.7	5.7	
28.0		140.0	201.8		286.8	5.8	
28.5	32	142.5	208.9	60	293.9	5.9	
29.0		145.0	209.0		294.0	6.0	
29.5		147.5	216.1		301.1	6.1	
30.0		150.0	216.2		301.2	6.2	
30.5		152.5	223.3		308.3	6.3	
31.0		155.0	223.4		308.4	6.4	
31.5		157.5	230.5		315.5	6.5	
32.0		160.0	230.6		315.6	6.6	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适合用于普通钢、不锈钢、铝的油孔钻。可以进行钻头直径 7D 用开孔加工。

This oil hole drill is suitable for workpiece materials from Steel and Stainless Steel to Aluminum. It is possible to drill holes up to 7 × Dc.

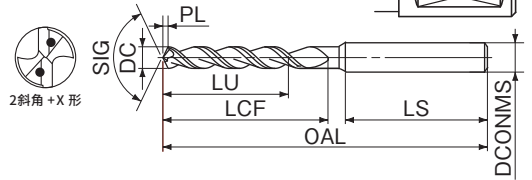

LIST 7592P

订货方式 SGOH7D 直径 (带 * 标记的商品: SGOH7D 直径 × 柄径)

单位 (Unit) : mm


直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
5.0	35.0	51.0			111.0	1.0	
5.1	35.7						
5.2	36.4						
5.3	37.1	51.1			111.1	1.1	
5.4	37.8						
5.5	38.5			50			
5.6	39.2						
5.7	39.9						
5.8	40.6	55.2			111.2	1.2	
5.9	41.3						
6.0	42.0						
6.1	42.7						
6.2	43.4						
6.3	44.1	60.3			121.3	1.3	
6.4	44.8						
6.5	45.5			51			
6.6	46.2						
6.7	46.9						
6.8	47.6	64.4			121.4	1.4	
6.9	48.3						
7.0	49.0						
7.1	49.7						
7.2	50.4	69.5			131.5	1.5	
7.3	51.1						
7.4	51.8						
7.5	52.5	69.6		52			
7.6	53.2						
7.7	53.9	73.6			131.6	1.6	
7.8	54.6						
7.9	55.3						
8.0	56.0	73.7			131.7		
8.1	56.7						
8.2	57.4	78.7			141.7	1.7	
8.3	58.1						
8.4	58.8						
8.5	59.5	78.8		53			
8.6	60.2						
8.7	60.9	82.8			141.8	1.8	
8.8	61.6						
8.9	62.3						
9.0	63.0	82.9			141.9		
9.1	63.7						
9.2	64.4	87.9			151.9	1.9	
9.3	65.1						
9.4	65.8						
9.5	66.5	88.0		54			
9.6	67.2						
9.7	67.9	92.0			152.0	2.0	
9.8	68.6						
9.9	69.3	92.1			152.1		
10.0	70.0						
10.1	70.7					2.1	
10.2	71.4	97.1			172.1		
10.3	72.1						
10.4	72.8	97.2					
10.5	73.5			60			
10.6	74.2						
10.7	74.9	101.2			172.2	2.2	
10.8	75.6						
10.9	76.3	101.3			172.3	2.3	

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
11.0	11	77.0	101.3		172.3		
11.1		77.7				2.3	
11.2		78.4	106.3		182.3		
11.3		79.1					
11.4		79.8					
11.5	12	80.5	106.4	60			
11.6		81.2			182.4	2.4	
11.7		81.9	110.4				
11.8		82.6					
11.9		83.3					
12.0		84.0	110.5		182.5		
12.1		84.7				2.5	
12.2		85.4	115.5		192.5		
12.3		86.1					
12.4		86.8					
12.5		87.5	115.6		192.6	2.6	
12.6	13	88.2	119.6				
12.7		88.9					
12.8		89.6					
12.9		90.3	119.7		192.7	2.7	
13.0		91.0					
13.1		91.7	124.7		202.7		
13.2		92.4					
13.3		93.1					
13.4		93.8	124.8				
13.5	14	94.5			202.8	2.8	
13.6		95.2					
13.7		95.9	128.8				
13.8		96.6					
13.9		97.3	128.9		202.9		
14.0		98.0		61		2.9	
14.1		98.7	133.9		212.9		
14.2		99.4					
14.3		100.1					
14.4		100.8	134.0				
14.5	15	101.5			213.0	3.0	
14.6		102.2	138.0				
14.7		102.9					
14.8		103.6					
14.9		104.3	138.1		213.1	3.1	
15.0		105.0					
15.1		105.7	143.1		223.1		
15.2		106.4					
15.3		107.1					
15.4		107.8	143.2		223.2	3.2	
15.5	16	108.5					
15.6		109.2	148.2				
15.7		109.9					
15.8		110.6	148.3		223.3	3.3	
15.9		111.3					
16.0		112.0					
16.1		112.7	152.3		248.3		
16.2		113.4					
16.3		114.1					
16.4		114.8	152.4		248.4	3.4	
16.5	17	115.5		72			
16.6		116.2	156.4				
16.7		116.9					
16.8		117.6	156.5		248.5	3.5	
16.9		118.3					

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
17.0	17	119.0	156.5	72	248.5	3.5	
17.1		119.7	161.5		258.5		
17.2		120.4					
17.3		121.1	161.6				
17.4		121.8			258.6	3.6	
17.5	18	122.5		76			
17.6		123.2	165.6				
17.7		123.9					
17.8		124.6	165.7		258.7	3.7	
17.9		125.3					
18.0		126.0					
18.1		126.7	170.7		268.7		
18.2		127.4					
18.3		128.1	170.8		268.8	3.8	
18.4		128.8					
18.5	19	129.5		77			
18.6		130.2					
18.7		130.9					
18.8		131.6	174.9		268.9	3.9	
18.9		132.3					
19.0		133.0					
19.1		133.7					
19.2		134.4					
19.3		135.1	180.0		279.0	4.0	
19.4		135.8					
19.5	20	136.5		78			
19.6		137.2					
19.7		137.9					
19.8		138.6	184.1		279.1	4.1	
19.9		139.3					
20.0		140.0					
20.5		143.5	193.2		284.2	4.2	
21.0		147.0	193.3		284.3	4.3	
21.5	25	150.5	202.5	56	293.5	4.5	
22.0		154.0	202.6		293.6	4.6	
22.5		157.5	211.7		302.7	4.7	
23.0		161.0	211.8		302.8	4.8	
*23.5	32	164.5	220.9	60	315.9	4.9	
23.5				56			
*24.0	25	168.0	221.0	60	316.0	5.0	
24.0				60			
*24.5	25	171.5	230.1	56	325.1	5.1	
24.5	32			60			
*25.0	25	175.0	230.2	56	325.2	5.2	
25.0							
25.5		178.5	239.3		334.3	5.3	
26.0		182.0	239.4		334.4	5.4	
26.5		185.5	248.5		343.5	5.5	
27.0		189.0	248.6		343.6	5.6	
27.5		192.5	257.7		352.7	5.7	
28.0		196.0	257.8		352.8	5.8	
28.5	32	199.5	266.9	60	361.9	5.9	
29.0		203.0	267.0		362.0	6.0	
29.5		206.5	276.1		371.1	6.1	
30.0		210.0	276.2		371.2	6.2	
30.5		213.5	285.3		380.3	6.3	
31.0		217.0	285.4		380.4	6.4	
31.5		220.5	294.5		389.5	6.5	
32.0		224.0	294.6		389.6	6.6	

●适用于普通钢、不锈钢、铝的油孔钻。可以进行钻头直径 9D 用开孔加工。

This oil hole drill is suitable for workpiece materials from Steel and Stainless Steel to Aluminum. It is possible to drill holes up to 9 × Dc.

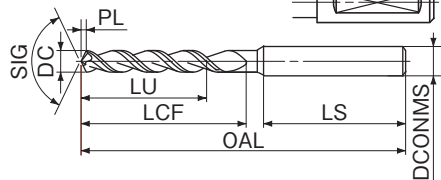

新商品

LIST 7594P

订货方式 SGOH9D 直径 (带*标记的商品: SGOH9D 直径 × 柄径)

单位 (Unit): mm

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
7.0	7	63.0	78.4	51	136.4	1.4	
7.1		63.9					
7.2		64.8	84.5		146.5	1.5	
7.3		65.7					
7.4		66.6					
7.5	8	67.5	84.6	52			
7.6		68.4					
7.7		69.3			146.6	1.6	
7.8		70.2	91.6				
7.9		71.1					
8.0		72.0	91.7		146.7		
8.1		72.9					
8.2		73.8					
8.3		74.7	96.7		158.7	1.7	
8.4		75.6					
8.5	9	76.5	96.8	53			
8.6		77.4					
8.7		78.3			158.8	1.8	
8.8		79.2	101.8				
8.9		80.1					
9.0		81.0	101.9		158.9		
9.1		81.9					
9.2		82.8					
9.3		83.7	106.9		169.9	1.9	
9.4		84.6					
9.5	10	85.5	107.0	54			
9.6		86.4					
9.7		87.3	112.0		170.0	2.0	
9.8		88.2					
9.9		89.1	112.1		170.1		
10.0		90.0					
10.1		90.9				2.1	
10.2		91.8	118.1		197.1		
10.3		92.7					
10.4		93.6					
10.5	11	94.5	118.2				
10.6		95.4			197.2	2.2	
10.7		96.3	123.2				
10.8		97.2					
10.9		98.1					
11.0		99.0	123.3		197.3		
11.1		99.9		60		2.3	
11.2		100.8	129.3		209.3		
11.3		101.7					
11.4		102.6					
11.5	12	103.5	129.4				
11.6		104.4			209.4	2.4	
11.7		105.3	134.4				
11.8		106.2					
11.9		107.1					
12.0		108.0	134.5		209.5		
12.1		108.9				2.5	
12.2		109.8	140.5		221.5		
12.3		110.7					
12.4		111.6					
12.5	13	112.5	140.6	61			
12.6		113.4			221.6	2.6	
12.7		114.3	145.6				
12.8		115.2					
12.9		116.1	145.7		221.7	2.7	

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
13.0	13	117.0	145.7		221.7		
13.1		117.9				2.7	
13.2		118.8	151.7		233.7		
13.3		119.7					
13.4		120.6	151.8				
13.5	14	121.5			233.8	2.8	
13.6		122.4					
13.7		123.3	156.8				
13.8		124.2					
13.9		125.1	156.9		233.9		
14.0		126.0				2.9	
14.1		126.9			245.9		
14.2		127.8	162.9				
14.3		128.7					
14.4		129.6					
14.5	15	130.5		61	246.0	3.0	
14.6		131.4	168.0				
14.7		132.3					
14.8		133.2					
14.9		134.1	168.1		246.1		
15.0		135.0				3.1	
15.1		135.9			258.1		
15.2		136.8	174.1				
15.3		137.7					
15.4		138.6	174.2		258.2	3.2	
15.5	16	139.5					
15.6		140.4	179.2				
15.7		141.3					
15.8		142.2			258.3	3.3	
15.9		143.1	179.3				
16.0		144.0					
16.1		144.9	185.3		290.3		
16.2		145.8					
16.3		146.7					
16.4		147.6	185.4		290.4	3.4	
16.5		148.5					
16.6	17	149.4	190.4	72			
16.7		150.3					
16.8		151.2	190.5		290.5	3.5	
16.9		152.1					
17.0		153.0					
17.1		153.9	196.5		302.5		
17.2		154.8					
17.3		155.7					
17.4		156.6	196.6		302.6	3.6	
17.5		157.5					
17.6	18	158.4	201.6	76			
17.7		159.3					
17.8		160.2			302.7	3.7	
17.9		161.1	201.7				
18.0		162.0					
18.1		162.9	207.7		314.7		
18.2		163.8					
18.3		164.7					
18.4		165.6	207.8		314.8	3.8	
18.5	19	166.5		77			
18.6		167.4					
18.7		168.3					
18.8		169.2	212.9		314.9	3.9	
18.9		170.1					

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	先端 PL	库存 Stock
19.0	19	171.0	212.9	77	314.9	3.9	
19.1		171.9					
19.2		172.8					
19.3		173.7	219.0		327.0	4.0	
19.4		174.6					
19.5	20	175.5		78			
19.6		176.4					
19.7		177.3					
19.8		178.2	224.1		327.1	4.1	
19.9		179.1					
20.0		180.0					
20.5		184.5	235.2		331.2	4.2	
21.0		189.0	235.3		331.3	4.3	
21.5	25	193.5	246.5	56	342.5	4.5	
22.0		198.0	246.6		342.6	4.6	
22.5		202.5	257.7		353.7	4.7	
23.0		207.0	257.8		353.8	4.8	
*23.5	32	211.5	268.9	60	368.9	4.9	
23.5				56			
*24.0	25	216.0	269.0		369.0	5.0	
24.0	32			60			
*24.5	25	220.5	280.1	56	380.1	5.1	
24.5	32			60			
*25.0	25	225.0	280.2	56	380.2	5.2	
25.0							
25.5		229.5	291.3		391.3	5.3	
26.0		234.0	291.4		391.4	5.4	
26.5		238.5	302.5		402.5	5.5	
27.0		243.0	302.6		402.6	5.6	
27.5		247.5	313.7		413.7	5.7	
28.0		252.0	313.8		413.8	5.8	
28.5	32	256.5	324.9	60	424.9	5.9	
29.0		261.0	325.0		425.0	6.0	
29.5		265.5	336.1		436.1	6.1	
30.0		270.0	336.2		436.2	6.2	
30.5		274.5	347.3		447.3	6.3	
31.0		279.0	347.4		447.4	6.4	
31.5		283.5	358.5		458.5	6.5	
32.0		288.0	358.6		458.6	6.6	

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●本钻头是从普通钢到不锈钢以及铝材，一般都能高速、高效率加工的油孔钻。

This oil hole drill is adapted in workpiece material from Steel and Stainless Steel to Aluminum.

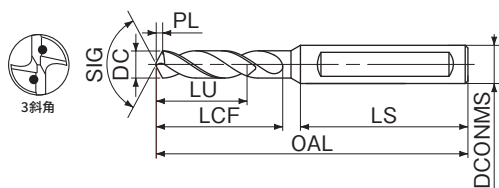

LIST 7580P

订货方式 **SGOH** 直径

仅限直径
8.0~9.9的库存品

单位 (Unit) : mm

直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
8.0	40.0	57.7	125.7	16	48	1.7	
8.1	40.5	61.7	129.7				
8.2	41.0						
8.3	41.5						
8.4	42.0	61.8	129.8			1.8	
8.5	42.5						
8.6	43.0						
8.7	43.5						
8.8	44.0	61.9	129.9			1.9	□
8.9	44.5						
9.0	45.0						
9.1	45.5						
9.2	46.0	66.9	134.9			2.0	
9.3	46.5						
9.4	47.0						
9.5	47.5						
9.6	48.0	72.0	140.0			2.1	●
9.7	48.5						
9.8	49.0						
9.9	49.5						
10.0	50.0	77.1	146.1			2.2	□
10.1	50.5						
10.2	51.0						
10.3	51.5						
10.4	52.0	77.2	146.2			2.3	●
10.5	52.5						
10.6	53.0						
10.7	53.5						
10.8	54.0	77.3	146.3			2.4	□
10.9	54.5						
11.0	55.0						
11.1	55.5						
11.2	56.0	82.3	151.3			2.5	●
11.3	56.5						
11.4	57.0						
11.5	57.5						
11.6	58.0	82.4	151.4			2.6	□
11.7	58.5						
11.8	59.0						
11.9	59.5						
12.0	60.0	82.5	151.5			2.7	●
12.1	60.5						
12.2	61.0						
12.3	61.5						
12.4	62.0	88.5	157.5			2.8	□
12.5	62.5						
12.6	63.0						
12.7	63.5						
12.8	64.0	88.6	157.6			2.9	●
12.9	64.5						
13.0	65.0						
13.1	65.5						
13.2	66.0	88.7	157.7			3.0	□
13.3	66.5						
13.4	67.0						
13.5	67.5						
13.6	68.0	88.8	157.8			3.1	●
13.7	68.5						
13.8	69.0						
13.9	69.5						

直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
14.0	70.0	99.9	168.9	16	48	2.9	●
14.1	70.5						□
14.2	71.0						
14.3	71.5						
14.4	72.0	100.0	169.0			3.0	●
14.5	72.5						
14.6	73.0						
14.7	73.5						□
14.8	74.0	100.1	169.1			3.1	●
14.9	74.5						
15.0	75.0						
15.1	75.5						□
15.2	76.0	105.1	180.1			3.2	●
15.3	76.5						
15.4	77.0						
15.5	77.5						□
15.6	78.0	105.2	180.2			3.3	●
15.7	78.5						
15.8	79.0						
15.9	79.5						□
16.0	80.0	105.3	180.3			3.4	●
16.1	80.5						
16.2	81.0						
16.3	81.5						□
16.4	82.0	110.3	185.3			3.5	●
16.5	82.5						
16.6	83.0						
16.7	83.5						□
16.8	84.0	110.4	185.4			3.6	●
16.9	84.5						
17.0	85.0						
17.1	85.5						□
17.2	86.0	110.5	185.5			3.7	●
17.3	86.5						
17.4	87.0						
17.5	87.5						□
17.6	88.0	116.5	191.5			3.8	●
17.7	88.5						
17.8	89.0						
17.9	89.5						□
18.0	90.0	116.6	191.6			3.9	●
18.1	90.5						
18.2	91.0						
18.3	91.5						□
18.4	92.0	116.7	191.7			4.0	●
18.5	92.5						
18.6	93.0						
18.7	93.5						□
18.8	94.0	121.7	196.7			4.1	●
18.9	94.5						
19.0	95.0						
19.1	95.5						□
19.2	96.0	121.8	196.8			4.2	●
19.3	96.5						
19.4	97.0						
19.5	97.5						□
19.6	98.0	121.9	196.9			4.3	●
19.7	98.5						
19.8	99.0						
19.9	99.5						□

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

直径 DC	有效长 LU	槽长 LCF	全长 OAL	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
20.0	100.0	132.1	215.1	25	56	4.1	●
20.5	102.5	132.2	215.2			4.2	
21.0	105.0	136.3	219.3			4.3	
21.5	107.5	136.5	219.5			4.5	
22.0	110.0	141.6	224.6			4.6	
22.5	112.5	141.7	224.7			4.7	
23.0	115.0	146.8	229.8			4.8	
23.5	117.5	146.9	229.9			4.9	
24.0	120.0	152.0	243.0	32	60	5.0	
24.5	122.5	152.1	243.1			5.1	
25.0	125.0	156.2	247.2			5.2	
25.5	127.5	156.3	247.3			5.3	
26.0	130.0	161.4	252.4			5.4	
26.5	132.5	161.5	252.5			5.5	
27.0	135.0	166.6	257.6			5.6	
27.5	137.5	166.7	257.7			5.7	
28.0	140.0	170.8	261.8			5.8	
28.5	142.5	170.9	261.9			5.9	
29.0	145.0	176.0	267.0			6.0	
29.5	147.5	176.1	267.1			6.1	
30.0	150.0	180.2	271.2			6.2	


一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	—	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	◎	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●本钻头是泛用涂层油孔钻。

●本钻头采用了侧固柄。

This side lock shank drill is general coated oil-hole drills.

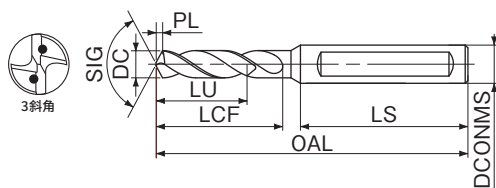

LIST 6558P

订货方式 **GOH** 直径 (带*标记的商品: GOH 直径 × 柄径)

单位 (Unit) : mm

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	先端 PL	库存 Stock
8.0	16	24.0	35.4	85.4	48	2.4	●
8.1		24.3					
8.2		24.6					
8.3		24.9	35.5	85.5		2.5	□
8.4		25.2					
8.5		25.5					
8.6		25.8	40.6	90.6		2.6	●
8.7		26.1					
8.8		26.4					
8.9		26.7	40.7	90.7		2.7	●
9.0		27.0					
9.1		27.3					
9.2		27.6	40.8	90.8		2.8	□
9.3		27.9					
9.4		28.2					
9.5		28.5	40.9	90.9		2.9	●
9.6		28.8					
9.7		29.1					
9.8		29.4	45.9	95.9		3.0	□
9.9		29.7					
10.0		30.0					
10.1		30.3	46.0	96.0		3.1	●
10.2		30.6					
10.3		30.9					
10.4		31.2	46.1	96.1		3.2	□
10.5		31.5					
10.6		31.8					
10.7		32.1	51.2	101.2		3.3	●
10.8		32.4					
10.9		32.7					
11.0		33.0	51.3	101.3		3.4	●
11.1		33.3					
11.2		33.6					
11.3		33.9	51.4	101.4		3.5	□
11.4		34.2					
11.5		34.5					
11.6		34.8	51.5	101.5		3.6	●
11.7		35.1					
11.8		35.4					
11.9	35.7	56.5	106.5	3.7	□		
12.0	36.0						
12.1	36.3						
12.2	36.6	56.6	106.6	3.8	●		
12.3	36.9						
12.4	37.2						
12.5	37.5	56.7	106.7	3.9	□		
12.6	37.8						
12.7	38.1						
12.8	38.4	61.8	111.8	4.0	●		
12.9	38.7						
13.0	39.0						
13.1	39.3	61.9	111.9	4.1	□		
13.2	39.6						
13.3	39.9						
13.4	40.2	62.0	112.0	4.2	●		
13.5	40.5						
13.6	40.8						
13.7	41.1	67.1	117.1	4.3	□		
13.8	41.4						
13.9	41.7						

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	先端 PL	库存 Stock	
14.0	16	42.0	67.2	117.2	48	4.2	●	
14.1		42.3						
14.2		42.6						
14.3		42.9	67.3	117.3		4.3	□	
14.4		43.2						
14.5		43.5					●	
14.6		43.8	74.4	129.4		4.4		
14.7		44.1					□	
14.8		44.4						
14.9		44.7	74.5	129.5		4.5	●	
15.0		45.0						
15.1		45.3						
15.2	20	45.6	74.6	129.6	50	4.6	□	
15.3		45.9						
15.4		46.2	74.7	129.7		4.7		
15.5		46.5					●	
15.6		46.8						
15.7		47.1	79.7	134.7		4.7	□	
15.8		47.4						
15.9		47.7						
16.0		48.0	79.8	134.8		4.8	●	
16.1		48.3						
16.2		48.6						
16.3		48.9	79.9	134.9		4.9	□	
16.4		49.2						
16.5		49.5						
16.6		49.8	80.0	135.0		5.0	●	
16.7		50.1					□	
16.8		50.4						
16.9		50.7	85.1	140.1		5.1	●	
17.0		51.0						
17.1		51.3						
17.2		51.6	85.2	140.2		5.2	□	
17.3		51.9						
17.4		52.2						
17.5		52.5	85.3	140.3		5.3	●	
17.6		52.8						
17.7		53.1						
17.8		53.4	90.3	145.3		5.3	□	
17.9		53.7						
18.0		54.0						
18.1	25	54.3	90.4	145.4	56	5.4	●	
18.2		54.6						
18.3		54.9						
18.4		55.2	90.5	145.5		5.5	□	
18.5		55.5						
18.6		55.8						
18.7		56.1	100.6	161.6		5.6		
18.8		56.4					□	
18.9		56.7						
19.0		57.0	100.7	161.7		5.7	●	
19.1		57.3						
19.2		57.6						
19.3	57.9	100.8	161.8		5.8	□		
19.4	58.2							
19.5	58.5							
19.6	58.8	100.9	161.9		5.9	●		
19.7	59.1							
19.8	59.4					□		
19.9	59.7	101.0	162.0		6.0			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	先端 PL	库存 Stock
20.0	25	60.0	101.0	162.0	56	6.0	
20.5		61.5	101.2	162.2		6.2	
21.0		63.0	101.3	162.3		6.3	
21.5		64.5	101.5	162.5		6.5	
22.0		66.0	106.6	167.6		6.6	
22.5		67.5	106.8	167.8		6.8	
23.0		69.0	106.9	167.9		6.9	
23.5		70.5	107.1	168.1		7.1	
24.0		72.0	109.2	197.2		7.2	
24.5		73.5	109.4	197.4		7.4	
25.0	32	75.0	109.5	197.5	60	7.5	●
25.5		76.5	109.7	197.7		7.7	
26.0		78.0	115.8	202.8		7.8	
26.5		79.5	116.0	203.0		8.0	
27.0		81.0	116.1	203.1		8.1	
27.5		82.5	116.3	203.3		8.3	
28.0		84.0	120.4	208.4		8.4	
28.5		85.5	120.6	208.6		8.6	
29.0		87.0	126.7	213.7		8.7	
29.5		88.5	126.9	213.9		8.9	
30.0	40	90.0	127.0	214.0	70	9.0	□
30.5		91.5	127.2	214.2		9.2	
* 31.0		93.0	127.3	224.3		9.3	
31.0							
* 31.5		94.5	127.5	224.5		9.5	
31.5							
* 32.0		96.0	131.6	229.6		9.6	
32.0							
* 32.5		97.5	131.8	229.8		9.8	
32.5							
* 33.0	40	99.0	137.9	234.9	70	9.9	□
33.0							
* 33.5		100.5	138.1	235.1		10.1	
33.5							
* 34.0		102.0	138.2	235.2		10.2	
34.0							
* 34.5		103.5	138.4	235.4		10.4	
34.5							
* 35.0		105.0	142.5	240.5		10.5	
35.0							
* 35.5	40	106.5	142.7	240.7	70	10.7	●
35.5							
* 36.0		108.0	148.8	245.8		10.8	
36.0							
* 36.5		109.5	149.0	246.0		11.0	
36.5							
* 37.0		111.0	153.1	251.1		11.1	
37.0							
* 37.5		112.5	153.3	251.3		11.3	
37.5							
* 38.0	40	114.0	159.4	256.4	70	11.4	●
38.0							
* 38.5		115.5	159.6	256.6		11.6	
38.5							
* 39.0		117.0	159.7	256.7		11.7	
39.0							
* 39.5		118.5	159.9	256.9		11.9	
39.5							
* 40.0		120.0	164.0	262.0		12.0	
40.0							


直径 DC	柄径 DCONMS	有效长 LU	槽长 LCF	全长 OAL	柄长 LS	先端 PL	库存 Stock
41.0	40	123.0	177.3	262.3	70	12.3	□
42.0		126.0	177.6	262.6		12.6	
44.0		132.0	183.2	273.2		13.2	
45.0		135.0	183.5	273.5		13.5	
47.0		141.0	189.1	279.1		14.1	
48.0		144.0	189.4	279.4		14.4	
49.0		147.0	194.7	284.7		14.7	
50.0		150.0	195.0	285.0		15.0	
51.0		153.0	200.3	290.3		15.3	
52.0		156.0	200.6	290.6		15.6	

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

●本钻头带超长钻刃，是适合深孔加工的泛用涂层油孔钻。

This side lock shank drill having ultra-long flute is general coated oil-hole drills.

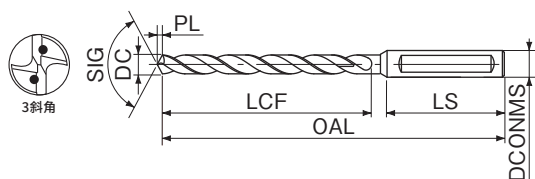

LIST 6556P

订货方式 **GOHL** 直径

仅限直径
5.0~9.5的库存品

单位 (Unit) : mm

直径 DC	槽长 LCF	全长 OAL	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
5.0	151.5	221.5	16	48	1.5	□
5.5	151.7	221.7			1.7	
6.0	151.8	221.8			1.8	
6.5	152.0	222.0			2.0	
7.0	152.1	222.1			2.1	
7.5	152.3	222.3			2.3	
8.0	152.4	222.4			2.4	
8.5	152.6	222.6			2.6	
9.0	152.7	222.7			2.7	
9.5	152.9	222.9			2.9	
10.0	153.0	223.0			3.0	
10.5	153.2	223.2			3.2	
11.0	153.3	223.3			3.3	
11.5	153.5	223.5			3.5	
12.0	153.6	223.6			3.6	
12.5	153.8	223.8			3.8	
13.0	153.9	223.9			3.9	
13.5	154.1	224.1	20	50	4.1	□
14.0	154.2	224.2			4.2	
14.5	204.4	274.4			4.4	
15.0	204.5	274.5			4.5	
15.5	204.7	274.7			4.7	
16.0	204.8	274.8			4.8	
16.5	205.0	275.0			5.0	
17.0	205.1	275.1			5.1	
17.5	205.3	275.3	25	56	5.3	
18.0	205.4	275.4			5.4	
18.5	205.6	275.6			5.6	
19.0	205.7	285.7			5.7	
19.5	205.9	285.9			5.9	
20.0	206.0	286.0			6.0	
20.5	206.2	286.2			6.2	
21.0	206.3	286.3			6.3	
21.5	206.5	286.5	32	60	6.5	
22.0	206.6	286.6			6.6	
22.5	206.8	286.8			6.8	
23.0	206.9	286.9			6.9	
23.5	277.1	372.1			7.1	
24.0	277.2	372.2			7.2	
24.5	277.4	372.4			7.4	
25.0	277.5	372.5			7.5	
25.5	277.7	372.7			7.7	
26.0	277.8	372.8			7.8	
26.5	278.0	373.0			8.0	
27.0	278.1	373.1			8.1	
27.5	278.3	373.3			8.3	
28.0	278.4	373.4			8.4	
28.5	278.6	373.6			8.6	
29.0	278.7	373.7			8.7	
29.5	278.9	373.9			8.9	
30.0	279.0	374.0			9.0	
30.5	279.2	374.2			9.2	
31.0	279.3	374.3			9.3	
31.5	279.5	374.5			9.5	
32.0	279.6	374.6			9.6	
32.5	289.8	399.8	62		9.8	
33.0	289.9	399.9			9.9	
33.5	290.1	400.1			10.1	
34.0	290.2	400.2			10.2	
34.5	290.4	400.4			10.4	


直径 DC	槽长 LCF	全长 OAL	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
35.0	290.5	400.5	32	62	10.5	□
35.5	290.7	400.7			10.7	
36.0	290.8	400.8			10.8	
36.5	291.0	401.0			11.0	
37.0	291.1	401.1			11.1	
37.5	291.3	401.3			11.3	
38.0	291.4	401.4			11.4	
38.5	291.6	401.6			11.6	
39.0	291.7	401.7			11.7	
39.5	291.9	401.9			11.9	
40.0	292.0	402.0			12.0	

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used 一: 不推荐 Not recommended

●可以对铝合金进行高效率加工。

High efficiency drilling of Aluminum Alloy is available.

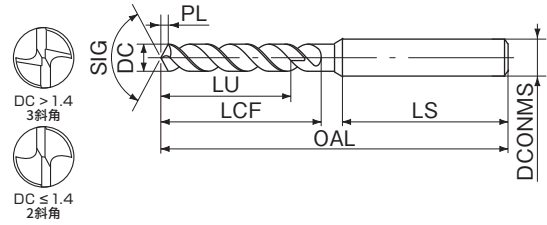

新商品

LIST 544

订货方式 **DLCHD** 直径

单位 (Unit) : mm

直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
1.0	5.0	12					
1.1	5.5	14				0.2	
1.2	6.0	16					
1.3	6.5			50		0.3	
1.4	7.0	18					
1.5	7.5						
1.6	8.0	20				0.4	
1.7	8.5						
1.8	9.0	22					
1.9	9.5						
2.0	10.0	24				0.5	
2.1	10.5						
2.2	11.0	25					
2.3	11.5						
2.4	12.0	30				0.6	
2.5	12.5						
2.6	13.0	33					
2.7	13.5						
2.8	14.0						
2.9	14.5						
3.0	15.0						
3.1	15.5	36				0.7	
3.2	16.0						
3.3	16.5						
3.4	17.0	39				0.8	
3.5	17.5						
3.6	18.0						
3.7	18.5	43					
3.8	19.0						
3.9	19.5						
4.0	20.0						
4.1	20.5						
4.2	21.0	47				0.9	
4.3	21.5						
4.4	22.0						
4.5	22.5						
4.6	23.0						
4.7	23.5						
4.8	24.0	52				1.0	
4.9	24.5						
5.0	25.0						
5.1	25.5						
5.2	26.0						
5.3	26.5						
5.4	27.0						
5.5	27.5						
5.6	28.0						
5.7	28.5						
5.8	29.0						
5.9	29.5						
6.0	30.0						
6.1	30.5						
6.2	31.0						
6.3	31.5						
6.4	32.0						
6.5	32.5						
6.6	33.0						
6.7	33.5						
6.8	34.0						
6.9	34.5						

直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
7.0	35.0					1.4	
7.1	35.5						
7.2	36.0	69				1.5	
7.3	36.5						
7.4	37.0						
7.5	37.5						
7.6	38.0						
7.7	38.5						
7.8	39.0						
7.9	39.5						
8.0	40.0						
8.1	40.5						
8.2	41.0						
8.3	41.5						
8.4	42.0						
8.5	42.5						
8.6	43.0						
8.7	43.5						
8.8	44.0						
8.9	44.5						
9.0	45.0						
9.1	45.5						
9.2	46.0						
9.3	46.5						
9.4	47.0						
9.5	47.5						
9.6	48.0						
9.7	48.5						
9.8	49.0						
9.9	49.5						
10.0	50.0						
10.1	50.5						
10.2	51.0						
10.3	51.5						
10.4	52.0						
10.5	52.5						
10.6	53.0						
10.7	53.5						
10.8	54.0						
10.9	54.5						
11.0	55.0						
11.1	55.5						
11.2	56.0						
11.3	56.5						
11.4	57.0						
11.5	57.5						
11.6	58.0						
11.7	58.5						
11.8	59.0						
11.9	59.5						
12.0	60.0						
12.1	60.5						
12.2	61.0						
12.3	61.5						
12.4	62.0						
12.5	62.5						
12.6	63.0						
12.7	63.5						
12.8	64.0						
12.9	64.5						

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新品

← 上一页 Previous Page

单位 (Unit) : mm

直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCOMMS	先端 PL	库存 Stock
13.0	65.0	101	50	158	12	2.7	●
13.5	67.5	108		168	16	2.8	□
14.0	70.0					2.9	
14.5	72.5	114		173	20	3.0	
15.0	75.0					3.1	
15.5	77.5	120	52	3.2			
16.0	80.0			3.3			
16.5	82.5	125		189		3.4	
17.0	85.0				3.5		
17.5	87.5	130		60	3.6		
18.0	90.0				3.7		
18.5	92.5	135	206		3.8		
19.0	95.0				3.9		
19.5	97.5	140	210	25	4.0		
20.0	100.0				4.1		

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	×	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	×	×	—	◎	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●本钻头适用于铝合金高效率深孔加工。

This drill is suitable for the high efficiency and deep hole drilling in Aluminum Alloy.

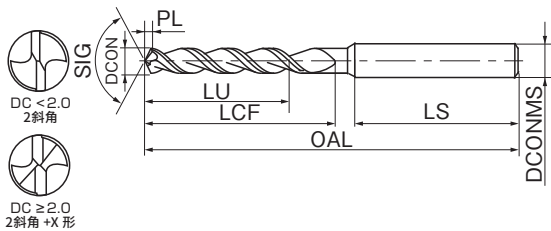

新商品

订货方式 商品编码

直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock														
1.0	8.0	26	28.0	60	3	0.2	□														
1.1	8.8	28		62		0.3															
1.2	9.6	30						66	0.4												
1.3	10.4	33								68	0.5										
1.4	11.2	35										70	0.6								
1.5	12.0	38												73	0.7						
1.6	12.8	41														75	0.8				
1.7	13.6	44																78	0.9		
1.8	14.4	47																		82	1.0
1.9	15.2	51																			
2.0	16.0	55	92		1.2																
2.1	16.8	60		96		1.3															
2.2	17.6	64						106	1.4												
2.3	18.4	69								111	1.5										
2.4	19.2	74										116	1.6								
2.5	20.0	80												122	1.7						
2.6	20.8	86														130	1.8				
2.7	21.6	92																137	1.9		
2.8	22.4	99																		144	2.0
2.9	23.2	106																			
3.0	24.0	113	157		2.2																
3.1	24.8	120		164		2.3															
3.2	25.6	127						171	2.4												
3.3	26.4	134								178	2.5										
3.4	27.2	141										185	2.6								
3.5	28.0	148												192	2.7						
3.6	28.8	155														199	2.8				
3.7	29.6	162																206	2.9		
3.8	30.4	169																		213	3.0
3.9	31.2	176																			
4.0	32.0	183	227		3.2																
4.1	32.8	190		234		3.3															
4.2	33.6	197					241	3.4													
4.3	34.4	204							248	3.5											
4.4	35.2	211									255	3.6									
4.5	36.0	218											262	3.7							
4.6	36.8	225													269	3.8					
4.7	37.6	232															276	3.9			
4.8	38.4	239																	283	4.0	
4.9	39.2	246																			290
5.0	40.0	253	297		4.2																
5.1	40.8	260		304		4.3															
5.2	41.6	267					311	4.4													
5.3	42.4	274							318	4.5											
5.4	43.2	281									325	4.6									
5.5	44.0	288											332	4.7							
5.6	44.8	295													339	4.8					
5.7	45.6	302															346	4.9			
5.8	46.4	309																	353	5.0	
5.9	47.2	316																			360
6.0	48.0	323	367		5.2																
6.1	48.8	330		374		5.3															
6.2	49.6	337					381	5.4													
6.3	50.4	344							388	5.5											
6.4	51.2	351									395	5.6									
6.5	52.0	358											402	5.7							
6.6	52.8	365													409	5.8					
6.7	53.6	372															416	5.9			
6.8	54.4	379																	423	6.0	
6.9	55.2	386																			430
7.0	56.0	393	437		6.2																
7.1	56.8	400		444		6.3															
7.2	57.6	407					451	6.4													
7.3	58.4	414							458	6.5											
7.4	59.2	421									465	6.6									
7.5	60.0	428											472	6.7							
7.6	60.8	435													479	6.8					
7.7	61.6	442															486	6.9			
7.8	62.4	449																	493	7.0	
7.9	63.2	456																			500
8.0	64.0	463	507		7.2																
8.1	64.8	470		514		7.3															
8.2	65.6	477					521	7.4													
8.3	66.4	484							528	7.5											
8.4	67.2	491									535	7.6									
8.5	68.0	498											542	7.7							
8.6	68.8	505													549	7.8					
8.7	69.6	512															556	7.9			
8.8	70.4	519																	563	8.0	
8.9	71.2	526																			570
9.0	72.0	533	577		8.2																
9.1	72.8	540		584		8.3															
9.2	73.6	547					591	8.4													
9.3	74.4	554							598	8.5											
9.4	75.2	561									605	8.6									
9.5	76.0	568											612	8.7							
9.6	76.8	575													619	8.8					
9.7	77.6	582															626	8.9			
9.8	78.4	589																	633	9.0	
9.9	79.2	596																			640
10.0	80.0	603	647		9.2																
10.1	80.8	610		654		9.3															
10.2	81.6	617					661	9.4													
10.3	82.4	624							668	9.5											
10.4	83.2	631									675	9.6									
10.5	84.0	638											682	9.7							
10.6	84.8	645													689	9.8					
10.7	85.6	652															696	9.9			
10.8	86.4	659																	703	10.0	
10.9	87.2	666																			710
11.0	88.0	673	717		10.2																
11.1	88.8	680		724		10.3															
11.2	89.6	687					731	10.4													
11.3	90.4	694							738	10.5											
11.4	91.2	701									745	10.6									
11.5	92.0	708											752	10.7							
11.6	92.8	715													759	10.8					
11.7	93.6	722															766	10.9			
11.8	94.4	729																	773	11.0	
11.9	95.2	736																			780
12.0	96.0	743	787		11.2																
12.1	96.8	750		794		11.3															
12.2	97.6	757					801	11.4													
12.3	98.4	764							808	11.5											
12.4	99.2	771									815	11.6									
12.5	100.0	778											822	11.7							
12.6	100.8	785													829	11.8					
12.7	101.6	792															836	11.9			
12.8	102.4	799																	843	12.0	
12.9	103.2	806																			850
13.0	104.0	813	857		12.2																
13.1	104.8	820		864		12.3															
13.2	105.6	827					871	12.4													
13.3	106.4	834							878	12.5											
13.4	107.2	841									885	12.6									
13.5	108.0	848											892	12.7							
13.6	108.8	855													899	12.8					
13.7	109.6	862															906	12.9			
13.8	110.4	869																	913	13.0	
13.9	111.2	876																			920
14.0	112.0	883	927		13.2																
14.1	112.8	890		934		13.3															
14.2	113.6	897					941	13.4													
14.3	114.4	904							948	13.5											
14.4	115.2	911									955	13.6									
14.5	116.0	918											962	13.7							
14.6	116.8	925													969	13.8					
14.7	117.6	932															976	13.9			
14.8	118.4	939																	983	14.0	
14.9	119.2	946																			990
15.0	120.0	953	997		14.2																
15.1	120.8	960		1004		14.3															
15.2	121.6	967					1011	14.4													
15.3	122.4	974							1018	14.5											
15.4	123.2	981									1025	14.6									
15.5	124.0	988											1032	14.7							
15.6	124.8	995													1039	14.8					
15.7	125.6	1002															1046	14.9			
15.8	126.4	1009																	1053	15.0	
15.9	127.2	1016																			1060
16.0	128.0	1023	1067		15.2																
16.1	128.8	1030		1074		15.3															
16.2	129.6	1037					1081	15.4													
16.3	130.4	1044							1088	15.5											
16.4	131.2	1051									1095	15.6									
16.5	132.0	1058											1102	15.7							
16.6	132.8	1065													1109	15.8					
16.7	133.6	1072															1116	15.9			
16.8	134.4	1079																	1123	16.0	
16.9	135.2	1086																			1130
17.0	136.0	1093	1137		16.2																
17.1	136.8	1100		1144		16.3															
17.2	137.6	1107					1151	16.4													
17.3	138.4	1114							1158	16.5											
17.4	139.2	1121									1165	16.6									
17.5	140.0	1128											1172	16.7							
17.6	140.8	1135													1179	16.8					
17.7	141.6	1142															1186	16.9			
17.8	142.4	1149																	1193	17.0	
17.9	143.2	1156																			1200
18.0	144.0	1163	1207		17.2																
18.1	144.8	1170		1214		17.3															
18.2	145.6	1177					1221	17.4													
18.3	146.4	1184							1228	17.5											
18.4	147.2	1191									1235	17.6									
18.5	148.0	1198											1242	17.7							
18.6	148.8	1205													1249	17.8					
18.7	149.6	1212															1256	17.9			
18.8	150.4	1219																	1263	18.0	
18.9	151.2	1226																			1270
19.0	152.0	1233	1277		18.2																
19.1	152.8	1240		1284		18.3															
19.2	153.6	1247					1291	18.4													
19.3	154.4	1254							1298	18.5											
19.4	155.2	1261									1305	18.6									
19.5	156.0	1268											1312	18.7							
19.6	156.8	1275													1319	18.8					
19.7	157.6	1282															1326	18.9			
19.8	158.4	1289																	1333	19.0	
19.9	159.2	1296																			1340
20.0	160.0	1303	1347		19.2																
20.1	160.8	1310		1354		19.3															
20.2	161.6	1317					1361	19.4													
20.3	162.4	1324							1368	19.5											
20.4	163.2	1331									1375	19.6									
20.5	164.0	1338											1382	19.7							
20.6	164.8	1345													1389	19.8					
20.7	165.6	1352															1396	19.9			
20.8	166.4	1359																	1403	20.0	
20.9	167.2	1366																			1410
21.0	168.0	1373	1417		20.2																
21.1	168.8	1380		1424		20.3															
21.2	169.6	1387					1431	20.4													
21.3	170.4	1394							1438	20.5											
21.4	171.2	1401									1445	20.6									
21.5	172.0	1408											1452	20.7							
21.6	172.8	1415													1459	20.8					
21.7	173.6	1422															1466	20.9			
21.8	174.4	1429																	1473	21.0	
21.9	175.2	1436																			1480
22.0	176.0	1443	1487		21.2																
22.1	176.8	1450		1494		21.3															
22.2	177.6	1457					1501	21.4													
22.3	178.4	1464							1508	21.5											
22.4	179.2	1471									1515	21.6									
22.5	180.0	1478											1522	21.7							
22.6	180.8	1485													1529	21.8					
22.7	181.6	1492															1536	21.9			
22.8	182.4	1500																	1543	22.0	
22.9	183.2	1507																			1550
23.0	184.0	1514	1557		22.2																
23.1	184.8	1521		1564		22.3															
23.2	185.6																				

新商品

← 上一页 Previous Page

单位 (Unit) : mm

直径 DC	有效长 LU	槽长 LCF	柄长 LS	全长 OAL	柄径 DCONMS	先端 PL	库存 Stock
12.6	100.8	134	46.0	184	12	2.6	☐
12.7	101.6						
12.8	102.4						
12.9	103.2					2.7	
13.0	104.0						

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●采用耐粘性出色的涂层，适用于铝和铜的加工。

This drill specially coated is most suitable for Aluminum and Copper.



新商品

订货方式 RGASD 直径

单位 (Unit) : mm

直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
1.0	12	34	0.2	
1.01				
1.02				
1.03				
1.04				
1.05				
1.06				
1.07				
1.08				
1.09				
1.1	14	36	0.2	
1.11				
1.12				
1.13				
1.14				
1.15				
1.16				
1.17				
1.18				
1.19				
1.2	16	38	0.2	
1.21				
1.22				
1.23				
1.24				
1.25				
1.26				
1.27				
1.28				
1.29				
1.3	18	40	0.3	□
1.31				
1.32				
1.33				
1.34				
1.35				
1.36				
1.37				
1.38				
1.39				
1.4	20	43	0.3	
1.41				
1.42				
1.43				
1.44				
1.45				
1.46				
1.47				
1.48				
1.49				
1.5	22	46	0.4	
1.51				
1.52				
1.53				
1.54				
1.55				
1.56				
1.57				
1.58				
1.59				
1.6	24	49	0.4	
1.61				
1.62				
1.63				
1.64				
1.65				
1.66				
1.67				
1.68				
1.69				
1.7	26	52	0.5	
1.71				
1.72				
1.73				
1.74				
1.75				
1.76				
1.77				
1.78				
1.79				
1.8	28	55	0.5	
1.81				
1.82				
1.83				
1.84				
1.85				
1.86				
1.87				
1.88				
1.89				
1.9	30	57	0.5	
1.91				
1.92				
1.93				
1.94				
1.95				
1.96				
1.97				
1.98				
1.99				
2.0	32	60	0.6	
2.01				
2.02				
2.03				
2.04				
2.05				
2.06				
2.07				
2.08				
2.09				
2.1	34	63	0.6	
2.11				
2.12				
2.13				
2.14				
2.15				
2.16				
2.17				
2.18				
2.19				
2.2	36	65	0.7	
2.21				
2.22				
2.23				
2.24				
2.25				
2.26				
2.27				
2.28				
2.29				
2.3	38	68	0.7	
2.31				
2.32				
2.33				
2.34				
2.35				
2.36				
2.37				
2.38				
2.39				
2.4	40	70	0.8	
2.41				
2.42				
2.43				
2.44				
2.45				
2.46				
2.47				
2.48				
2.49				
2.5	42	72	0.8	
2.51				
2.52				
2.53				
2.54				
2.55				
2.56				
2.57				
2.58				
2.59				
2.6	44	74	0.8	
2.61				
2.62				
2.63				
2.64				
2.65				
2.66				
2.67				
2.68				
2.69				
2.7	46	76	0.8	
2.71				
2.72				
2.73				
2.74				
2.75				
2.76				
2.77				
2.78				
2.79				
2.8	48	78	0.8	
2.81				
2.82				
2.83				
2.84				
2.85				
2.86				
2.87				
2.88				
2.89				
2.9	50	80	0.8	
2.91				
2.92				
2.93				
2.94				
2.95				
2.96				
2.97				
2.98				
2.99				
3.0	52	82	0.8	
3.01				
3.02				
3.03				
3.04				
3.05				
3.06				
3.07				
3.08				
3.09				
3.1	54	84	0.8	
3.11				
3.12				
3.13				
3.14				
3.15				
3.16				
3.17				
3.18				
3.19				
3.2	56	86	0.8	
3.21				
3.22				
3.23				
3.24				
3.25				
3.26				
3.27				
3.28				
3.29				
3.3	58	88		

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般结构用钢	碳钢	合金钢调质钢	模具钢预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	—	×	×	×	×
不锈钢		钛合金耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	×	×	—	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

← 上一页 Previous Page


单位 (Unit) : mm

直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
3.88	43	75	0.8	
3.89				
3.9				
3.91				
3.92				
3.93				
3.94				
3.95				
3.96				
3.97				
3.98				
3.99				
4.0				
4.01				
4.02				
4.03				
4.04				
4.05				
4.06				
4.07				
4.08				
4.09				
4.1				
4.11				
4.12				
4.13				
4.14				
4.15				
4.16				
4.17				
4.18				
4.19				
4.2				
4.21				
4.22				
4.23				
4.24				
4.25				
4.26				
4.27				
4.28				
4.29				
4.3			0.9	
4.31				
4.32				
4.33				
4.34				
4.35				
4.36				
4.37				
4.38				
4.39				
4.4				
4.41				
4.42				
4.43				
4.44				
4.45				
4.46				
4.47				
4.48				
4.49				
4.5				
4.51			1.0	
4.52				
4.53				
4.54				
4.55				
4.56				
4.57				
4.58				
4.59				

直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
4.6	47	80		
4.61				
4.62				
4.63				
4.64				
4.65				
4.66				
4.67				
4.68				
4.69				
4.7				
4.71				
4.72				
4.73				
4.74				
4.75				
4.76				
4.77				
4.78				
4.79				
4.8				
4.81			1.0	
4.82				
4.83				
4.84				
4.85				
4.86				
4.87				
4.88				
4.89				
4.9				
4.91				
4.92				
4.93				
4.94				
4.95				
4.96				
4.97				
4.98				
4.99				
5.0	52	86		
5.01				
5.02				
5.03				
5.04				
5.05				
5.06				
5.07				
5.08				
5.09				
5.1				
5.11				
5.12				
5.13				
5.14				
5.15				
5.16				
5.17				
5.18				
5.19				
5.2			1.1	
5.21				
5.22				
5.23				
5.24				
5.25				
5.26				
5.27				
5.28				
5.29				
5.3				
5.31				

直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
5.32	52	86		
5.33				
5.34				
5.35				
5.36				
5.37				
5.38				
5.39				
5.4				
5.41				
5.42				
5.43				
5.44				
5.45				
5.46				
5.47				
5.48				
5.49				
5.5				
5.51				
5.52				
5.53	57	93		
5.54				
5.55				
5.56				
5.57				
5.58				
5.59				
5.6				
5.61				
5.62				
5.63				
5.64				
5.65				
5.66				
5.67				
5.68				
5.69				
5.7				
5.71				
5.72	63	101	1.3	
5.73				
5.74				
5.75				
5.76				
5.77				
5.78				
5.79				
5.8				
5.81				
5.82				
5.83				
5.84				
5.85				
5.86				
5.87				
5.88				
5.89				
5.9				
5.91				
5.92	63	101	1.3	
5.93				
5.94				
5.95				
5.96				
5.97				
5.98				
5.99				
6.0				
6.1				
6.2				
6.3				

直径 DC	槽长 LCF	全长 OAL	先端 PL	库存 Stock
6.4	63	101	1.3	□
6.5				
6.6				
6.7				
6.8	69	109	1.4	
6.9				
7.0				
7.1				
7.2	75	117	1.5	
7.3				
7.4				
7.5				
7.6	81	125	1.6	
7.7				
7.8				
7.9				
8.0	87	133	1.7	
8.1				
8.2				
8.3				
8.4	94	142	1.8	
8.5				
8.6				
8.7				
8.8	101	151	1.9	
8.9				
9.0				
9.1				
9.2	107	161	2.0	
9.3				
9.4				
9.5				
9.6	113	171	2.1	
9.7				
9.8				
9.9				
10.0	119	181	2.2	
10.1				
10.2				
10.3				
10.4	125	191	2.3	
10.5				
10.6				
10.7				
10.8	131	201	2.4	
10.9				
11.0				
11.1				
11.2	137	211	2.5	
11.3				
11.4				
11.5				
11.6	143	221	2.6	
11.7				
11.8				
11.9				
12.0	149	231	2.7	
12.1				
12.2				
12.3				
12.4	155	241	2.8	
12.5				
12.6				
12.7				
12.8	161	251	2.9	
12.9				
13.0				
13.1				

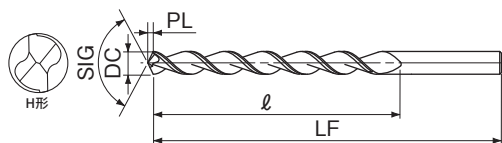

新商品


订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
KSA2.0	2.0	35	70	0.6	□
KSA2.1	2.1				
KSA2.2	2.2				
KSA2.3	2.3				
KSA2.4	2.4				
KSA2.5	2.5				
KSA2.6	2.6	45	80	0.8	
KSA2.7	2.7				
KSA2.8	2.8				
KSA2.9	2.9				
KSA3.0	3.0				
KSA3.1	3.1				
KSA3.2	3.2				
KSA3.3	3.3	55	90	1.0	
KSA3.4	3.4				
KSA3.5	3.5				
KSA3.6	3.6				
KSA3.7	3.7				
KSA3.8	3.8				
KSA3.9	3.9	65	100	1.1	
KSA4.0	4.0				
KSA4.1	4.1				
KSA4.2	4.2				
KSA4.3	4.3				
KSA4.4	4.4				
KSA4.5	4.5	75	110	1.3	
KSA4.6	4.6				
KSA4.7	4.7				
KSA4.8	4.8				
KSA4.9	4.9				
KSA5.0	5.0				
KSA5.1	5.1	80	115	1.5	
KSA5.2	5.2				
KSA5.3	5.3				
KSA5.4	5.4				
KSA5.5	5.5				
KSA5.6	5.6				
KSA5.7	5.7	85	125	1.7	
KSA5.8	5.8				
KSA5.9	5.9				
KSA6.0	6.0				
KSA6.1	6.1				
KSA6.2	6.2				
KSA6.3	6.3	90	130	1.9	
KSA6.4	6.4				
KSA6.5	6.5				
KSA6.6	6.6				
KSA6.7	6.7				
KSA6.8	6.8				
KSA6.9	6.9	95	135	2.1	
KSA7.0	7.0				
KSA7.1	7.1				
KSA7.2	7.2				
KSA7.3	7.3				
KSA7.4	7.4				
KSA7.5	7.5	100	140	2.3	
KSA7.6	7.6				
KSA7.7	7.7				
KSA7.8	7.8				
KSA7.9	7.9				
KSA8.0	8.0				
KSA8.1	8.1	105	145	2.5	
KSA8.2	8.2				
KSA8.3	8.3				
KSA8.4	8.4				
KSA8.5	8.5				
KSA8.6	8.6				
KSA8.7	8.7	110	150	2.7	
KSA8.8	8.8				
KSA8.9	8.9				
KSA9.0	9.0				
KSA9.1	9.1				
KSA9.2	9.2				
KSA9.3	9.3	115	155	2.9	
KSA9.4	9.4				
KSA9.5	9.5				
KSA9.6	9.6				
KSA9.7	9.7				
KSA9.8	9.8				
KSA9.9	9.9	120	160	3.1	
KSA10.0	10.0				
KSA10.1	10.1				
KSA10.2	10.2				
KSA10.3	10.3				
KSA10.4	10.4				
KSA10.5	10.5	125	165	3.3	
KSA10.6	10.6				
KSA10.7	10.7				
KSA10.8	10.8				
KSA10.9	10.9				
KSA11.0	11.0				
KSA11.1	11.1	130	170	3.5	
KSA11.2	11.2				
KSA11.3	11.3				
KSA11.4	11.4				
KSA11.5	11.5				
KSA11.6	11.6				
KSA11.7	11.7	135	175	3.7	
KSA11.8	11.8				
KSA11.9	11.9				
KSA12.0	12.0				
KSA12.1	12.1				
KSA12.2	12.2				
KSA12.3	12.3	140	180	3.9	
KSA12.4	12.4				
KSA12.5	12.5				
KSA12.6	12.6				
KSA12.7	12.7				
KSA12.8	12.8				
KSA12.9	12.9	145	185	4.1	
KSA13.0	13.0				
KSA13.1	13.1				
KSA13.2	13.2				
KSA13.3	13.3				
KSA13.4	13.4				
KSA13.5	13.5	150	190	4.3	
KSA13.6	13.6				
KSA13.7	13.7				
KSA13.8	13.8				
KSA13.9	13.9				
KSA14.0	14.0				
KSA14.1	14.1	155	195	4.5	
KSA14.2	14.2				
KSA14.3	14.3				
KSA14.4	14.4				
KSA14.5	14.5				
KSA14.6	14.6				
KSA14.7	14.7	160	200	4.7	
KSA14.8	14.8				
KSA14.9	14.9				
KSA15.0	15.0				
KSA15.1	15.1				
KSA15.2	15.2				
KSA15.3	15.3	165	205	4.9	
KSA15.4	15.4				
KSA15.5	15.5				
KSA15.6	15.6				
KSA15.7	15.7				
KSA15.8	15.8				
KSA15.9	15.9	170	210	5.1	
KSA16.0	16.0				
KSA16.1	16.1				
KSA16.2	16.2				
KSA16.3	16.3				
KSA16.4	16.4				
KSA16.5	16.5	175	215	5.3	
KSA16.6	16.6				
KSA16.7	16.7				
KSA16.8	16.8				
KSA16.9	16.9				
KSA17.0	17.0				
KSA17.1	17.1	180	220	5.5	
KSA17.2	17.2				
KSA17.3	17.3				
KSA17.4	17.4				
KSA17.5	17.5				
KSA17.6	17.6				
KSA17.7	17.7	185	225	5.7	
KSA17.8	17.8				
KSA17.9	17.9				
KSA18.0	18.0				
KSA18.1	18.1				
KSA18.2	18.2				
KSA18.3	18.3	190	230	5.9	
KSA18.4	18.4				
KSA18.5	18.5				
KSA18.6	18.6				
KSA18.7	18.7				
KSA18.8	18.8				
KSA18.9	18.9	195	235	6.1	
KSA19.0	19.0				
KSA19.1	19.1				
KSA19.2	19.2				
KSA19.3	19.3				
KSA19.4	19.4				
KSA19.5	19.5	200	240	6.3	
KSA19.6	19.6				
KSA19.7	19.7				
KSA19.8	19.8				
KSA19.9	19.9				
KSA20.0	20.0				
KSA20.1	20.1	205	245	6.5	
KSA20.2	20.2				
KSA20.3	20.3				
KSA20.4	20.4				
KSA20.5	20.5				
KSA20.6	20.6				
KSA20.7	20.7	210	250	6.7	
KSA20.8	20.8				
KSA20.9	20.9				
KSA21.0	21.0				
KSA21.1	21.1				
KSA21.2	21.2				
KSA21.3	21.3	215	255	6.9	
KSA21.4	21.4				
KSA21.5	21.5				
KSA21.6	21.6				
KSA21.7	21.7				
KSA21.8	21.8				
KSA21.9	21.9	220	260	7.1	
KSA22.0	22.0				
KSA22.1	22.1				
KSA22.2	22.2				
KSA22.3	22.3				
KSA22.4	22.4				
KSA22.5	22.5	225	265	7.3	
KSA22.6	22.6				
KSA22.7	22.7				
KSA22.8	22.8				
KSA22.9	22.9				
KSA23.0	23.0				
KSA23.1	23.1	230	270	7.5	
KSA23.2	23.2				
KSA23.3	23.3				
KSA23.4	23.4				
KSA23.5	23.5				
KSA23.6	23.6				
KSA23.7	23.7	235	275	7.7	
KSA23.8	23.8				
KSA23.9	23.9				
KSA24.0	24.0				
KSA24.1	24.1				
KSA24.2	24.2				
KSA24.3	24.3	240	280	7.9	
KSA24.4	24.4				
KSA24.5	24.5				
KSA24.6	24.6				
KSA24.7	24.7				
KSA24.8	24.8				
KSA24.9	24.9	245	285	8.1	
KSA25.0	25.0				
KSA25.1	25.1				
KSA25.2	25.2				
KSA25.3	25.3				
KSA25.4	25.4				
KSA25.5	25.5	250	290	8.3	
KSA25.6	25.6				
KSA25.7	25.7				
KSA25.8	25.8				
KSA25.9	25.9				
KSA26.0	26.0				
KSA26.1	26.1	255	295	8.5	
KSA26.2	26.2				
KSA26.3	26.3				
KSA26.4	26.4				
KSA26.5	26.5				
KSA26.6	26.6				
KSA26.7	26.7	260	300	8.7	
KSA26.8	26.8				
KSA26.9	26.9				
KSA27.0	27.0				
KSA27.1	27.1				
KSA27.2	27.2				
KSA27.3	27.3	265	305	8.9	
KSA27.4	27.4				
KSA27.5	27.5				
KSA27.6	27.6				
KSA27.7	27.7				
KSA27.8	27.8				
KSA27.9	27.9	270	310	9.1	
KSA28.0	28.0				
KSA28.1	28.1				
KSA28.2	28.2				
KSA28.3	28.3				
KSA28.4	28.4				
KSA28.5	28.5	275	315	9.3	
KSA28.6	28.6				
KSA28.7	28.7				
KSA28.8	28.8				
KSA28.9	28.9				
KSA29.0	29.0				
KSA29.1	29.1	280	320	9.5	
KSA29.2	29.2				
KSA29.3	29.3				
KSA29.4	29.4				
KSA29.5	29.5				
KSA29.6	29.6				
KSA29.7	29.7	285	325	9.7	
KSA29.8	29.8				
KSA29.9	29.9				
KSA30.0	30.0				
KSA30.1	30.1				
KSA30.2	30.2				
KSA30.3	30.3	290	330	9.9	
KSA30.4	30.4				
KSA30.5	30.5				
KSA30.6	30.6				
KSA30.7	30.7				
KSA30.8	30.8				
KSA30.9	30.9	295	335	10.1	
KSA31.0	31.0				
KSA31.1	31.1				
KSA31.2	31.2				
KSA31.3	31.3				
KSA31.4	31.4				
KSA31.5	31.5	300	340	10.3	
KSA31.6	31.6				
KSA31.7	31.7				
KSA31.8	31.8				
KSA31.9	31.9				
KSA32.0	32.0				
KSA32.1	32.1	305	345	10.5	
KSA32.2	32.2				
KSA32.3	32.3				
KSA32.4	32.4				
KSA32.5	32.5				
KSA32.6	32.6				
KSA32.7	32.7	310	350	10.7	
KSA32.8	32.8				
KSA32.9	32.9				
KSA33.0	33.0				
KSA33.1	33.1				
KSA33.2	33.2				
KSA33.3	33.3	315	355	10.9	
KSA33.4	33.4				
KSA33.5	33.5				
KSA33.6	33.6				
KSA33.7	33.7				
KSA33.8	33.8				
KSA33.9	33.9	320	360	11.1	
KSA34.0	34.0				
KSA34.1	34.1				
KSA34.2	34.2				
KSA34.3	34.3				
KSA34.4	34.4				
KSA34.5	34.5	325	365	11.3	
KSA34.6	34.6				
KSA34.7	34.7				
KSA34.8	34.8				
KSA34.9	34.9				
KSA35.0	35.0				
KSA35.1	35.1	330	370	11.5	
KSA35.2	35.2				
KSA35.3	35.3				
KSA35.4	35.4				
KSA35.5	35.5				
KSA35.6	35.6				
KSA35.7	35.7	335	375	11.7	
KSA35.8	35.8				
KSA35.9	35.9				
KSA36.0	36.0				
KSA36.1	36.1				
KSA36.2	36.2				
KSA36.3	36.3	340	380	11.9	
KSA36.4	36.4				
KSA36.5	36.5				
KSA36.6	36.6				
KSA36.7	36.7				
KSA36.8	36.8				
KSA36.9	36.9	345	385	12.1	
KSA37.0	37.0				
KSA37.1	37.1				
KSA37.2	37.2				
KSA37.3	37.3				
KSA37.4	37.4				
KSA37.5	37.5	350	390	12.3	
KSA37.6	37.6				
KSA37.7	37.7				
KSA37.8	37.8				
KSA37.9	37.9				
KSA38.0	38.0				
KSA38.1	38.1	355	395	12.5	
KSA38.2	38.2				
KSA38.3	38.3				
KSA38.4	38.4				
KSA38.5	38.5				
KSA38.6	38.6				
KSA38.7	38.7	360	400	12.7	
KSA38.8	38.8				
KSA38.9	38.9				
KSA39.0	39.0				
KSA39.1	39.1				
KSA39.2	39.2				
KSA39.3	39.3	365	405	12.9	
KSA39.4	39.4				
KSA39.5	39.5				
KSA39.6	39.6				
KSA39.7	39.7				
KSA39.8	39.8				
KSA39.9	39.9	370	410	13.1	
KSA40.0	40.0				
KSA40.1	40.1				
KSA40.2	40.2				
KSA40.3	40.3				
KSA40.4	40.4				
KSA40.5	40.5	375	415	13.3	
KSA40.6	40.6				
KSA40.7	40.7				
KSA40.8	40.8				
KSA40.9	40.9				
KSA41.0	41.0				
KSA41.1	41.1	380	420	13.5	
KSA41.2	41.2				
KSA41.3	41.3				
KSA41.4	41.4				
KSA41.5	41.5				
KSA41.6	41.6				
KSA41.7	41.7	385	425	13.7	
KSA41.8	41.8				
KSA41.9	41.9				
KSA42.0	42.0				
KSA42.1	42.1				
KSA42.2	42.2				
KSA42.3	42.3	390	430	13.9	
KSA42.4	42.4				
KSA42.5	42.5				
KSA42.6	42.6				
KSA42.7	42.7				
KSA42.8	42.8				
KSA42.9	42.9	395	435	14.1	
KSA43.0	43.0				
KSA43.1	43.1				
KSA43.2	43.2				
KSA43.3	43.3				
KSA43.4	43.4				
KSA43.5	43.5	400	440	14.3	
KSA43.6	43.6				
KSA43.7	43.7				
KSA43.8	43.8				
KSA43.9	43.9				
KSA44.0	44.0				
KSA44.1	44.1	405	445	14.5	
KSA44.2	44.2				
KSA44.3	44.3				
KSA44.4	44.4				
KSA44.5	44.5				
KSA44.6	44.6				
KSA44.7	44.7	410	450	14.7	
KSA44.8	44.8				
KSA44.9	44.9				
KSA45.0	45.0				
KSA45.1	45.1				
KSA45.2	45.2				
KSA45.3	45.3	415	455	14.9	
KSA45.4	45.4				
KSA45.5	45.5				
KSA45.6	45.6				
KSA45.7	45.7				
KSA45.8	45.8				
KSA45.9	45.9	420	460	15.1	
KSA46.0	46.0				
KSA46.1	46.1				
KSA46.2	46.2				
KSA46.3	46.3				
KSA46.4	46.4				

●采用耐粘性出色的涂层，适用于铝和铜的加工。

This long drill specially coated is most suitable for deep holes of Aluminum and Copper.

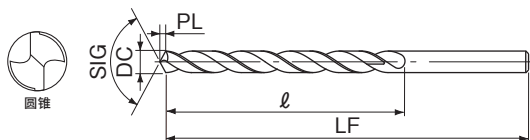

订货方式 RGALSD 直径

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
1.0	13	44	0.2	□
1.1	18	50		
1.2				
1.3				
1.4				
1.5				
1.6	24	56	0.3	
1.7				
1.8				
1.9				
2.0				
2.1	30	62	0.4	
2.2				
2.3				
2.4				
2.5				
2.6	36	68	0.5	
2.7				
2.8				
2.9				
3.0				
3.1	39	82	0.6	
3.2				
3.3				
3.4				
3.5				
3.6	44	88	0.7	
3.7				
3.8				
3.9				
4.0				
4.1	50	94	0.8	
4.2				
4.3				
4.4				
4.5				
4.6	55	100	0.9	
4.7				
4.8				
4.9				
5.0				
5.1	61	114	1.1	

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock	
5.2	61	114	1.1	□	
5.3					
5.4					
5.5					
5.6	66	120	1.2		
5.7					
5.8					
5.9					
6.0	72	132	1.3		
6.1					
6.2					
6.3					
6.4	77		1.4		
6.5					
6.6					
6.7					
6.8	83	144	1.5		
6.9					
7.0					
7.1					
7.2	88		1.6		
7.3					
7.4					
7.5					
7.6	94	156	1.7		
7.7					
7.8					
7.9					
8.0	99		168		1.8
8.1					
8.2					
8.3					
8.4	104	192			1.9
8.5					
8.6					
8.7					
8.8	109		210		2.0
8.9					
9.0					
9.1					
9.2	114	216			2.1
9.3					
9.4					
9.5					

直径 DC	槽长 ℓ	全长 LF	先端 PL	库存 Stock
9.4	104	168	1.9	□
9.5	110		2.0	
9.6				
9.7				
9.8				
9.9				
10.0	116	195	2.1	
10.1				
10.2				
10.3				
10.4				
10.5	121	2.2		
10.6				
10.7				
10.8				
10.9				
11.0	127	207	2.3	
11.1				
11.2				
11.3				
11.4				
11.5	132	2.4		
11.6				
11.7				
11.8				
11.9				
12.0	138	219	2.5	
12.1				
12.2				
12.3				
12.4				
12.5	143	2.6		
12.6				
12.7				
12.8				
12.9				
13.0		2.7		


精密工具

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	—	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	×	×	—	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●可以对铝合金进行高效率的深孔加工。

This drill is suitable for the high efficiency and deep hole drilling in Aluminum Alloy.

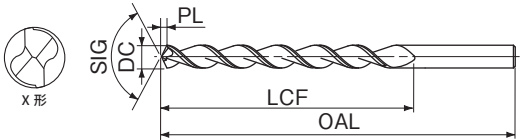

新商品

订货方式 DLCPLSD 直径 × 全长

直径 DC	全长 OAL	槽长 LCF	先端 PL	库存 Stock
1.0	56	33	0.3	
1.0	100	60		
1.1	60	37		
1.1	100	60		
1.2	65	41	0.4	
1.2	105	65		
1.3	65	41		
1.3	105	65		
1.4	70	45	0.5	
1.4	110	70		
1.5	70	45		
1.5	110	70		
1.6	76	50	0.6	
1.6	115	75		
1.7	76	50		
1.7	115	75		
1.8	80	53	0.7	
1.8	120	80		
1.9	80	53		
1.9	120	80		
2.0	85	56	0.8	
2.0	125	85		
2.1	85	56		
2.1	125	85		
2.2	90	59	0.9	
2.2	135	90		
2.3	90	59		
2.3	135	90		
2.4	95	62	1.0	
2.4	140	95		
2.5	95	62		
2.5	140	95		
2.6	95	62	1.1	
2.6	140	95		
2.7	100	66		
2.7	150	100		
2.8	100	66	1.2	
2.8	150	100		
2.9	100	66		
2.9	150	100		
3.0	100	66	1.3	
3.0	150	100		
3.1	106	69		
3.1	155	105		
3.2	106	69	1.4	
3.2	155	105		
3.3	106	69		
3.3	155	105		
3.4	112	73	1.5	
3.4	165	115		
3.5	112	73		
3.5	165	115		
3.6	112	73	1.6	
3.6	165	115		
3.7	112	73		
3.7	165	115		
3.8	119	78	1.7	
3.8	175	120		
3.9	119	78		
3.9	175	120		
4.0	119	78	1.8	
4.0	175	120		
4.1	119	78		
4.1	175	120		

单位 (Unit) : mm

直径 DC	全长 OAL	槽长 LCF	先端 PL	库存 Stock
4.0	175	120	1.2	
4.1	119	78		
4.1	175	120		
4.2	119	78		
4.2	175	120	1.3	
4.3	126	82		
4.3	185	125		
4.4	126	82		
4.4	185	125	1.4	
4.5	126	82		
4.5	185	125		
4.6	126	82		
4.6	185	125	1.5	
4.7	126	82		
4.7	185	125		
4.8	132	87		
4.8	195	135	1.6	
4.9	132	87		
4.9	195	135		
5.0	132	87		
5.0	195	135	1.7	
5.1	132	87		
5.1	195	135		
5.2	132	87		
5.2	195	135	1.8	
5.3	132	87		
5.3	195	135		
5.4	139	91		
5.4	205	140	1.9	
5.5	139	91		
5.5	205	140		
5.6	139	91		
5.6	205	140	2.0	
5.7	139	91		
5.7	205	140		
5.8	139	91		
5.8	205	140	2.1	
5.9	139	91		
5.9	205	140		
6.0	139	91		
6.0	205	140	2.2	
6.1	148	97		
6.1	215	150		
6.2	148	97		
6.2	215	150	2.3	
6.3	148	97		
6.3	215	150		
6.4	148	97		
6.4	215	150	2.4	
6.5	148	97		
6.5	215	150		
6.6	148	97		
6.6	215	150	2.5	
6.7	148	97		
6.7	215	150		
6.8	156	102		
6.8	225	155	2.6	
6.9	156	102		
6.9	225	155		
7.0	156	102		
7.0	225	155	2.7	
7.1	156	102		
7.1	225	155		
7.2	156	102		

Next Page 下一页 ➡

柄部直径小于钻头直径。刃长较长的钻头，柄部直径明显小于钻头直径，因此使用钻头夹套时，请选定过盈量充分的夹套。详情请参照 I-10。

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	全长 OAL	槽长 LCF	先端 PL	库存 Stock
7.1	156	102	2.1	□
7.1	225	155		
7.2	156	102	2.2	
7.2	225	155		
7.3	156	102		
7.3	225	155		
7.4	156	102		
7.4	225	155		
7.5	156	102	2.3	
7.5	225	155		
7.6	165	109		
7.6	240	165		
7.7	165	109		
7.7	240	165		
7.8	165	109		
7.8	240	165		
7.9	165	109	2.4	
7.9	240	165		
8.0	165	109		
8.0	240	165		
8.1	165	109		
8.1	240	165		
8.2	165	109	2.5	
8.2	240	165		
8.3	165	109		
8.3	240	165		
8.4	165	109		
8.4	240	165		
8.5	165	109	2.6	
8.5	240	165		
8.6	175	115		
8.6	250	175		
8.7	175	115		
8.7	250	175		
8.8	175	115	2.7	
8.8	250	175		
8.9	175	115		
8.9	250	175		
9.0	175	115		
9.0	250	175		
9.1	175	115	2.8	
9.1	250	175		
9.2	175	115		
9.2	250	175		
9.3	175	115		
9.3	250	175		
9.4	175	115	2.9	
9.4	250	175		
9.5	175	115		
9.5	250	175		
9.6	184	121		
9.6	265	185		
9.7	184	121	3.0	
9.7	265	185		
9.8	184	121		
9.8	265	185		
9.9	184	121		
9.9	265	185		
10.0	184	121	3.1	
10.0	265	185		
10.1	184	121		
10.1	265	185		
10.2	184	121		
10.2	265	185		
10.3	184	121	3.2	
10.3	265	185		
10.4	184	121		
10.4	265	185		
10.5	184	121		
10.5	265	185		


直径 DC	全长 OAL	槽长 LCF	先端 PL	库存 Stock
10.6	184	121	3.2	□
10.6	265	185		
10.7	195	128		
10.7	280	195		
10.8	195	128		
10.8	280	195	3.3	
10.9	195	128		
10.9	280	195		
11.0	195	128		
11.0	280	195		
11.1	195	128	3.4	
11.1	280	195		
11.2	195	128		
11.2	280	195		
11.3	195	128		
11.3	280	195	3.5	
11.4	195	128		
11.4	280	195		
11.5	195	128		
11.5	280	195		
11.6	195	128	3.6	
11.6	280	195		
11.7	195	128		
11.7	280	195		
11.8	195	128		
11.8	280	195	3.7	
11.9	205	134		
11.9	295	205		
12.0	205	134		
12.0	295	205		
12.1	205	134	3.8	
12.1	295	205		
12.2	205	134		
12.2	295	205		
12.3	205	134		
12.3	295	205	3.9	
12.4	205	134		
12.4	295	205		
12.5	205	134		
12.5	295	205		
12.6	205	134	4.0	
12.6	295	205		
12.7	205	134		
12.7	295	205		
12.8	205	134		
12.8	295	205	4.1	
12.9	205	134		
12.9	295	205		
13.0	205	134		
13.0	295	205		

一般结构用钢	碳钢	合金钢调质钢	模具钢预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	×	×	×	×	×
不锈钢		钛合金耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	×	◎	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●螺旋角大，切屑排出性出色的铝用长钻头。

This is long drill for Aluminum.

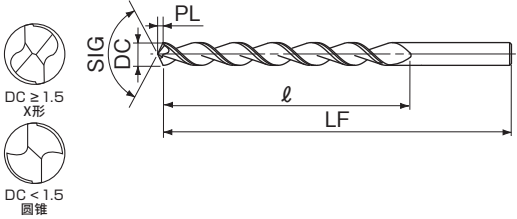

新商品

LIST 6532

订货方式 **LASD** 直径 × 全长

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
1.0	75	40	0.3	□
1.0	100	50		
1.5	75	40	0.5	
1.5	100	50		
1.6	75	40		
1.6	100	50		
2.0	75	40	0.6	
2.0	100	50		
2.0	150	75		
2.1	75	40		
2.1	100	50		
2.1	150	75	0.8	
2.5	100	50		
2.5	150	75		
2.7	100	50		
2.7	150	75	0.9	
3.0	100	50		
3.0	150	75		
3.0	200	100		
3.3	100	50	1.0	
3.3	150	75		
3.3	200	100		
3.5	100	50	1.1	
3.5	150	75		
3.5	200	100		
4.0	150	75	1.2	
4.0	200	100		
4.0	250	150		
4.2	150	75	1.3	
4.2	200	100		
4.2	250	150		
4.5	150	75	1.4	
4.5	200	100		
4.5	250	150		
5.0	150	75	1.5	
5.0	200	100		
5.0	250	150		
5.0	300	180		
5.3	150	75	1.6	
5.3	200	100		
5.3	250	150		
5.3	300	180		
5.5	150	75	1.7	
5.5	200	100		
5.5	250	150		
5.5	300	180		
6.0	150	75	1.8	
6.0	200	100		
6.0	250	150		
6.0	300	180		
6.5	200	100	2.0	
6.5	250	150		
6.5	300	180		
6.8	200	100		
6.8	250	150	2.1	
6.8	300	180		
7.0	200	100		
7.0	250	150		
7.0	300	180		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
7.5	200	100	2.3	□
7.5	250	150		
7.5	300	180		
8.0	200	100	2.4	
8.0	250	150		
8.0	300	180		
8.5	200	100	2.6	
8.5	250	150		
8.5	300	180		
8.8	200	100		
8.8	250	150		
8.8	300	180	2.7	
9.0	200	100		
9.0	250	150		
9.0	300	180		
9.5	200	100	2.9	
9.5	250	150		
9.5	300	180		
10.0	200	100	3.0	
10.0	250	150		
10.0	300	180		
10.3	250	150	3.1	
10.3	300	180		
10.5	250	150	3.2	
10.5	300	180		
11.0	250	150	3.3	
11.0	300	180		
11.5	250	150	3.5	
11.5	300	180		
12.0	250	150	3.6	
12.0	300	180		
12.5	250	150	3.8	
12.5	300	180		
13.0	250	150	3.9	
13.0	300	180		

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	×	×	×	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	×	◎	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

新品

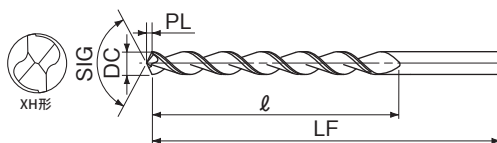

订购方式 KLA 直径 × 全长

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
2.0	100	60	0.6	□
2.0	150	80		
2.1	100	60		
2.1	150	80		
2.2	100	60	0.7	
2.2	150	80		
2.3	100	60		
2.3	150	80		
2.4	100	60	0.8	
2.4	150	80		
2.5	100	60		
2.5	150	80		
2.6	100	60	0.9	
2.6	150	80		
2.7	100	60		
2.7	150	80		
2.8	100	60	1.0	
2.8	150	80		
2.9	100	60		
2.9	150	80		
3.0	100	60	1.1	
3.0	150	100		
3.1	100	60		
3.1	150	100		
3.2	100	60	1.2	
3.2	150	100		
3.3	100	60		
3.3	150	100		
3.4	100	60	1.3	
3.4	150	100		
3.5	100	60		
3.5	150	100		
3.6	100	60	1.4	
3.6	150	100		
3.7	100	60		
3.7	150	100		
3.8	100	60	1.5	
3.8	150	100		
3.9	100	60		
3.9	150	100		
4.0	100	60	1.6	
4.0	150	100		
4.1	100	60		
4.1	150	100		
4.2	100	60	1.7	
4.2	150	100		
4.3	100	60		
4.3	150	100		
4.4	100	60	1.8	
4.4	150	100		
4.5	100	60		
4.5	150	100		
4.6	100	60	1.9	
4.6	150	100		
4.7	100	60		
4.7	150	100		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
4.7	200	150	1.4	□
4.8	150	100		
4.8	200	150		
4.9	150	100	1.5	
4.9	200	150		
5.0	150	100		
5.0	200	150		
5.0	250	175		
5.1	150	100		
5.1	200	150		
5.1	250	175		
5.2	150	100		
5.2	200	150		
5.2	250	175		
5.3	150	100	1.7	
5.3	200	150		
5.3	250	175		
5.4	150	100		
5.4	200	150		
5.4	250	175		
5.5	150	100	1.8	
5.5	200	150		
5.5	250	175		
5.6	150	100		
5.6	200	150		
5.6	250	175		
5.7	150	100	1.9	
5.7	200	150		
5.7	250	175		
5.8	150	100		
5.8	200	150		
5.8	250	175		
5.9	150	100	2.0	
5.9	200	150		
5.9	250	175		
6.0	150	100		
6.0	200	150		
6.0	250	175		
6.0	300	200	2.1	
6.1	150	100		
6.1	200	150		
6.1	250	175		
6.1	300	200		
6.2	150	100		
6.2	200	150		
6.2	250	175		
6.2	300	200		
6.3	150	100		
6.3	200	150		
6.3	250	175	2.3	
6.3	300	200		
6.4	150	100		
6.4	200	150		
6.4	250	175		
6.4	300	200		
6.5	150	100	2.4	
6.5	200	150		
6.5	250	175		
6.5	300	200		
6.6	150	100		
6.6	200	150		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
6.6	200	150	2.0	□
6.6	250	175		
6.6	300	200		
6.7	150	100		
6.7	200	150		
6.7	250	175		
6.7	300	200		
6.8	150	100		
6.8	200	150		
6.8	250	175		
6.8	300	200		
6.9	150	100	2.1	
6.9	200	150		
6.9	250	175		
6.9	300	200		
7.0	150	100		
7.0	200	150		
7.0	250	175		
7.0	300	200		
7.1	150	100		
7.1	200	150		
7.1	250	175		
7.1	300	200		
7.2	150	100	2.2	
7.2	200	150		
7.2	250	175		
7.2	300	200		
7.3	150	100		
7.3	200	150		
7.3	250	175		
7.3	300	200		
7.4	150	100		
7.4	200	150		
7.4	250	175		
7.4	300	200		
7.5	150	100	2.3	
7.5	200	150		
7.5	250	175		
7.5	300	200		
7.6	200	150		
7.6	250	175		
7.6	300	200		
7.7	200	150		
7.7	250	175		
7.7	300	200		
7.8	200	150	2.4	
7.8	250	175		
7.8	300	200		
7.9	200	150		
7.9	250	175		
7.9	300	200		
8.0	200	150		
8.0	250	175		
8.0	300	200		
8.1	200	150		
8.1	250	175	2.5	
8.1	300	200		
8.2	200	150		
8.2	250	175		
8.2	300	200		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm


直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
8.3	200	150	2.5	□
8.3	250	175		
8.3	300	200		
8.4	200	150		
8.4	250	175		
8.4	300	200		
8.5	200	150	2.6	
8.5	250	175		
8.5	300	200		
8.6	200	150		
8.6	250	175		
8.6	300	200		
8.7	200	150		
8.7	250	175		
8.7	300	200		
8.8	200	150	2.7	
8.8	250	175		
8.8	300	200		
8.9	200	150		
8.9	250	175		
8.9	300	200		
9.0	200	150		
9.0	250	175		
9.0	300	200		
9.1	200	150	2.8	
9.1	250	175		
9.1	300	200		
9.2	200	150	2.9	
9.2	250	175		
9.2	300	200		
9.3	200	150		
9.3	250	175		
9.3	300	200	3.0	
9.4	200	150		
9.4	250	175		
9.4	300	200		
9.5	200	150		
9.5	250	175	3.1	
9.5	300	200		
9.6	200	150		
9.6	250	175		
9.6	300	200		
9.7	200	150	3.2	
9.7	250	175		
9.7	300	200		
9.8	200	150		
9.8	250	175		
9.8	300	200	3.3	
9.9	200	150		
9.9	250	175		
9.9	300	200		
10.0	200	150		
10.0	250	175	3.4	
10.0	300	200		
10.1	200	150		
10.1	250	175		
10.1	300	200		
10.2	200	150	3.5	
10.2	250	175		
10.2	300	200		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
10.3	200	150	3.1	□
10.3	250	175		
10.3	300	200		
10.4	200	150		
10.4	250	175		
10.4	300	200		
10.5	200	150		
10.5	250	175		
10.5	300	200		
10.6	200	150		
10.6	250	175		
10.6	300	200		
10.7	200	150		
10.7	250	175		
10.7	300	200		
10.8	200	150		
10.8	250	175		
10.8	300	200		
10.9	200	150		
10.9	250	175		
10.9	300	200		
11.0	200	150		
11.0	250	175		
11.0	300	200		
11.1	200	150		
11.1	250	175		
11.1	300	200		
11.2	200	150		
11.2	250	175		
11.2	300	200		
11.3	200	150		
11.3	250	175		
11.3	300	200		
11.4	200	150		
11.4	250	175		
11.4	300	200		
11.5	200	150		
11.5	250	175		
11.5	300	200		
11.6	200	150		
11.6	250	175		
11.6	300	200		
11.7	200	150		
11.7	250	175		
11.7	300	200		
11.8	200	150		
11.8	250	175		
11.8	300	200		
11.9	200	150		
11.9	250	175		
11.9	300	200		
12.0	200	150		
12.0	250	175		
12.0	300	200		
12.1	200	150		
12.1	250	175		
12.1	300	200		
12.2	200	150		
12.2	250	175		
12.2	300	200		

直径 DC	全长 LF	槽长 ℓ	先端 PL	库存 Stock
12.3	200	150	3.7	□
12.3	250	175		
12.3	300	200		
12.4	200	150		
12.4	250	175		
12.4	300	200		
12.5	200	150	3.8	
12.5	250	175		
12.5	300	200		
12.6	200	150		
12.6	250	175		
12.6	300	200		
12.7	200	150		
12.7	250	175		
12.7	300	200		
12.8	200	150		
12.8	250	175	3.9	
12.8	300	200		
12.9	200	150		
12.9	250	175		
12.9	300	200		
13.0	200	150		
13.0	250	175		
13.0	300	200		

- 在柄部利用三爪夹头，可方便地将本钻头用于电动钻、钻床上。

It is a shank drill that is easy to use three-claw chucks such as electric drills and drilling machines.

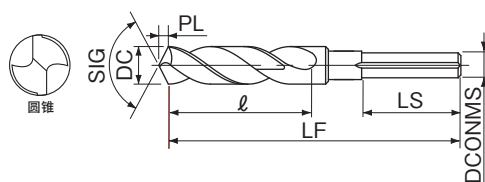

6 型 (1/4) 6Type

LIST 574

订货方式 NOS 直径 -4

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
7.0	35	75	6.5	25	2.1	●
7.5					2.3	
8.0					2.4	
8.5					2.6	
9.0					2.7	
9.5					2.9	
10.0	48	95		30	3.0	
10.5					3.2	
11.0					3.3	
11.5					3.5	
12.0					3.6	
12.5					3.8	
13.0					3.9	

13 型 (1/2) 13Type

LIST 578

订货方式 NOS 直径 -2

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
13.1	74	134	12.65	40	3.9	□
13.2					4.0	
13.3					4.1	
13.4					4.2	
13.5					4.3	
13.6					4.4	
13.7					4.5	
13.8					4.6	
13.9					4.7	
14.0					4.8	
14.1					4.9	
14.2					5.0	
14.3					5.1	
14.4					5.2	
14.5					5.3	
14.6					5.4	
14.7					5.5	
14.8					5.6	
14.9					5.7	
15.0					5.8	
15.1					5.9	
15.2					6.0	
15.3					6.1	
15.4					6.2	
15.5					6.3	
15.6					6.4	
15.7					6.5	
15.8					6.6	
15.9					6.7	
16.0					6.8	
16.1					6.9	
16.2					7.0	
16.3					7.1	
16.4					7.2	
16.5					7.3	
16.6					7.4	
16.7					7.5	
16.8					7.6	
16.9					7.7	
17.0					7.8	
17.1					7.9	
17.2					8.0	
17.3					8.1	
17.4					8.2	
17.5					8.3	
17.6					8.4	
17.7					8.5	
17.8					8.6	
17.9					8.7	
18.0					8.8	
18.1					8.9	
18.2					9.0	
18.3					9.1	
18.4					9.2	
18.5					9.3	
18.6					9.4	
18.7					9.5	
18.8					9.6	
18.9					9.7	
19.0					9.8	

10 型 (3/8) 10Type

LIST 576

订货方式 NOS 直径 -8

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
10.5	65	120	9.5	35	3.2	●
11.0					3.3	
11.5					3.5	
12.0					3.6	
12.5					3.8	
13.0					3.9	
13.5					4.1	
14.0					4.2	
14.5					4.4	
15.0					4.5	
15.5					4.7	
16.0					4.8	

柄部的 V 槽在外周上有 3 个槽。这是防滑用的槽，10 型和 13 型的钻头上采用了这一设计。10 型和 13 型上还带有保护环。(6 型无 V 槽及保护环。) 包装数量方面，仅 6 型 (1/4) 为 5 支包装，其他为 1 支包装。也可使用 1 支包装的 NOSP (盒装) (G-10)。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
19.1	74	134	12.65	40	5.7	□
19.2						
19.3						
19.4					5.8	●
19.5						□
19.6						
19.7					5.9	●
19.8						□
19.9						
20.0					6.0	●
20.1						□
20.2						
20.3					6.1	●
20.4						□
20.5						
20.6					6.2	●
20.7						□
20.8						
20.9					6.3	●
21.0						□
21.1						
21.2					6.4	●
21.3						□
21.4						
21.5					6.5	●
21.6						□
21.7						
21.8					6.6	●
21.9						□
22.0						
22.1	6.7	●				
22.2		□				
22.3						
22.4	6.8	●				
22.5		□				
22.6						
22.7	6.9	●				
22.8		□				
22.9						
23.0	7.0	●				
23.1		□				
23.2						
23.3	7.1	●				
23.4		□				
23.5						
23.6	7.2	●				
23.7		□				
23.8						
23.9	7.3	●				
24.0		□				
24.1						
24.2	7.4	●				
24.3		□				
24.4						
24.5	7.5	●				
24.6		□				
24.7						
24.8	7.6	●				
24.9		□				
25.0						


直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
25.1	74	134	12.65	40	7.5	□
25.2					7.6	
25.3						
25.4					7.7	●
25.5						□
25.6						
25.7					7.8	●
25.8						
25.9						
26.0					8.1	●
27.0						
28.0						
29.0	8.4	●				
30.0						
32.0						

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	—	—	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●在柄部利用三爪夹头，可方便地将本含钴钻头用于电动钻、钻床上。

It is a shank cobalt HSS drill that is easy to use three-claw chucks such as electric drills and drilling machines.

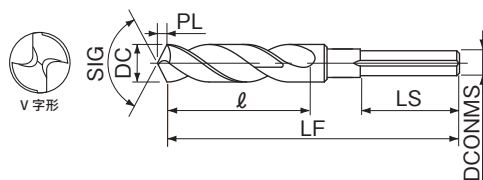

10 型 (3/8) 10Type

LIST 6586

订货方式 SNOS 直径 -8

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
10.0	65	120	9.5	35	3.0	●
10.5					3.2	
11.0					3.3	
11.5					3.5	
12.0					3.6	
12.5					3.8	
13.0					3.9	
13.5					4.1	
14.0					4.2	
14.5					4.4	
15.0	65	120	9.5	30	4.5	●
15.5					4.7	
16.0					4.8	
16.5					4.8	

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65 HRC
○	○	○	—	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	—	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

13 型 (1/2) 13Type

LIST 6588

订货方式 SNOS 直径 -2

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
13.1	74	134	12.65	40	3.9	□
13.2					4.0	
13.3					4.1	
13.4					4.2	
13.5					4.3	
13.6					4.4	
13.7					4.5	
13.8					4.6	
13.9					4.7	
14.0					4.8	
14.1					4.9	
14.2					5.0	
14.3					5.1	
14.4					5.2	
14.5					5.3	
14.6					5.4	
14.7					5.5	
14.8					5.6	
14.9					5.7	
15.0					5.8	
15.1					5.9	
15.2					6.0	
15.3					6.1	
15.4					6.2	
15.5					6.3	
15.6					6.4	
15.7					6.5	
15.8					6.6	
15.9					6.7	
16.0					6.8	
16.1					6.9	
16.2					7.0	
16.3					7.1	
16.4					7.2	
16.5					7.3	
16.6					7.4	


直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	库存 Stock
16.7	74	134	12.65	40	5.0	□
16.8					5.1	
16.9					5.2	
17.0					5.3	
17.1					5.4	
17.2					5.5	
17.3					5.6	
17.4					5.7	
17.5					5.8	
17.6					5.9	
17.7					6.0	
17.8					6.1	
17.9					6.2	
18.0					6.3	
18.1					6.4	
18.2					6.5	
18.3					6.6	
18.4					6.7	
18.5					6.8	
18.6					6.9	
18.7					7.0	
18.8					7.1	
18.9					7.2	
19.0					7.3	
19.1					7.4	
19.2					7.5	
19.3					7.6	
19.4					7.7	
19.5					7.8	
19.6					7.9	
19.7					8.0	
19.8					8.1	
19.9					8.2	
20.0					8.3	

HCD

平头小螺丝 沉孔专用钻头 Machine screw counter bore Drills

●用于平头小螺丝沉孔加工的阶梯钻。

Step drill bit for drilling countersunk fillister screw holes

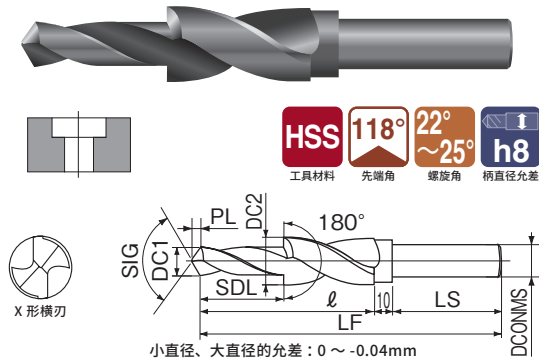

LIST 595

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小径槽 SDL	大直径 DC2	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
HCDM3	M3	3.4	13	5.9	25	30	65	6	1.0	●
HCDM4	M4	4.5	18	7.4	35		75	6	1.4	
HCDM5	M5	5.5	22	9.4	40		85	8	1.7	
HCDM6	M6	6.6	25	11.0	45	35	90	10	2.0	
HCDM8	M8	9.0	28	14.5	55		100	12	2.7	


切削条件 Cutting Condition ▶▶▶B-168

SCD

盘头小螺丝 沉孔专用钻头 Machine screw counter sink Drills

●用于盘头小螺丝沉孔加工的阶梯钻。

Step drill bit for drilling countersunk flat screw holes

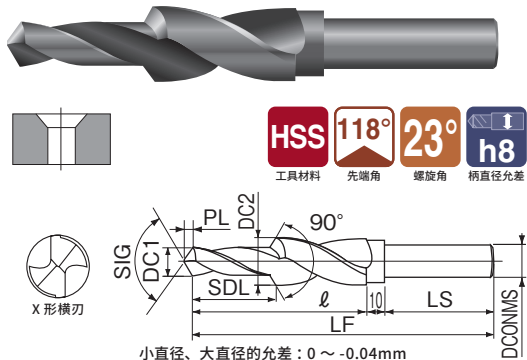

LIST 598

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小径槽 SDL	大直径 DC2	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
SCDM3	M3	3.4	13	6.4	25	30	65	6	1.0	●
SCDM4	M4	4.5	18	8.4	30		70	6	1.4	
SCDM5	M5	5.5	22	10.4	35		80	8	1.7	
SCDM6	M6	6.6	25	12.5	40	35	85	10	2.0	
SCDM8	M8	9.0	28	16.5	45		90	12	2.7	


切削条件 Cutting Condition ▶▶▶B-168

RCD

六角螺栓 沉孔专用钻头 Counter bore Drills for hexagon socket head bolts

●用于六角螺栓沉孔加工的阶梯钻。

Step drill bit for drilling countersunk slotted hex bolt holes

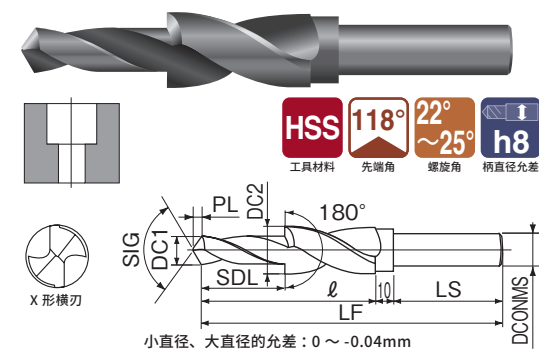

LIST 597

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	螺纹尺寸 Thread Size	小直径 DC1	小径槽 SDL	大直径 DC2	槽长 ℓ	柄长 LS	全长 LF	柄径 DCONMS	先端 PL	库存 Stock
RCDM3	M3	3.4	13	6.5	25	30	65	6	1.0	●
RCDM4	M4	4.5	18	8.0	35		75	6	1.4	
RCDM5	M5	5.5	22	9.5	40		85	8	1.7	
RCDM6	M6	6.6	25	11.0	45	35	90	10	2.0	
RCDM8	M8	9.0	28	14.0	55		100	12	2.7	
RCDM10	M10	11.0	30	17.5	60		110	12	3.3	●
RCDM12	M12	14.0	32	20.0	65		115	12	4.2	
RCDM14	M14	16.0	35	23.0	75	40	125	12	4.8	
RCDM16	M16	18.0	40	26.0	85		135	12	5.4	
RCDM18	M18	20.0	45	29.0	95		145	12	6.0	

切削条件 Cutting Condition ▶▶▶B-168

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65 HRC
○	◎	◎	○	—	—
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	◎	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●可以对从普通钢到不锈钢以及铝进行高效率加工。

This drill is suitable for workpiece materials from Steel and Stainless Steel to Aluminum.

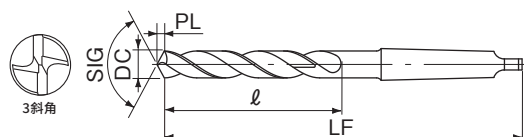

订货方式 SGTDK 直径

仅限直径
5.0~6.9的库存品

单位 (Unit) : mm


直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
5.0	60	136	1.0	1	□
5.1			1.1		
5.2					
5.3					
5.4					
5.5					
5.6					
5.7			1.2		
5.8					
5.9					
6.0					
6.1					
6.2					
6.3	1.3				
6.4					
6.5					
6.6					
6.7					
6.8					
6.9	1.4				
7.0					
7.1					
7.2					
7.3					
7.4					
7.5	1.5				
7.6					
7.7					
7.8					
7.9					
8.0					
8.1	1.6				
8.2					
8.3					
8.4					
8.5					
8.6					
8.7	1.7				
8.8					
8.9					
9.0					
9.1					
9.2					
9.3	1.8				
9.4					
9.5					
9.6					
9.7					
9.8					
9.9	1.9				
10.0					
10.1					
10.2					
10.3					
10.4					
10.5	2.0				
10.6					
10.7					
10.8					
10.9					
10.0					
10.1	2.1				
10.2					
10.3					
10.4					
10.5					
10.6					
10.7	2.2				
10.8					
10.9					
10.0					
10.1					
10.2					
10.3	2.3				
10.4					
10.5					
10.6					
10.7					
10.8					
10.9					

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
11.0	81	161	2.3	1	□
11.1					
11.2					
11.3					
11.4					
11.5	86	166	2.4		
11.6					
11.7					
11.8					
11.9					
12.0					
12.1			2.5		
12.2					
12.3					
12.4					
12.5					
12.6	2.6				
12.7					
12.8					
12.9					
13.0					
13.1	90	170	2.7		
13.2					
13.3					
13.4					
13.5					
13.6			2.8		
13.7					
13.8					
13.9					
14.0					
14.1	93	188	2.9		
14.2					
14.3					
14.4					
14.5					
14.6			3.0		
14.7					
14.8					
14.9					
15.0					
15.1	97	192	3.1		
15.2					
15.3					
15.4					
15.5					
15.6			3.2		
15.7					
15.8					
15.9					
16.0					
16.1	100	195	3.3		
16.2					
16.3					
16.4					
16.5					
16.6			3.4		
16.7					
16.8					
16.9					
16.9					

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock					
17.0	100	195	3.5	2	□					
17.1										
17.2										
17.3			3.6							
17.4										
17.5										
17.6										
17.7			3.7							
17.8										
17.9										
18.0										
18.1	106	201	3.8							
18.2										
18.3										
18.4										
18.5			3.9							
18.6										
18.7										
18.8										
18.9			110			205	4.0			
19.0										
19.1										
19.2	4.1									
19.3										
19.4										
19.5										
19.6	4.2									
19.7										
19.8										
19.9										
20.0	120	215	4.3							
20.5										
21.0										
21.5			125	220		4.5				
22.0										
22.5										
23.0										
23.5						130	225	4.7		
24.0										
24.5										
25.0										
25.5	133	250						4.8		
26.0										
26.5										
27.0			135	255				4.9		
27.5										
28.0										
28.5										
29.0					140	260	5.0			
29.5										
30.0										
30.5										
31.0	145	265					5.1			
31.5										
32.0										
32.5										
33.0			150	270			5.2			
33.5										
34.0										
34.5										
35.0					155	275	5.3			
35.5										
36.0										
36.5										
37.0	160	280					5.4			
37.5										
38.0										
38.5										
39.0			165	285			5.5			
39.5										
40.0										
40.5										
41.0					170	290	5.6			
41.5										
42.0										
42.5										
43.0	175	295					5.7			
43.5										
44.0										
44.5										
45.0			180	300			5.8			
45.5										
46.0										
46.5										
47.0					185	305	5.9			
47.5										
48.0										
48.5										
49.0	190	310					6.0			
49.5										
50.0										
50.5										
51.0			195	315			6.1			
51.5										
52.0										
52.5										
53.0					200	320	6.2			
53.5										
54.0										
54.5										
55.0	205	325					6.3			
55.5										
56.0										
56.5										
57.0			210	330			6.4			
57.5										
58.0										
58.5										
59.0					215	335	6.5			
59.5										
60.0										
60.5										
61.0	220	340					6.6			
61.5										
62.0										
62.5										
63.0			225	345			6.7			
63.5										
64.0										
64.5										
65.0					230	350	6.8			
65.5										
66.0										
66.5										
67.0	235	355					6.9			
67.5										
68.0										
68.5										
69.0			240	360			7.0			
69.5										
70.0										
70.5										
71.0					245	365	7.1			
71.5										
72.0										
72.5										
73.0	250	370					7.2			
73.5										
74.0										
74.5										
75.0			255	375			7.3			
75.5										
76.0										
76.5										
77.0					260	380	7.4			
77.5										
78.0										
78.5										
79.0	265	385					7.5			
79.5										
80.0										
80.5										
81.0			270	390			7.6			
81.5										
82.0										
82.5										
83.0					275	395	7.7			
83.5										
84.0										
84.5										
85.0	280	400					7.8			
85.5										
86.0										
86.5										
87.0			285	405			7.9			
87.5										
88.0										
88.5										
89.0					290	410	8.0			
89.5										
90.0										
90.5										
91.0	295	415					8.1			
91.5										
92.0										
92.5										
93.0			300	420			8.2			
93.5										
94.0										
94.5										
95.0					305	425	8.3			
95.5										
96.0										
96.5										
97.0	310	430					8.4			
97.5										
98.0										
98.5										
99.0			315	435			8.5			
99.5										
100.0										
100.5										
101.0					320	440	8.6			
101.5										
102.0										
102.5										
103.0	325	445					8.7			
103.5										
104.0										
104.5										
105.0			330	450			8.8			
105.5										
106.0										
106.5										
107.0					335	455	8.9			
107.5										
108.0										
108.5										
109.0	340	460					9.0			
109.5										
110.0										
110.5										
111.0			345	465			9.1			
111.5										
112.0										
112.5										
113.0					350	470	9.2			
113.5										
114.0										
114.5										
115.0	355	475					9.3			
115.5										
116.0										
116.5										
117.0			360	480			9.4			
117.5										
118.0										
118.5										
119.0					365	485	9.5			
119.5										
120.0										
120.5										
121.0	370	490					9.6			
121.5										
122.0										
122.5										
123.0			375	495			9.7			
123.5										
124.0										
124.5										
125.0					380	500	9.8			
125.5										
126.0										
126.5										
127.0	385	505					9.9			
127.5										
128.0										
128.5										
129.0			390	510			10.0			
129.5										
130.0										
130.5										
131.0					395	515	10.1			
131.5										
132.0										
132.5										
133.0	400	520					10.2			
133.5										
134.0										
134.5										
135.0			405	525			10.3			
135.5										
136.0										
136.5										
137.0					410	530	10.4			
137.5										
138.0										
138.5										
139.0	415	535					10.5			
139.5										
140.0										
140.5										
141.0			420	540			10.6			
141.5										
142.0										
142.5										
143.0					425	545	10.7			
143.5										
144.0										
144.5										
145.0	430	550					10.8			
145.5										
146.0										
146.5										
147.0			435	555			10.9			
147.5										
148.0										
148.5										
149.0					440	560	11.0			
149.5										
150.0										
150.5										
151.0	445	565					11.1			
151.5										
152.0										
152.5										
153.0			450	570			11.2			
153.5										
154.0										
154.5										
155.0					455	575	11.3			
155.5										
156.0										
156.5										
157.0	460	580					11.4			
157.5										
158.0										
158.5										
159.0			465	585			11.5			
159.5										
160.0										
160.5										
161.0					470	590	11.6			
161.5										
162.0										
162.5										
163.0	475	595					11.7			
163.5										
164.0										
164.5										
165.0			480	600			11.8			
165.5										
166.0										
166.5										
167.0					485	605	11.9			
167.5										
168.0										
168.5										
169.0	490	610					12.0			
169.5										
170.0										
170.5										
171.0			495	615			12.1			
171.5										
172.0										
172.5										
173.0					500	620	12.2			
173.5										
174.0										
174.5										
175.0	505	625					12.3			
175.5										
176.0										
176.5										
177.0			510	630			12.4			
177.5										
178.0										
178.5										
179.0					515	635	12.5			
179.5										
180.0										
180.5										
181.0	520	640					12.6			
181.5										
182.0										
182.5										
183.0			525	645			12.7			
183.5										
184.0										
184.5										
185.0					530	650	12.8			
185.5										
186.0										
186.5										
187.0	535	655					12.9			
187.5										
188.0										
188.5										
189.0			540	660			13.0			
189.5										
190.0										
190.5										
191.0					545	665	13.1			
191.5										
192.0										
192.5										
193.0	550	670					13.2			
193.5										
194.0										
194.5										
195.0			555	675			13.3			
195.5										
196.0										
196.5										
197.0					560	680	13.4			
197.5										
198.0										
198.5										
199.0	565	685					13.5			
199.5										
200.0										
200.5										
201.0			570	690			13.6			
201.5										
202.0										
202.5										
203.0					575	695	13.7			
203.5										
204.0										
204.5										
205.0	580	700					13.8			
205.5										
206.0										
206.5										
207.0			585	705			13.9			
207.5										
208.0										
208.5										
209.0					590	710	14.0			
209.5										
210.0										
210.5										
211.0	595	715					14.1			
211.5										
212.0										
212.5										
213.0			600	720			14.2			
213.5										
214.0										
214.5										
215.0					605	725	14.3			
215.5										
216.0										
216.5										
217.0	610	730					14.4			
217.5										
218.0										
218.5										
219.0			615	735			14.5			
219.5										
220.0										
220.5										
221.0					620	740	14.6			
221.5										
222.0										
222.5										
223.0	625	745					14.7			
223.5										
224.0										
224.5										
225.0			630	750			14.8			
225.5										
226.0										
226.5										
227.0					635	755	14.9			
227.5										
228.0										
228.5										
229.0	640	760					15.0			
229.5										
230.0										
230.5										
231.0			645	765			15.1			
231.5										
232.0										
232.5										
233.0					650	770	15.2			
233.5										
234.0										
234.5										
235.0	655	775					15.3			
235.5										
236.0										
236.5										
237.0			660	780			15.4			
237.5										
238.0										
238.5										
239.0					665	785	15.5			
239.5										
240.0										
240.5										
241.0	670	790					15.6			
241.5										
242.0										
242.5										
243.0			675	795			15.7			
243.5										
244.0										
244.5										
245.0					680	800	15.8			
245.5										
246.0										
246.5										
247.0	685	805					15.9			
247.5										
248.0										
248.5										
249.0			690	810			16.0			
249.5										
250.0										
250.5										
251.0					695	815	16.1			
251.5										
252.0										
252.5										
253.0	700	820					16.2			
253.5										
254.0										
254.5										
255.0			705	825			16.3			
255.5										
256.0										
256.5										
257.0					710	830	16.4			
257.5										
258.0										
258.5										
259.0	715	835					16.5			
259.5										
260.0										
260.5										
261.0			720	840			16.6			
261.5										
262.0										
262.5										
263.0					725	845	16.7			
263.5										
264.0										
264.5										
265.0	730	850					16.8			
265.5										
266.0										
266.5										
267.0			735	855			16.9			
267.										

- 可以对从普通钢到不锈钢以及铝进行高效率加工。
可得到高精度的孔位置。

This drill having short length is suitable for high-speed drilling of most material from Stainless Steel to Aluminum.

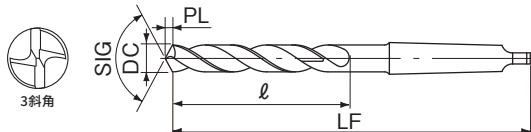

新商品

LIST 6618P

订货方式 GTS 直径

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
7.0	45	126	1.4	1	●
7.1			1.5		□
7.2					
7.3					
7.4					
7.5	49	130			
7.6			□		
7.7					
7.8					
7.9					
8.0	52	133			1.7
8.1			□		
8.2					
8.3					
8.4					
8.5	56	137			1.8
8.6			□		
8.7					
8.8					
8.9					
9.0	61	142			1.9
9.1			□		
9.2					
9.3					
9.4					
9.5	66	147			2.0
9.6			□		
9.7					
9.8					
9.9					
10.0	70	151			2.1
10.1			□		
10.2					
10.3					
10.4					
10.5	73	171		2.2	●
10.6			□		
10.7					
10.8					
10.9					
11.0	77	175		2.3	●
11.1			□		
11.2					
11.3					
11.4					
11.5	81	179		2.4	●
11.6			□		
11.7					
11.8					
11.9					
12.0	84	182		2.5	●
12.1			□		
12.2					
12.3					
12.4					
12.5	87	185		2.6	●
12.6			□		
12.7					
12.8					
12.9					
13.0	90	188		2.7	●
13.1			□		
13.2					
13.3					

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
13.4	70	151	2.8	1	☐
13.5					☒
13.6					☐
13.7					☐
13.8					☐
13.9	73	171	2.9	2	☒
14.0					☐
14.1					☒
14.2					☐
14.3					☒
14.4	77	175	3.0	3	☒
14.5					☐
14.6					☒
14.7					☐
14.8					☒
14.9	81	179	3.1	4	☒
15.0					☐
15.1					☒
15.2					☐
15.3					☒
15.4	84	182	3.2	5	☒
15.5					☐
15.6					☒
15.7					☐
15.8					☒
15.9	87	185	3.3	6	☒
16.0					☐
16.1					☒
16.2					☐
16.3					☒
16.4	90	188	3.4	7	☒
16.5					☐
16.6					☒
16.7					☐
16.8					☒
16.9	93	191	3.5	8	☒
17.0					☐
17.1					☒
17.2					☐
17.3					☒
17.4	96	194	3.6	9	☒
17.5					☐
17.6					☒
17.7					☐
17.8					☒
17.9	99	197	3.7	10	☒
18.0					☐
18.1					☒
18.2					☐
18.3					☒
18.4	102	200	3.8	11	☒
18.5					☐
18.6					☒
18.7					☐
18.8					☒
18.9	105	203	3.9	12	☒
19.0					☐
19.1					☒
19.2					☐
19.3					☒
19.4	108	206	4.0	13	☒
19.5					☐
19.6					☒
19.7					☐

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Next 下一页 ➔

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
19.8	90	188	4.1	2	☐
19.9					☒
20.0					☐
20.1					☒
20.2	93	191	4.2		☐
20.3					☒
20.4					☐
20.5					☒
20.6			4.3		☐
20.7					☒
20.8					☐
20.9					☒
21.0	96	194	4.4		☐
21.1					☒
21.2					☐
21.3					☒
21.4			4.5		☐
21.5					☒
21.6					☐
21.7					☒
21.8			4.6		☐
21.9					☒
22.0	☐				
22.1	☒				
22.2	100	198	4.7		☐
22.3					☒
22.4					☐
22.5					☒
22.6			4.8		☐
22.7					☒
22.8				☐	
22.9				☒	
23.0	103	224	4.9	☐	
23.1				☒	
23.2				☐	
23.3				☒	
23.4			5.0	☐	
23.5				☒	
23.6				☐	
23.7				☒	
23.8			5.1	☐	
23.9				☒	
24.0	☐				
24.1	☒				
24.2	105	226	5.2	☐	
24.3				☒	
24.4				☐	
24.5				☒	
24.6			5.3	☐	
24.7				☒	
24.8				☐	
24.9				☒	
25.0	109	230	5.4	☐	
25.1				☒	
25.2				☐	
25.3				☒	
25.4			5.5	☐	
25.5				☒	
25.6				☐	
25.7				☒	
25.8	109	230	5.6	☐	
25.9				☒	
26.0				☐	
26.1				☒	
26.2	109	230	5.7	☐	
26.3				☒	
26.4				☐	
26.5				☒	
26.6	109	230	5.8	☐	
26.7				☒	
26.8				☐	
26.9				☒	
27.0	109	230	5.9	☐	
27.1				☒	

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock			
27.2	109	230	5.6	3				
27.3			5.7		□			
27.4					●			
27.5					□			
27.6			5.8		●			
27.7					□			
27.8					●			
27.9					□			
28.0	111	232	5.9		●			
28.1					□			
28.2					●			
28.3					□			
28.4			6.0		●			
28.5					□			
28.6					●			
28.7			6.1		□			
28.8					●			
28.9			6.2		□			
29.0	●							
29.1	□							
29.2	●							
29.3	114	235	6.3		□			
29.4					●			
29.5					□			
29.6					●			
29.7			6.4		□			
29.8					●			
29.9			6.5		□			
30.0					●			
30.1	120	275			6.7	4	□	
30.2					6.8			
30.3			6.9					
30.4			7.0					
30.5			7.1					
30.6			7.2					
30.7			7.4					
30.8			7.5					
30.9	135	290	7.6					
31.0			7.7					
31.1			7.8					
31.2	145	300	7.9					
31.3			8.0					
31.4			8.1					
31.5			8.2					
31.6	155	310	8.3					
31.7			8.7					
31.8			8.8					
31.9			8.9					
32.0			175		320			9.3
32.1								9.5
32.2								9.7
32.3			185		330			9.9
32.4	10.4							

●本钻头是可用于从普通钢到不锈钢以及铝的泛用涂层钻头。

This is general coated drills having jobbers length.

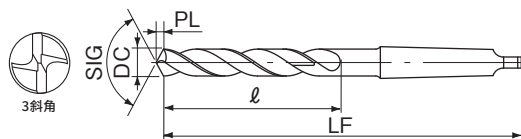

新商品

LIST 620P

订货方式 GTD 直径

仅限直径
2.0~6.9的库存品

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
2.0	29	105	0.6	1	□
2.1					
2.2	33	110	0.7		
2.3					
2.4	35				
2.5					
2.6	37		0.8		
2.7					
2.8	39	115			
2.9					
3.0	42		0.9		
3.1					
3.2					
3.3	45	122	1.0		
3.4					
3.5					
3.6	48	128	1.1		
3.7					
3.8					
3.9	51				
4.0			1.2		
4.1	54	135			
4.2					
4.3					
4.4	56		1.3		
4.5					
4.6					
4.7	59	140	1.4		
4.8					
4.9					
5.0	62		1.5		
5.1					
5.2					
5.3	64	145	1.6		
5.4					
5.5					
5.6					
5.7	67	148	1.7		
5.8					
5.9					
6.0					
6.1	70	152	1.8		
6.2					
6.3					
6.4					
6.5	73	155	2.0		
6.6					
6.7					
6.8					
6.9					
7.0			2.1		●
7.1	67	148			□
7.2			2.2		□
7.3					●
7.4					□
7.5					●
7.6	73	154	2.3		□
7.7					
7.8					
7.9			2.4		

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
8.0			2.4	1	●
8.1					
8.2	73	154			□
8.3			2.5		
8.4					●
8.5					
8.6			2.6		□
8.7					
8.8					
8.9	79	160			●
9.0			2.7		
9.1					□
9.2					
9.3			2.8		□
9.4					
9.5					●
9.6					
9.7			2.9		□
9.8					
9.9					
10.0	85	166			●
10.1			3.0		
10.2					□
10.3			3.1		
10.4					●
10.5					
10.6			3.2		□
10.7					
10.8					
10.9					
11.0			3.3		●
11.1					
11.2	91	172			□
11.3			3.4		
11.4					●
11.5					
11.6			3.5		□
11.7					
11.8					
11.9					
12.0			3.6		●
12.1					
12.2					
12.3			3.7		□
12.4					
12.5	98	179			●
12.6			3.8		
12.7					□
12.8					
12.9					
13.0			3.9		●
13.1					
13.2					
13.3			4.0		□
13.4					
13.5					●
13.6	105	186			
13.7			4.1		□
13.8					
13.9			4.2		

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品 其它

精密工具

技术资料 索引

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
14.0	105	186	4.2	1	●
14.1					
14.2					
14.3			4.3		□
14.4					
14.5	111	209			●
14.6			4.4		
14.7					□
14.8					
14.9					
15.0			4.5		●
15.1					
15.2					□
15.3			4.6		
15.4					
15.5	116	214			●
15.6			4.7		
15.7					□
15.8					
15.9					
16.0			4.8		●
16.1					
16.2					□
16.3			4.9		
16.4					
16.5	121	219			●
16.6			5.0		
16.7					□
16.8					
16.9					
17.0			5.1	2	●
17.1					
17.2			5.2		□
17.3					
17.4					
17.5	126	224			●
17.6			5.3		
17.7					□
17.8					
17.9			5.4		●
18.0					
18.1					
18.2			5.5		□
18.3					
18.4					
18.5	130	228			●
18.6			5.6		
18.7					□
18.8					
18.9			5.7		●
19.0					
19.1					
19.2			5.8		□
19.3					
19.4					
19.5	135	233			●
19.6			5.9		
19.7					□
19.8					
19.9			6.0		

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
20.0	135	233	6.0		●
20.1					
20.2					
20.3			6.1		□
20.4					
20.5	140	238			●
20.6			6.2		
20.7					□
20.8					
20.9					
21.0			6.3		●
21.1					
21.2					□
21.3			6.4		
21.4					
21.5	145	243		2	●
21.6			6.5		
21.7					□
21.8					
21.9					
22.0			6.6		●
22.1					
22.2					□
22.3			6.7		
22.4					
22.5	149	247			●
22.6			6.8		
22.7					□
22.8					
22.9			6.9		●
23.0					
23.1					
23.2			7.0		□
23.3		270			
23.4					
23.5					●
23.6			7.1		
23.7					□
23.8					
23.9			7.2		●
24.0					
24.1					
24.2	154	275	7.3		□
24.3					
24.4					
24.5			7.4	3	●
24.6					
24.7					□
24.8					
24.9			7.5		●
25.0					
25.1					
25.2	159	280			
25.3			7.6		□
25.4					
25.5					●
25.6			7.7		
25.7					□
25.8					
25.9			7.8		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock				
26.0	159	280	7.8	3	●				
26.1			7.9		□				
26.2					●				
26.3					□				
26.4			8.0		●				
26.5	163	284			□				
26.6					●				
26.7		8.1			□				
26.8					●				
26.9			□						
27.0		8.2	●						
27.2			□						
27.3			●						
27.5		8.3	□						
27.6			●						
27.8			□						
28.0		8.4	●						
28.2			□						
28.3		8.5	●						
28.5	168		289		□				
28.6		8.6			●				
28.7			□						
28.8			●						
29.0		8.7	●		□				
29.5	172			293					
30.0									
30.5		8.9							
31.0									
31.5									
32.0	177	298		9.0					
32.5				9.2					
33.0				9.3					
33.5	200	345		9.5					
34.0				9.6					
34.5				9.8					
35.0				9.9					
35.5				10.1					
36.0	205	350	10.2						
36.5			10.4						
37.0			10.5						
37.5			10.7						
38.0			10.8						
38.5	210	355	11.0						
39.0			11.1						
39.5			11.3						
40.0			11.4						
40.5			11.6						
41.0	215	360	11.7						
41.5			11.9						
42.0			12.0						
42.5			12.2						
43.0			12.3						
43.5	220	365	12.5						
44.0			12.6						
44.5			12.8						
45.0			12.9						
45.5			13.1						
46.0	225	370	13.2						
46.5			13.4						
47.0			13.5						
47.5			13.7						
48.0	230	375	13.8						
48.5			14.0						
49.0			14.1						
49.5			14.2						
50.0									
51.0	235	380							
52.0									
53.0									
54.0									
55.0									


直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
47.5	240	385	14.3	4	□
48.0			14.4		
48.5			14.6		
49.0			14.7		
49.5	245	390	14.9	5	
50.0			15.0		
51.0		15.3			
52.0	250	430	15.6		
53.0			15.9		
54.0			16.2		
55.0	255	435	16.5		
56.0			16.8		
56.5	260	440	17.0		
57.0			17.1		
57.5			17.3		
58.0	265	445	17.4		
59.0			17.7		
60.0			18.0		
74.0	270	450	22.2		
75.0			22.5		

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used 一: 不推荐 Not recommended

- 本钻头是可用于从普通钢到不锈钢以及铝的泛用含钴钻头。

This is general cobalt HSS drills.

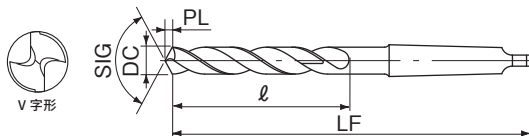

LIST 6602

订货方式 **COTD** 直径

仅限直径
5.0~6.9的库存品

单位 (Unit) : mm

直径 DC	槽长 l	全长 LF	先端 PL	柄 MT No.	库存 Stock
5.0	62	140	1.0	1	□
5.1					
5.2					
5.3	64	145	1.1		
5.4					
5.5					
5.6					
5.7	67	148	1.2		
5.8					
5.9					
6.0	70	152	1.3	1	●
6.1					
6.2					
6.3					
6.4					
6.5	73	155	1.4		
6.6					
6.7					
6.8					
6.9					
7.0	75			1	●
7.1					
7.2					
7.3	78	158	1.5		
7.4					
7.5					
7.6					
7.7					
7.8	82	162	1.6		
7.9					
8.0				1	●
8.1					
8.2					
8.3	85	168	1.7		
8.4					
8.5					
8.6					
8.7					
8.8	88	172	1.8		
8.9					
9.0				1	●
9.1					
9.2					
9.3	92	175	1.9		
9.4					
9.5					
9.6					
9.7					
9.8	95	178	2.0		
9.9					
10.0				1	●
10.1					
10.2					
10.3	98	182	2.1		
10.4					
10.5					
10.6					
10.7					
10.8	102	185	2.2		
10.9					

直径 DC	槽长 l	全长 LF	先端 PL	柄 MT No.	库存 Stock
11.0	102	185		1	●
11.1					
11.2					
11.3	105	188	2.3		
11.4					
11.5					
11.6					
11.7					
11.8	108	192	2.4		
11.9					
12.0				1	●
12.1					
12.2					
12.3	112	195	2.5		
12.4					
12.5					
12.6					
12.7					
12.8	115	198	2.6		
12.9					
13.0				1	●
13.1					
13.2					
13.3	118	202	2.7		
13.4					
13.5					
13.6					
13.7					
13.8					
13.9	122	205	2.8		
14.0				1	●
14.1					
14.2					
14.3					
14.4					
14.5					
14.6					
14.7					
14.8	125	225	2.9		
14.9					
15.0				1	●
15.1					
15.2					
15.3	128	228	3.0		
15.4					
15.5					
15.6					
15.7					
15.8	130	230	3.1		
15.9					
16.0				1	●
16.1					
16.2					
16.3	132	232	3.2		
16.4					
16.5					
16.6					
16.7					
16.8	135	235	3.3		
16.9					

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
17.0	135	235	3.5	2	●
17.1	140	240			
17.2					
17.3					
17.4					
17.5					
17.6					
17.7	145	245	3.6		
17.8					
17.9					
18.0					
18.1					
18.2					
18.3	150	250	3.7		
18.4					
18.5					
18.6					
18.7					
18.8					
18.9	155	255	3.8		
19.0					
19.1					
19.2					
19.3					
19.4					
19.5	160	260	3.9		
19.6					
19.7					
19.8					
19.9					
20.0					
20.1	165	265	4.0		
20.2					
20.3					
20.4					
20.5					
20.6					
20.7	170	270	4.1		
20.8					
20.9					
21.0					
21.1					
21.2					
21.3	175	275	4.2		
21.4					
21.5					
21.6					
21.7					
21.8					
21.9	180	280	4.3		
22.0					
22.1					
22.2					
22.3					
22.4					
22.5	185	285	4.4		
22.6					
22.7					
22.8					
22.9					

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
23.0	165	265		2	●
23.1		285	4.8	3	
23.2					
23.3					
23.4					
23.5					
23.6					
23.7					
23.8					
23.9					
24.0					
24.1					
24.2					
24.3					
24.4					
24.5					
24.6					
24.7					
24.8					
24.9					
25.0					
25.1					
25.2					
25.3					
25.4					
25.5					
25.6					
25.7					
25.8					
25.9					
26.0					
26.1	170	290	5.4		
26.2					
26.3					
26.4					
26.5					
26.6					
26.7					
26.8	175	295	5.5		
26.9					
27.0					
27.1					
27.2					
27.3					
27.4					
27.5	180	300	5.6		
27.6					
27.7					
27.8					
27.9					
28.0					
28.1					
28.2	180	300	5.7		
28.3					
28.4					
28.5					
28.6					
28.7					
28.8					
28.9	180	300	5.8		
28.3					
28.4					
28.5					
28.6					
28.7					
28.8					
28.9	180	300	5.9		
28.3					
28.4					
28.5					
28.6					
28.7					
28.8					
28.9	180	300	6.0		
28.3					
28.4					
28.5					
28.6					
28.7					
28.8					

新商品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
29.0	180	300	6.0	3	●
29.1	185	305			
29.2					
29.3			6.1		
29.4					
29.5					
29.6			6.2		
29.7					
29.8					
29.9	190	310	6.3		
30.0					
30.2					
30.3			6.4		
30.5					
30.7					
30.8	195	315	6.5		
31.0					
31.2					
31.3			6.6		
31.5					
31.7					
31.8	200	345	6.7		
32.0					
32.2					
32.3			6.8		
32.5					
32.7					
32.8	205	350	6.9		
33.0					
33.5					
34.0			7.0		
34.5			7.1		
35.0			7.2		
35.5	210	355	7.4		
36.0			7.5		
36.5			7.6		
37.0			7.7		
37.5			7.8		
38.0	215	360	7.9		
38.5			8.0		
39.0			8.1		
39.5			8.2		
40.0			8.3		
40.5	220	365	8.4		
41.0			8.5		
41.5			8.6		
42.0			8.7		
42.5			8.8		
43.0	225	370	8.9		
43.5			9.0		
44.0			9.1		
44.5			9.2		
45.0			9.3		
45.5			9.4		
46.0	235	380	9.5		
46.5			9.6		
47.0			9.7		
47.5			9.8		
48.0			9.9		
48.5	240	385	10.0	4	□

单位 (Unit) : mm


直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
49.0	240	385	10.1	4	□
49.5	245	390	10.3		
50.0			10.4		

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used 一:不推荐 Not recommended

●本钻头是用途较广的泛用钻头。

This drill is applied for general purpose.

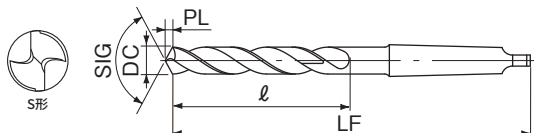

新商品

LIST 602

订货方式 **TD** 直径 (□商品: TD 直径 × 柄径)

单位 (Unit): mm

直径 DC	柄 MT No.	槽长 ℓ	全长 LF	先端 PL	库存 Stock
7.0	1	75	155	2.1	●
7.1		78	158		
7.2					
7.3					
7.4		82	162	2.2	
7.5					
7.6					
7.7		85	168	2.3	
7.8					
7.9					
8.0		88	172	2.4	
8.1					
8.2					
8.3		92	175	2.5	
8.4					
8.5					
8.6		95	178	2.6	
8.7					
8.8					
8.9		98	182	2.7	
9.0					
9.1					
9.2		102	185	2.8	
9.3					
9.4					
9.5		105	188	2.9	
9.6					
9.7					
9.8		108	192	3.0	
9.9					
10.0					
10.1	112	195	3.1		
10.2					
10.3					
10.4	115	198	3.2		
10.5					
10.6					
10.7	118	202	3.3		
10.8					
10.9					
11.0			3.4		
11.1					
11.2					
11.3			3.5		
11.4					
11.5					
11.6			3.6		
11.7					
11.8					
11.9			3.7		
12.0					
12.1					
12.2			3.8		
12.3					
12.4					
12.5			3.9		
12.6					
12.7					
12.8			4.0		
12.9					
13.0					
13.1			4.1		

直径 DC	柄 MT No.	槽长 ℓ	全长 LF	先端 PL	库存 Stock
13.2	1	118	202	4.0	●
13.3					
13.4					
13.5		122	205	4.1	
13.6					
13.7					
13.8		125	225	4.2	
13.9					
14.0					
14.1		128	228	4.3	
14.2					
14.3					
14.4		130	230	4.4	
14.5					
14.6					
14.7	132	232	4.5		
14.8					
14.9					
15.0	135	235	4.6		
15.1					
15.2					
15.3	140	240	4.7		
15.4					
15.5					
15.6	145	245	4.8		
15.7					
15.8					
15.9	150	250	4.9		
16.0					
16.1					
16.2			5.0		
16.3					
16.4					
16.5			5.1		
16.6					
16.7					
16.8			5.2		
16.9					
17.0					
17.1			5.3		
17.2					
17.3					
17.4			5.4		
17.5					
17.6					
17.7			5.5		
17.8					
17.9					
18.0			5.6		
18.1					
18.2					
18.3			5.7		
18.4					
18.5					
18.6			5.8		
18.7					
18.8					
18.9					
19.0					
19.1					
19.2					
19.3					

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀


切削工具

套装商品
其它

精密工具

技术资料
索引

颈长的计算方法
 $\ell_1 = LF - LS$



柄 MT No.	柄长 LS
1	65.5
2	80
3	99
4	124
5	156

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	—	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

← 上一页 Previous Page

单位 (Unit) : mm

直径 DC	柄 MT No.	槽长 ℓ	全长 LF	先端 PL	库存 Stock		
19.4	2	150	250	5.8	●		
19.5				5.9			
19.6							
19.7							
19.8		155	255	6.0			
19.9							
20.0				6.1			
20.1							
20.2							
20.3				6.2			
20.4							
20.5		160	260	6.3			
20.6							
20.7				6.4			
20.8							
20.9							
21.0				6.5			
21.1							
21.2		3	165	265			
21.3				6.6			
21.4							
21.5	6.7						
21.6							
21.7	165		285	6.8			
21.8							
21.9				6.9			
22.0							
22.1				7.0			
22.2							
22.3	165		285	7.1			
22.4							
22.5				7.2			
22.6							
22.7				7.3			
22.8							
22.9	165		285	7.4			
23.0							
23.1				7.5			
23.2							
23.3				7.6			
23.4							
23.5	165		285	7.7			
23.6							
23.7				7.8			
23.8							
23.9				7.9			
24.0							
24.1	165		285	8.0			
24.2							
24.3				8.1			
24.4							
24.5				8.2			
24.6							
24.7	165		285	8.3			
24.8							
24.9				8.4			
25.0							
25.1				8.5			
25.2							
25.3	165		285	8.6			
25.4							
25.5				8.7			

直径 DC	柄 MT No.	槽长 ℓ	全长 LF	先端 PL	库存 Stock
25.6	3	165	285	7.7	●
25.7				7.8	
25.8					
25.9					
26.0		170	290	7.9	
26.1					
26.2				8.0	
26.3					
26.4					
26.5				8.1	
26.6					
26.7		175	295	8.2	
26.8					
26.9				8.3	
27.0					
27.1					
27.2				8.4	
27.3					
27.4		180	300	8.5	
27.5					
27.6				8.6	
27.7					
27.8					
27.9				8.7	
28.0					
28.1		185	305	8.8	
28.2					
28.3				8.9	
28.4					
28.5					
28.6				9.0	
28.7					
28.8		190	310	9.1	
28.9					
29.0	9.2				
29.1					
29.2					
29.3	9.3				
29.4					
29.5	195	315	9.4		
29.6					
29.7			9.5		
29.8					
29.9					
30.0			9.6		
30.1					
30.2	195	315	9.7		
30.3					
30.4			9.8		
30.5					
30.6					
30.7			9.9		
30.8					
30.9			10.0		
31.0					
31.1	195	315	10.1		
31.2					
31.3			10.2		
31.4					
31.5					
31.6			10.3		
31.7					

单位 (Unit) : mm

直径 DC	柄 MT No.	槽长 ℓ	全长 LF	先端 PL	库存 Stock		
31.8	3	195	315	9.6			
31.9							
32.0							
32.1							
32.2							
32.3				200		345	9.7
32.4							
32.5							
32.6							
32.7							
32.8	9.8						
32.9							
33.0							
33.1							
33.2							
33.3	205	350	10.0				
33.4							
33.5							
33.6							
33.7							
33.8			10.1				
33.9							
34.0							
34.1							
34.2							
34.3	210	355	10.2				
34.4							
34.5							
34.6							
34.7							
34.8			10.3				
34.9							
35.0							
35.1							
35.2							
35.3	215	360	10.4				
35.4							
35.5							
35.6							
35.7							
35.8			10.5				
35.9							
36.0							
36.1							
36.2							
36.3	220	365	10.6				
36.4							
36.5							
36.6							
36.7							
36.8			10.7				
36.9							
37.0							
37.1							
37.2							
37.3	225	370	10.8				
37.4							
37.5							
37.6							
37.7							
37.8			10.9				
37.9							
38.0							
38.1							
38.2							
38.3	230	375	11.0				
38.4							
38.5							
38.6							
38.7							
38.8			11.1				
38.9							
39.0							
39.1							
39.2							
39.3	235	380	11.2				
39.4							
39.5							
39.6							
39.7							
39.8			11.3				
39.9							
40.0							
40.1							
40.2							
40.3	240	385	11.4				
40.4							
40.5							
40.6							
40.7							
40.8			11.5				
40.9							
41.0							
41.1							
41.2							
41.3	245	390	11.6				
41.4							
41.5							
41.6							
41.7							
41.8			11.7				
41.9							
42.0							
42.1							
42.2							
42.3	250	395	11.8				
42.4							
42.5							
42.6							
42.7							
42.8			11.9				
42.9							
43.0							
43.1							
43.2							
43.3	255	400	12.0				
43.4							
43.5							
43.6							
43.7							
43.8			12.1				
43.9							
44.0							
44.1							
44.2							
44.3	260	405	12.2				
44.4							
44.5							
44.6							
44.7							
44.8			12.3				
44.9							
45.0							
45.1							
45.2							
45.3	265	410	12.4				
45.4							
45.5							
45.6							
45.7							
45.8			12.5				
45.9							
46.0							
46.1							
46.2							
46.3	270	415	12.6				
46.4							
46.5							
46.6							
46.7							
46.8			12.7				
46.9							
47.0							
47.1							
47.2							
47.3	275	420	12.8				
47.4							
47.5							
47.6							
47.7							
47.8			12.9				
47.9							
48.0							
48.1							
48.2							
48.3	280	425	13.0				
48.4							
48.5							
48.6							
48.7							
48.8			13.1				
48.9							
49.0							
49.1							
49.2							
49.3	285	430	13.2				
49.4							
49.5							
49.6							
49.7							
49.8			13.3				
49.9							
50.0							
50.1							
50.2							
50.3	290	435	13.4				
50.4							
50.5							
50.6							
50.7							
50.8			13.5				
50.9							
51.0							
51.1							
51.2							
51.3	295	440	13.6				
51.4							
51.5							
51.6							
51.7							
51.8			13.7				
51.9							
52.0							
52.1							
52.2							
52.3	300	445	13.8				
52.4							
52.5							
52.6							
52.7							
52.8			13.9				
52.9							
53.0							
53.1							
53.2							
53.3	305	450	14.0				
53.4							
53.5							
53.6							
53.7							
53.8			14.1				
53.9							
54.0							
54.1							
54.2							
54.3	310	455	14.2				
54.4							
54.5							
54.6							
54.7							
54.8			14.3				
54.9							
55.0							
55.1							
55.2							
55.3	315	460	14.4				
55.4							
55.5							
55.6							
55.7							
55.8			14.5				
55.9							
56.0							
56.1							
56.2							
56.3	320	465	14.6				
56.4							
56.5							
56.6							
56.7							
56.8			14.7				
56.9							
57.0							
57.1							
57.2							
57.3	325	470	14.8				
57.4							
57.5							
57.6							
57.7							
57.8			14.9				
57.9							
58.0							
58.1							
58.2							
58.3	330	475	15.0				
58.4							
58.5							
58.6							
58.7							
58.8			15.1				
58.9							
59.0							
59.1							
59.2							
59.3	335	480	15.2				
59.4							
59.5							
59.6							
59.7							
59.8			15.3				
59.9							
60.0							
60.1							
60.2							
60.3	340	485	15.4				
60.4							
60.5							
60.6							
60.7							
60.8			15.5				
60.9							
61.0							
61.1							
61.2							
61.3	345	490	15.6				
61.4							
61.5							
61.6							
61.7							
61.8			15.7				
61.9							
62.0							
62.1							
62.2							
62.3	350	495	15.8				
62.4							
62.5							
62.6							
62.7							
62.8			15.9				
62.9							
63.0							
63.1							
63.2							
63.3	355	500	16.0				
63.4							
63.5							
63.6							
63.7							
63.8			16.1				
63.9							
64.0							
64.1							
64.2							
64.3	360	505	16.2				
64.4							
64.5							
64.6							
64.7							
64.8			16.3				
64.9							
65.0							
65.1							
65.2							
65.3	365	510	16.4				
65.4							
65.5							
65.6							
65.7							
65.8			16.5				
65.9							
66.0							
66.1							
66.2							
66.3	370	515	16.6				
66.4							
66.5							
66.6							
66.7							
66.8			16.7				
66.9							
67.0							
67.1							
67.2							
67.3	375	520	16.8				
67.4							
67.5							
67.6							
67.7							
67.8			16.9				
67.9							
68.0							
68.1							
68.2							
68.3	380	525	17.0				
68.4							
68.5							
68.6							
68.7							
68.8			17.1				
68.9							
69.0							
69.1							
69.2							
69.3	385	530	17.2				
69.4							
69.5							
69.6							
69.7							
69.8			17.3				
69.9							
70.0							
70.1							
70.2							
70.3	390	535	17.4				
70.4							
70.5							
70.6							
70.7							
70.8			17.5				
70.9							
71.0							
71.1							
71.2							
71.3	395	540	17.6				
71.4							
71.5							
71.6							
71.7							
71.8			17.7				
71.9							
72.0							
72.1							
72.2							
72.3	400	545	17.8				
72.4							
72.5							
72.6							
72.7							
72.8			17.9				
72.9							
73.0							
73.1							
73.2							
73.3	405	550	18.0				
73.4							
73.5							
73.6							
73.7							
73.8			18.1				
73.9							
74.0							
74.1							
74.2							
74.3	410	555	18.2				
74.4							
74.5							
74.6							
74.7							
74.8			18.3				
74.9							
75.0							
75.1							
75.2							
75.3	415	560	18.4				
75.4							
75.5							
75.6							
75.7							
75.8			18.5				
75.9							
76.0							
76.1							
76.2							
76.3	420	565	18.6				
76.4							
76.5							
76.6							
76.7							
76.8			18.7				
76.9							
77.0							
77.1							
77.2							
77.3	425	570	18.8				
77.4							
77.5							
77.6							
77.7							
77.8			18.9				
77.9							
78.0							
78.1							
78.2							
78.3	430	575	19.0				
78.4							
78.5							
78.6							
78.7							
78.8			19.1				
78.9							
79.0							
79.1							
79.2							
79.3	435	580	19.2				
79.4							
79.5							
79.6							
79.7							
79.8			19.3				
79.9							
80.0							
80.1							
80.2							
80.3	440	585	19.4				
80.4							
80.5							
80.6							
80.7							
80.8			19.5				
80.9							
81.0							
81.1							
81.2							
81.3	445	590	19.6				
81.4							
81.5							
81.6							
81.7							
81.8			19.7				
81.9							
82.0							
82.1							
82.2							
82.3	450	595	19.8				
82.4							
82.5							
82.6							
82.7							
82.8			19.9				
82.9							
83.0							
83.1							
83.2							
83.3	455	600	20.0				
83.4							
83.5							
83.6							
83.7							
83.8			20.1				
83.9							
84.0							
84.1							
84.2							
84.3	460	605	20.2				
84.4							
84.5							
84.6							
84.7							
84.8			20.3				
84.9							
85.0							
85.1							
85.2							
85.3	465	610	20.4				
85.4							
85.5							
85.6							
85.7							
85.8			20.5				
85.9							
86.0							
86.1							
86.2							
86.3	470	615	20.6				
86.4							
86.5							
86.6							
86.7							
86.8			20.7				
86.9							
87.0							
87.1							
87.2							
87.3	475	620	20.8				
87.4							
87.5							
87.6							
87.7							
87.8			20.9				
87.9							
88.0							
88.1							
88.2							
88.3	480	625	21.0				
88.4							
88.5							
88.6							
88.7							
88.8			21.1				
88.9							
89.0							
89.1							
89.2							
89.3	485	630	21.2				
89.4							
89.5							
89.6							
89.7							
89.8			21.3				
89.9							
90.0							
90.1							
90.2							
90.3	490	635	21.4				
90.4							
90.5							
90.6							
90.7							
90.8			21.5				
90.9							
91.0							
91.1							
91.2							
91.3	495	640	21.6				
91.4							
91.5							
91.6							
91.7							
91.8			21.7				
91.9							
92.0							
92.1							
92.2							
92.3	500	645	21.8				
92.4							
92.5							
92.6							
92.7							
92.8			21.9				
92.9							
93.0							
93.1							
93.2							
93.3	505	650	22.0				
93.4							
93.5							
93.6							
93.7							
93.8			22.1				
93.9							
94.0							
94.1							
94.2							
94.3	510	655	22.2				
94.4							
94.5							
94.6							
94.7							
94.8			22.3				
94.9							
95.0							
95.1							
95.2							
95.3	515	660	22.4				
95.4							
95.5							
95.6							
95.7							
95.8			22.5				
95.9							
96.0							
96.1							
96.2							
96.3	520	665	22.6				
96.4							
96.5							
96.6							
96.7							
96.8			22.7				
96.9							
97.0							
97.1							
97.2							
97.3	525	670	22.8				
97.4							
97.5							
97.6							
97.7							
97.8			22.9				
97.9							
98.0							
98.1							
98.2							
98.3	530	675	23.0				
98.4							
98.5							
98.6							
98.7							
98.8			23.1				
98.9							
99.0							
99.1							
99.2							
99.3	535	680	23.2				
99.4							
99.5							
99.6							
99.7							
99.8			23.3				
99.9							
100.0							
100.1							
100.2							
100.3	540	685	23.4				
100.4							
100.5							
100.6							
10							

← 上一页 Previous Page


单位 (Unit) : mm

直径 DC	柄 MT No.	槽长 ℓ	全长 LF	先端 PL	库存 Stock
46.2	4	235	380	13.9	●
46.3				14.0	
46.4				14.1	
46.5				14.2	
46.6				14.3	
46.7				14.4	
46.8				14.5	
46.9				14.6	
47.0				14.7	
47.1				14.8	
47.2		240	385	14.2	
47.3				14.3	
47.4				14.4	
47.5				14.5	
47.6				14.6	
47.7				14.7	
47.8				14.8	
47.9				14.9	
48.0				15.0	
48.1				15.2	
48.2	5	245	390	15.3	
48.3				15.5	
48.4				15.6	
48.5				15.8	
48.6				15.9	
48.7				16.1	
48.8				16.2	
48.9				16.4	
49.0				16.5	
49.1				16.7	
49.2		250	430	16.8	
49.3				17.0	
49.4				17.1	
49.5				17.3	
49.6				17.4	
49.7				17.6	
49.8				17.7	
49.9				17.9	
50.0				18.0	
50.5				18.2	
51.0		255	435	18.3	
51.5				18.5	
52.0				18.6	
52.5				18.8	
53.0				18.9	
53.5				19.1	
54.0				19.2	
54.5				19.4	
55.0				19.5	
55.5				19.7	
56.0	6	260	440	19.8	
56.5				19.9	
57.0				20.0	
57.5				20.1	
58.0				20.2	
58.5				20.3	
59.0				20.4	
59.5				20.5	
60.0				20.6	
60.5				20.7	
61.0	7	270	450	20.8	
61.5				20.9	
62.0				21.0	
62.5				21.1	
63.0				21.2	
63.5				21.3	
64.0				21.4	
64.5				21.5	
65.0				21.6	
65.5				21.7	
66.0	8	280	460	21.8	
66.5				21.9	
67.0				22.0	
67.5				22.1	
68.0				22.2	
68.5				22.3	
69.0				22.4	
69.5				22.5	
70.0				22.6	
70.5				22.7	
71.0	9	290	470	22.8	
71.5				22.9	
72.0				23.0	
72.5				23.1	
73.0				23.2	
73.5				23.3	
74.0				23.4	
74.5				23.5	
75.0				23.6	
75.5				23.7	
76.0	10	300	480	23.8	
77.0				23.9	
77.5				24.0	
78.0				24.1	
78.5				24.2	
79.0				24.3	
79.5				24.4	
80.0				24.5	
80.5				24.6	
81.0				24.7	
81.5	11	310	490	24.8	
82.0				24.9	
82.5				25.0	
83.0				25.1	
83.5				25.2	
84.0				25.3	
84.5				25.4	
85.0				25.5	
85.5				25.6	
86.0				25.7	
86.5	12	320	500	25.8	
87.0				25.9	
87.5				26.0	
88.0				26.1	
88.5				26.2	
89.0				26.3	
89.5				26.4	
90.0				26.5	
90.5				26.6	
91.0				26.7	
91.5	13	330	510	26.8	
92.0				26.9	
92.5				27.0	
93.0				27.1	
93.5				27.2	
94.0				27.3	
94.5				27.4	
95.0				27.5	
95.5				27.6	
96.0				27.7	
96.5	14	340	520	27.8	
97.0				27.9	
97.5				28.0	
98.0				28.1	
98.5				28.2	
99.0				28.3	
99.5				28.4	
100.0				28.5	
100.5				28.6	
101.0				28.7	
101.5	15	350	530	28.8	
102.0				28.9	
102.5				29.0	
103.0				29.1	
103.5				29.2	
104.0				29.3	
104.5				29.4	
105.0				29.5	
105.5				29.6	
106.0				29.7	
106.5	16	360	540	29.8	
107.0				29.9	
107.5				30.0	
108.0				30.1	
108.5				30.2	
109.0				30.3	
109.5				30.4	
110.0				30.5	
110.5				30.6	
111.0				30.7	
111.5	17	370	550	30.8	
112.0				30.9	
112.5				31.0	
113.0				31.1	
113.5				31.2	
114.0				31.3	
114.5				31.4	
115.0				31.5	
115.5				31.6	
116.0				31.7	
116.5	18	380	560	31.8	
117.0				31.9	
117.5				32.0	
118.0				32.1	
118.5				32.2	
119.0				32.3	
119.5				32.4	
120.0				32.5	
120.5				32.6	
121.0				32.7	

直径 DC	柄 MT No.	槽长 ℓ	全长 LF	先端 PL	库存 Stock	
67.0	5	285	465	20.1	●	
67.5				20.3		
68.0				20.4		
68.5				20.6		
69.0				20.7		
69.5		290	470	20.9		
70.0				21.0		
70.5				21.2		
71.0				21.3		
71.5				21.5		
72.0		295	475	21.6		
72.5				21.8		
73.0				21.9		
73.5				22.1		
74.0				22.2		
74.5		300	480	22.4		
75.0				22.5		
75.5				22.7		
76.0				22.8		
77.0				23.1		
77.0	6	315	500	23.1	□	
78.0	5		560	●		
78.0	6		500	23.4	□	
78.0	6		560	●		
79.0	5		500	23.7	□	
79.0	6		560	●		
80.0	5		500	24.0	□	
80.0	6		560	●		
81.0	5		510	24.3	□	
81.0	6		570	●		
82.0	5	510	24.6	□		
82.0	6	570	●			
83.0	5	325	510	24.9	□	
83.0	6		570	●		
84.0	5		510	25.2	□	
84.0	6		570	●		
85.0	5		510	25.5	□	
85.0	6		570	●		
86.0	5		520	25.8	□	
86.0	6		580	●		
87.0	5	520	26.1	□		
87.0	6	580	●			
88.0	5	335	520	26.4	□	
88.0	6		580	●		
89.0	5		520	26.7	□	
89.0	6		580	●		
90.0	5		520	27.0	□	
90.0	6		580	●		
91.0	5		345	530	27.3	□
91.0	6			590	●	
92.0	5	530		27.6	□	
92.0	6	590		●		
93.0	5	530		27.9	□	
93.0	6	590		●		
94.0	5	530		28.2	□	
94.0	6	590		●		
95.0	5	355	530	28.5	□	
95.0	6		590	●		
96.0	5		540	28.8	□	
96.0	6		600	●		
97.0	5		540	29.1	□	
97.0	6		600	●		
98.0	5		540	29.4	□	
98.0	6		600	●		
99.0	5	360	540	29.7	□	
99.0	6		600	●		
100.0	5		540	30.0	□	
100.0	6		600	●		
105.0	6		360	605	31.5	□
110.0					33.0	
115.0					34.5	
120.0					36.1	

- 本钻头是适用于钢筋桥梁等的型钢、薄板加工的涂层钻头。

This coated drill is suitable for drilling of Die Steel or splice plates.

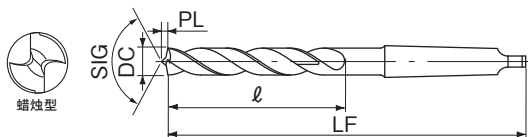

LIST 644P

订货方式 GTDD 直径

切削条件 Cutting Condition ▶▶B-160

单位 (Unit) : mm

直径 DC	槽长 l	全长 LF	先端 PL	柄 MT No.	库存 Stock
17.5	140	260	2.9	3	●
18.0			3.0		
18.5	145	265	3.3		
20.0	150	270	3.5		
21.5	160	280	3.6		
22.0			3.7		
22.5			3.8		
23.0			3.9		
23.5	165	285	4.0		
24.0			4.1		
24.5			4.3		
25.0			4.4		
26.0	170	290	4.4		



一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	—	—	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	—	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

顶端切削刃采用切入性出色的特殊的蜡烛型。

- 本钻头适用于钢筋桥梁等的型钢、薄板加工。

This drill is suitable for drilling of Die Steel or splice plates.

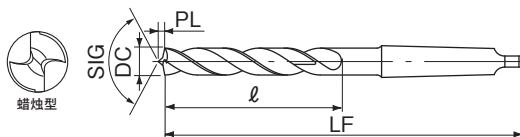

LIST 644

订货方式 TTD 直径

切削条件 Cutting Condition ▶▶B-161

(带 * 标记的商品 : TTD 直径 - 3)

单位 (Unit) : mm

直径 DC	槽长 l	全长 LF	先端 PL	柄 MT No.	库存 Stock
12.5	112	212	2.1	2	●
13.0	115	215	2.2		
13.5	118	218	2.3		
14.0	122	222	2.4		
14.5			2.5		
15.0	125	225	2.6		
15.5	128	228	2.7		
16.0	130	230	2.8		
16.5	132	232	2.9		
17.0	135	235	3.0		
17.5	140	240	3.1	3	●
18.0		260	3.2		
* 17.5			3.3		
* 18.0			3.4		
18.5	145	265	3.5		
19.0			3.6		
19.5	150	270	3.7		
20.0			3.8		
20.5	155	275	3.9		
21.0	160	280	4.0		
21.5			4.1		
22.0			4.2		
22.5	165	285	4.3	4	●
23.0			4.4		
23.5			4.5		
23.8			4.6		
24.0			4.7		
24.5			4.8		
25.0			4.9		
25.5			5.0		
26.0			5.1		
26.5	170	290	5.2		
27.0		315	5.3		
27.5	175	320	5.4		
28.0			5.5		
28.5	180	325	5.6		
29.0			5.7		
29.5	185	330	5.8		
30.0			5.9		
30.5	190	335	6.0		
31.0			6.1		
31.5	195	340	6.2		
32.0			6.3		
32.5	200	345	6.4		
33.0			6.5		
33.5	205	350	6.6		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●本钻头是适用于从普通钢到不锈钢以及铝的涂层长钻头。

This is general coated long drills for deep holes.

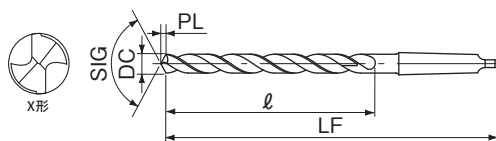

订货方式 GLTD 直径 × 全长 (带 * 标记的商品 : GLTD 直径 × 全长 × 柄)

仅限直径
4.0~6.9的库存品

单位 (Unit) : mm

直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock
4.0	200	1	125	1.2	□
4.2	200			1.3	
4.3	200			1.4	
4.5	200			1.5	
4.8	200				
5.0	200				
5.0	250				
5.0	300		200		
5.1	200		125		
5.1	250		150		
5.2	200		125		
5.2	250		150		
5.3	200		125		
5.3	250		150		
5.4	200		125		
5.4	250		150		
5.5	200		125		
5.5	250		150		
5.5	300		200		
5.6	200		125		
5.6	250		150		
5.7	200		125		
5.7	250		150		
5.8	200		125		
5.8	250		150		
5.9	200		125		
5.9	250		150		
6.0	200		125		
6.0	250		150		
6.0	300		200		
6.1	200		125		
6.1	250		150		
6.2	200	125			
6.2	250	150			
6.3	200	125			
6.3	250	150			
6.4	200	125			
6.4	250	150			
6.5	200	125			
6.5	250	150			
6.5	300	200			
6.6	200	125			
6.6	250	150			
6.7	200	125			
6.7	250	150			
6.8	200	125			
6.8	250	150			
6.8	300	200			
6.9	200	125			
6.9	250	150			
7.0	200	125			
7.0	250	150			
7.0	300	200			
7.1	200	125			
7.1	250	150			
7.2	200	125			
7.2	250	150			
7.3	200	125			
7.3	250	150			
7.4	200	125			

直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock
7.4	250	1	150	2.2	□
7.5	200		125	2.3	
7.5	250		150		
7.5	300		200		
7.6	200		125		
7.6	250		150		
7.7	200		125		
7.7	250		150		
7.8	200		125		
7.8	250		150		
7.9	200		125	2.4	
7.9	250		150		
8.0	200		125		
8.0	250		150		
8.0	300		200		
8.0	350		250		
8.0	400		275		
8.0	500		375		
8.0	600		425		
8.1	200		125		
8.1	250		150	2.5	
8.1	300		200		
8.2	200		125		
8.2	250		150		
8.2	300		200		
8.3	200		125		
8.3	250		150		
8.3	300		200		
8.4	200		125		
8.4	250		150		
8.4	300		200	2.6	
8.5	200		125		
8.5	250		150		
8.5	300		200		
8.5	350		250		
8.5	400		275		
8.5	500	375			
8.5	600	425			
8.6	200	125			
8.6	250	150			
8.6	300	200	2.7		
8.7	200	125			
8.7	250	150			
8.7	300	200			
8.8	200	125			
8.8	250	150			
8.8	300	200			
8.9	200	125			
8.9	250	150			
8.9	300	200			
9.0	200	125	2.7		
9.0	250	150			
9.0	300	200			
9.0	350	250			
9.0	400	275			
9.0	500	375			
9.0	600	425			
9.1	200	125			
9.1	250	150			
9.1	300	200			

直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock
9.2	200	1	125	2.8	□
9.2	250			2.9	
9.2	300			3.0	
9.3	200			3.1	
9.3	250			3.2	
9.3	300			3.3	
9.4	200		125	3.4	
9.4	250		150	3.5	
9.4	300		200	3.6	
9.5	200		125	3.7	
9.5	250		150	3.8	
9.5	300		200	3.9	
9.5	350		250	4.0	
9.5	400		275	4.1	
9.5	500		375	4.2	
9.5	600		425	4.3	
9.6	200		125	4.4	
9.6	250		150	4.5	
9.6	300		200	4.6	
9.7	200		125	4.7	
9.7	250		150	4.8	
9.7	300	1	200	4.9	□
9.8	200			5.0	
9.8	250		150	5.1	
9.8	300			5.2	
9.9	200		125	5.3	
9.9	250			5.4	
9.9	300		200	5.5	
10.0	200		125	5.6	
10.0	250			5.7	
10.0	300		200	5.8	
10.0	350	1	250	5.9	□
10.0	400			6.0	
10.0	500		375	6.1	
10.0	600			6.2	
10.1	200		125	6.3	
10.1	250			6.4	
10.1	300		200	6.5	
10.2	200		125	6.6	
10.2	250			6.7	
10.2	300		200	6.8	
10.3	200	1	125	6.9	□
10.3	250			7.0	
10.3	300		150	7.1	
10.4	200			7.2	
10.4	250		125	7.3	
10.4	300			7.4	
10.5	200		150	7.5	
10.5	250			7.6	
10.5	300		200	7.7	
10.5	350		250	7.8	
10.5	400	1	275	7.9	□
10.5	500			8.0	
10.5	600		425	8.1	
10.6	200			8.2	
10.6	250		150	8.3	
10.6	300			8.4	
10.7	200		125	8.5	
10.7	250			8.6	
10.7	300		200	8.7	
10.7	350		250	8.8	

单位 (Unit) : mm

直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock
10.8	200	1	125	3.2	□
10.8	250		150		
10.8	300		200		
10.9	200		125	3.3	
10.9	250		150		
10.9	300		200		
11.0	200		125		
11.0	250		150		
11.0	300		200		
11.0	350		250		
11.0	400		275		
11.0	500		375		
11.0	600		425		
11.1	200		125	3.4	
11.1	250		150		
11.1	300		200		
11.2	200		125		
11.2	250		150		
11.2	300		200		
11.3	200		125		
11.3	250		150		
11.3	300		200		
11.4	200		125	3.5	
11.4	250		150		
11.4	300		200		
11.5	200		125		
11.5	250		150		
11.5	300		200		
11.5	350		250		
11.5	400		275		
11.5	500	375			
11.5	600	425	3.6		
11.6	200	125			
11.6	250	150			
11.6	300	200			
11.7	200	125			
11.7	250	150			
11.7	300	200			
11.8	200	125			
11.8	250	150			
11.8	300	200	3.7		
11.9	200	125			
11.9	250	150			
11.9	300	200			
12.0	200	125			
12.0	250	150			
12.0	300	200			
12.0	350	250			
12.0	400	275			
12.0	500	375	3.8		
12.0	600	425			
12.1	200	125			
12.1	250	150			
12.1	300	200			
12.2	200	125			
12.2	250	150			
12.2	300	200			
12.3	200	125			
12.3	250	150	3.9		
12.3	300	200			
12.4	200	125			
12.4	250	150			
12.4	300	200			
12.5	200	125			
12.5	250	150			
12.5	300	200			
12.5	350	250			
12.5	400	275	4.0		
12.5	500	375			
12.5	600	425			

直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock
12.6	200	1	125	3.8	□
12.6	250		150		
12.6	300		200		
12.7	200		125		
12.7	250		150		
12.7	300		200		
12.8	200		125		
12.8	250		150		
12.8	300		200		
12.9	200		125		
12.9	250		150		
12.9	300		200		
13.0	250		150		
13.0	300		200		
13.0	350		250		
13.0	400		275		
13.0	500		375		
13.0	600		425		
13.1	250		150		
13.1	300		200		
13.2	250		150		
13.2	300		200		
13.3	250		150		
13.3	300		200		
13.4	250		150		
13.4	300		200		
13.5	250		150		
13.5	300		200		
13.5	350		250		
13.5	400		275		
13.5	500	375			
13.5	600	425			
13.6	250	150			
13.6	300	200			
13.7	250	150			
13.7	300	200			
13.8	250	150			
13.8	300	200			
13.9	250	150			
13.9	300	200			
14.0	250	150			
14.0	300	200			
14.0	350	250			
14.0	400	275			
14.0	500	375			
14.0	600	425			
* 14.1	250	2	150		
14.1	250		2		
* 14.1	300	1	200		
14.1	300	2			
* 14.2	250	1	150		
14.2	250	2	200		
* 14.2	300	1			
14.2	300	2			
* 14.3	250	1	150		
14.3	250	2	200		
* 14.3	300	1			
14.3	300	2			
* 14.4	250	1	150		
14.4	250	2	200		
* 14.4	300	1			
14.4	300	2			
* 14.5	250	1	150		
14.5	250	2	200		
14.5	300		250		
14.5	350		250		
14.5	400		275		
14.5	500		375		
14.5	600	425			
* 14.6	250	1	150		

直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock	
14.6	250	2	150	4.4	□	
* 14.6	300	1	200			
14.6	300	2				
* 14.7	250	1	150			
14.7	250	2				
* 14.7	300	1	200			
14.7	300	2				
* 14.8	250	1	150			
14.8	250	2				
* 14.8	300	1	200			
14.8	300	2				
* 14.9	250	1	150	4.5		
14.9	250	2				
* 14.9	300	1	200			
14.9	300					
15.0	250		150			
15.0	300		200			
15.0	350		250			
15.0	400		275			
15.0	500		375			
15.0	600		425			
15.1	250		150	4.6		
15.1	300		200			
15.1	350		250			
15.2	250		150			
15.2	300		200			
15.2	350		250			
15.3	250		150			
15.3	350		250			
15.4	250		150	4.7		
15.4	350		250			
15.5	250		150			
15.5	300		200			
15.5	350		250			
15.5	400		275			
15.5	500		375			
15.5	600		425			
15.6	250		150	4.8		
15.6	350		250			
15.7	250		150			
15.7	300		200			
15.7	350		250			
15.8	250		150			
15.8	300		200			
15.8	350		250			
15.9	250		150	4.9		
15.9	350		250			
16.0	250		150			
16.0	300		200			
16.0	350		250			
16.0	400		275			
16.0	500		375			
16.0	600		425			
16.1	250		150	5.0		
16.1	300		200			
16.1	350		250			
16.2	250		150			
16.2	300		200			
16.2	350		250			
16.3	250		150			
16.3	350		250			
16.4	250		150	5.0		
16.4	350		250			
16.5	250		150			
16.5	300		200			
16.5	350		250			
16.5	400		275			
16.5	500		375			
16.5	600		425			
16.6	250		150			


← 上一页 Previous Page

单位 (Unit) : mm

	直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock		直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock		直径 DC	全长 LF	柄 MT No.	槽长 ℓ	先端 PL	库存 Stock
新商品	16.6	350		250				19.4	400		275	5.8			30.0	500		375	9.0	
	16.7	250		150				19.5	300		200				30.5	400		250	9.2	
	16.7	350		250	5.0			19.5	400		275				30.5	500		375		
	16.8	250		150				19.5	500		375				31.0	400		250	9.3	
	16.8	350		250				19.5	600		425				31.0	500	3	375		
硬质合金钻头	16.9	250		150				19.6	300		200	5.9			31.5	400		250	9.5	
	16.9	350		250				19.6	400		275				31.5	500		375		
	17.0	250		150				19.7	300		200				32.0	400		250	9.6	
	17.0	300		200				19.7	400		275				32.0	500		375		
	17.0	350		250	5.1			19.8	300		200				32.5	425		250	9.8	
	17.0	400		275				19.8	400		275				32.5	500		300		
	17.0	500		375				19.9	300		200				33.0	425		250		
高速钢钻头	17.0	600		425				19.9	400		275				33.0	475		300	9.9	
	17.1	250		150				20.0	300		200				33.0	500		350		
	17.1	350		250				20.0	400		275	6.0			33.0	525		350		
	17.2	250		150				20.0	500		375				33.5	425		250	10.1	
	17.2	350		250				20.0	600		425				33.5	500		300		
	17.3	250		150				20.1	400						34.0	425		250		
	17.3	350		250	5.2			20.2	400		275				34.0	500		300	10.2	
	17.4	250		150				20.3	400			6.1			34.0	525		350		
丝锥	17.4	350		250				20.4	400	2					34.5	425		250	10.4	
	17.5	250		150				20.5	300		200				34.5	500		300		
	17.5	300		200				20.5	370		250				35.0	425		250		
	17.5	350		250				20.5	400		275				35.0	500		300	10.5	
	17.5	400		275				20.5	500		375	6.2			35.0	525		350		
	17.5	500		375				20.6	400						35.5	425		250		
	17.5	600		425				20.7	400		275				35.5	500		300	10.7	
硬质合金立铣刀	17.6	250		150	5.3			20.8	400						36.0	425		250		
	17.6	350		250				20.9	400						36.0	500		300	10.8	
	17.7	250		150				21.0	300		200				36.0	525		350		
	17.7	350		250				21.0	370		250	6.3			36.5	425		250		
	17.8	250		150				21.0	500		375				36.5	500		300	11.0	
	17.8	350		250				21.5	300		200				37.0	425		250		
	17.9	250		150				21.5	370		250	6.5			37.0	500		300	11.1	
高速钢立铣刀	17.9	350	2	250		□		21.5	500		375				37.0	525		350		
	18.0	300		200				22.0	300		200				37.5	425		250	11.3	
	18.0	350		250				22.0	370		250	6.6			37.5	500		300		
	18.0	400		275	5.4			22.0	500		375				38.0	425		250		
	18.0	500		375				22.5	300		200				38.0	500	4	300	11.4	
	18.0	600		425				22.5	370		250	6.8			38.0	525		350		
	18.1	300		200				22.5	500		375				38.5	425		250	11.6	
切削工具	18.1	400		275				23.0	300		200				38.5	500		300		
	18.2	300		200				23.0	370		250	6.9			39.0	425		250		
	18.2	400		275				23.0	500		375				39.0	500		300	11.7	
	18.3	300		200				23.5	370		250				39.0	525		350		
	18.3	400		275	5.5			23.5	500		375	7.1			39.5	425		250		
	18.4	300		200				24.0	370		250				39.5	500		300	11.9	
	18.4	400		275				24.0	500		375	7.2			40.0	425		250		
套装商品	18.5	300		200				24.5	370		250				40.0	500		300	12.0	
其它	18.5	400		275				24.5	500		375	7.4			40.0	525		350		
	18.5	500		375				25.0	370		250				40.5	425			12.2	
	18.5	600		425				25.0	500		375	7.5			41.0	425			12.3	
	18.6	300		200				25.5	370		250				41.5	425			12.5	
	18.6	400		275	5.6			25.5	500		375	7.7			42.0	425			12.6	
	18.7	300		200				26.0	400		250				42.5	425			12.8	
精密工具	18.7	400		275				26.0	500		375	7.8			43.0	425			12.9	
	18.8	300		200				26.5	400		250				43.5	425			13.1	
	18.8	400		275				26.5	500	3	375	8.0			44.0	425			13.2	
	18.9	300		200				27.0	400		250				44.5	425			13.4	
	18.9	400		275				27.0	500		375	8.1			45.0	425			13.5	
	19.0	300		200				27.5	400		250				45.5	475			13.7	
	19.0	400		275				27.5	500		375	8.3			46.0	475			13.8	
	19.0	500		375	5.7			28.0	400		250				46.5	475			14.0	
	19.0	600		425				28.0	500		375	8.4			47.0	475			14.1	
技术资料	19.1	300		200				28.5	400		250				47.5	475			14.3	
索引	19.1	400		275				28.5	500		375	8.6			48.0	475			14.4	
	19.2	300		200				29.0	400		250				48.5	475			14.6	
	19.2	400		275				29.0	500		375	8.7			49.0	475			14.7	
	19.3	300		200	5.8			29.5	400		250				49.5	475			14.9	
	19.3	400		275				29.5	500		375	8.9			50.0	475			15.0	
	19.4	300		200				30.0	400		250	9.0								

- 本钻头是可用于从普通钢到不锈钢以及铝的泛用含钴长钻头。

This is general cobalt HSS long drills for deep holes.



新商品

订货方式 商品编码

仅限直径
2.0~6.9的库存品

单位 (Unit) : mm

商品記号 Code	直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
COLTD2.0	2.0	150	60	0.4	1	□
COLTD2.1	2.1					
COLTD2.2	2.2			0.5		
COLTD2.3	2.3					
COLTD2.4	2.4					
COLTD2.5	2.5					
COLTD2.6	2.6			0.6		
COLTD2.7	2.7					
COLTD2.8	2.8					
COLTD2.9	2.9					
COLTD3.0	3.0		0.7			
COLTD3.1	3.1					
COLTD3.2	3.2					
COLTD3.3	3.3					
COLTD3.4	3.4		0.8			
COLTD3.5	3.5					
COLTD3.6	3.6					
COLTD3.7	3.7					
COLTD3.8	3.8		80	0.9		
COLTD3.9	3.9					
COLTD4.0	4.0					
COLTD4.1	4.1					
COLTD4.2	4.2	1.0				
COLTD4.3	4.3					
COLTD4.4	4.4					
COLTD4.5	4.5					
COLTD4.6	4.6	1.1				
COLTD4.7	4.7					
COLTD4.8	4.8					
COLTD4.9	4.9					
COLTD5.0	5.0	200	120	1.2		
COLTD5.1	5.1					
COLTD5.2	5.2					
COLTD5.3	5.3					
COLTD5.4	5.4			1.3		
COLTD5.5	5.5					
COLTD5.6	5.6					
COLTD5.7	5.7					
COLTD5.8	5.8		1.4			
COLTD5.9	5.9					
COLTD6.0	6.0					
COLTD6.1	6.1					
COLTD6.2	6.2		250	150	1.5	
COLTD6.3	6.3					
COLTD6.4	6.4					
COLTD6.5	6.5					
COLTD6.6	6.6	1.6				
COLTD6.7	6.7					
COLTD6.8	6.8					
COLTD6.8 × 250	6.8					
COLTD6.9	6.9	200	120	1.7		
COLTD7.0	7.0					
COLTD7.1	7.1					
COLTD7.2	7.2					
COLTD7.3	7.3			1.8		
COLTD7.4	7.4					
COLTD7.5	7.5					
COLTD7.6	7.6					
COLTD7.7	7.7					

商品記号 Code	直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock		
COLTD7.8	7.8	200	120	1.6	1	□		
COLTD7.9	7.9			1.7				
COLTD8.0	8.0							
COLTD8.1	8.1							
COLTD8.2	8.2			1.8				
COLTD8.3	8.3							
COLTD8.4	8.4							
COLTD8.5	8.5							
COLTD8.6	8.6	250	150	1.9				
COLTD8.7	8.7							
COLTD8.7 × 250	8.8	200	120				2.0	
COLTD8.8	8.9							
COLTD8.9	9.0							
COLTD9.0	9.1							
COLTD9.1	9.2			2.1				
COLTD9.2	9.3							
COLTD9.3	9.4							
COLTD9.4	9.5			2.2				
COLTD9.5	9.6							
COLTD9.6	9.7							
COLTD9.7	9.8							
COLTD9.8	9.9			250			150	2.3
COLTD9.9	10.0							
COLTD10.0	10.1							
COLTD10.1	10.2	2.4						
COLTD10.2	10.3							
COLTD10.3	10.4							
COLTD10.3 × 250	10.5							
COLTD10.4	10.6	200	120		2.5			
COLTD10.5	10.7							
COLTD10.6	10.8							
COLTD10.7	10.9							
COLTD10.8	11.0			2.6				
COLTD10.9	11.1							
COLTD11.0	11.2							
COLTD11.1	11.3			2.7				
COLTD11.2	11.4							
COLTD11.3	11.5							
COLTD11.4	11.6							
COLTD11.5	11.7			2.8				
COLTD11.6	11.8							
COLTD11.7	11.9							
COLTD11.8	12.0	2.9						
COLTD11.9	12.1							
COLTD12.0	12.2	3.0						
COLTD12.1	12.3							
COLTD12.2	12.4	3.1						
COLTD12.3	12.5							
COLTD12.4	12.6	3.2						
COLTD12.5	12.7							
COLTD12.6	12.8	3.3						
COLTD12.7	12.9							
COLTD12.8	13.0	3.4						
COLTD12.9	13.1							
COLTD13.0	13.2	3.5						
COLTD13.1	13.3							
COLTD13.2	13.4	3.6						
COLTD13.3	13.5							
COLTD13.4	13.6	3.7						
COLTD13.5	13.7							
COLTD13.6	13.8	3.8						
COLTD13.7	13.9							
COLTD13.8	14.0	3.9						
COLTD13.9	14.1							
COLTD14.0	14.2	4.0						
COLTD14.1	14.3							
COLTD14.2	14.4	4.1						
COLTD14.3	14.5							
COLTD14.4	14.6	4.2						
COLTD14.5	14.7							
COLTD14.6	14.8	4.3						
COLTD14.7	14.9							
COLTD14.8	15.0	4.4						
COLTD14.9	15.1							
COLTD15.0	15.2	4.5						
COLTD15.1	15.3							
COLTD15.2	15.4	4.6						
COLTD15.3	15.5							
COLTD15.4	15.6	4.7						
COLTD15.5	15.7							
COLTD15.6	15.8	4.8						
COLTD15.7	15.9							
COLTD15.8	16.0	4.9						
COLTD15.9	16.1							
COLTD16.0	16.2	5.0						
COLTD16.1	16.3							
COLTD16.2	16.4	5.1						
COLTD16.3	16.5							
COLTD16.4	16.6	5.2						
COLTD16.5	16.7							
COLTD16.6	16.8	5.3						
COLTD16.7	16.9							
COLTD16.8	17.0	5.4						
COLTD16.9	17.1							
COLTD17.0	17.2	5.5						
COLTD17.1	17.3							
COLTD17.2	17.4	5.6						
COLTD17.3	17.5							
COLTD17.4	17.6	5.7						
COLTD17.5	17.7							
COLTD17.6	17.8	5.8						
COLTD17.7	17.9							
COLTD17.8	18.0	5.9						
COLTD17.9	18.1							
COLTD18.0	18.2	6.0						
COLTD18.1	18.3							
COLTD18.2	18.4	6.1						
COLTD18.3	18.5							
COLTD18.4	18.6	6.2						
COLTD18.5	18.7							
COLTD18.6	18.8	6.3						
COLTD18.7	18.9							
COLTD18.8	19.0	6.4						
COLTD18.9	19.1							
COLTD19.0	19.2	6.5						
COLTD19.1	19.3							
COLTD19.2	19.4	6.6						
COLTD19.3	19.5							
COLTD19.4	19.6	6.7						
COLTD19.5	19.7							
COLTD19.6	19.8	6.8						
COLTD19.7	19.9							
COLTD19.8	20.0	6.9						
COLTD19.9	20.1							
COLTD20.0	20.2	7.0						
COLTD20.1	20.3							
COLTD20.2	20.4	7.1						
COLTD20.3	20.5							
COLTD20.4	20.6	7.2						
COLTD20.5	20.7							
COLTD20.6	20.8	7.3						
COLTD20.7	20.9							
COLTD20.8	21.0	7.4						
COLTD20.9	21.1							
COLTD21.0	21.2	7.5						
COLTD21.1	21.3							
COLTD21.2	21.4	7.6						
COLTD21.3	21.5							
COLTD21.4	21.6	7.7						
COLTD21.5	21.7							
COLTD21.6	21.8	7.8						
COLTD21.7	21.9							
COLTD21.8	22.0	7.9						
COLTD21.9	22.1							
COLTD22.0	22.2	8.0						
COLTD22.1	22.3							
COLTD22.2	22.4	8.1						
COLTD22.3	22.5							
COLTD22.4	22.6	8.2						
COLTD22.5	22.7							
COLTD22.6	22.8	8.3						
COLTD22.7	22.9							
COLTD22.8	23.0	8.4						
COLTD22.9	23.1							
COLTD23.0	23.2	8.5						
COLTD23.1	23.3							
COLTD23.2	23.4	8.6						
COLTD23.3	23.5							
COLTD23.4	23.6	8.7						
COLTD23.5	23.7							
COLTD23.6	23.8	8.8						
COLTD23.7	23.9							
COLTD23.8	24.0	8.9						
COLTD23.9	24.1							
COLTD24.0	24.2	9.0						
COLTD24.1	24.3							
COLTD24.2	24.4	9.1						
COLTD24.3	24.5							
COLTD24.4	24.6	9.2						
COLTD24.5	24.7							
COLTD24.6	24.8	9.3						
COLTD24.7	24.9							
COLTD24.8	25.0	9.4						
COLTD24.9	25.1							
COLTD25.0	25.2	9.5						
COLTD25.1	25.3							
COLTD25.2	25.4	9.6						
COLTD25.3	25.5							
COLTD25.4	25.6	9.7						
COLTD25.5	25.7							
COLTD25.6	25.8	9.8						
COLTD25.7	25.9							
COLTD25.8	26.0	9.9						
COLTD25.9	26.1							
COLTD26.0	26.2	10.0						
COLTD26.1	26.3							
COLTD26.2	26.4	10.1						
COLTD26.3	26.5							
COLTD26.4	26.6	10.2						
COLTD26.5	26.7							
COLTD26.6	26.8	10.3						
COLTD26.7	26.9							
COLTD26.8	27.0	10.4						
COLTD26.9	27.1							
COLTD27.0	27.2	10.5						
COLTD27.1	27.3							
COLTD27.2	27.4	10.6						
COLTD27.3	27.5							
COLTD27.4	27.6	10.7						
COLTD27.5	27.7							
COLTD27.6	27.8	10.8						
COLTD27.7	27.9							
COLTD27.8	28.0	10.9						
COLTD27.9	28.1							
COLTD28.0	28.2	11.0						
COLTD28.1	28.3							
COLTD28.2	28.4	11.1						
COLTD28.3	28.5							
COLTD28.4	28.6	11.2						
COLTD28.5	28.7							
COLTD28.6	28.8	11.3						
COLTD28.7	28.9							
COLTD28.8	29.0	11.4						
COLTD28.9	29.1							
COLTD29.0	29.2	11.5						
COLTD29.1	29.3							
COLTD29.2	29.4	11.6						
COLTD29.3	29.5							
COLTD29.4	29.6	11.7						
COLTD29.5	29.7							
COLTD29.6	29.8	11.8						
COLTD29.7	29.9							
COLTD29.8	30.0	11.9						
COLTD29.9	30.1							
COLTD30.0	30.2	12.0						
COLTD30.1	30.3							
COLTD30.2	30.4	12.1						
COLTD30.3	30.5							
COLTD30.4	30.6	12.2						
COLTD30.5	30.7							
COLTD30.6	30.8	12.3						
COLTD30.7	30.9							
COLTD30.8	31.0	12.4						
COLTD30.9	31.1							
COLTD31.0	31.2	12.5						
COLTD31.1	31.3							
COLTD31.2	31.4	12.6						
COLTD31.3	31.5							
COLTD31.4	31.6	12.7						
COLTD31.5	31.7							
COLTD31.6	31.8	12.8						
COLTD31.7	31.9							
COLTD31.8	32.0	12.9						
COLTD31.9	32.1							
COLTD32.0	32.2	13.0						
COLTD32.1	32.3							
COLTD32.2	32.4	13.1						
COLTD32.3	32.5							
COLTD32.4	32.6	13.2						
COLTD32.5	32.7							
COLTD32.6	32.8	13.3						
COLTD32.7	32.9							
COLTD32.8	33.0	13.4						
COLTD32.9	33.1							
COLTD33.0	33.2	13.5						
COLTD33.1	33.3							
COLTD33.2	33.4	13.6						
COLTD33.3	33.5							
COLTD33.4	33.6	13.7						
COLTD33.5	33.7							
COLTD33.6	33.8	13.8						
COLTD33.7	33.9							
COLTD33.8	34.0	13.9						
COLTD33.9	34.1							
COLTD34.0	34.2	14.0						
COLTD34.1	34.3							
COLTD34.2	34.4	14.1						
COLTD34.3	34.5							
COLTD34.4	34.6	14.2						
COLTD34.5	34.7							
COLTD34.6	34.8	14.3						
COLTD34.7	34.9							
COLTD34.8	35.0	14.4						
COLTD34.9	35.1							
COLTD35.0	35.2	14.5						
COLTD35.1	35.3							
COLTD35.2	35.4	14.6						
COLTD35.3	35.5							
COLTD35.4	35.6	14.7						
COLTD35.5	35.7							
COLTD35.6	35.8	14.8						
COLTD35.7	35.9							
COLTD35.8	36.0	14.9						
COLTD35.9	36.1							
COLTD36.0	36.2	15.0						
COLTD36.1	36.3							
COLTD36.2	36.4	15.1						
COLTD36.3	36.5							
COLTD36.4	36.6	15.2						
COLTD36.5	36.7							
COLTD36.6	36.8	15.3						
COLTD36.7	36.9							
COLTD36.8	37.0	15.4						
COLTD36.9	37.1							
COLTD37.0	37.2	15.5						
COLTD37.1	37.3							
COLTD37.2	37.4	15.6						
COLTD37.3	37.5							
COLTD37.4	37.6	15.7						
COLTD37.5	37.7							
COLTD37.6	37.8	15.8						
COLTD37.7	37.9							
COLTD37.8	38.0	15.9						
COLTD37.9	38.1							
COLTD38.0	38.2	16.0						
COLTD38.1	38.3							
COLTD38.2	38.4	16.1						
COLTD38.3	38.5							
COLTD38.4	38.6	16.2						
COLTD38.5	38.7							
COLTD38.6	38.8	16.3						
COLTD38.7	38.9							
COLTD38.8	39.0	16.4						
COLTD38.9	39.1							
COLTD39.0	39.2	16.5						
COLTD39.1	39.3							
COLTD39.2	39.4	16.6						
COLTD39.3	39.5							
COLTD39.4	39.6	16.7						
COLTD39.5	39.7							
COLTD39.6	39.8	16.8						
COLTD39.7	39.9							
COLTD39.8	40.0	16.9						
COLTD39.9	40.1							
COLTD40.0	40.2	17.0						
COLTD40.1	40.3							
COLTD40.2	40.4	17.1						
COLTD40.3	40.5							
COLTD40.4	40.6	17.2						
COLTD40.5	40.7							
COLTD40.6	40.8	17.3						
COLTD40.7	40.9							
COLTD40.8	41.0	17.4						
COLTD40.9	41.1							
COLTD41.0	41.2	17.5						
COLTD41.1	41.3							
COLTD41.2	41.4	17.6						
COLTD41.3	41.5							
COLTD41.4	41.6	17.7						
COLTD41.5	41.7							
COLTD41.6	41.8	17.8						
COLTD41.7	41.9							
COLTD41.8	42.0	17.9						
COLTD41.9	42.1							
COLTD42.0	42.2	18.0						
COLTD42.1	42.3							
COLTD42.2	42.4	18.1						
COLTD42.3	42.5							
COLTD42.4	42.6	18.2						
COLTD42.5	42.7							
COLTD42.6	42.8	18.3						
COLTD42.7	42.9							
COLTD42.8	43.0	18.4						
COLTD42.9	43.1							
COLTD43.0	43.2	18.5						
COLTD43.1	43.3							
COLTD43.2	43.4	18.6						
COLTD43.3	43.5							
COLTD43.4	43.6	18.7						
COLTD43.5	43.7							
COLTD43.6	43.8	18.8						
COLTD43.7	43.9							
COLTD43.8	44.0	18.9						
COLTD43.9	44.1							
COLTD44.0	44.2	19.0						
COLTD44.1	44.3							
COLTD44.2	44.4	19.1						
COLTD44.3	44.5							
COLTD44.4	44.6	19.2						
COLTD44.5	44.7							
COLTD44.6	44.8	19.3						
COLTD44.7	44.9							
COLTD44.8	45.0	19.4						
COLTD44.9	45.1							
COLTD45.0	45.2	19.5						
COLTD45.1	45.3							
COLTD45.2	45.4	19.6						
COLTD45.3	45.5							
COLTD45.4	45.6	19.7						
COLTD45.5	45.7							
COLTD45.6	45.8	19.8						
COLTD45.7	45.9							
COLTD45.8	46.0	19.9						
COLTD45.9	46.1							
COLTD46.0	46.2	20.0						
COLTD46.1	46.3							
COLTD46.2	46.4	20.1						
COLTD46.3	46.5							
COLTD46.4								

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used -:不推荐 Not recommended

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●本钻头是用途较广的泛用钻头。

This drill having long flute is general drills for deep holes.



LIST 650

订货方式 LTD 直径 × 全长

(□商品: LTD 直径 × 全长 × 槽长)

(带*标记的商品: LTD 直径 × 全长 × 槽长 × MT 柄)

仅限直径
4.0~6.9的库存品

单位 (Unit): mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock		
4.0	200	120	1.2	1	□		
4.0	250	150					
4.0	300	200					
4.1	200	120	1.3			● □ ● □ ●	
4.2	200						
4.3	200						
4.4	200		1.4				
4.5	200						
4.6	200						
4.7	200		1.5				
4.8	200						
4.9	200						
5.0	250	150	1.6				
5.0	300	200					
5.0	350	225					
5.1	250	150	1.7				□
5.2	250						
5.3	250						
5.4	250		1.8				
5.5	250						
5.6	250						
5.7	250		1.9				
5.8	250						
5.9	250						
6.0	250	200	2.0				
6.0	300						
6.1	250						
6.2	250	150	2.1				
6.3	250						
6.4	250						
6.5	250		200				
6.5	300						
6.5	350						
6.6	250						
6.7	250						
6.7	300						
6.8	250						
6.8	300						
6.9	250						
7.0	200	100	2.2				
7.0	225	125					
7.0	250	150					
7.0	275	175					
7.0	300	200					
7.0	325	225					
7.0	350	250					
7.0	400	275					
7.0	400	275					
7.1	250	150					
7.2	250						
7.3	250						
7.4	250	100	2.3				
7.5	200						
7.5	225						
7.5	250	125					
7.5	250	150					
7.5	275	175					
7.5	300	200					
7.5	325	200					
7.5	350	225					

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
7.5	375	250	2.3	1	
7.5	400				
7.5	400				
7.6	250				
7.7	250				
7.8	250				
7.9	250	150	2.4		
8.0	200				
8.0	225				
8.0	250				
8.0	275				
8.0	300				
8.0	325				
8.0	350				
8.0	375				
8.0	400				
8.0	400				
8.0	450				
8.0	500				
8.0	500				
8.0	600				
8.0	600				
8.0	700				
8.0	700				
8.0	800				
8.1	250				
8.1	300				
8.2	250				
8.2	300				
8.2	350				
8.3	250				
8.3	300				
8.4	250				
8.4	300				
8.5	200				
8.5	225				
8.5	250				
8.5	275				
8.5	300				
8.5	325				
8.5	350				
8.5	375				
8.5	400				
8.5	400				
8.5	500				
8.5	600				
8.6	250				
8.6	300				
8.7	250				
8.7	300				
8.7	350				
8.8	250				
8.8	300				
8.9	250				
8.9	300				
9.0	200				
9.0	225				
9.0	250				
9.0	275				
9.0	300				

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock			
9.0	325	200	2.7	1	□			
9.0	350	225			●			
9.0	375	250			□			
9.0	400							
9.0	400	275						
9.0	450	300						
9.0	500	325						
9.0	500	350						
9.0	600							
9.0	600	400						
9.0	700	450						
9.0	800	500						
9.1	250	150	2.8		1	□		
9.1	300	200						
9.2	250	150						
9.2	300	200						
9.3	250	150						
9.3	300	200						
9.4	250	150						
9.4	300	200						
9.5	200	100	2.9				1	●
9.5	225	125						□
9.5	250	150				●		
9.5	275	175				□		
9.5	300	200				●		
9.5	325					□		
9.5	350	225				●		
9.5	375	250				□		
9.5	400							
9.5	400	275						
9.5	450	300						
9.5	500	325						
9.5	600	350						
9.6	250	150						
9.6	300	200						
9.7	250	150						
9.7	300	200						
9.8	250	150	3.0					
9.8	300	200						
9.9	250	150						
9.9	300	200						
10.0	200	100		●				
10.0	225	125						
10.0	250	150						
10.0	275	175						
10.0	300	200						
10.0	325							
10.0	350	225						
10.0	375	250						
10.0	400							
10.0	400	275						
10.0	450	300	□					
10.0	500	325						
10.0	500	350						
10.0	600							
10.0	600	400						
10.0	700							
10.0	700	450						
10.0	800	500						
10.0	1000	600						

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
10.1	250	150	3.0	1	□
10.1	300	200			
10.2	250	150	3.1		
10.2	300	200			
10.3	250	150			
10.3	300	200			
10.3	350	250			
10.3	400	275			
10.4	250	150	3.2		
10.4	300	200			
10.5	200	100			
10.5	225	125			
10.5	250	150			
10.5	275	175			
10.5	300	200			
10.5	325				
10.5	350	225			
10.5	375	250			
10.5	400	275			
10.5	400	275			
10.5	450	300			
10.5	500	325			
10.5	500	350			
10.5	600	350			
10.6	250	150			
10.6	300	200			
10.7	250	150			
10.7	300	200			
10.8	250	150			
10.8	300	200			
10.9	250	150			
10.9	300	200			
11.0	200	100			
11.0	225	125			
11.0	250	150			
11.0	275	175			
11.0	300	200			
11.0	325				
11.0	350	225			
11.0	375	250			
11.0	400				
11.0	400	275			
11.0	450	300			
11.0	500	325			
11.0	500	350			
11.0	600	350			
11.0	600	400			
11.0	700	450			
11.0	800	500			
11.0	1000	600			
11.1	250	150			
11.1	300	200			
11.2	250	150			
11.2	300	200			
11.3	250	150			
11.3	300	200			
11.4	250	150			
11.4	300	200			
11.5	225	125			
11.5	250	150			

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
11.5	275	175	3.5		□
11.5	300	200			●
11.5	325				□
11.5	350	225			●
11.5	375	250			
11.5	400				
11.5	400	275			
11.5	450	300			
11.5	500	325			
11.5	500				
11.5	600	350			
11.6	250	150			□
11.6	300	200	3.6	1	●
11.7	250	150			□
11.7	300	200			●
11.8	250	150			□
11.8	300	200			●
11.9	250	150			
11.9	300	200			
12.0	225	125			
12.0	250	150			●
12.0	275	175			□
12.0	300	200			●
12.0	325				□
12.0	350	225			●
12.0	375		3.7		
12.0	400	250			
12.0	400	275			
12.0	450	300			
12.0	500	325			
12.0	500				
12.0	600	350			
12.0	600	400			
12.0	700	450			
12.0	800	500			
12.0	1000	600			
12.1	250	150			□
12.1	300	200	3.8		
12.1	350	250			
12.2	250	150			●
12.2	300	200			□
12.2	350	250			●
12.2	500	350			□
12.3	250	150			●
12.3	300	200			
12.3	350	250			
12.4	250	150			
12.4	300	200			
12.4	350	250			
12.5	225	125	3.8		●
12.5	250	150			□
12.5	275	175			●
12.5	300				□
12.5	325	200			●
12.5	350	225			□
12.5	350				●
12.5	375	250			
12.5	400				
12.5	400	275			
12.5	450	300			
12.5	500	325			
12.5	500		3.8		□
12.5	600	350			
12.5	600	400			
12.6	250	150			
12.6	300	200			
12.6	350	250			
12.7	250	150			
12.7	300	200			
12.7	350	250			

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
12.7	400	275	3.8		
12.7	500	325			
12.8	250	150			
12.8	300	200			
12.8	350	250			
12.8	400	275			□
12.8	500	325			
12.9	250	150			
12.9	300	200			
12.9	350	250			
13.0	225	125			●
13.0	250	150			□
13.0	275	175	3.9		●
13.0	300	200			□
13.0	325				●
13.0	350	225			
13.0	375				
13.0	400	250			
13.0	400	275			
13.0	450	300			
13.0	500	325			
13.0	500				
13.0	600	350			
13.0	600	400	4.0	1	
13.0	700				
13.0	700	450			
13.0	800	500			
13.0	1000	600			
13.1	300	200			□
13.1	350	225			
13.1	350	250			
13.1	400	275			
13.1	500	325			
13.2	300	200			
13.2	350	225	4.1		●
13.2	350	250			□
13.2	400	275			●
13.2	500	325			□
13.3	300	200			●
13.3	350	225			
13.3	350	250			
13.3	400	275			
13.4	300	200			
13.4	350	225			
13.4	350	250			
13.4	400	275			
13.5	225	125			
13.5	250	150	4.1		●
13.5	275	175			□
13.5	300				●
13.5	325	200			□
13.5	350	225			●
13.5	375				
13.5	400	250			
13.5	400	275			
13.5	450	300			
13.5	500	325			
13.5	500				
13.5	600	350			
13.5	600	400	4.1		□
13.5	800	500			
13.6	300	200			
13.6	350	225			
13.6	350	250			
13.6	400	275			
13.7	300	200			
13.7	350	225			
13.7	350	250			
13.7	400	275			
13.7	500	325			

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
13.8	300	200	4.1		□
13.8	350	225			
13.8	350	250			
13.8	400	275			
13.8	500	325			
13.9	300	200			
13.9	350	225			
13.9	350	250			
13.9	400	275			
14.0	225	125			
14.0	250	150	1		●
14.0	275	175			
14.0	300	200			
14.0	325				
14.0	350	225			
14.0	375	250			
14.0	400				
14.0	400	275			
14.0	450	300			
14.0	500	325			
14.0	500	350	2		●
14.0	600	400			
14.0	600	400			
* 14.0	700	450			
* 14.0	700	500			
* 14.0	800				
* 14.0	800	600			
* 14.0	1000				
* 14.0	1200	800			
* 14.1	300	200			
14.1	300		2		□
14.1	350	225			
14.1	350	250			
14.1	400				
14.1	400	275			
14.1	500	350			
14.1	500	375			
14.1	600	425			
* 14.2	300	200			
14.2	300		2		□
14.2	350	225			
14.2	350	250			
14.2	400				
14.2	400	275			
14.2	500	350			
14.2	500	375			
14.2	600	425			
* 14.3	300	200			
14.3	300		2		□
14.3	350	225			
14.3	350	250			
14.3	400				
14.3	400	275			
14.3	500	350			
14.3	500	375			
14.3	600	425			
* 14.4	300	200			
14.4	300		2		□
14.4	350	225			
14.4	350	250			
14.4	400				
14.4	400	275			
14.4	500	350			
14.4	500	375			
14.4	600	425			
14.5	250	125			
14.5	275	150	4.4		●
14.5	300	175			
14.5	325	200			
14.5	350	225			
14.5	350	250			

※

※仅限特定代理店库存品。
This product is for sale while stock lasts.

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
14.5	375			2	●
14.5	400	250			
14.5	400				
14.5	425	275			
14.5	450	300			
14.5	475	325			
14.5	500	350			
14.5	500	375			
14.5	600	400			
14.5	600	425			
14.5	700	450	4.4	2	□
14.5	700				
14.5	800	500			
14.5	800				
14.5	1000	600			
* 14.6	300	200			
14.6	300				
14.6	350	225			
14.6	350	250			
14.6	400				
14.6	400	275	2	1	□
14.6	500	350			
14.6	500	375			
14.6	600	425			
* 14.7	300	200			
14.7	300				
14.7	350	225			
14.7	350	250			
14.7	400				
14.7	400	275			
14.7	500	350	2	1	□
14.7	500	375			
14.7	600	425			
* 14.8	300	200			
14.8	300				
14.8	350	225			
14.8	350	250			
14.8	400				
14.8	400	275			
14.8	500	350			
14.8	500	375	4.5	2	□
14.8	600	425			
* 14.9	300	200			
14.9	300				
14.9	350	225			
14.9	350	250			
14.9	400				
14.9	400	275			
14.9	500	350			
14.9	500	375			
14.9	600	425	2	1	□
15.0	250	125			
15.0	275	150			
15.0	300	175			
15.0	325	200			
15.0	350	225			
15.0	375	250			
15.0	400				
15.0	400	275			
15.0	425				
15.0	450	300	4.5	2	□
15.0	475	325			
15.0	500	350			
15.0	500	375			
15.0	600	400			
15.0	600	425			
15.0	700	450			
15.0	700				
15.0	800	500			
15.0	800	600			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
15.0	1000	600	4.5		
15.1	300	175			
15.1	350	225			
15.1	350	250			
15.1	400	250			
15.1	400	275			
15.1	500	350			
15.1	500	375			
15.1	600	400			
15.1	600	425			
15.2	300	175			
15.2	350	225			
15.2	350	250			
15.2	400	275			
15.2	500	350			
15.2	500	375			
15.2	600	400			
15.2	600	425			
15.3	300	175			
15.3	350	225			
15.3	350	250	4.6		□
15.3	400	275			
15.3	500	350			
15.3	500	375			
15.3	600	400			
15.3	600	425			
15.4	300	175			
15.4	350	225			
15.4	350	250			
15.4	400	275			
15.4	500	350		2	
15.4	500	375			
15.4	600	400			
15.4	600	425			
15.5	250	125			
15.5	275	150			
15.5	300	175			
15.5	325	200			
15.5	350	225			
15.5	375	250			
15.5	400	275			●
15.5	425	275			
15.5	450	300			
15.5	475	325			
15.5	500	350			
15.5	500	375			
15.5	600	400			
15.5	600	425			
15.5	700	450			
15.5	700	500			
15.5	800	500	4.7		□
15.5	800	600			
15.6	300	175			
15.6	350	225			
15.6	350	250			
15.6	400	275			
15.6	400	275			
15.6	500	350			
15.6	500	375			
15.6	600	400			
15.7	300	175			
15.7	350	225			
15.7	350	250			
15.7	400	250			
15.7	400	275			
15.7	400	275			

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
15.7	500	350	4.7		
15.7	500	375			
15.7	600	400			
15.7	600	425			
15.8	300	175			
15.8	350	225			
15.8	350	250			
15.8	400	275			
15.8	400	275			
15.8	500	350			
15.8	500	375			□
15.8	600	400			
15.8	600	425			
15.9	300	175			
15.9	350	225			
15.9	350	250			
15.9	400	275			
15.9	400	275			
15.9	500	350			
15.9	500	375			
15.9	600	400	4.8	2	●
15.9	600	425			
16.0	250	125			
16.0	275	150			
16.0	300	175			
16.0	325	200			
16.0	350	225			
16.0	375	250			
16.0	400	275			
16.0	400	275			
16.0	425	275			●
16.0	450	300			
16.0	475	325			
16.0	500	350			
16.0	500	375			
16.0	600	400			
16.0	600	425			
16.0	700	450			
16.0	700	500			
16.0	800	500			
16.0	800	600			□
16.0	1000	600			
16.0	1200	800			
16.1	350	225			
16.1	350	250			
16.1	400	275			
16.1	400	275			
16.1	500	350			
16.1	500	375			
16.1	600	400			
16.1	600	425	4.9		□
16.2	350	225			
16.2	350	250			
16.2	400	275			
16.2	400	275			
16.2	500	350			
16.2	500	375			
16.2	600	400			
16.2	600	425			
16.3	350	225			
16.3	350	250			
16.3	400	275			
16.3	400	275			
16.3	500	350			
16.3	500	375			
16.3	600	400			
16.3	600	425			
16.3	600	425			
16.4	350	225			
16.4	350	250			
16.4	400	250			
16.4	400	250			

※仅限特定代理店库存品。
This product is for sale while stock lasts.

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
16.4	400	275	4.9		☐
16.4	500	350			
16.4	500	375			
16.4	600	400			
16.4	600	425			
16.5	250	125			
16.5	275	150			
16.5	300	175			
16.5	325	200			
16.5	350	225			
16.5	375	250	5.0		☐
16.5	400	275			
16.5	425	300			
16.5	450	325			
16.5	475	350			
16.5	500	375			
16.5	500	400			
16.5	600	400			
16.5	600	425			
16.5	700	450			
16.5	700	500	5.1		☐
16.5	800	600			
16.6	350	225			
16.6	350	250			
16.6	400	275			
16.6	500	350			
16.6	500	375			
16.6	600	400			
16.6	600	425			
16.7	350	225			
16.7	350	250	5.2		☐
16.7	400	275			
16.7	400	300			
16.7	500	375			
16.7	500	400			
16.7	600	425			
16.8	350	225			
16.8	350	250			
16.8	400	275			
16.8	400	300			
16.8	500	350	5.3		☐
16.8	500	375			
16.8	600	400			
16.8	600	425			
16.9	350	225			
16.9	350	250			
16.9	400	275			
16.9	400	300			
16.9	500	350			
16.9	500	375			
16.9	600	400	5.4		☐
16.9	600	425			
17.0	250	125			
17.0	275	150			
17.0	300	175			
17.0	325	200			
17.0	350	225			
17.0	375	250			
17.0	400	275			
17.0	425	300			
17.0	450	325	5.5		☐
17.0	475	350			
17.0	500	375			
17.0	500	400			
17.0	600	425			
17.0	600	450			
17.0	600	475			
17.0	600	500			
17.0	600	525			
17.0	600	550			

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
17.0	600	425	5.1		☐
17.0	700	450			
17.0	700	500			
17.0	800	600			
17.0	800	600			
17.0	1000	600			
17.1	400	250			
17.1	400	275			
17.1	500	350			
17.1	500	375			
17.2	400	250	5.2		☐
17.2	400	275			
17.2	500	350			
17.2	500	375			
17.3	400	250			
17.3	400	275			
17.3	500	350			
17.3	500	375			
17.4	400	250			
17.4	400	275			
17.4	500	350	5.3		☐
17.4	500	375			
17.5	250	125			
17.5	275	150			
17.5	300	175			
17.5	325	200			
17.5	350	225			
17.5	375	250			
17.5	400	275			
17.5	425	300			
17.5	450	325	5.4		☐
17.5	475	350			
17.5	500	375			
17.5	500	400			
17.5	600	425			
17.5	600	450			
17.5	700	500			
17.5	800	600			
17.6	400	250			
17.6	400	275	5.5		☐
17.6	500	350			
17.6	500	375			
17.7	400	250			
17.7	400	275			
17.7	500	350			
17.7	500	375			
17.8	400	250			
17.8	400	275			
17.8	500	350			
17.8	500	375	5.6		☐
17.9	400	250			
17.9	400	275			
17.9	500	350			
17.9	500	375			
18.0	275	150			
18.0	300	175			
18.0	300	200			
18.0	325	225			
18.0	350	250			
18.0	375	275	5.7		☐
18.0	400	300			
18.0	425	325			
18.0	450	350			
18.0	475	375			
18.0	500	400			
18.0	500	425			
18.0	500	450			
18.0	500	475			
18.0	500	500			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
18.0	600	400	5.4		
18.0	600	425			
18.0	700	450			
18.0	700				
18.0	800	500			
18.0	800				
18.0	1000	600			
※ 18.0	1200	800			
18.1	400	250			
18.1	400	275			
18.1	500	350	5.5		
18.1	500	375			
18.2	400	250			
18.2	400	275			
18.2	500	350			
18.2	500	375			
18.3	400	250			
18.3	400	275			
18.3	500	350			
18.3	500	375			
18.4	400	250	5.6	2	
18.4	400	275			
18.4	500	350			
18.4	500	375			
18.5	275	150			
18.5	300	175			
18.5	300	200			
18.5	325				
18.5	350	225			
18.5	375	250			
18.5	400		5.7		
18.5	400	275			
18.5	425				
18.5	450	300			
18.5	475	325			
18.5	500	350			
18.5	500	375			
18.5	600	400			
18.5	600	425			
18.5	700	450			
18.5	700		5.8		
18.5	800	500			
18.5	1000	600			
18.6	400	250			
18.6	400	275			
18.6	500	350			
18.6	500	375			
18.7	400	250			
18.7	400	275			
18.7	500	350			
18.7	500	375	5.9		
18.8	400	250			
18.8	400	275			
18.8	500	350			
18.8	500	375			
18.9	400	250			
18.9	400	275			
18.9	500	350			
18.9	500	375			
19.0	275	150			
19.0	300	175	6.0		
19.0	300	200			
19.0	325				
19.0	350	225			
19.0	375	250			
19.0	400				
19.0	400	275			
19.0	425				
19.0	450	300			
19.0	450	325			

※仅限特定代理店库存品。
This product is for sale while stock lasts.

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
19.0	475	325	5.7		
19.0	500	350			
19.0	500	375			
19.0	600	400			
19.0	600	425			
19.0	700	450			
19.0	700				
19.0	800	500			
19.0	800				
19.0	1000	600			
19.1	400	250	5.8		
19.1	400	275			
19.1	500	350			
19.1	500	375			
19.2	400	250			
19.2	400	275			
19.2	500	350			
19.2	500	375			
19.3	400	250			
19.3	400	275			
19.3	500	350	5.9		
19.3	500	375			
19.4	400	250			
19.4	400	275			
19.4	500	350			
19.4	500	375			
19.5	275	150			
19.5	300	175			
19.5	300	200			
19.5	325				
19.5	350	225	6.0		
19.5	375	250			
19.5	400				
19.5	400	275			
19.5	425				
19.5	450	300			
19.5	475	325			
19.5	500	350			
19.5	500	375			
19.5	600	400			
19.5	600	425	6.1		
19.5	700	450			
19.5	700				
19.5	800	500			
19.5	800	600			
19.6	400	250			
19.6	400	275			
19.6	500	350			
19.6	500	375			
19.7	400	250			
19.7	400	275	6.2		
19.7	500	350			
19.7	500	375			
19.8	400	250			
19.8	400	275			
19.8	500	350			
19.8	500	375			
19.9	400	250			
19.9	400	275			
19.9	500	350			
19.9	500	375	6.3		
20.0	275	150			
20.0	300	175			
20.0	300	200			
20.0	325				
20.0	350	225			
20.0	375	250			
20.0	400				
20.0	400	275			
20.0	425				

※※

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
20.0	450	300	6.0		□
20.0	475	325			●
20.0	500	350			
20.0	500	375			
20.0	600	400			
20.0	600	425			
20.0	700	450			
20.0	700				
20.0	800	500			
20.0	800				
20.0	1000	600			
20.0	1200	800	6.1		
20.0	1500	1000			
20.1	400	250			□
20.1	400	275			
20.1	500	350			
20.1	500	375			
20.2	400	250			
20.2	400	275			
20.2	500	350			
20.2	500	375			
20.3	400	250	6.2	2	
20.3	400	275			
20.3	500	350			
20.3	500	375			
20.4	400	250			
20.4	400	275			
20.4	500	350			
20.4	500	375			
20.5	275	150			
20.5	300	175			●
20.5	325	200	6.3		□
20.5	350	225			●
20.5	375				
20.5	400	250			□
20.5	400				
20.5	400	275			●
20.5	425				□
20.5	450	300			●
20.5	475	325			
20.5	500	350			
20.5	500	375	6.2		
20.5	600	400			
20.5	600	425			
20.5	700	450			
20.5	700				
20.5	800	500			
20.5	800	600			
20.6	400	250			
20.6	400	275			
20.6	500	350			
20.6	500	375	6.3		
20.7	400	250			□
20.7	400	275			
20.7	500	350			
20.7	500	375			
20.8	400	250			
20.8	400	275			
20.8	500	350			
20.8	500	375			
20.9	400	250			
20.9	400	275	6.3		
20.9	500	350			
20.9	500	375			
21.0	275	150			
21.0	300	175			
21.0	325				●
21.0	350	200			□
21.0	350	225			
21.0	375				●
21.0	400	250			□

※仅限特定代理店库存品。
This product is for sale while stock lasts.

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
21.0	400		6.3		□
21.0	425	275			●
21.0	450	300			□
21.0	475	325			●
21.0	500	350			
21.0	500	375			
21.0	600	400			
21.0	600	425			
21.0	700	450			
21.0	700				
21.0	800	500	6.4		
21.0	800				
21.0	800	600			
21.1	400	250			□
21.1	400	275			
21.2	400	250			
21.2	400	275			
21.3	400	250			
21.3	400	275			
21.4	400	250			
21.4	400	275	6.5	2	
21.5	275	150			
21.5	300	175			
21.5	325	200			●
21.5	350	225			□
21.5	375				●
21.5	400	250			□
21.5	400				
21.5	425	275			●
21.5	450	300			□
21.5	475	325	6.5		●
21.5	500	350			
21.5	500	375			
21.5	600	400			
21.5	600	425			
21.5	700	450			
21.5	700				
21.5	800	500			
21.5	800	600			
21.6	400	250			
21.6	400	275	6.6		□
21.7	400	250			
21.7	400	275			
21.8	400	250			
21.8	400	275			
21.9	400	250			
21.9	400	275			
22.0	275	150			
22.0	300	175			●
22.0	325	200			□
22.0	350	225	6.6		●
22.0	375				
22.0	400	250			□
22.0	400				
22.0	425	275			●
22.0	450	300			□
22.0	475	325			●
22.0	500	350			
22.0	500	375			
22.0	600	400			
22.0	600	425	6.7		
22.0	700	450			
22.0	700				
22.0	700	500			
22.0	800				□
22.0	800	600			
22.0	1000				
22.1	400	250			
22.1	400	275			
22.2	400	250			
22.2	400	275			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

新商品

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
22.3	400	250	6.7		□
22.3	400	275			
22.4	400	250			
22.4	400	275			
22.5	275	150			
22.5	300	175	6.8	2	●
22.5	325	200			□
22.5	350	225			●
22.5	375	250			□
22.5	400	275			●
22.5	425	300			□
22.5	450	325			●
22.5	475	350			□
22.5	500	375			●
22.5	600	400			□
22.5	600	425			●
22.5	700	450			□
22.5	700	500			●
22.5	800	600			□
22.5	800	600			●
22.6	400	250	6.9	3	□
22.6	400	275			●
22.7	400	250			□
22.7	400	275			●
22.8	400	250			□
22.8	400	275			●
22.9	400	250			□
22.9	400	275			●
23.0	275	150			□
23.0	300	175			●
23.0	325	200			□
23.0	350	225			●
23.0	375	250			□
23.0	400	275			●
23.0	425	300			□
23.0	475	325			●
23.0	500	350	7.0	3	□
23.0	500	375			●
23.0	600	400			□
23.0	600	425			●
23.0	700	450			□
23.0	700	500			●
23.0	800	600			□
23.0	800	600			●
23.0	1000	600			□
23.1	400	250			●
23.1	400	275			□
23.2	400	250			●
23.2	400	275			□
23.3	400	250			●
23.3	400	275			□
23.4	400	250	7.1	3	□
23.4	400	275			●
23.5	325	175			□
23.5	350	200			●
23.5	350	225			□
23.5	375	225			●
23.5	400	250			□
23.5	400	275			●
23.5	425	275			□
23.5	450	300			●
23.5	450	325			□
23.5	475	350			●
23.5	500	350			□
23.5	500	375			●
23.5	550	350			□

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
23.5	600	400	7.1	3	●
23.5	600	425			□
23.5	700	450			●
23.5	700	500			□
23.5	800	600			●
23.5	800	600			□
23.6	400	250			●
23.6	400	275			□
23.7	400	250			●
23.7	400	275			□
23.8	400	250			●
23.8	400	275			□
23.9	400	250			●
23.9	400	275			□
24.0	325	175	7.2	3	●
24.0	350	200			□
24.0	350	225			●
24.0	375	225			□
24.0	400	250			●
24.0	400	275			□
24.0	425	275			●
24.0	450	300			□
24.0	450	325			●
24.0	475	350			□
24.0	500	350			●
24.0	500	375			□
24.0	550	350			●
24.0	600	400			□
24.0	600	425	7.3	3	●
24.0	700	450			□
24.0	700	500			●
24.0	800	600			□
24.0	800	600			●
24.0	1000	600			□
24.1	400	250			●
24.1	400	275			□
24.2	400	250			●
24.2	400	275			□
24.3	400	250			●
24.3	400	275			□
24.4	400	250			●
24.4	400	275			□
24.5	325	175	7.4	3	●
24.5	350	200			□
24.5	350	225			●
24.5	375	225			□
24.5	400	250			●
24.5	400	275			□
24.5	425	275			●
24.5	450	300			□
24.5	450	325			●
24.5	475	350			□
24.5	500	350			●
24.5	500	375			□
24.5	550	350			●
24.5	600	400			□
24.5	600	425	7.5	3	●
24.5	700	450			□
24.5	700	500			●
24.5	800	600			□
24.5	800	600			●
24.6	400	250			□
24.6	400	275			●
24.7	400	250			□
24.7	400	275			●
24.8	400	250			□
24.8	400	275			●
24.9	400	250			□
24.9	400	275			●
25.0	325	175			□

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
25.0	350	200	7.5		●
25.0	350	225			□
25.0	375				●
25.0	400	250			□
25.0	400	275			●
25.0	425				□
25.0	450	300			●
25.0	450	325			□
25.0	475				●
25.0	500	350			□
25.0	500	375			●
25.0	550	350			□
25.0	600	400			●
25.0	600	425			
25.0	700	450			
25.0	700	500			
25.0	800				
25.0	800	600			
25.0	1000				
25.0	1200	800			
25.0	1500	1000			
25.1	400	250	7.6		□
25.1	400	275			
25.2	400	250			
25.2	400	275			
25.3	400	250			
25.3	400	275			
25.4	400	250			
25.4	400	275			
25.5	325	175			
25.5	350	200			●
25.5	350	225	7.7	3	□
25.5	375				●
25.5	400	250			□
25.5	400	275			●
25.5	425				□
25.5	450	300			●
25.5	450	325			□
25.5	475				●
25.5	500	350			□
25.5	500	375			●
25.5	550	350			□
25.5	600	400			●
25.5	600	425			
25.5	700	450			
25.5	700	500			
25.5	800				
25.5	800	600			
25.6	400	250			□
25.6	400	275			
25.7	400	250	7.8		□
25.7	400	275			
25.8	400	250			
25.8	400	275			
25.9	400	250			
25.9	400	275			
26.0	325	175			
26.0	350	200			●
26.0	350	225			□
26.0	400	250			●
26.0	400	275	7.9		□
26.0	425				●
26.0	450	300			□
26.0	450	325			●
26.0	500	350			□
26.0	500	375			●
26.0	550	350			□
26.0	600	400			●
26.0	600	425			
26.0	700	450			
26.0	700	500	8.0		
26.0	800				
26.0	800	600			
26.0	1000	500			
26.0	1000	600			
26.0	1200	800			
26.0	1500	1000			
26.1	400	250			
26.1	400	275			
26.2	400	250			
26.2	400	275	8.1		
26.3	400	250			
26.3	400	275			
26.4	400	250			
26.4	400	275			
26.5	325	175			
26.5	350	200			
26.5	350	225			
26.5	375				
26.5	400	250			
26.5	400	275	8.2		
26.5	400	300			
26.5	450	325			
26.5	475				
26.5	500	350			
26.5	500	375			
26.5	550	350			
26.5	600	400			
26.5	600	425			
26.5	800	500			
26.6	400	250	8.3		
26.6	400	275			
26.7	400	250			
26.7	400	275			
26.8	400	250			
26.8	400	275			
26.9	400	250			
26.9	400	275			
27.0	325	175			
27.0	350	200			
27.0	350	225	8.4		
27.0	375				
27.0	400	250			
27.0	400	275			
27.0	425				
27.0	450	300			
27.0	450	325			
27.0	475				
27.0	500	350			
27.0	500	375			
27.0	550	350	8.5		
27.0	600	400			
27.0	600	425			
27.0	700	450			
27.0	700	500			
27.0	800				
27.0	800	600			
27.0	1000	500			
27.0	1000	600			
27.1	400	250			
27.1	400	275	8.6		
27.2	400	250			
27.2	400	275			
27.3	400	250			
27.3	400	275			
27.4	400	250			
27.4	400	275			
27.5	325	175			
27.5	350	200			
27.5	350	225			

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
26.0	600	425	7.8		
26.0	700	450			
26.0	700	500			
26.0	800				
26.0	800	600			
26.0	1000				
26.1	400	250			
26.1	400	275			
26.2	400	250			
26.2	400	275			
26.3	400	250	7.9		
26.3	400	275			
26.4	400	250			
26.4	400	275			
26.5	325	175			
26.5	350	200			
26.5	350	225			
26.5	375				
26.5	400	250			
26.5	400	275			
26.5	400	300	8.0		
26.5	450	325			
26.5	475				
26.5	500	350			
26.5	500	375			
26.5	550	350			
26.5	600	400			
26.5	600	425			
26.5	800	500			
26.5	800	600			
26.6	400	250	8.1		
26.6	400	275			
26.7	400	250			
26.7	400	275			
26.8	400	250			
26.8	400	275			
26.9	400	250			
26.9	400	275			
27.0	325	175			
27.0	350	200			
27.0	350	225	8.2		
27.0	375				
27.0	400	250			
27.0	400	275			
27.0	425				
27.0	450	300			
27.0	450	325			
27.0	475				
27.0	500	350			
27.0	500	375			
27.0	550	350	8.3		
27.0	600	400			
27.0	600	425			
27.0	700	450			
27.0	700	500			
27.0	800				
27.0	800	600			
27.0	1000	500			
27.0	1000	600			
27.1	400	250			
27.1	400	275	8.4		
27.2	400	250			
27.2	400	275			
27.3	400	250			
27.3	400	275			
27.4	400	250			
27.4	400	275			
27.5	325	175			
27.5	350	200			
27.5	350	225			

※仅限特定代理店库存品。
This product is for sale while stock lasts.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
27.5	350		8.3		□
27.5	375	225			●
27.5	400	250			□
27.5	400	275			●
27.5	425				□
27.5	450	300			●
27.5	450	325			□
27.5	475				●
27.5	500	350			□
27.5	500	375			●
27.5	550	350			□
27.5	600	400			●
27.5	600	425			□
27.5	800	500			
27.5	800	600			
27.6	400	250			
27.6	400	275			
27.7	400	250			
27.7	400	275			
27.8	400	250	8.4	3	●
27.8	400	275			
27.9	400	250			
27.9	400	275			
28.0	325	175			
28.0	350	200			
28.0	350				
28.0	375	225			
28.0	400	250			
28.0	400	275			
28.0	425				
28.0	450	300			
28.0	450	325	8.5		□
28.0	475				
28.0	500	350			
28.0	500	375			
28.0	550	350			
28.0	600	400			
28.0	600	425			
28.0	700	450			
28.0	700				
28.0	800	500			
28.0	800				
28.0	1000	600			
28.1	400	250	8.6		●
28.1	400	275			
28.2	400	250			
28.2	400	275			
28.3	400	250			
28.3	400	275			
28.4	400	250			
28.4	400	275			
28.5	325	175			
28.5	350	200			
28.5	375	225			
28.5	400	250			
28.5	400	275	8.6		□
28.5	425				
28.5	450	300			
28.5	450	325			
28.5	475				
28.5	500	350			
28.5	500	375			
28.5	550	350			
28.5	600	400			
28.5	600	425			
28.5	800	500			
28.5	800	600			
28.6	400	250			
28.6	400	275			
28.7	400	250			

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
28.7	400	275	8.6		□
28.8	400	250			
28.8	400	275			
28.9	400	250			
28.9	400	275			
29.0	325	175			
29.0	350	200			
29.0	350	225			
29.0	375				
29.0	400	250			
29.0	400	275			
29.0	425				
29.0	450	300	8.7		●
29.0	450	325			
29.0	475				
29.0	500	350			
29.0	500	375			
29.0	550	350			
29.0	600	400			
29.0	600	425			
29.0	700	450			
29.0	700	500			
29.0	800	600			
29.0	1000	500	8.8		□
29.0	1000	600			
29.1	400	250			
29.1	400	275			
29.2	400	250			
29.2	400	275			
29.3	400	250			
29.3	400	275			
29.4	400	250			
29.4	400	275			
29.5	325	175	8.9	3	●
29.5	350	200			
29.5	350				
29.5	375	225			
29.5	400	250			
29.5	400	275			
29.5	425				
29.5	450	300			
29.5	450	325			
29.5	475				
29.5	500	350			
29.5	500	375	9.0		□
29.5	550	350			
29.5	600	400			
29.5	600	425			
29.5	800	500			
29.5	800	600			
29.6	400	250			
29.6	400	275			
29.7	400	250			
29.7	400	275			
29.8	400	250			
29.8	400	275			
29.9	400	250			
29.9	400	275			
30.0	325	175			
30.0	350	200			
30.0	350				
30.0	375	225			
30.0	400	250			
30.0	400	275			
30.0	425				
30.0	450	300			
30.0	450	325			
30.0	475				
30.0	500	350			

※※

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock		
30.0	500	375	9.0		□		
30.0	550	350			●		
30.0	600	400			□		
30.0	600	425					
30.0	700	450					
30.0	700	500					
30.0	800						
30.0	800						
30.0	1000	600					
30.0	1200					800	
30.0	1500	1000					
30.1	400	275	9.1				
30.2	400						
30.3	400						
30.4	400						
30.5	350	200	9.2	3	●		
30.5	350	225			□		
30.5	375	250			●		
30.5	400	275			□		
30.5	400	300			●		
30.5	450	325			□		
30.5	475	350			●		
30.5	500	375			□		
30.5	550	350			●		
30.5	600	400			□		
30.5	600	425			●		
30.6	400	275			9.3		□
30.7	400						
30.8	400						
30.9	400						
31.0	350	200					●
31.0	350	225					□
31.0	375	250	●				
31.0	400	275	□				
31.0	425	300	●				
31.0	450	325	□				
31.0	475	350	●				
31.0	500	375	□				
31.0	550	350	●				
31.0	600	400	□				
31.0	600	425	●				
31.0	700	450	9.5				□
31.0	700	500					
31.0	800	500					
31.0	800	600					
31.0	1000	600					
31.5	350	200			●		
31.5	375	225			□		
31.5	400	250			●		
31.5	400	275			□		
31.5	425	275			●		
31.5	450	300			□		
31.5	450	325	●				
31.5	475	325	□				
31.5	500	350	●				
31.5	500	375	□				
31.5	550	350	●				
31.5	600	400	□				
31.5	600	425	●				
32.0	350	200	9.6		●		
32.0	350	225			□		
32.0	375	250			●		
32.0	400	275			□		

※仅限特定代理店库存品。
This product is for sale while stock lasts.

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock	
32.0	425	275	9.6	3	□	
32.0	450	300			●	
32.0	450	325			□	
32.0	475				●	
32.0	500	350			□	
32.0	500	375			●	
32.0	550	350			□	
32.0	600	400			●	
32.0	600	425			9.8	□
32.0	700	450				
32.0	700	500				
32.0	800					
32.0	800	550				
32.0	800	600				
32.0	1000					
32.5	400	250				
32.5	500	300				
32.5	600	400				
33.0	400	250	9.9	●		
33.0	400	275				
33.0	425	250				
33.0	475	300				
33.0	500					
33.0	525	350				
33.0	600	400				
33.0	625	450				
33.0	700	400				
33.0	700	500				
33.0	800	550				
33.0	1000	600	10.1	□		
33.5	400	250				
33.5	500	300				
33.5	600	400	10.2	●		
34.0	400	250				
34.0	425	250				
34.0	475	300	10.4	●		
34.0	500					
34.0	525	350				
34.0	600	400	10.5	□		
34.0	625	450				
34.0	700	500				
34.0	800	550	10.7	●		
34.0	800	600				
34.0	1000	600				
34.5	400	250	10.8	□		
34.5	500	300				
34.5	600	400				
34.5	625	450	10.9	□		
35.0	400	250				
35.0	425	250				
35.0	475	300	11.0	●		
35.0	500	300				
35.0	525	350				
35.0	600	400	11.1	□		
35.0	625	450				
35.0	700	500				
35.0	800	550	11.2	●		
35.0	800	600				
35.0	1000	600				
35.0	1000	700	11.3	□		
35.0	1200	800				
35.0	1500	1000				
35.5	400	250	11.4	□		
35.5	500	300				
35.5	600	400				
36.0	400	250	11.5	●		
36.0	425	250				
36.0	475	300				
36.0	500	300	11.6	□		
36.0	525	350				
36.0	525	350				

※※

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

← 上一页 Previous Page

单位 (Unit) : mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
36.0	600	400	10.8		□
36.0	625	450			●
36.0	700	500			
36.0	800	550			
36.0	800	600			□
36.0	1000	600	11.0		
36.5	500	300			
36.5	600	400			
37.0	425	250			●
37.0	475	300			□
37.0	500		11.1		●
37.0	525	350			□
37.0	600	400			●
37.0	625	450			□
37.0	700	500			●
37.0	800	550	11.3		
37.0	1000	600			□
37.5	500	300			
37.5	600	400			
37.5	700	500			
38.0	425	250	11.4		●
38.0	475	300			□
38.0	500				●
38.0	525	350			□
38.0	600	400			●
38.0	625	450	11.6		
38.0	700	500			
38.0	800	550			
38.0	800	600			□
38.0	1000	600			
38.5	500	300	11.7	4	●
38.5	600	400			□
38.5	700	500			●
39.0	425	250			□
39.0	475	300			●
39.0	500		11.9		□
39.0	525	350			●
39.0	600	400			□
39.0	625	450			●
39.0	700	500			
39.0	800	550	12.0		□
39.0	1000	600			●
39.5	500	300			□
39.5	600	400			●
39.5	700	500			
40.0	425	250	12.2		●
40.0	475	300			□
40.0	500				●
40.0	525	350			□
40.0	600	400			●
40.0	625	450	12.3		
40.0	700	500			
40.0	800	550			
40.0	800	600			□
40.0	1000	600			
40.0	1200	800	12.2		□
40.5	500	300			
40.5	500	350			
40.5	600	400			
41.0	425	250	12.3		●
41.0	475	300			□
41.0	500				□
41.0	525	350			●
41.0	600	400			□
41.0	625	450	14.3		●
41.0	700	500			
41.0	800	550			
41.0	800	600			□
41.0	1000	600			

※仅限特定代理店库存品。
This product is for sale while stock lasts.

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
41.5	500	300	12.5		□
41.5	600	400			
42.0	425	250			●
42.0	475	300			□
42.0	500				●
42.0	525	350	12.6		□
42.0	600	400			●
42.0	625	450			□
42.0	700	500			●
42.0	800	550			
42.0	800	600	12.8		□
42.0	1000	600			
42.5	500	300			
42.5	600	400			
43.0	425	250	12.9		●
43.0	475	300			□
43.0	500				●
43.0	525	350			□
43.0	600	400			●
43.0	625	450	13.1		
43.0	700	500			
43.0	800	550			
43.0	1000	600			□
43.5	500	300			
43.5	600	400	13.2		□
43.5	700	500			●
44.0	425	250			□
44.0	475	300			●
44.0	500				□
44.0	525	350	13.4		●
44.0	600	400			□
44.0	625	450			●
44.0	700	500			
44.0	800	550			
44.0	1000	600	13.5		□
44.5	500	300			●
44.5	600	400			□
45.0	425	250			●
45.0	475	300	13.7		□
45.0	500				●
45.0	525	350			□
45.0	600	400			●
45.0	625	450	13.8		
45.0	700	500			
45.0	800	550			
45.0	800	600			□
45.0	1000	600			
45.5	500	300	14.0		□
45.5	600	400			●
46.0	475	300			□
46.0	500				●
46.0	525	350	14.1		□
46.0	600	400			●
46.0	625	450			□
46.0	700	500			●
46.0	800	550	14.3		
46.0	800	600			
46.0	1000	600			□
46.5	500	300			
46.5	600	400			
47.0	475	300	14.3		●
47.0	500				□
47.0	525	350			●
47.0	600	400			□
47.0	625	450			●
47.0	700	500	14.3		
47.0	800	550			
47.0	800	600			□
47.5	500	300			
47.5	600	400			

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock		
48.0	475	300	14.4	4	●		
48.0	500				□		
48.0	525				350	●	
48.0	600				400	□	
48.0	625				450	●	
48.0	700				500	□	
48.0	800				550		
48.0	800						
48.0	1000	600					
48.5	500	300	14.6				
48.5	600	400					
49.0	475	300	14.7		●		
49.0	500				300		□
49.0	525				350	●	
49.0	600				400	□	
49.0	625				450	●	
49.0	700				500	□	
49.0	800				550		
49.0	1000				600		
49.5	500	350	14.9				
49.5	600	400					
50.0	475	300	15.0		●		
50.0	500				300		□
50.0	525				350		●
50.0	600				400	□	
50.0	625				450	●	
50.0	700				500	□	
50.0	800				550		
50.0	800				600		
50.0	1000						
50.0	1000				700		
50.5	500	300	15.2				
51.0	500						
51.0	600	400	15.3				
51.0	800	550					
51.0	1000	650	15.5				
51.5	500	300					
52.0	500	300	15.6		5	□	
52.0	600						400
52.0	800						550
52.0	1000			650			
52.5	500	300	15.8				
53.0	500	300	15.9				
53.0	600			400			
53.0	800			550			
53.0	1000			650			
53.5	500	300	16.1				
54.0	500	300	16.2				
54.0	600			400			
54.0	800			550			
54.0	1000			650			
54.5	500	300	16.4				
55.0	500	300	16.5				
55.0	600			400			
55.0	700			450			
55.0	700			500			
55.0	800			550			
55.0	1000			650			
55.5	500	300	16.7				
56.0	500	300	16.8				
56.0	600			400			
56.0	800			550			
56.0	1000			650			
56.5	500	300	17.0				
57.0	500	300	17.1				
57.0	600			400			
57.0	800			550			
57.0	1000			650			
57.5	500	300	17.3				
58.0	500	300	17.4				

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock		
58.0	600	400	17.4	5	□		
58.0	800	550					
58.0	1000	650					
58.5	500	300	17.6				
59.0	500						
59.0	600	400	17.7				
59.0	800	550					
59.0	1000	650					
59.5	500	300	17.9				
60.0	500						
60.0	600	400	18.0				
60.0	800	550					
60.0	1000	650					
61.0	600	400	18.3				
61.0	800	550					
62.0	600	400	18.6				
62.0	800	550					
63.0	600	400	18.9				
63.0	800	550					
64.0	600	400	19.2				
64.0	800	550					
65.0	600	400	19.5				
65.0	800	550					
66.0	600	400	19.8				
66.0	800	550					
67.0	600	400	20.1				
67.0	800	550					
68.0	600	400	20.4				
68.0	800	550					
69.0	600	400	20.7				
69.0	800	550					
70.0	600	400	21.0				
70.0	800	550					
71.0	600	400	21.3				
71.0	800	550					
72.0	600	400	21.6				
72.0	800	550					
73.0	600	400	21.9				
74.0	600						
75.0	600	550	22.2				
75.0	800						
76.0	600	400	22.5				
76.0	800	550					
77.0	600	400	22.8				
78.0	600						
78.0	800	550	23.1				
79.0	600	400					
80.0	600	23.4				6	
80.0	800						550
80.0	600	400	23.7				
80.0	800						
80.0	800	550	24.0				
85.0	800						

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	—	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

- 本钻头是适用于普通钢、不锈钢、铝的涂层长钻头。
- 适合用于深孔加工或深位置开孔。

This is general coated long drill and is suitable for non-step drilling of deep holes.

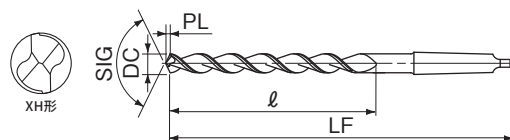

新品



订货方式 商品编码

仅限直径
5.0~6.8的库存品

单位 (Unit) : mm

商品記号 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
GNLTD5.0	5.0	200	300	1.0	1	□
GNLTD5.5	5.5			1.1		
GNLTD6.0	6.0			1.2		
GNLTD6.2	6.2			1.3		
GNLTD6.5	6.5			1.4		
GNLTD6.7	6.7			1.5		
GNLTD6.8	6.8			1.6		
GNLTD7.0	7.0			1.7		
GNLTD7.2	7.2			1.8		
GNLTD7.5	7.5			1.9		
GNLTD7.7	7.7			2.0		
GNLTD7.8	7.8			2.1		
GNLTD8.0	8.0			2.2		
GNLTD8.2	8.2			2.3		
GNLTD8.3	8.3			2.4		
GNLTD8.5	8.5			2.5		
GNLTD8.7	8.7			2.6		
GNLTD8.8	8.8			2.7		
GNLTD9.0	9.0			2.8		
GNLTD9.2	9.2			2.9		
GNLTD9.5	9.5			3.0	2	
GNLTD9.7	9.7			3.1		
GNLTD9.8	9.8			3.2		
GNLTD10.0	10.0			3.3		
GNLTD10.2	10.2			3.4		
GNLTD10.3	10.3			3.5		
GNLTD10.5	10.5			3.6		
GNLTD10.8	10.8			3.7		
GNLTD11.0	11.0			3.8		
GNLTD11.1	11.1			3.9		
GNLTD11.5	11.5			4.0		
GNLTD11.7	11.7			4.1		
GNLTD11.8	11.8			4.2		
GNLTD12.0	12.0			4.3		
GNLTD12.1	12.1			4.4		
GNLTD12.2	12.2			4.5		
GNLTD12.3	12.3			4.6		
GNLTD12.5	12.5			4.7		
GNLTD12.7	12.7			4.8		
GNLTD12.8	12.8			4.9		
GNLTD13.0	13.0	5.0				
GNLTD13.2	13.2	5.1				
GNLTD13.5	13.5	5.2				
GNLTD13.7	13.7	5.3				
GNLTD13.8	13.8	5.4				
GNLTD14.0	14.0	5.5				
GNLTD14.1	14.1	5.6				
GNLTD14.2	14.2	5.7				
GNLTD14.3	14.3	5.8				
GNLTD14.5	14.5	5.9				
GNLTD14.7	14.7	6.0				
GNLTD14.8	14.8	6.1				
GNLTD15.0	15.0	6.2				
GNLTD15.2	15.2	6.3				
GNLTD15.5	15.5	6.4				
GNLTD15.7	15.7	6.5				
GNLTD15.8	15.8	6.6				
GNLTD16.0	16.0	6.7				
GNLTD16.5	16.5	6.8				
GNLTD17.0	17.0	6.9				

商品記号 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
GNLTD17.5	17.5	200	300	3.6	2	□
GNLTD18.0	18.0			3.7		
GNLTD18.5	18.5			3.8		
GNLTD19.0	19.0			3.9		
GNLTD19.5	19.5			4.0		
GNLTD20.0	20.0			4.1		

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
◎	◎	◎	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used 一: 不推荐 Not recommended



工具材料

直径公差


先端角

螺旋角

直径范围

- 本钻头是适用于普通钢、不锈钢、铝的长钻头。
- 切屑排出性良好，适合用于深位置开孔。

This is general cobalt long drill and is suitable for non-step drilling of deep holes.

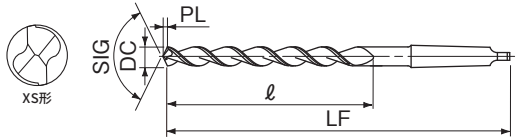

新商品

LIST 6650

订货方式 NLTD 直径 × 全长

仅限直径
5.0~6.8的库存品

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
5.0	200	100	1.0	1	□
5.0	250	150	1.1		
5.5	200	100			
5.5	250	150	1.2		
6.0	200	100			
6.0	250	150	1.3		
6.0	300	200			
6.2	300				
6.5	200	100	1.4		
6.5	250	150			
6.5	300	200	1.6		
6.7	300				
6.8	300		1.7		
7.0	200	100			
7.0	250	150	1.8		
7.0	300	200			
7.5	200	100	1.9		
7.5	250	150			
7.5	300	200	2.0		
8.0	200	100			
8.0	250	150	2.1		
8.0	300	200			
8.5	200	100	2.2		
8.5	250	150			
8.5	300	200	2.3		
9.0	200	100			
9.0	250	150	2.4		
9.0	300	200			
9.5	200	100	2.5		
9.5	250	150			
9.5	300	200	2.6		
10.0	200	100			
10.0	250	150	2.7		
10.0	300	200			
10.0	350	250	2.8		
10.5	250	150			
10.5	300	200	2.9		
10.5	350	250			
11.0	250	150	3.0		
11.0	300	200			
11.0	350	250	3.1		
11.5	250	150			
11.5	300	200	3.2		
11.5	350	250			
12.0	250	150	3.3		
12.0	300	200			
12.0	350	250	3.4		
12.5	250	150			
12.5	300	200	3.5		
12.5	350	250			
13.0	250	150	3.6		
13.0	300	200			
13.0	350	250	3.7		
13.5	250	150			
13.5	300	200	3.8		
13.5	350	250			
14.0	250	150	3.9		
14.0	300	200			
14.0	350	250	4.0		
14.0	400	300			

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
14.0	500	400	2.9	1	□
14.2	300	200		3.0	
14.3	300				
14.5	300				
14.5	375				
14.5	400				
14.5	500				
14.7	300	200	3.1		
14.8	300				
15.0	300				
15.0	375	250	3.2		
15.0	400	300			
15.0	500	400			
15.2	300	200	3.3		
15.5	300	250			
15.5	375	250			
15.5	400	300	3.4		
15.5	500	400			
15.7	300	200		3.5	
15.8	300				
16.0	300				
16.0	375	250	3.6		
16.0	400	300			
16.0	500	400			
16.5	300	200	3.7		
16.5	375	250			
16.5	400	300			
16.5	500	400	3.8		
17.0	300	200			
17.0	375	250			
17.0	400	300	3.9		
17.0	500	400			
17.5	300	200		4.0	
17.5	375	250			
17.5	400	300			
17.5	500	400	4.1		
18.0	300	200			
18.0	375	250			
18.0	400	300	4.2		
18.0	500	400			
18.5	300	200		4.3	
18.5	375	250			
18.5	400	300			
18.5	500	400	4.4		
19.0	300	200			
19.0	375	250			
19.0	400	300	4.5		
19.0	500	400			
19.5	300	200		4.6	
19.5	375	250			
19.5	400	300			
19.5	500	400	4.7		
20.0	300	200			
20.0	375	250			
20.0	400	300	4.8		
20.0	500	400			
20.5	375	250		4.9	
20.5	400	300			
20.5	500	400			
21.0	300	200	4.3		

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	库存 Stock
21.0	375	250	4.3	2	□
21.0	400	300			
21.0	500	400			
21.5	375	250	4.5		
21.5	400	300			
21.5	500	400			
22.0	300	200	4.6		
22.0	375	250			
22.0	400	300			
22.0	500	400	4.7		
22.5	375	250			
22.5	400	300			
22.5	500	400			
23.0	300	200	4.8		
23.0	375	250			
23.0	400	300			
23.0	500	400	4.9		
23.5	400	275			
23.5	500	375			
24.0	400	275	5.0		
24.0	500	375			
24.5	400	275	5.1		
24.5	500	375			
25.0	400	275	5.2		
25.0	500	375			
25.5	400	275	5.3		
25.5	500	375			
26.0	400	275	5.4		
26.0	500	375			
26.5	400	275	5.5		
26.5	500	375			
27.0	400	275	5.6		
27.0	500	375			
27.5	400	275	5.7		
27.5	500	375			
28.0	400	275	5.8		
28.0	500	375			
28.5	400	275	5.9		
28.5	500	375			
29.0	400	275	6.0		
29.0	500	375			
29.5	400	275	6.1		
29.5	500	375			
30.0	400	275	6.2		
30.0	500	375			
30.5	400	275	6.3		
30.5	500	375			
31.0	400	275	6.4		
31.0	500	375			
31.5	400	275	6.5		
31.5	500	375			
32.0	400	275	6.6		
32.0	500	375			
33.0	500	350	6.8	4	
34.0	500		7.0		
35.0	500		7.2		
36.0	500		7.5		
37.0	500		7.7		
38.0	500		7.9		
39.0	500		8.1		
40.0	500		8.3		

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 本钻头是适用于普通钢、不锈钢、铝的泛用涂层油孔钻。
- 适合用于深孔加工。

This is general coated taper shank drills with oil-hole.

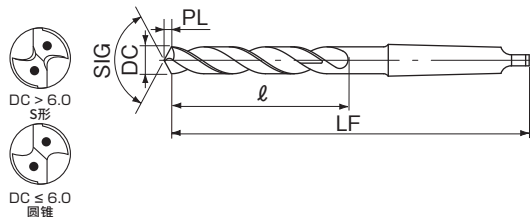

订货方式 GTD0H 直径 × 全长

仅限直径
5.0~9.5的库存品

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	给油方式 Coolant Supply	库存 Stock
5.0	250	150	1.5	2		
5.5	250		1.7			
6.0	250		1.8			
6.5	250		2.0			
7.0	250		2.1			
7.5	250		2.3			
8.0	250		2.4			
8.5	250		2.6			
9.0	250		2.7			
9.5	250		2.9			
10.0	250		3.0			
10.5	250		3.2			
11.0	250		3.3			
11.5	250		3.5			
12.0	250		3.6			
12.5	250		3.8			
13.0	250	200	3.9	2	2・3	□
13.5	250		4.1			
14.0	250	200	4.2			
14.5	300		4.4			
15.0	250	150	4.5			
15.0	300	200	4.7			
15.5	300		4.7			
16.0	250	150	4.8			
16.0	300	200	5.0			
16.5	300		5.1			
17.0	250	150	5.3			
17.0	300	200	5.3			
17.5	300		5.3			
18.0	250	150	5.4			
18.0	300	200	5.6			
18.5	300		5.7			
19.0	300		5.7			
19.5	300		5.9			
20.0	300		6.0			
20.5	300		6.2			
21.0	300		6.3			
21.5	300		6.5			
22.0	300	270	6.6	3		
22.5	300		6.8			
23.0	300		6.9			
23.5	400		7.1			
24.0	400		7.2			
24.5	400		7.4			
25.0	400		7.5			
25.5	400		7.7			
26.0	400		7.8			
26.5	400		8.0			
27.0	400		8.1			
27.5	400		8.3			
28.0	400	280	8.4	4		
28.5	400		8.6			
29.0	400		8.7			
29.5	400		8.9			
30.0	400		9.0			
30.5	400		9.2			
31.0	400		9.3			
31.5	400		9.5			
32.0	400	280	9.6			
32.5	450		9.8			

单位 (Unit) : mm


直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	给油方式 Coolant Supply	库存 Stock
33.0	450	280	9.9	4	2・3	□
33.5	450		10.1			
34.0	450		10.2			
34.5	450		10.4			
35.0	450		10.5			
35.5	450		10.7			
36.0	450		10.8			
36.5	450		11.0			
37.0	450		11.1			
37.5	450		11.3			
38.0	450		11.4			
38.5	450		11.6			
39.0	450		11.7			
39.5	450		11.9			
40.0	450		12.0			
40.5	450		12.2			
41.0	450		12.3			
41.5	450	280	12.5	4	2・3	□
42.0	450		12.6			
42.5	450		12.8			
43.0	450		12.9			
43.5	450		13.1			
44.0	450		13.2			
44.5	450		13.4			
45.0	450		13.5			
45.5	450		13.7			
46.0	450		13.8			
46.5	450		14.0			
47.0	450		14.1			
47.5	450		14.3			
48.0	450		14.4			
48.5	450		14.6			
49.0	450		14.7			
49.5	450		14.9			
50.0	450		15.0			

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30~40 HRC	40~50 HRC	50~65 HRC
◎	◎	◎	◎	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used 一: 不推荐 Not recommended

●本钻头是用途较广的泛用涂层油孔钻。

This is general cobalt HSS drills with oil-hole.

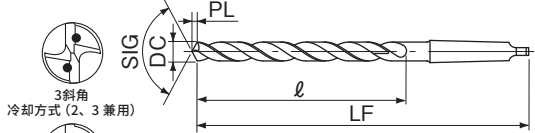

冷却方式 (1、2、3 兼用)

订货方式 COTDOH 直径 × 冷却方式

冷却方式 (2、3 兼用)

冷却方式 (1、2、3 兼用)

仅限直径
5.0~10.0的库存品

单位 (Unit) : mm

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
5.0	90	200	1.5	2	
5.5			1.7		
6.0			1.8		
6.5			2.0		
7.0			2.1		
7.5			2.3		
8.0			2.4		
8.5			2.6		
9.0			2.7		
9.5			2.9		
10.0	120	230	3.0	2	
10.5			3.2		
11.0			3.3		
11.5			3.5		
12.0			3.6		
12.5			3.8		
13.0			3.9		
13.5			4.1		
14.0			4.2		
14.5			4.4		
15.0	150	270	4.5	2	
15.5			4.7		
16.0			4.8		
16.5			5.0		
17.0			5.1		
17.5			5.3		
18.0			5.4		
18.5			5.6		
19.0			5.7		
19.5			5.9		
20.0	170	300	6.0	3	
20.5			6.2		
21.0			6.3		
21.5			6.5		
22.0			6.6		
22.5			6.8		
23.0			6.9		
23.5			7.1		
24.0			7.2		
24.5			7.4		
25.0	190	330	7.5	3	
25.5			7.7		
26.0			7.8		
26.5			8.0		
27.0			8.1		
27.5			8.3		
28.0			8.4		
28.5			8.6		
29.0			8.7		
29.5			8.9		
30.0	200	370	9.0	4	
30.5			9.2		
31.0			9.3		
31.5			9.5		
32.0			9.6		

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
10.0	160	275	3.0	1	
10.5			3.2		
11.0			3.3		
11.5			3.5		
12.0			3.6		
12.5			3.8		
13.0			3.9		
13.5			4.1		
14.0			4.2		
14.5			4.4		
15.0	175	305	4.5	2	
15.5			4.7		
16.0			4.8		
16.5			5.0		
17.0			5.1		
17.5			5.3		
18.0			5.4		
18.5			5.6		
19.0			5.7		
19.5			5.9		
20.0	200	335	6.0	2	
20.5			6.2		
21.0			6.3		
21.5			6.5		
22.0			6.6		
22.5			6.8		
23.0			6.9		
23.5			7.1		
24.0			7.2		
24.5			7.4		
25.0	225	380	7.5	3	
25.5			7.7		
26.0			7.8		
26.5			8.0		

直径 DC	槽长 ℓ	全长 LF	先端 PL	柄 MT No.	库存 Stock
27.0	225	380	8.1	3	
27.5			8.3		
28.0			8.4		
28.5			8.6		
29.0			8.7		
29.5			8.9		
30.0			9.0		
30.5			9.2		
31.0			9.3		
31.5			9.5		
32.0	250	405	9.6	3	
33.0			9.9		
34.0			10.2		
35.0			10.5		
36.0			10.8		
37.0			11.1		
38.0			11.4		
39.0			11.7		
40.0			12.0		
41.0			12.3		
42.0	325	505	12.6	4	
43.0			12.9		
44.0			13.2		
45.0			13.5		
46.0			13.8		
47.0			14.1		
48.0			14.4		
49.0			14.7		
50.0			15.0		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65 HRC
○	○	○	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

- 本钻头是适用于普通钢、不锈钢、铝的泛用涂层油孔钻。
- 适合用于深孔加工。

This is general coated taper shank long drills with oil-hole, and has rich variation of flute.



订货方式 GLTDOH 直径 × 全长

仅限直径
5.0~10.0的库存品

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	冷却方式 Coolant Supply	库存 Stock
5.0	300	200	1.5	2	2・3	□
5.0	350	230				
5.0	400	280				
5.0	450	300	1.7			
5.0	500	350				
5.5	300	200				
5.5	350	230	1.8			
5.5	400	280				
6.0	300	200				
6.0	350	230	2.0			
6.0	400	280				
6.0	450	300				
6.0	500	350	2.1			
6.5	300	200				
6.5	350	230				
6.5	400	280	2.3			
7.0	300	200				
7.0	350	230				
7.0	400	280	2.4			
7.0	450	300				
7.0	500	350				
7.5	300	200	2.6			
7.5	350	230				
7.5	400	280				
8.0	300	200	2.7			
8.0	350	230				
8.0	400	280				
8.0	450	300	2.9			
8.0	500	350				
8.0	600	400				
8.5	300	200	3.0			
8.5	350	230				
8.5	400	280				
9.0	300	200	3.2			
9.0	350	230				
9.0	400	280				
9.0	450	300	3.3			
9.0	500	350				
9.0	600	400				
9.0	800	600	3.5			
9.5	300	200				
9.5	350	230				
9.5	400	280	3.6			
10.0	300	200				
10.0	350	230				

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	冷却方式 Coolant Supply	库存 Stock		
12.0	400	280	3.6	2	2・3	□		
12.0	450	300						
12.0	500	350						
12.0	600	400	3.8					
12.0	800	600						
12.5	300	200						
12.5	350	230						
12.5	400	280						
12.5	450	300						
12.5	500	350						
12.5	600	400	3.9					
13.0	300	200						
13.0	350	230						
13.0	400	280						
13.0	450	300						
13.0	500	350						
13.0	600	400	4.1					
13.0	800	600						
13.5	300	200						
13.5	350	230						
13.5	400	280						
13.5	450	300						
13.5	500	350						
13.5	600	400	4.2					
14.0	300	200						
14.0	350	230						
14.0	400	280						
14.0	450	300						
14.0	500	350						
14.0	600	400	4.4					
14.0	800	600						
14.5	350	230						
14.5	400	260						
14.5	500	350						
14.5	600	400						
15.0	350	220	4.5				3	1・2・3
15.0	400	260						
15.0	500	350						
15.0	600	400						
15.0	800	600						
15.5	350	220						
15.5	400	260	4.7					
15.5	500	350						
15.5	600	400						
16.0	350	220						
16.0	400	260	4.8					
16.0	450	300						
16.0	500	350						
16.0	600	400						
16.0	800	600	5.0					
16.5	350	220						
16.5	400	260						
16.5	500	350						
16.5	600	400	5.1					
17.0	350	220						
17.0	400	260						
17.0	450	300						
17.0	500	350						
17.0	600	400						
17.0	800	600	5.3					
17.5	350	220						
17.5	400	260						
17.5	500	350						
17.5	600	400						

颈长的计算方法
 $\ell_1 = LF - LS$

柄 MT No.	柄长 LS
1	65.5
2	80
3	99
4	124
5	156

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	冷却方式 Coolant Supply	库存 Stock
18.0	350	220	5.4	3	1・2・3	□
18.0	400	260				
18.0	450	300				
18.0	500	350				
18.0	600	400				
18.0	800	600				
18.5	350	220	5.6			
18.5	400	260				
18.5	500	350				
18.5	600	400				
19.0	350	220	5.7			
19.0	400	260				
19.0	450	300				
19.0	500	350				
19.0	600	400				
19.0	800	600				
19.5	350	220	5.9			
19.5	400	260				
19.5	500	350				
19.5	600	400				
20.0	350	220	6.0			
20.0	400	260				
20.0	450	300				
20.0	500	350				
20.0	600	400				
20.0	800	600				
20.5	400	260	6.2			
20.5	500	350				
20.5	600	400				
21.0	400	260				
21.0	500	350	6.3			
21.0	600	400				
21.0	800	600				
21.5	400	260				
21.5	500	350	6.5			
21.5	600	400				
22.0	400	260				
22.0	500	350				
22.0	600	400	6.6			
22.0	800	600				
22.5	400	260				
22.5	500	350				
22.5	600	400	6.8			
22.5	800	600				
23.0	400	260				
23.0	500	350				
23.0	600	400	6.9			
23.0	800	600				
23.5	500	350				
23.5	600	400				
24.0	500	340	7.1			
24.0	600	400				
24.0	800	600				
24.5	500	340				
24.5	600	440	7.2			
25.0	500	340				
25.0	600	440				
25.0	800	600				
25.5	500	340	7.4			
25.5	600	440				
26.0	500	340				
26.0	600	440				
26.0	800	600	7.5			
26.5	500	340				
26.5	600	440				
26.0	500	340				
26.0	600	440	7.7			
26.0	800	600				
26.5	500	340				
26.5	600	440				
26.0	500	340	7.8			
26.0	600	440				
26.0	800	600				
26.5	500	340				
26.5	600	440	8.0			
26.5	500	340				
26.5	600	440				
26.5	600	440				

一般 结构用钢	碳钢	合金钢 调质钢	模具钢 预硬钢	高硬度钢	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	○	○	×	×
不锈钢		钛合金 耐热合金	铸铁	铝合金	铜合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
○	○	○	○	○	○

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used 一:不推荐 Not recommended

单位 (Unit) : mm

直径 DC	全长 LF	槽长 ℓ	先端 PL	柄 MT No.	冷却方式 Coolant Supply	库存 Stock
27.0	500	340	8.1	4	1・2・3	□
27.0	600	440				
27.0	800	600				
27.5	500	340	8.3			
27.5	600	440				
28.0	500	340				
28.0	600	440	8.4			
28.0	800	600				
28.5	500	340				
28.5	600	440	8.6			
29.0	500	340				
29.0	600	440				
29.0	800	600	8.7			
29.5	500	340				
29.5	600	440				
30.0	500	340	8.9			
30.0	600	440				
30.0	800	600				
30.5	500	340	9.0			
30.5	600	440				
31.0	500	340				
31.0	600	440	9.2			
31.0	800	600				
31.5	500	340				
31.5	600	440	9.3			
32.0	500	340				
32.0	600	440				
32.0	800	600	9.5			
33.0	500	340				
33.0	600	440				
33.0	800	600	9.6			
34.0	500	340				
34.0	600	440				
34.0	800	600	9.9			
35.0	500	340				
35.0	600	440				
35.0	800	600	10.2			
36.0	500	340				
36.0	600	440				
36.0	800	600	10.5			
37.0	500	340				
37.0	600	440				
37.0	800	600	10.8			
38.0	500	340				
38.0	600	440				
38.0	800	600	11.1			
39.0	500	340				
39.0	600	440				
39.0	800	600	11.4			
40.0	500	340				
40.0	600	440				
40.0	800	600	11.7			
41.0	500	340				
41.0	600	440				
41.0	800	600	12.0			
42.0	500	340				
42.0	600	440				
42.0	800	600	12.3			
43.0	500	340				
43.0	600	440				
43.0	800	600	12.6			
44.0	500	340				
44.0	600	440				
44.0	800	600	12.9			
45.0	500	340				
45.0	600	440				
45.0	800	600	13.2			
46.0	500	340				
46.0	600	440				
46.0	800	600	13.5			
47.0	500	340				
47.0	600	440				
47.0	800	600	13.8			
48.0	500	340				
48.0	600	440				
48.0	800	600	14.1			
49.0	500	340				
49.0	600	440				
49.0	800	600	14.4			
50.0	500	340				
50.0	600	440				
50.0	800	600	14.7			
50.0	500	340				
50.0	600	440				
50.0	800	600	15.0			
50.0	500	340				
50.0	600	440				

高速钢钻头的基准切削条件

Standard Cutting Condition for HSS Drills

SGESS
SGOH7D
SGOH

SG-ESS 钻头 SG-ESS Drills

SG 直柄油孔钻 7D SG Oil-Hole Straight Shank Drills (7D)

SG-FAX 油孔钻 SG-FAX Oil-Hole Drills

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金		耐热·耐腐蚀合金 钛合金 镍铬铁合金	
	SS400 S50C Structural Steel Carbon Steel ~200HB		SCM440 NAK Alloy Steel Heat Treated Steel 20~30HRC		SKD61 NAK HPM Mold Steel Pre-Hardened Steel 30~40HRC		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy		Corrosion and Heat Resistant Alloy Titanium Alloy Inconel 30~40HRC	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
0.5	16000	240	13000	150	9500	80	5100	50	20000	300	23000	300	2500	18
1.0	9500	250	8000	190	6400	140	3500	65	12000	400	15000	500	1600	25
2.0	5700	360	4600	240	3200	160	1900	80	6300	490	9700	760	800	27
3.0	4200	460	3400	320	2100	170	1300	85	4700	640	7200	980	530	29
5.0	2500	430	2000	290	1250	165	760	80	2800	600	4300	920	320	28
8.0	1600	370	1300	250	800	150	480	75	1800	530	2700	790	200	26
10.0	1300	340	1000	230	650	140	380	73	1400	460	2200	730	160	26
12.0	1100	310	850	210	530	130	320	70	1200	430	1800	670	130	25
16.0	800	290	640	200	400	120	240	63	880	390	1400	610	100	23
20.0	640	260	510	180	320	110	190	57	700	350	1100	550	80	21
25.0	510	240	410	160	250	95	150	50	560	330	870	510	64	19
32.0	400	180	320	120	200	70	120	40	440	250	680	380	50	16

B-8, B-92, B-94 ◀尺寸表 Stocked Sized

SGESR
SGES
SGSS
SGSD
SGOH9D
SGTDK

SG-ESR 钻头 SG-ESR Drills

SG-ES 钻头 SG-ES Drills

SG 短钻头 SG Short Drills

SG 直柄钻头 SG Straight Shank Drills

SG 直柄油孔钻 9D SG Oil-Hole Straight Shank Drills (9D)

SG-FAX 锥柄钻头 SG-FAX Taper Shank Drills

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢 ⁽¹¹⁾		铸铁		铝合金 铜合金		耐热·耐腐蚀合金 钛合金 镍铬铁合金	
	SS400 S50C Structural Steel Carbon Steel ~200HB		SCM440 NAK Alloy Steel Heat Treated Steel 20~30HRC		SKD61 NAK HPM Mold Steel Pre-Hardened Steel 30~40HRC		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy		Corrosion and Heat Resistant Alloy Titanium Alloy Inconel 30~40HRC	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2	5700	300	4600	200	3200	120	1800	55	6300	410	9700	630	800	23
3	4200	380	3400	260	2100	120	1100	60	4700	530	7200	820	580	25
5	2500	360	2000	240	1300	120	760	75	2800	500	4300	770	320	23
8	1600	310	1300	210	800	115	480	80	1800	440	2700	660	200	22
10	1300	280	1000	190	640	110	380	80	1400	390	2200	610	160	22
12	1100	260	850	180	530	105	320	80	1200	360	1800	560	132	21
16	800	240	640	160	400	100	240	70	880	330	1400	500	100	20
20	640	220	510	150	320	90	190	60	700	300	1100	460	80	19
25	510	200	410	140	250	80	150	50	560	270	870	420	64	18
32	400	150	320	110	200	65	120	45	440	210	680	330	50	15

B-14, B-21, B-43, B-44, B-93, B-116 ◀尺寸表 Stocked Sized

SGESS/SGESR/SGOH3D/5D/7D 等 SG 钻头系列

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 油孔钻请采用内部冷却方式。
- 5) 开孔深度超过 3DC 或使用非水溶性切削油剂时，请将转数及进给速度降低 20%。
- 6) 加工不锈钢时，请进行分级加工。
- 7) 开孔深度超过 3DC 时，请采用分级加工方式。但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 8) 分级进给时请返回到孔的上部。
- 9) 请将分级量的大致标准设定为 0.5~1DC。小直径时，为 0.2~0.5DC 左右。
- 10) 请使用筒夹、铣夹。
- 11) **SGES, SGSD** 不适用于奥氏体不锈钢 (SUS304 等) 的加工。另外，一般结构用钢 (SS400) 或低碳钢 (S15C 等) 时，请仅将转数降低 20%。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) Oil-Hole drill, use on internal coolant.
- 5) Reduce RPM and feed speed by 20% for hole deeper than 3 × DC or when using non-water soluble cutting fluid.
- 6) When for Stainless Steel drilling, add step feed.
- 7) When for hole depth more than 3 × DC deep, add step feeding. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 8) In step feed, return to the entrance hole.
- 9) Step feed interval is about 0.5~1 × DC. In small diameter, about 0.2~0.5 × DC.
- 10) Use a collet chuck, milling chuck.
- 11) SGES and SGSD is not suitable for Austenitic Stainless Steel (SUS304 and others). Also, for Structural Steel (SS400) and Low-Carbon Steel (S15C), reduce only the RPM.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

SGEZ | SG 平头钻 SG FLAT Drill


被削材 Work Material	一般结构用钢 碳钢 灰口铸铁		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金		耐热・耐腐蚀合金 钛合金 铬镍铁合金	
	SS400 S50C Structural Steel Carbon Steel Cast Iron		SCM440 NAK Alloy Steel Heat Treated Steel		SKD61 NAK HPM Mold Steel Pre-Hardened Steel		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy		Corrosion and Heat Resistant Alloy Titanium Alloy Inconel	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC									
16	500	80	400	65	300	38	200	32	500	100	600	100	100	13
20	400	80	320	65	240	38	160	32	400	100	480	100	80	13
24	330	80	265	65	200	38	130	32	330	100	400	100	70	13
28	280	70	230	55	170	33	110	28	280	80	340	90	60	11
32	250	70	200	55	150	33	100	28	250	80	300	90	50	11
36	220	65	175	45	130	30	90	26	220	80	260	90	40	10
40	200	60	160	45	120	30	80	24	200	70	240	80	40	10
44	180	50	145	40	110	25	70	20	180	60	220	75	40	8
50	160	50	125	35	95	25	60	18	160	50	190	65	30	7

SGEZ

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
如果使用无刚性的机械, 请预先进行开孔。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 本切削条件表适用于开孔深度为 1DC 以下的加工。
- 5) 加工时可能出现切屑飞溅的情况, 因此请戴上遮罩, 防止飞溅。
切屑变长时, 请通过分级加工等将切屑切割为细小的碎片。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
In the case of machines does not have stiffness, please pre-drilling.
- 2) For drilling with water soluble cutting fluid.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) For drilling depth of 1 × DC or less.
- 5) When the chip grow, add step feed.

切削深度
Depth of cut



B-23 ◀ ▶ 尺寸表 Stocked Sized

SGOH3D | SG 直柄油孔钻 3D SG Oil-Hole Straight Shank Drills (3D)

SGOH5D | SG 直柄油孔钻 5D SG Oil-Hole Straight Shank Drills (5D)

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金		耐热・耐腐蚀合金 钛合金 铬镍铁合金	
	SS400 S50C Structural Steel Carbon Steel		SCM440 NAK Alloy Steel Heat Treated Steel		SKD61 NAK HPM Mold Steel Pre-Hardened Steel		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy		Corrosion and Heat Resistant Alloy Titanium Alloy Inconel	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC								30 ~ 40HRC	
5	2500	470	2000	320	1250	180	760	90	2800	660	4300	1010	320	32
8	1600	410	1300	280	800	165	480	85	1800	580	2700	870	200	30
10	1300	370	1000	250	640	155	380	80	1400	510	2200	800	160	29
12	1100	350	850	240	530	145	320	75	1200	480	1800	730	130	28
16	800	320	640	210	400	130	240	68	880	430	1400	670	100	26
20	640	290	510	190	320	115	190	62	700	390	1100	600	80	24
25	510	250	410	170	260	100	150	53	560	340	870	540	64	21
32	400	210	320	140	200	80	120	45	440	280	680	440	50	18

B-90, B-91 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套裝商品
其它

精密工具

技术资料
索引

高速钢钻头的基准切削条件

Standard Cutting Condition for HSS Drills

AGESS | AG-ESS 钻头 AG-ESS Drills

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		不锈钢 SUS304 SUS316 Stainless Steel		铸铁 FC250 FCD400 Cast Iron		铝合金 铜合金 A5052 C1100 Aluminum Alloy Copper Alloy	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	12000	320	9000	200	6400	130	3800	60	15000	500	20000	700
2	7200	430	5600	280	3200	150	1900	70	8000	600	12000	960
3	4800	500	3700	330	2100	170	1300	90	5300	640	8000	1000
5	2900	450	2200	310	1300	160	760	80	3200	640	4800	960
8	1800	430	1400	300	800	150	480	80	2000	560	3000	840
10	1400	400	1100	280	640	140	380	78	1600	530	2400	800
12	1200	360	930	260	530	130	320	75	1300	480	2000	720
16	900	310	700	220	400	120	240	70	1000	400	1500	600
20	720	290	560	220	320	110	190	65	800	400	1200	600

B-24 ◀▶ 尺寸表 Stocked Sized

AGES | AG-ES 钻头 AG-ES Drills

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 调质钢 SCM440 NAK Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		不锈钢 SUS304 SUS316 Stainless Steel		铸铁 FC250 FCD400 Cast Iron		铝合金 铜合金 A5052 C1100 Aluminum Alloy Copper Alloy	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2	7200	390	5600	255	3200	115	1900	60	8000	520	12000	800
3	4800	420	3700	280	2100	130	1300	70	5300	560	8000	840
5	2900	400	2200	280	1300	130	760	65	3200	560	4800	840
8	1800	360	1400	255	800	125	480	65	2000	480	3000	720
10	1400	330	1100	235	640	120	380	60	1600	440	2400	660
12	1200	300	930	210	530	110	320	60	1300	400	2000	600
16	900	270	700	190	400	95	240	50	1000	350	1500	520
20	720	240	560	170	320	95	190	50	800	320	1200	480

B-28 ◀▶ 尺寸表 Stocked Sized

AGESSL | AG-ES 钻头 中长型 请参照以下内容。

B-30 ◀▶ 尺寸表 Stocked Sized

AGESS/AGES/AGESSL

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 开孔深度超过 3DC 或使用非水溶性切削油剂时，请将转数及进给速度降低 20%。
- 5) 本切削条件适用于开孔深度为 3DC 以下的加工。
- 6) 开孔深度超过 3DC 时，请采用分级加工方式。
但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 7) **AGESSL** 请在 AGESS 的基础上，将转数降低 25%，进给速度降低 35%。
- 8) 分级进给时请返回到孔的上面。
- 9) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径或 AGESSL 时，为 0.2 ~ 0.5DC 左右。
- 10) 夹紧时，请将钻头的振动控制在 0.02mm 以下。
- 11) 请使用筒夹、铣夹。
- 12) 再研磨后，请降低切削条件后再使用。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) Reduce RPM and feed speed by 20% for hole deeper than 3 × DC or when using non-water soluble cutting fluid.
- 5) Use the table values for drilling depth under 3 × DC.
- 6) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 7) AGESSL reduce the rotation to 75% and feed to 65% for table values of AGESS.
- 8) In step feed, return to the entrance hole.
- 9) Step feed interval is about 0.5 ~ 1 × DC. In small diameter and AGESSL, about 0.2 ~ 0.5 × DC.
- 10) Adjust the drill run out to 0.02mm or less.
- 11) Use a collet chuck, milling chuck.
- 12) After grinding please lower cutting condition.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AGSTD AGSTDLS

AG 定心钻 AG Starting Drills AG 定心钻 长柄型 AG Starting Drills Long Shank

定心 Centering

被削材 Work Material	一般结构用钢 碳钢		合金钢		模具钢 预硬钢 SKD61 NAK HPM		不锈钢 SUS304		铸铁		铝合金 有色金属	
	SS400 S50C Structural Steel Carbon Steel		SCM440 Alloy Steel		Mold Steel Pre-Hardened Steel		Stainless Steel		FC250 Cast Iron		Aluminum Alloy Non-Ferrous Metal	
直径 Drill Dia. (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度
	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)
3	5300	318	3200	192	1600	72	1600	72	5300	318	8000	600
4	4000	320	2400	180	1200	72	1200	72	4000	320	6000	600
5	3200	320	1900	181	960	67	950	67	3200	320	4800	600
6	2700	324	1600	168	800	68	800	68	2700	324	4000	600
8	2000	300	1200	156	600	66	600	66	2000	300	3000	600
10	1600	288	960	134	480	62	480	62	1600	288	2400	600
12	1300	260	800	124	400	60	400	60	1300	260	2000	600
16	1000	240	600	114	300	57	300	57	1000	240	1500	600
20	800	224	480	110	240	55	240	55	800	224	1200	600

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 请向加工点充分供给切削油剂。
- 4) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 5) 请在定心时适用本切削条件。
- 6) 在压延面及黑皮面进行定心时, 请将转速和进给速度降低 20%。
- 7) 请使用筒夹、铣夹。
- 8) 对曲面、倾斜面定心时, 请将进给速度降低 20%。

- 1) Adjust cutting condition according to the situation, such as rigidity of machine, work clamp, and shape of workpiece.
- 2) For drilling with water soluble cutting fluid.
- 3) Apply sufficient cutting fluid to work area.
- 4) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 5) Use these cutting condition for centering work.
- 6) Reduce RPM and feed speed by 20% for centering work on the rolled surfaces or the mill scale surfaces.
- 7) Use collet chuck or milling chuck.
- 8) Reduce feed speed by 20% when centering on curved or angled surfaces.


倒角加工 Chamfering

被削材 Work Material	一般结构用钢 碳钢		合金钢		模具钢 预硬钢 SKD61 NAK HPM		不锈钢 SUS304		铸铁		铝合金 有色金属	
	SS400 S50C Structural Steel Carbon Steel		SCM440 Alloy Steel		Mold Steel Pre-Hardened Steel		Stainless Steel		FC250 Cast Iron		Aluminum Alloy Non-Ferrous Metal	
直径 Drill Dia. (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度
	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)
3	5300	200	3200	100	1600	40	1600	40	5300	450	8000	400
4	4000	200	2400	100	1200	40	1200	40	4000	450	6000	400
5	3200	200	1900	100	960	40	950	40	3200	450	4800	400
6	2600	200	1600	100	800	40	800	40	2700	450	4000	400
8	2000	200	1200	100	600	40	600	40	2000	450	3000	400
10	1600	200	960	100	480	40	480	40	1600	450	2400	400
12	1300	200	800	100	400	40	400	40	1300	450	2000	400
16	1000	200	600	100	300	40	300	40	1000	450	1500	400
20	800	180	480	100	240	35	240	35	800	400	1200	360

- 1) 进行 V 槽加工时, 进给速度请降低到原速度的 1/3 以下。
- 2) 在机械或加工物安装过程中, 无刚性或者发生颤动时, 请按照相同比例, 降低上表中的转速和进给速度。
- 3) AGSTDLS 时, 请将转速降低到 70%, 进给速度降低到 50% 以下。

- 1) Reduce the feed speed to less than 1/3 to cut V grooves.
- 2) Reduce the RPM and the feed speed in the above table at the same rate if chattering occurs because the workpiece is not rigidly mounted to the machine.
- 3) In case of AGSTDLS, reduce the rotation by 30% and reduce the feed to 50%.

倒角加工 Chamfering



B-41, B-42 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢钻头的基准切削条件

Standard Cutting Condition for HSS Drills

AGSUSS
AGSUSR

AG-SUS 短刃型钻头 AG-SUS Drills Short

AG-SUS 钻头 标准型 AG-SUS Drills Regular

被削材 Work Material	奥氏体不锈钢			奥氏体不锈钢		马氏体不锈钢		铁氧体不锈钢		一般结构用钢、低碳钢	
	SUS304 SUS316 Austenitic Stainless Steel			SUS304N Austenitic Stainless Steel		SUS420 SUS440 Martensitic Stainless Steel		SUS405 SUS430 Ferritic Stainless Steel		SS400 S15C Structural Steel Low Carbon Steel	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	4800	100		3800	70	5700	110	6400	130	11000	220
2	2400	110		1900	80	2900	130	3200	140	5600	250
3	1600	120		1300	90	1900	140	2100	160	3700	280
5	960	120		760	80	1100	140	1300	160	2200	280
8	600	120		480	80	720	140	800	160	1400	280
10	480	120		380	80	570	140	640	160	1100	280
12	400	120		320	80	480	140	530	160	930	280
16	300	110		240	80	360	130	400	140	700	250
20	240	100		190	70	290	120	320	130	560	220

AGSUSS/AGSUSR

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 开孔深度超过 3DC 或使用非水溶性切削油剂时，请将转速及进给速度降低 20%。
- 5) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 6) 开孔深度超过 3DC 时，请采用分级加工方式。
但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时，为 0.2 ~ 0.5DC 左右。
- 9) 在压延面及黑皮面进行开孔时，请将切削速度和进给速度设置为 80%。
- 10) 请使用筒夹、铣夹。
- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) Reduce RPM and feed speed by 20% for hole deeper than 3 × DC or when using non-water soluble cutting fluid.
- 5) Use the table values for drilling depth under 3 × DC.
- 6) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please set feed.
- 7) In step feed, return to the entrance hole.
- 8) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 9) When drilling on the rolled surface or the mill scale surface, please set the cutting speed and feed speed to 80%.
- 10) Use a collet chuck, milling chuck.

B-31, B-37 ◀ ▶ 尺寸表 Stacked Sized

AGPSD

AG 强力钻 AG Power Drills

被削材 Work Material	碳钢		合金钢		模具钢 调质钢		铸铁	
	S-C Carbon Steel		SCM SNC Alloy Steel		SKD Mold Steel Heat Treated Steel		FC FCD Cast Iron	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	7200	250	5700	170	4300	90	8600	340
2	4300	300	3400	200	2600	110	5200	420
3	3200	330	2500	230	1900	110	3800	460
5	1900	330	1500	230	1100	110	2300	470
8	1200	340	960	230	720	110	1400	450
10	960	340	760	230	570	110	1100	440
13	730	300	590	210	440	110	880	390

AGPSD

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 使用非水溶性切削油剂时，请将转速和进给速度降低 20%。
- 4) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 5) 开孔深度超过 3DC 时，请将转速及进给速度降低 20%。
- 6) 开孔深度超过 3DC 时，请采用分级加工方式。
但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 7) 分级进给时请返回到孔的上面。
- 8) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时，为 0.2 ~ 0.5DC 左右。
- 9) 请使用筒夹、铣夹。
- 10) 在压延面及黑皮面进行开孔时，请将切削速度和进给速度设置为 80%。
- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Use the table values for drilling depth under 3 × DC.
- 5) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 6) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 7) In step feed, return to the entrance hole.
- 8) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 9) Use a collet chuck, milling chuck.
- 10) When drilling on the rolled surface or the mill scale surface, please set the cutting speed and feed speed to 80%.

B-45 ◀ ▶ 尺寸表 Stacked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

AGPSLSD | AG 强力中长刀钻 AG Power Semi-long Drills

被削材 Work Material	碳钢		合金钢		模具钢 调质钢		铸铁	
	S-C Carbon Steel		SCM SNC Alloy Steel		SKD Mold Steel Heat Treated Steel		FC FCD Cast Iron	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	5700	160	4100	90	3000	40	7500	240
2	3200	180	2400	110	1600	50	7400	280
3	2500	210	1800	130	1200	70	3000	320
5	1800	270	1150	150	830	80	1900	330
6	1500	270	950	150	700	80	1600	330
8	1100	260	720	140	520	80	1200	320
10	900	250	570	140	420	80	950	320
13	680	230	440	130	320	70	700	280

AGPSLSD

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 5) 依被削材及加工条件, 切削的排出性有时会变差。此时, 请进行分级进给。
- 6) 分级进给时请返回到孔的上面。
- 7) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
- 8) 请使用筒夹、铣夹。
- 9) 在压延面及黑皮面进行开孔时, 请将切削速度和进给速度设置为 80%。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 5) A work material and cutting condition to chip removal may be worse. In that case, please add step feeding.
- 6) In step feed, return to the entrance hole.
- 7) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 8) Use a collet chuck, milling chuck.
- 9) When drilling on the rolled surface or the mill scale surface, please set the cutting speed and feed speed to 80%.

B-61 ◀ ▶ 尺寸表 Stocked Sized

AGPLSD | AG 强力长刀钻 AG Power Long Drills

被削材 Work Material	碳钢		合金钢 工具钢		预硬钢 调质钢		铸铁	
	S-C Carbon Steel		SCM440 SKD Alloy Steel Tool Steel		NAK55 HPM1 Pre-Hardened Steel Heat Treated Steel		FC FCD Cast Iron	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	4000	70	2400	40	1600	20	4000	84
2	2400	100	1400	60	1000	30	2400	120
3	2000	140	1200	80	800	40	2000	160
5	1400	180	860	110	570	60	1400	210
6	1300	200	800	120	530	60	1300	230
8	1000	200	600	120	400	60	1000	240
10	800	180	480	110	320	60	800	220
13	610	170	370	100	240	50	610	200

AGPLSD

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 请向加工点及钻头充分供给切削油剂。
- 4) 使用非水溶性切削油剂时, 请将转速和进给速度降低 20%。
- 5) 本切削条件表适用于开孔深度为 20DC 以下的加工。
- 6) 开孔深度超过 20DC 时, 请将转速及进给速度降低 30%。
- 7) 开孔深度超过 17DC 时, 请采用分级加工方式。
但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 8) 分级进给时请返回到孔的上面。
- 9) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
- 10) 请使用筒夹、铣夹。
- 11) 请预先加工导向孔。孔深为 2 ~ 3DC。
- 12) 导向孔加工时, 推荐使用 **SGESS**。请选定和深孔钻相同直径的钻头。

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 4) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 5) Use the table values for drilling depth under 20 × DC.
- 6) When for hole depth more than 20 × DC, reduce the rotation and feed by 30%.
- 7) When for hole depth more than 17 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 8) In step feed, return to the entrance hole.
- 9) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 10) Use a collet chuck, milling chuck.
- 11) Recommend pre-drilling of guide hole. Depth is 2 to 3DC.
- 12) Recommend the SGESS Drill for guide drilling. Select one with the same diameter as the deep hole drill.

B-62 ◀ ▶ 尺寸表 Stocked Sized

新品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢钻头的基准切削条件

Standard Cutting Condition for HSS Drills

GSS
GOH
GTS
GTD
GTDOH

G 涂层 短刀型钻头 G Short Drills
G 涂层 油孔钻 G Oil-Hole Drills
G 涂层 锥柄短钻头 G Taper Shank Short Drills
G 涂层 锥柄油孔钻 G Taper Shank Drills with Oil-Hole

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金	
	SS400 S50C Structural Steel Carbon Steel ~ 200HB		SCM440 NAK Alloy Steel Heat Treated Steel 20 ~ 30HRC		SKD61 NAK HPM Mold Steel Pre-Hardened Steel 30 ~ 40HRC		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	7200	220	5700	150	4300	100	2500	50	7900	310	12000	480
2	4300	270	3400	180	2600	120	1400	57	4700	370	7300	570
3	3200	350	2500	230	1900	160	1050	70	3500	480	5400	740
5	1900	330	1500	220	1200	150	650	70	2100	450	3200	690
8	1200	280	960	190	720	130	400	65	1300	380	2000	590
10	960	250	760	170	570	110	320	60	1100	350	1600	530
12	800	240	640	160	480	110	270	60	880	330	1400	520
16	600	220	480	150	360	97	200	55	660	300	1000	460
20	480	190	380	130	290	88	160	50	530	270	810	410
25	380	160	310	110	230	75	130	40	420	230	650	350
32	300	130	240	90	180	57	100	30	330	170	510	270

B-46, B-96, B-117, B-150 ◀ 尺寸表 Stacked Sized

GSD
GCOSD
GCOSDML
GOHL
GTD
GTTD
GLTDOH

G 涂层 标准钻头 G Standard Drills
G 涂层 含钴直柄钻头 G Straight Shank Cobalt Drills
G 涂层 含钴微型长钻头 G Micro-Long Drills
G 涂层 油孔长钻头 G Oil-Hole Long Drills
G 涂层 锥柄标准钻头 G Taper Shank Standard Drills
G 涂层 铸铁用锥柄钻头 G Taper Shank Drills for Iron Frame
G 涂层 锥柄加长油孔钻 G Taper Shank Long Drills with Oil-Hole

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金	
	SS400 S50C Structural Steel Carbon Steel ~ 200HB		SCM440 NAK Alloy Steel Heat Treated Steel 20 ~ 30HRC		SKD61 NAK HPM Mold Steel Pre-Hardened Steel 30 ~ 40HRC		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	7200	190	5700	130	4300	84	2500	50	7900	260	12000	400
2	4300	220	3400	150	2600	101	1400	57	4700	310	7300	470
3	3200	290	2500	190	1900	130	1050	70	3500	400	5400	610
5	1900	270	1500	180	1200	120	650	64	2100	380	3200	570
8	1200	230	960	160	720	110	400	60	1300	320	2000	490
10	960	210	760	140	570	94	320	58	1100	290	1600	440
12	800	200	640	130	480	89	270	55	880	270	1400	430
16	600	180	480	120	360	81	200	50	660	250	1000	380
20	480	160	380	110	290	74	160	45	530	220	810	340
25	380	150	310	100	230	67	130	38	420	200	650	320
32	300	120	240	80	180	52	100	26	330	160	510	240

B-48, B-49, B-59, B-98, B-119, B-129, B-152 ◀ 尺寸表 Stacked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

SLDR
MCD
COTDOH

侧固柄大直径钻头 Side Lock Straight Shank Drills Larger Shank

MC钻头 MC Drills

含钴锥柄油孔钻 Taper Shank Cobalt Drills with Oil-Hole

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金	
	SS400 S50C Structural Steel Carbon Steel		SCM440 NAK Alloy Steel Heat Treated Steel		SKD61 NAK HPM Mold Steel Pre-Hardened Steel		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	2100	180	1700	120	1300	82	850	50	2300	240	3600	380
5	1300	170	1000	110	760	75	500	45	1400	230	2200	360
8	800	140	640	100	480	65	300	40	900	200	1400	320
10	640	130	510	88	380	58	250	38	700	180	1100	280
12	530	120	420	81	320	55	210	35	580	170	900	260
16	400	110	320	75	240	50	160	32	440	150	680	230
20	320	100	250	66	190	44	130	30	350	140	540	210
25	250	90	200	61	150	41	100	28	280	130	430	190
30	210	81	170	55	130	37	85	25	230	110	360	170
40	160	69	130	48	100	32	65	21	180	100	270	150
50	130	62	100	41	80	29	50	18	140	84	220	130

B-51, B-52, B-151 ◀ ▶ 尺寸表 Stocked Sized

COSD
SD
COSDML
NOS
SNOS
COTD
TD
TTD

含钴直柄钻头 Straight Shank Cobalt Drills

直柄钻头 Straight Shank Drills

含钴微型长钻头 Micro-Long Drills

NOS 钻头 Noss Drills

含钴 NOS 不锈钢用钻头 Cobalt Noss Drills for Stainless Steel

含钴锥柄钻头 Taper Shank Cobalt Drills

锥柄钻头 Taper Shank Drills

铸铁用锥柄钻头 Taper Shank Drills for Iron Frame

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金	
	SS400 S50C Structural Steel Carbon Steel		SCM440 NAK Alloy Steel Heat Treated Steel		SKD61 NAK HPM Mold Steel Pre-Hardened Steel		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	4800	100	3800	65	2900	44	2500	40	5300	130	8100	200
2	2900	120	2300	78	1700	51	1250	40	3200	160	4900	250
3	2100	150	1700	100	1300	68	850	45	2300	200	3600	320
5	1300	140	1000	94	760	63	500	40	1400	190	2200	300
8	800	120	640	82	480	54	300	35	900	170	1400	260
10	640	110	510	74	380	48	250	32	700	150	1100	240
12	530	100	420	68	320	46	210	30	580	140	900	220
16	400	92	320	63	240	41	160	28	440	130	680	200
20	320	83	250	55	190	37	120	25	350	115	540	180
25	250	75	200	51	150	34	100	23	280	100	430	160
30	210	67	170	46	130	31	85	20	230	90	360	140
40	160	58	130	40	100	27	65	18	180	81	270	120
50	130	52	100	34	80	24	50	15	140	70	220	110

B-54, B-55, B-60, B-112, B-114, B-122, B-125, B-129 ◀ ▶ 尺寸表 Stocked Sized

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 4) 开孔深度超过 3DC 时，请将转速及进给速度降低 20%。
- 5) 开孔深度超过 3DC 时，请采用分级进给方式。但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 6) 分级进给时请退回到孔的上面。
- 7) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时，为 0.1 ~ 0.5DC 左右。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) Use the table values for drilling depth under 3 × DC.
- 4) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 5) When for hole depth more than 3 × DC deep, add step feeding. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 6) In step feed, return to the entrance hole.
- 7) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.1 ~ 0.5 × DC.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢钻头的基准切削条件

Standard Cutting Condition for HSS Drills

GLSD
GNLSD
GLD
GLTD
GNLTD

- G 涂层 长钻头 G Non-Step Straight Shank Long Drills
G 涂层 不分段加工长刃型长钻头 G Non-Step Straight Shank Long Drills with Longer Flute
G 涂层 直柄长钻头 G Straight Shank Long Drills
G 涂层 锥柄长钻头 G Taper Shank Long Drills
G 涂层 不分段加工锥柄长钻头 G Non-Step Taper Shank Long Drills

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金	
	SS400 S50C Structural Steel Carbon Steel		SCM440 NAK Alloy Steel Heat Treated Steel		SKD61 NAK HPM Mold Steel Pre-Hardened Steel		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	~200HB		20~30HRC		30~40HRC							
1	3500	65	2200	35	1400	20	1300	16	3500	74	4800	105
2	2100	80	1300	40	880	25	800	21	2100	90	4000	180
3	1800	110	1050	55	750	33	640	26	1800	125	3200	230
5	1300	130	770	69	510	40	450	31	1300	153	2500	320
8	900	130	550	76	360	42	280	30	900	155	2000	370
10	700	130	450	70	290	40	220	28	700	147	1600	350
13	550	120	340	67	220	37	170	27	550	137	1200	330
16	450	110	280	62	180	34	140	24	450	125	1000	300
20	350	95	220	54	140	30	110	21	350	110	800	260
25	280	80	180	45	115	25	90	18	280	95	650	220
32	220	65	140	33	90	20	70	14	220	75	500	170

GLSD/GNLSD/GLD

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 20DC 时，请将转速及进给速度降低 30%。
- 4) 开孔深度超过 10DC (GLD 为超过 3DC 时) 时，请采用分级加工方式。
但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 5) 分级进给时请返回到孔的上部。
- 6) 请将分级量的大致标准设定为 0.5~1DC。小直径时，为 0.2~0.5DC 左右。
- 7) 请预先加工导向孔。孔深为 2~3DC。
- 8) 导向孔加工时，推荐使用 **SGESS**。请选定和深孔钻相同直径的钻头。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) When for hole depth more than 20 × DC, reduce the rotation and feed by 30%.
- 4) When for hole depth more than 10 × DC deep, add step feeding. (GLD more than 3 × DC)
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 5) In step feed, return to the entrance hole.
- 6) Step feed interval is about 0.5~1 × DC. In small diameter, about 0.2~0.5 × DC.
- 7) Recommend pre-drilling of guide hole. Guide hole is depth is 2~3 × DC.
- 8) Recommend the SGESS Drill for guide drilling. Select one with the same diameter as the deep hole drill.

GLTD/GNLTD

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 本切削条件表适用于开孔深度为 3DC 以下的加工。
- 4) 开孔深度超过 3DC 时，请将转速及进给速度降低 20%。
- 5) 开孔深度超过 3DC 时，请采用分级加工方式。
但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 6) 分级进给时请返回到孔的上部。
- 7) 请将分级量的大致标准设定为 0.5~1DC。小直径时，为 0.1~0.5DC 左右。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) Use the table values for drilling depth under 3 × DC.
- 4) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 5) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 6) In step feed, return to the entrance hole.
- 7) Step feed interval is about 0.5~1 × DC. In small diameter, about 0.1~0.5 × DC.

B-65, B-69, B-74, B-130, B-148 ◀ • 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

LSD
COLSD
NLSD
LASD
COLTD
LTD
NLTD

直柄长钻头 Straight Shank Long Drills

含钴直柄长钻头 Straight Shank Cobalt Long Drills

不分段加工长刃型长钻头 Non-Step Straight Shank Long Drills

直柄铝用长钻头 Straight Shank Long Drills for Aluminum

含钴锥柄长钻头 Taper Shank Cobalt Long Drills

锥柄长钻头 Taper Shank Long Drills

不分段加工锥柄长钻头 Non-Step Taper Shank Long Drills

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金	
	SS400 S50C Structural Steel Carbon Steel ~ 200HB		SCM440 NAK Alloy Steel Heat Treated Steel 20 ~ 30HRC		SKD61 NAK HPM Mold Steel Pre-Hardened Steel 30 ~ 40HRC		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	2550	34	1900	23	1400	14	1250	12	2550	40	3200	55
2	1600	48	1100	30	870	19	720	14	1600	54	2900	100
3	1250	60	960	43	640	24	530	18	1270	73	2100	120
5	900	80	650	54	450	31	350	23	900	87	1900	190
8	650	84	480	59	320	33	240	23	640	89	1400	200
10	500	76	380	55	250	32	190	22	510	84	1100	190
13	400	66	290	48	200	29	150	20	390	76	850	170
16	320	58	240	42	160	27	120	18	320	69	700	160
20	250	51	190	38	120	24	95	16	260	61	550	140
25	200	43	150	32	100	20	76	14	200	54	450	120
30	170	38	125	27	85	18	64	12	170	48	370	110
40	130	31	95	22	65	14	48	11	130	41	280	95
50	100	28	75	20	50	13	38	10	100	36	220	85

B-76, B-84, B-86, B-109, B-133, B-134, B-149 ◀ ▶ 尺寸表 Stocked Sized

其他长钻头

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 10DC 时, 请将转速及进给速度降低 20%。深度超过 20DC 时, 请将转速降低 30%, 进给速度降低 40%。
- 4) 请采用分级加工方式。
- 5) 分级进给时请返回到孔的上面。
- 6) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
- 7) 请预先加工导向孔。孔深为 2 ~ 3DC。
- 8) 导向孔加工时, 推荐使用 **SGESS**。请选定和深孔钻相同直径的钻头。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) Reduce RPM and feed speed by 20% for hole deeper than 10 × DC. Reduce RPM by 30% and feed speed by 40% for hole deeper than 20 × DC.
- 4) Add step feeding.
- 5) In step feed, return to the entrance hole.
- 6) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 7) Recommend pre-drilling of guide hole. Guide hole is depth is 2 ~ 3 × DC.
- 8) Recommend the SGESS Drill for guide drilling. Select one with the same diameter as the deep hole drill.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢钻头的基准切削条件

Standard Cutting Condition for HSS Drills

YKS
KSA

YKS 强力钻头 标准型 Parabolic Flute Drills Regular

KSA 强力钻头 铝用标准型 Parabolic Flute Drills for Aluminum Regular

	YKS 强力钻头 标准型								KSA 强力型 铝用标准型钻头			
被削材 Work Material	一般结构用钢 碳钢	合金钢 调质钢	模具钢 预硬钢	不锈钢		铸铁		铝合金 铜合金				
	SS400 S50C Structural Steel Carbon Steel	SCM440 NAK HPM Alloy Steel Heat Treated Steel	SKD61 NAK HPM Mold Steel Pre-Hardened Steel	SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy				
	~ 200HB	20 ~ 30HRC	30 ~ 40HRC									
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		
1	2550	34	1900	23	1400	14	1250	12	2550	40	—	—
2	1600	48	1100	30	870	19	720	14	1600	54	2900	100
3	1250	60	960	43	640	24	530	18	1270	73	2100	120
5	900	80	650	54	450	31	350	23	900	87	1900	190
8	650	84	480	59	320	33	240	23	640	89	1400	200
10	500	76	380	55	250	32	190	22	510	84	1100	190
13	400	66	290	48	200	29	150	20	390	76	850	170

B-58, B-105 ◀尺寸表 Stocked Sized

YKS/KSA

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 10DC 时, 请将转数及进给速度降低 20%。深度超过 20DC 时, 请将转数降低 30%, 进给速度降低 40%。
- 4) 请采用分级加工方式。
- 5) 分级进给时请返回到孔的上面。
- 6) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
- 7) 请预先加工导向孔。孔深为 2 ~ 3DC。
- 8) 导向孔加工时, 推荐使用 **SGESS**。请选定和深孔钻相同直径的钻头。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) Reduce RPM and feed speed by 20% for hole deeper than 10 × DC (DC: diameter). Reduce RPM by 30% and feed speed by 40% for hole deeper than 20 × DC.
- 4) Add step feeding.
- 5) In step feed, return to the entrance hole.
- 6) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 7) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 8) Recommend the SGESS Drill for guide drilling. Select one with the same diameter as the deep hole drill.

YKL
KLA

YKL 强力钻头 长型 Parabolic Flute Drills Long

KLA 强力钻头 铝用长型 Parabolic Flute Drills for Aluminum Long

	YKL 强力钻头										KLA 强力型 铝用长钻头	
被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		铸铁		铝合金 铜合金	
	SS400 S50C Structural Steel Carbon Steel		SCM440 NAK HPM Alloy Steel Heat Treated Steel		SKD61 NAK HPM Mold Steel Pre-Hardened Steel		SUS304 SUS316 Stainless Steel		FC250 FCD400 Cast Iron		A5052 C1100 Aluminum Alloy Copper Alloy	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC							
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	2040	27	1520	18	1120	11	1000	10	2040	32	—	—
2	1280	38	880	24	700	15	580	11	1280	43	2320	80
3	1000	48	770	34	510	19	420	14	1020	58	1680	96
5	720	64	520	43	360	25	280	18	720	70	1520	152
8	520	67	380	47	260	26	190	18	510	71	1120	160
10	400	61	300	44	200	26	150	18	410	67	880	152
13	320	53	230	38	160	23	120	16	310	61	680	136

B-87, B-110 ◀尺寸表 Stocked Sized

YKL/KLA

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 20DC 时, 请将转数降低 15%, 进给速度降低 30%。
- 4) 请采用分级加工方式。
- 5) 分级进给时请返回到孔的上面。
- 6) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
- 7) 请预先加工导向孔。孔深为 2 ~ 3DC。
- 8) 导向孔加工时, 推荐使用 **SGESS**。请选定和深孔钻相同直径的钻头。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) Reduce RPM by 15% and feed speed by 30% for hole deeper than 20 × DC.
- 4) Add step feeding.
- 5) In step feed, return to the entrance hole.
- 6) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 7) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 8) Recommend the SGESS Drill for guide drilling. Select one with the same diameter as the deep hole drill.

精密工具

技术资料
索引

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

KLE | KLE 强力钻头 加长型 Parabolic Flute Drills Extra Long

被削材 Work Material	一般结构用钢 碳钢 SS400 S50C Structural Steel Carbon Steel		合金钢 调质钢 SCM440 NAK HPM Alloy Steel Heat Treated Steel		模具钢 预硬钢 SKD61 NAK HPM Mold Steel Pre-Hardened Steel		不锈钢 SUS304 SUS316 Stainless Steel		铸铁 FC250 FCD400 Cast Iron	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2	1120	29	770	18	610	11	500	8	1120	32
3	880	36	670	26	450	14	370	11	890	44
5	630	48	460	32	320	19	250	14	630	52
8	460	50	340	35	220	20	170	14	450	53
10	350	46	270	33	180	19	130	13	360	50
13	280	40	200	29	140	17	110	12	270	46

B-89 ◀ ▶ 尺寸表 Stocked Sized

KLE

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 请采用分级加工方式。
- 4) 分级进给时请返回到孔的上面。
- 5) 请将分进给的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
- 6) 请预先加工导向孔。孔深为 2 ~ 3DC。
- 7) 导向孔加工时, 推荐使用 **SGESS**。请选定和深孔钻相同直径的钻头。
- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) Add step feeding.
- 4) In step feed, return to the entrance hole.
- 5) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 6) Recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 7) Recommend the SGESS Drill for guide drilling. Select one with the same diameter as the deep hole drill.

DLCHD | DLC 高速钢钻头 DLC-HSS Drills

被削材 Work Material	纯铝 A1070 Aluminum		铝合金 Si Mg-Si 类 A4032 A6061 Aluminum Alloy Si Mg-Si		铝合金 Mg 类 A5052 Aluminum Alloy Mg		铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg		铝合金铸件 AC ADC Aluminum Alloy Casting		铜合金 C1100 Copper Alloy	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
直径 Drill Dia. (mm)												
1	30600	910	20400	670	25500	1020	20400	600	20400	600	15300	450
2	19100	1150	12700	840	15900	1280	12700	750	12700	750	9600	550
3	12700	1150	8500	840	10600	1280	8500	750	8500	750	6400	550
5	7600	1150	5100	840	6400	1280	5100	750	5100	750	3800	550
8	4700	1150	3200	840	4000	1280	3200	750	3200	750	2400	550
10	3800	1150	2500	840	3200	1280	2500	750	2500	750	1900	550
12	3200	1150	2100	840	2700	1280	2100	750	2100	750	1600	550
16	2400	800	1600	600	2000	800	1600	500	1600	500	1200	400
20	1900	500	1300	400	1600	500	1300	350	1300	350	1000	300

B-99 ◀ ▶ 尺寸表 Stocked Sized

DLCPLSD | DLC 强力长刃钻 DLC-Power Long Drills

被削材 Work Material	纯铝 A1070 Aluminum		铝合金 Si Mg-Si 类 A4032 A6061 Aluminum Alloy Si Mg-Si		铝合金 Mg 类 A5052 Aluminum Alloy Mg		铝合金 Zn-Mg 类 A7075 Aluminum Alloy Zn-Mg		铝合金铸件 AC ADC Aluminum Alloy Casting		铜合金 C1100 Copper Alloy	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
直径 Drill Dia. (mm)												
1	31800	690	20700	480	25500	690	20700	450	20700	450	15900	340
2	19100	820	12700	590	15900	860	12700	550	12700	550	9550	410
3	12700	820	8500	590	10600	860	8500	550	8500	550	6400	410
5	7600	820	5100	590	6400	860	5100	550	5100	550	3800	410
8	4800	730	3200	590	4000	860	3200	550	3200	550	2400	410
10	3800	650	2500	510	3200	730	2500	470	2500	470	1900	350
12	3200	500	2100	410	2700	610	2100	390	2100	390	1600	290

B-107 ◀ ▶ 尺寸表 Stocked Sized

DLCHD/DLCPLSD

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 3DC 时, 请采用分级加工方式。但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 4) 分级进给时请返回到孔的上面。
- 5) 请将分进给的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。
- 6) 请使用筒夹、铰夹。
- 7) 使用 DLCPLSD 时, 请预先加工导向孔。孔深为 2 ~ 3DC。
- 8) 导向孔加工时, 推荐使用 **SGESS**。请选定和深孔钻相同直径的钻头。
- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) When for hole depth more than 3 × DC deep, add step feeding. However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 4) In step feed, return to the entrance hole.
- 5) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 6) Use a collet chuck, milling chuck.
- 7) DLCPD recommend pre-drilling of guide hole. Depth is 2 ~ 3 × DC.
- 8) Recommend the SGESS Drill for guide drilling. Select one with the same diameter as the deep hole drill.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

DLCHDSL | DLC 高速钢钻头 中长型 DLC-HSS Drills Semi-long

被削材 Work Material	纯铝 A1070		铝合金 Si Mg-Si 类 A4032 A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy Si Mg-Si		Aluminum Alloy Mg		Aluminum Alloy Zn-Mg		Aluminum Alloy Casting		Copper Alloy	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
1	26600	800	17700	600	22200	890	17700	550	17700	550	13300	400
2	13300	800	8900	600	11100	890	8900	550	8900	550	6700	400
3	8900	800	5900	600	7400	890	5900	550	5900	550	4400	400
5	5400	800	3600	600	4500	890	3600	550	3600	550	2700	400
8	3400	800	2200	600	2800	890	2200	550	2200	550	1600	400
10	2700	800	1800	600	2200	890	1800	550	1800	550	1300	400
12	2200	800	1500	600	1800	890	1500	550	1500	550	1100	400

B-101 尺寸表 Stacked Sized

DLCHDSL

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 3DC 时，请采用分级加工方式。
但是，依被削材及加工条件，切削的排出性有时会变差。此时，即使孔深小于规定的孔深，也请使用分级进给。
- 4) 分级进给时请返回到孔的上面。
- 5) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时，为 0.2 ~ 0.5DC 左右。
- 6) 请使用筒夹、铣夹。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 4) In step feed, return to the entrance hole.
- 5) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.
- 6) Use a collet chuck, milling chuck.

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

RGASD | 涂层直柄铝用钻头 Coated Straight Shank Drills for Aluminum

泛用条件 Conventional Condition

被削材 Work Material	铝合金 Aluminum Alloy		铜合金 Copper Alloy	
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
1	16000	460	12700	420
2	8000	470	6400	430
3	5400	470	4200	420
5	3200	420	2500	380
8	2000	380	1600	350
10	1600	350	1300	330
13	1250	340	980	300

高速条件 High-Speed Condition

被削材 Work Material	铝合金 Aluminum Alloy		铜合金 Copper Alloy	
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
1	24000	690	19000	630
2	12000	700	9500	640
3	8000	700	6400	640
5	4800	630	3800	570
8	3000	560	2400	520
10	2400	530	1900	480
13	1800	480	1500	460

B-103 ◀ ▶ 尺寸表 Stocked Sized

RGALSD | 涂层直柄铝用长钻头 Coated Straight Shank Long Drills for Aluminum

泛用条件 Conventional Condition

被削材 Work Material	铝合金 Aluminum Alloy		铜合金 Copper Alloy	
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
1	16000	360	12700	330
2	8000	370	6400	340
3	5400	370	4200	330
5	3200	330	2500	300
8	2000	300	1600	280
10	1600	280	1300	260
13	1250	270	980	240

高速条件 High-Speed Condition

被削材 Work Material	铝合金 Aluminum Alloy		铜合金 Copper Alloy	
	直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
1	24000	550	19000	500
2	12000	560	9500	510
3	8000	560	6400	510
5	4800	500	3800	450
8	3000	440	2400	410
10	2400	420	1900	380
13	1800	380	1500	360

B-106 ◀ ▶ 尺寸表 Stocked Sized

RGASD/RGALSD

- 1) 本切削条件为使用水溶性切削油剂时的条件。
- 2) 请向加工点及钻头充分供给切削油剂。
- 3) 开孔深度超过 3DC 时, 请将转速及进给速度降低 20%。
- 4) 开孔深度超过 3DC 时, 请采用分级加工方式。
但是, 依被削材及加工条件, 切削的排出性有时会变差。此时, 即使孔深小于规定的孔深, 也请使用分级进给。
- 5) 分级进给时请返回到孔的上面。
- 6) 请将分级量的大致标准设定为 0.5 ~ 1DC。小直径时, 为 0.2 ~ 0.5DC 左右。

- 1) For drilling with water soluble cutting fluid.
- 2) Provide sufficient amount cutting fluid to the cutting point and in the flute.
- 3) When for hole depth more than 3 × DC, reduce the rotation and feed by 20%.
- 4) When for hole depth more than 3 × DC deep, add step feeding.
However, a work material and cutting condition to chip removal may be worse. In that case, even if under predetermined hole depth, please step feed.
- 5) In step feed, return to the entrance hole.
- 6) Step feed interval is about 0.5 ~ 1 × DC. In small diameter, about 0.2 ~ 0.5 × DC.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢钻头的基准切削条件

Standard Cutting Condition for HSS Drills

HCD
SCD
RCD

平头小螺丝 沉孔专用钻头 Machine screw counter bore Drills

盘头小螺丝 沉孔专用钻头 Machine screw counter sink Drills

六角螺栓 沉孔专用钻头 Counter bore Drills for hexagon socket head bolts

新商品

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢		模具钢 预硬钢		不锈钢		不锈钢		不锈钢	
	SS400 S50C Structural Steel Carbon Steel		SCM440 NAK Alloy Steel Heat Treated Steel		SKD61 NAK HPM Mold Steel Pre-Hardened Steel		SUS405 SUS430 Stainless Steel		SUS403 SUS416 Stainless Steel		SUS303 SUS304 Stainless Steel	
	~ 200HB		20 ~ 30HRC		30 ~ 40HRC		~ 180HB		~ 200HB		~ 185HB	
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
M3	1100	55	855	43	565	23	735	44	565	23	415	17
M4	850	51	665	40	435	22	570	40	435	22	320	16
M5	700	63	535	48	350	21	460	41	350	25	260	16
M6	600	78	445	53	290	32	380	46	290	32	215	24
M8	435	70	335	50	220	31	290	46	220	33	165	23
M10	410	103	320	70	210	40	270	59	210	40	155	29
M12	360	101	280	70	185	43	240	55	185	43	135	31
M14	310	99	240	67	160	42	210	55	160	42	120	31
M16	275	85	215	65	140	38	185	57	140	38	105	28
M18	245	86	190	63	125	38	165	58	125	38	95	29

硬质合金钻头

高速钢钻头

丝锥

被削材 Work Material	铸铁		铝合金		铜合金	
	FC250 FCD400 Cast Iron		A5052 Aluminum Alloy		C1100 Copper Alloy	
	~ 180HB					
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
M3	1225	86	1960	255	1470	162
M4	945	104	1515	242	1135	148
M5	765	99	1225	233	920	147
M6	635	102	1020	224	765	138
M8	480	106	770	185	580	128
M10	455	109	730	197	545	131
M12	400	112	635	178	475	119
M14	345	110	555	178	415	116
M16	305	95	490	152	365	99
M18	275	96	440	154	330	99

硬质合金立铣刀

高速立铣刀

切削工具

HCD/SCD/RCD

- 1) 请根据机械刚性及工装夹具、加工部形状等的情况调整切削条件。
- 2) 本切削条件为使用水溶性切削油剂时的条件。
- 3) 使用非水溶性切削油剂时，请将转数和进给速度降低 20%。
- 4) 依被削材及加工条件，切屑的排出性有时会变差。此时，请进行分级进给或者修改切削条件。
- 5) 请将分级量的大致标准设定为 0.5 ~ 1DC。
- 6) 夹紧时，请将钻头的振动控制在 0.02mm 以下。

套装商品
其它

- 1) Adjust cutting condition according to the rigidity of machine or work clamp state.
- 2) For drilling with water soluble cutting fluid.
- 3) In non-water soluble cutting fluid, reduce the rotation and feed by 20%.
- 4) Work material and cutting condition to chip removal may be worse. In that case, add step feed or review the cutting condition.
- 5) Step feed interval is about 0.5 ~ 1 × DC.
- 6) Adjust the drill run out to 0.02mm or less.

B-115 尺寸表 Stacked Sized

精密工具

技术资料
索引

有关切削条件的注意事项

- 1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
- 2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 3. 您使用的加工设备的最高转数未达到基准切削条件时，请以其最高转数进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

- 1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
- 2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 3. When using low speed machines, use the maximum speed and adjust the feed rate.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



丝锥

Taps


商品一览 Product List	C-2
各类被削材选型基准表 Selection Chart According to Work Materials	C-4
尺寸表 Size List	C-6
丝锥的基准切削条件 Standard Cutting Condition for Taps	C-46
NACHI 的提案 钻头 & 丝锥 NACHI Recommends Threaded Holes Cutting Tools Drills and Taps	C-47
精度等级 NACHI Tap Limit System	C-48
钻柄四棱部分尺寸 Square Portion Size of Shank	C-51
凸顶尖长度 Length of External Center	C-51
螺纹底孔直径 Recommended Tap Drill Sizes	C-52

系列 Series	页 Page	商品编码 Code	品名 Product Name	尺寸 Size
SG 系列 SG Series	C-6	SGSP	SG 螺旋槽丝锥 SG Spiral Tap	M2 ~ M24
	C-8	SGSP-1.5P	SG 短切刃螺旋槽丝锥 SG Spiral Tap Short Chamfer	M2 ~ M24
	C-9	SGSPL	SG 长柄螺旋槽丝锥 SG Spiral Tap Long Shank	M3 ~ M24
	C-11	SGSP-T	SG 螺旋丝锥 难削材、钛合金专用 SG Spiral Tap for Difficult-to-Cut Material and Titanium Alloy	M3 ~ M12
	C-12	SGPO	SG 螺尖丝锥 SG Point Tap	M1.4 ~ M24
	C-14	SGPOL	SG 长柄螺尖丝锥 SG Point Tap Long Shank	M3 ~ M24
Hyper Z 系列 Hyper Z Series	C-16	ZSP	Hyper Z 螺旋槽丝锥 Hyper Z Spiral Tap	M3 ~ M24
	C-18	ZSPL	Hyper Z 长柄螺旋槽丝锥 Hyper Z Spiral Tap Long Shank	M3 ~ M24
	C-20	ZSP-LS	Hyper Z 小螺旋角丝锥 Hyper Z Low Spiral Tap	M3 ~ M24
	C-21	ZSP-SUS	Hyper Z 不锈钢用螺旋丝锥 Hyper Z Spiral Tap for Stainless Steel	M3 ~ M24
	C-22	ZSP-T	Hyper Z 钛合金用螺旋槽丝锥 Hyper Z Spiral Tap for Titanium Alloy	M2.5 ~ M16
	C-23	ZSP-T-HL	Hyper Z 钛合金航空航天用螺旋槽丝锥 Hyper Z Spiral Tap for Titanium Alloy for helisert	M2.5 ~ M16
	C-24	ZPO	Hyper Z 螺尖丝锥 Hyper Z Point Tap	M3 ~ M24
	C-26	ZPOL	HyperZ 长柄螺尖丝锥 Hyper Z Point Tap Long Shank	M3 ~ M24
	C-28	ZPO-SUS	HyperZ 不锈钢用螺尖丝锥 Hyper Z Point Tap for Stainless Steel	M3 ~ M24
N 系列 N Series	C-29	NSP	N 螺旋槽丝锥 N Spiral Tap	M2 ~ M36
	C-31	NSPL	N 长柄螺旋槽丝锥 N Spiral Tap Long Shank	M3 ~ M24
	C-32	NPO	N 螺尖丝锥 N Point Tap	M1.4 ~ M36
	C-34	NPOL	N 长柄螺尖丝锥 N Point Tap Long Shank	M3 ~ M24
	C-35	HT	手用丝锥 Hand Tap	M3 ~ M24
ST 系列 ST Series	C-36	STSP	ST 螺旋槽丝锥 ST Spiral Tap	M2 ~ M24
	C-37	STPO	ST 螺尖丝锥 ST Point Tap	M2 ~ M24
EXCEL 系列 EXCEL Series	C-38	ESP	EXCEL 螺旋丝锥 EXCEL Spiral Tap	M4 ~ M12
	C-39	EHT	EXCEL 手用丝锥 EXCEL Hand Tap	M3 ~ M12
挤压丝锥 系列 Forming Tap Series	C-40	ZTF	ZT 挤压丝锥 NEW! ZT Forming Tap	M3 ~ M16
	C-41	TFS	挤压丝锥 -S TAFLET-S	M1.4 ~ M6
	C-42	TFL	挤压丝锥 -L TAFLET-L	M1.4 ~ M10
	C-43	TFL	挤压丝锥 -L 长柄 TAFLET-L Long Shank	M3 ~ M10
	C-44	TFST	钢用 挤压丝锥 TAFLET for Steel	M1.4 ~ M10
	C-45	TFSTL	钢用长柄 挤压丝锥 TAFLET Long Shank for Steel	M3 ~ M10

SG系列

SG series

- 采用高级粉末高速钢和SG涂层, 以长寿命丝锥实现稳定的螺纹加工
- 可用于多种被削材、加工机械, 在多种切削条件下发挥出色性能
- Realized stable cutting screw threads, and have the longest tool life by high grade powder HSS and SG coating
- Superior performance can exert on cutting various materials and machines, and wide range of cutting conditions

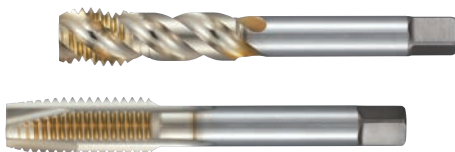

Hyper Z 系列

Hyper Z series

- 在低~中速度领域中, 实现稳定加工和长寿命
- 适合于丝锥加工的形状和材质
- New style innovative taps have stability at a low/middle cutting speed area and longer tool life
- Adapt the best geometry and material for tapping



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

N系列

N series

- 具有性价比的泛用丝锥
- 采用高钒高速钢, 可确保长寿命
- High flexibility screw threads have good cost performance
- By using high vanadium HSS, the tool life is longer than before



ST系列

ST series

- 重视通用性的形状设计
- 适合多种加工设备、被削材, 攻丝稳定波动小
- Optimized design for multipurpose usage
- Not influenced by equipment, stable tapping, less fluctuation of quality



EXCEL系列

EXCEL series

- 适用于铸铁和有色金属
- 可实现高速螺纹加工的长寿命硬质合金丝锥
- Carbide tap is most suitable for Cast Iron and Non-Ferrous Metal
- High speed cutting screw threads and long tool life



挤压丝锥系列

Forming Tap Series

- 不产生切屑, 可实现稳定的加工
- 增强螺纹强度的挤压丝锥
- Stable cutting screw threads because no chips are produced
- Forming taps improves screw strength












各类被削材选型基准表

Selection Chart According to Work Materials

丝锥

Taps

系列 Series	商品编码 Code	品名 Product Name	刊 载 页 数 Page No.	尺寸范围 Stocked Size				母材 Tool Material	表面 处理 Coating	商品照片 Product Photography	
				0	1.4	6	12				
新商品											
SG 系列 SG Series	SGSP	SG 螺旋槽丝锥 SG Spiral Tap	C-6	M2			M24	FAX	SG		
	SGSP-1.5P	SG 短切刃螺旋槽丝锥 SG Spiral Tap Short Chamfer	C-8	M2			M24	FAX	SG		
	SGSPL	SG 长柄螺旋槽丝锥 SG Spiral Tap Long Shank	C-9	M3			M24	FAX	SG		
	SGSP-T	SG 螺旋丝锥 难削材、钛合金专用 SG Spiral Tap for Difficult-to-Cut Material and Titanium Alloy	C-11	M3			M12	FAX	SG		
	SGPO	SG 螺尖丝锥 SG Point Tap	C-12	M1.4			M24	FAX	SG		
	SGPOL	SG 长柄螺尖丝锥 SG Point Tap Long Shank	C-14	M3			M24	FAX	SG		
Hyper Z 系列 Hyper Z Series	ZSP	Hyper Z 螺旋槽丝锥 Hyper Z Spiral Tap	C-16	M3			M24	HSS-E	特殊 Special		
	ZSPL	Hyper Z 长柄螺旋槽丝锥 Hyper Z Spiral Tap Long Shank	C-18	M3			M24	HSS-E	特殊 Special		
	ZSP-LS	Hyper Z 小螺旋角丝锥 Hyper Z Low Spiral Tap	C-20	M3			M24	FAX	特殊 Special		
	ZSP-SUS	Hyper Z 不锈钢用螺旋丝锥 Hyper Z Spiral Tap for Stainless Steel	C-21	M3			M24	HSS-E	特殊 Special		
	ZSP-T	Hyper Z 钛合金用螺旋槽丝锥 Hyper Z Spiral Tap for Titanium Alloy	C-22	M2.5			M16	FAX	特殊 Special		
	ZSP-T-HL	Hyper Z 钛合金航空航天用螺旋槽丝锥 Hyper Z Spiral Tap for Titanium Alloy for helisert	C-23	M2.5			M16	FAX	特殊 Special		
	ZPO	Hyper Z 螺尖丝锥 Hyper Z Point Tap	C-24	M3			M24	HSS-E	特殊 Special		
	ZPOL	HyperZ 长柄螺尖丝锥 Hyper Z Point Tap Long Shank	C-26	M3			M24	HSS-E	特殊 Special		
N 系列 N Series	ZPO-SUS	HyperZ 不锈钢用螺尖丝锥 Hyper Z Point Tap for Stainless Steel	C-28	M3			M24	HSS-E	特殊 Special		
	NSP	N 螺旋槽丝锥 N Spiral Tap	C-29	M2			M36	HSS-E	—		
	NSPL	N 长柄螺旋槽丝锥 N Spiral Tap Long Shank	C-31	M3			M24	HSS-E	—		
	NPO	N 螺尖丝锥 N Point Tap	C-32	M1.4			M36	HSS-E	—		
	NPOL	N 长柄螺尖丝锥 N Point Tap Long Shank	C-34	M3			M24	HSS-E	—		
ST 系列 ST Series	HT	手用丝锥 Hand Tap	C-35	M3			M24	HSS-E	—		
	STSP	ST 螺旋槽丝锥 ST Spiral Tap	C-36	M2			M24	HSS-E	—		
EXCEL 系列 EXCEL Series	STPO	ST 螺尖丝锥 ST Point Tap	C-37	M2			M24	HSS-E	—		
	ESP	EXCEL 螺旋丝锥 EXCEL Spiral Tap	C-38	M4			M12	超硬	TICN		
挤压丝锥系列 TAFLET Series	EHT	EXCEL 手用丝锥 EXCEL Hand Tap	C-39	M3			M12	超硬	TICN		
	ZTF	ZT 挤压丝锥 ZT Forming Tap	C-40	M3			M16	HSS-Co	ZT		
	TFS	挤压丝锥 -S TAFLET-S	C-41	M1.4			M6	HSS-E	—		
	TFL	挤压丝锥 -L TAFLET-L	C-42	M1.4			M10	HSS-E	—		
	TFL	挤压丝锥 -L 长柄 TAFLET-L Long Shank	C-43	M3			M10	HSS-E	—		
	TFST	钢用 挤压丝锥 TAFLET for Steel	C-44	M1.4			M10	HSS-E	—		
精密工具	TFSTL	钢用长柄 挤压丝锥 TAFLET Long Shank for Steel	C-45	M3			M10	HSS-E	—		
技术资料索引											

◎：优选 Excellent ○：适用 Good —：不推荐 Not recommended

	加工形状 Hole Condition						被削材 Work Materials											
	盲孔 Blind Hole			通孔 Through Hole			一般结构用钢 Structural Steel	低碳钢 Low Carbon Steel	中碳钢 Medium Carbon Steel	高碳钢 High Carbon Steel	合金钢 Alloy Steel	高硬度钢 Hardened Steel	不锈钢 Stainless Steel	铸铁 Cast Iron	球墨铸铁 Ductile Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy	钛合金 Titanium Alloy
	< 2D	≥ 2D	Deep Hole	< 2D	≥ 2D	Deep Hole												
							SS400	S15C	S40C	S50C	SCM SCR	30~40HRC	SUS	FC	FCD	Al, AC ADC	Cu	Ti
	◎	○	—	○	○	—	○	○	◎	◎	○	○	○	—	○	○	○	—
	◎	○	—	○	○	—	○	○	◎	◎	○	○	○	—	○	○	○	—
	○	○	◎	○	○	○	○	○	◎	◎	○	○	○	—	—	—	—	◎
	不适用 No Use			◎	○	—	○	○	◎	◎	◎	○	◎	○	○	○	○	—
	不适用 No Use			○	○	◎	○	○	◎	◎	◎	○	○	○	○	○	○	—
	◎	○	—	○	○	—	◎	◎	◎	○	○	—	—	—	○	○	—	—
	○	○	◎	○	○	○	◎	◎	◎	○	○	—	—	—	○	○	—	—
	◎	—	—	○	—	—	—	—	—	○	—	◎	—	○	○	—	—	—
	◎	○	—	○	○	—	—	—	—	○	—	—	◎	—	—	○	—	—
	◎	—	—	○	—	—	—	—	—	—	—	—	—	○	○	○	○	◎
	◎	—	—	○	—	—	—	—	—	—	—	—	—	○	○	○	○	◎
	不适用 No Use			◎	○	—	◎	◎	◎	○	○	—	—	○	○	○	—	—
	不适用 No Use			○	○	◎	◎	◎	◎	○	○	—	—	○	○	○	—	—
	不适用 No Use			◎	○	—	○	○	○	○	—	—	◎	—	—	○	—	—
	◎	○	—	○	○	—	○	○	○	○	○	—	—	—	○	○	○	—
	○	○	◎	○	○	○	○	○	○	○	○	—	—	—	○	○	○	—
	◎	—	—	○	—	—	—	—	—	—	—	—	—	○	○	○	○	◎
	◎	—	—	○	—	—	—	—	—	—	—	—	—	○	○	○	○	◎
	不适用 No Use			◎	○	—	◎	◎	◎	○	○	—	—	○	○	○	—	—
	不适用 No Use			○	○	◎	◎	◎	◎	○	○	—	—	○	○	○	—	—
	不适用 No Use			◎	○	—	○	○	○	○	—	—	◎	—	—	○	—	—
	◎	○	—	○	○	—	○	○	○	○	○	—	—	—	○	○	○	—
	○	○	◎	○	○	—	○	○	○	○	○	—	—	—	○	○	○	—
	◎	◎	—	◎	◎	—	◎	◎	◎	◎	◎	○	○	—	—	◎	—	—
	◎	○	—	◎	○	—	—	—	不适用 No Use							◎	○	—
	◎	◎	—	◎	○	—	—	—	不适用 No Use							◎	○	—
	○	○	◎	○	○	◎	—	—	不适用 No Use							◎	○	—
	◎	○	—	◎	○	—	◎	◎	◎	○	○	—	○	—	—	—	—	—
	○	○	◎	○	○	◎	◎	◎	◎	○	○	—	○	—	—	—	—	—

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●可用于多种被削材、加工机械，在多种切削条件下发挥出色性能。

Superior performance can exert on cutting various materials, machines, and wide range of cutting condition.

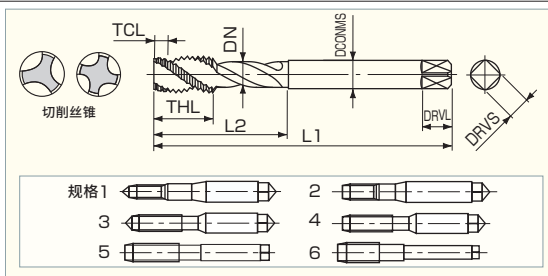

LIST 7946

订货方式 **SGSP** 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
2M0.4R	M2 × 0.4	REG	P1.5	2.5	40	8.0	3.0	15.0	2.1 *	1	●
2M0.4ZR	M2 × 0.4	REG	P1.5	2.5	40	8.0	3.0	15.0	2.1 *	2	●
2M0.25R	M2 × 0.25	REG	P1	2.5	40	8.0	3.0	15.0	2.1 *	1	●
2M0.25ZR	M2 × 0.25	REG	P1	2.5	40	8.0	3.0	15.0	2.1 *	2	●
2.2M0.45R	M2.2 × 0.45	REG	P2	2.5	42	9.5	3.0	15.0	2.3 *	1	●
2.2M0.45ZR	M2.2 × 0.45	REG	P2	2.5	42	9.5	3.0	15.0	2.3 *	2	●
2.2M0.25R	M2.2 × 0.25	REG	P1	2.5	42	9.5	3.0	15.0	2.3 *	1	●
2.2M0.25ZR	M2.2 × 0.25	REG	P1	2.5	42	9.5	3.0	15.0	2.3 *	2	●
2.3M0.4R	M2.3 × 0.4	REG	P1.5	2.5	42	9.5	3.0	15.0	2.4 *	1	●
2.3M0.4ZR	M2.3 × 0.4	REG	P1.5	2.5	42	9.5	3.0	15.0	2.4 *	2	●
2.5M0.45R	M2.5 × 0.45	REG	P2	2.5	44	9.5	3.0	16.0	2.6 *	1	●
2.5M0.45ZR	M2.5 × 0.45	REG	P2	2.5	44	9.5	3.0	16.0	2.6 *	2	●
2.5M0.35R	M2.5 × 0.35	REG	P1.5	2.5	44	9.5	3.0	16.0	2.6 *	1	●
2.5M0.35ZR	M2.5 × 0.35	REG	P1.5	2.5	44	9.5	3.0	16.0	2.6 *	2	●
2.6M0.45R	M2.6 × 0.45	REG	P2	2.5	44	9.5	3.0	16.0	2.7 *	1	●
2.6M0.45ZR	M2.6 × 0.45	REG	P2	2.5	44	9.5	3.0	16.0	2.7 *	2	●
3M0.5R	M3 × 0.5	REG	P2	2.5	46	3.5	3	4.0	18.0	2.35	3
3M0.5R+1	M3 × 0.5	REG+1	P3	2.5	46	3.5	3	4.0	18.0	2.35	4
3M0.5R+2	M3 × 0.5	REG+2	P4	2.5	46	3.5	3	4.0	18.0	2.35	3
3M0.5ZR	M3 × 0.5	REG	P2	2.5	46	3.5	3	4.0	18.0	2.35	4
3M0.35R	M3 × 0.35	REG	P2	2.5	46	3.5	3	4.0	18.0	2.55	3
3M0.35R+1	M3 × 0.35	REG+1	P3	2.5	46	3.5	3	4.0	18.0	2.55	4
3M0.35ZR	M3 × 0.35	REG	P2	2.5	46	3.5	3	4.0	18.0	2.55	3
3.5M0.6R	M3.5 × 0.6	REG	P2	2.5	48	4.2	3	4.0	18.0	2.75	3
3.5M0.35R	M3.5 × 0.35	REG	P2	2.5	48	4.2	3	4.0	18.0	2.95	3
4M0.7R	M4 × 0.7	REG	P3	2.5	52	4.9	3	5.0	20.0	3.15	3
4M0.7R+1	M4 × 0.7	REG+1	P4	2.5	52	4.9	3	5.0	20.0	3.15	4
4M0.7R+2	M4 × 0.7	REG+2	P5	2.5	52	4.9	3	5.0	20.0	3.15	3
4M0.7ZR	M4 × 0.7	REG	P3	2.5	52	4.9	3	5.0	20.0	3.15	4
4M0.5R	M4 × 0.5	REG	P2	2.5	52	4.9	3	5.0	20.0	3.35	3
4M0.5R+1	M4 × 0.5	REG+1	P3	2.5	52	4.9	3	5.0	20.0	3.35	4
4M0.5ZR	M4 × 0.5	REG	P2	2.5	52	4.9	3	5.0	20.0	3.35	3
4.5M0.75R	M4.5 × 0.75	REG	P2	2.5	55	5.3	3	5.0	20.0	3.55	3
4.5M0.5R	M4.5 × 0.5	REG	P2	2.5	55	5.3	3	5.0	20.0	3.85	3
5M0.8R	M5 × 0.8	REG	P3	2.5	60	5.6	3	5.5	22.0	4.05	3
5M0.8R+1	M5 × 0.8	REG+1	P4	2.5	60	5.6	3	5.5	22.0	4.05	4
5M0.8R+2	M5 × 0.8	REG+2	P5	2.5	60	5.6	3	5.5	22.0	4.05	3
5M0.8ZR	M5 × 0.8	REG	P3	2.5	60	5.6	3	5.5	22.0	4.05	4
5M0.5R	M5 × 0.5	REG	P2	2.5	60	5.6	3	5.5	22.0	4.35	3
5M0.5R+1	M5 × 0.5	REG+1	P3	2.5	60	5.6	3	5.5	22.0	4.35	4
5M0.5ZR	M5 × 0.5	REG	P2	2.5	60	5.6	3	5.5	22.0	4.35	3
5.5M0.5R	M5.5 × 0.5	REG	P2	2.5	60	6.3	3	5.5	23.0	4.85	3
6M1R	M6 × 1	REG	P3	2.5	62	7.0	3	6.0	24.0	4.75	3
6M1R+1	M6 × 1	REG+1	P4	2.5	62	7.0	3	6.0	24.0	4.75	4
6M1R+2	M6 × 1	REG+2	P5	2.5	62	7.0	3	6.0	24.0	4.75	3
6M1ZR	M6 × 1	REG	P3	2.5	62	7.0	3	6.0	24.0	4.75	4
6M0.75R	M6 × 0.75	REG	P2	2.5	62	7.0	3	6.0	24.0	5.05	3
6M0.75R+1	M6 × 0.75	REG+1	P3	2.5	62	7.0	3	6.0	24.0	5.05	4
6M0.75ZR	M6 × 0.75	REG	P2	2.5	62	7.0	3	6.0	24.0	5.05	3
6M0.5R	M6 × 0.5	REG	P2	2.5	62	7.0	3	6.0	24.0	5.35	3
6M0.5R+1	M6 × 0.5	REG+1	P3	2.5	62	7.0	3	6.0	24.0	5.35	4
6M0.5ZR	M6 × 0.5	REG	P2	2.5	62	7.0	3	6.0	24.0	5.35	3
7M1R	M7 × 1	REG	P3	2.5	65	7.0	3	6.2	26.0	5.75	5
7M0.75R	M7 × 0.75	REG	P2	2.5	65	7.0	3	6.2	26.0	6.05	5
8M1.25R	M8 × 1.25	REG	P3	2.5	70	8.8	3	6.2	29.8	6.55	6
8M1.25R+1	M8 × 1.25	REG+1	P4	2.5	70	8.8	3	6.2	29.8	6.55	6
8M1.25R+2	M8 × 1.25	REG+2	P5	2.5	70	8.8	3	6.2	29.8	6.55	6
8M1R	M8 × 1	REG	P3	2.5	70	8.8	3	6.2	29.8	6.75	6
8M1R+1	M8 × 1	REG+1	P4	2.5	70	8.8	3	6.2	29.8	6.75	6
8M0.75R	M8 × 0.75	REG	P3	2.5	70	8.8	3	6.2	29.8	7.05	6
8M0.75R+1	M8 × 0.75	REG+1	P4	2.5	70	8.8	3	6.2	29.8	7.05	6

M6 以下有带凸顶尖和不带凸顶尖（平头型）2 种。不带凸顶尖（平头型）时编号 R 的前面带有“Z”。
Taps of M6 or less have 2 types, which are external center and Flat type. In the case of Flat type (no external center), the code No. has "Z" in front of "R".

* : 螺纹直径 < 颈径。内螺纹加工深度较深时，如插入的长度超过螺纹长度，则会有折断的危险。

* : Thread Size < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
9M1.25R	M9 × 1.25	REG	P3	2.5	72	8.8	3	7.0	29.8	7.55	6	●
9M1R	M9 × 1	REG	P3	2.5	72	8.8	3	7.0	29.8	7.75	6	●
9M0.75R	M9 × 0.75	REG	P3	2.5	72	8.8	3	7.0	29.8	8.05	6	●
10M1.5R	M10 × 1.5	REG	P3	2.5	75	10.5	3	7.0	31.4	8.25	6	●
10M1.5R+1		REG+1	P4									
10M1.5R+2		REG+2	P5									
10M1.25R	M10 × 1.25	REG	P3	2.5	75	10.5	3	7.0	31.4	8.55	6	●
10M1.25R+1		REG+1	P4									
10M1R		REG	P3	2.5	75	10.5	3	7.0	31.4	8.75	6	●
10M1R+1	M10 × 1	REG+1	P4									
10M0.75R		REG	P3	2.5	75	10.5	3	7.0	31.4	9.05	6	●
10M0.75R+1		REG+1	P4									
11M1.5R	M11 × 1.5	REG	P3	2.5	80	10.5	3	8.0	31.4	9.25	6	●
11M1R	M11 × 1	REG	P3	2.5	80	10.5	3	8.0	31.4	9.75	6	●
11M0.75R	M11 × 0.75	REG	P3	2.5	80	10.5	3	8.0	31.4	10.05	6	●
12M1.75R	M12 × 1.75	REG	P4	2.5	82	12.3	3	8.5	36.2	9.95	6	●
12M1.75R+1		REG+1	P5									
12M1.75R+2		REG+2	P6									
12M1.5R	M12 × 1.5	REG	P3	2.5	82	12.3	3	8.5	36.2	10.25	6	●
12M1.5R+1		REG+1	P4									
12M1.25R		REG	P3	2.5	82	12.3	3	8.5	36.2	10.55	6	●
12M1.25R+1	M12 × 1.25	REG+1	P4									
12M1R		REG	P3	2.5	82	12.3	3	8.5	36.2	10.75	6	●
12M1R+1		REG+1	P4									
14M2R	M14 × 2	REG	P4	2.5	88	14.0	3	10.5	42.4	11.65	6	●
14M1.5R	M14 × 1.5	REG	P3	2.5	88	14.0	3	10.5	42.4	12.25	6	●
14M1.25R	M14 × 1.25	REG	P3	2.5	88	14.0	3	10.5	42.4	12.55	6	●
14M1R	M14 × 1	REG	P3	2.5	88	14.0	3	10.5	42.4	12.75	6	●
15M1.5R	M15 × 1.5	REG	P3	2.5	90	10.5	3	10.5	42.4	13.25	6	●
15M1R	M15 × 1	REG	P3	2.5	90	10.5	3	10.5	42.4	13.75	6	●
16M2R	M16 × 2	REG	P4	2.5	95	14.0	3	12.5	44.4	13.65	6	●
16M1.5R	M16 × 1.5	REG	P3	2.5	95	14.0	3	12.5	44.4	14.25	6	●
16M1R	M16 × 1	REG	P3	2.5	95	14.0	3	12.5	44.4	14.75	6	●
17M1.5R	M17 × 1.5	REG	P3	2.5	95	10.5	3	13.0	44.4	15.25	6	●
17M1R	M17 × 1	REG	P3	2.5	95	10.5	3	13.0	44.4	15.75	6	●
18M2.5R	M18 × 2.5	REG	P5	2.5	100	17.5	3	14.0	49.2	15.15	6	●
18M2R	M18 × 2	REG	P4	2.5	100	17.5	3	14.0	49.2	15.65	6	●
18M1.5R	M18 × 1.5	REG	P4	2.5	100	17.5	3	14.0	49.2	16.25	6	●
18M1R	M18 × 1	REG	P3	2.5	100	17.5	3	14.0	49.2	16.75	6	●
20M2.5R	M20 × 2.5	REG	P5	2.5	105	17.5	4	15.0	50.7	17.15	6	●
20M2R	M20 × 2	REG	P4	2.5	105	17.5	4	15.0	50.7	17.65	6	●
20M1.5R	M20 × 1.5	REG	P4	2.5	105	17.5	4	15.0	50.7	18.25	6	●
20M1R	M20 × 1	REG	P3	2.5	105	17.5	4	15.0	50.7	18.75	6	●
22M2.5R	M22 × 2.5	REG	P5	2.5	115	17.5	4	17.0	54.0	19.15	6	●
22M2R	M22 × 2	REG	P4	2.5	115	17.5	4	17.0	54.0	19.65	6	●
22M1.5R	M22 × 1.5	REG	P4	2.5	115	17.5	4	17.0	54.0	20.25	6	●
22M1R	M22 × 1	REG	P3	2.5	115	17.5	4	17.0	54.0	20.75	6	●
24M3R	M24 × 3	REG	P5	2.5	120	21.0	4	19.0	59.0	20.65	6	●
24M2R	M24 × 2	REG	P4	2.5	120	21.0	4	19.0	59.0	21.65	6	●
24M1.5R	M24 × 1.5	REG	P4	2.5	120	21.0	4	19.0	59.0	22.25	6	●
24M1R	M24 × 1	REG	P3	2.5	120	21.0	4	19.0	59.0	22.75	6	●

●刀具几何形状的优化方案，实现长寿命

Optimization shape of chamfer can make tool life longer

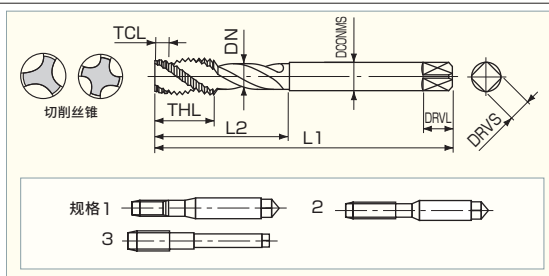

LIST 7954

订货方式 SGSP 编码 × 1.5P

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
2M0.4R	M2 × 0.4	REG	P1.5	1.5	40	8.0	3.0	15.0	2.1 *	1	●
3M0.5R	M3 × 0.5	REG	P2	1.5	46	3.5	3.0	18.0	2.35	2	●
3.5M0.6R	M3.5 × 0.6	REG	P2	1.5	48	4.2	3.0	18.0	2.75	2	●
4M0.7R	M4 × 0.7	REG	P3	1.5	52	4.9	3.0	20.0	3.15	2	●
5M0.8R	M5 × 0.8	REG	P3	1.5	60	5.6	3.0	22.0	4.05	2	●
6M1R	M6 × 1	REG	P3	1.5	62	7.0	3.0	24.0	4.75	2	●
8M1.25R	M8 × 1.25	REG	P3	1.5	70	8.8	3.0	29.8	6.55	3	●
8M1R	M8 × 1	REG	P3	1.5	70	8.8	3.0	29.8	6.75	3	●
10M1.5R	M10 × 1.5	REG	P3	1.5	75	10.5	3.0	31.4	8.25	3	●
10M1.25R	M10 × 1.25	REG	P3	1.5	75	10.5	3.0	31.4	8.55	3	●
10M1R	M10 × 1	REG	P3	1.5	75	10.5	3.0	31.4	8.75	3	●
12M1.75R	M12 × 1.75	REG	P4	1.5	82	12.3	3.0	36.2	9.95	3	●
12M1.5R	M12 × 1.5	REG	P3	1.5	82	12.3	3.0	36.2	10.25	3	●
12M1.25R	M12 × 1.25	REG	P3	1.5	82	12.3	3.0	36.2	10.55	3	●
14M2R	M14 × 2	REG	P4	1.5	88	14.0	3.0	42.4	11.65	3	●
14M1.5R	M14 × 1.5	REG	P3	1.5	88	14.0	3.0	42.4	12.25	3	●
16M2R	M16 × 2	REG	P4	1.5	95	14.0	3.0	44.4	13.65	3	●
16M1.5R	M16 × 1.5	REG	P3	1.5	95	14.0	3.0	44.4	14.25	3	●
18M2.5R	M18 × 2.5	REG	P5	1.5	100	17.5	3.0	49.2	15.15	3	●
18M1.5R	M18 × 1.5	REG	P4	1.5	100	17.5	3.0	49.2	16.25	3	●
20M2.5R	M20 × 2.5	REG	P5	1.5	105	17.5	4.0	50.7	17.15	3	●
20M1.5R	M20 × 1.5	REG	P4	1.5	105	17.5	4.0	50.7	18.25	3	●
22M2.5R	M22 × 2.5	REG	P5	1.5	115	17.5	4.0	54.0	19.15	3	●
22M1.5R	M22 × 1.5	REG	P4	1.5	115	17.5	4.0	54.0	20.25	3	●
24M3R	M24 × 3	REG	P5	1.5	120	21.0	4.0	59.0	20.65	3	●
24M1.5R	M24 × 1.5	REG	P4	1.5	120	21.0	4.0	59.0	22.25	3	●

* : 螺纹直径 < 颈径。内螺纹加工深度较深时，如插入的长度超过螺纹长度，则会有折断的危险。

* : Thread Size < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●当标准尺寸丝锥长度不够时，请使用本丝锥。

This tap is used when a standard SG Spiral Tap is too short.

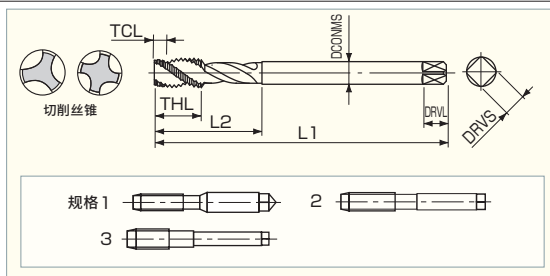

LIST 7948

订货方式 **SGSPL** 编码 × 全长

单位 (Unit) : mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	规格 Type	库存 Stock		
3M0.5R	100	M3 × 0.5	REG	P2	2.5	5.8	3	4.0	13.0	1	●		
3M0.5R+1			REG+1	P3									
3M0.5R+2			REG+2	P4									
3M0.35R	100	M3 × 0.35	REG	P2	2.5	4.9	3	4.0	13.0	1	●		
3M0.35R+1			REG+1	P3									
3.5M0.6R	100	M3.5 × 0.6	REG	P2	2.5	6.5	3	4.0	15.0	1	●		
3.5M0.35R	100	M3.5 × 0.35	REG	P2	2.5	4.9	3	4.0	15.0	1	●		
4M0.7R	100	M4 × 0.7	REG	P3	2.5	7.8	3	5.0	17.0	1	●		
4M0.7R+1			REG+1	P4									
4M0.7R+2			REG+2	P5									
4M0.5R	100	M4 × 0.5	REG	P2	2.5	5.8	3	5.0	17.0	1	●		
4M0.5R+1			REG+1	P3									
4.5M0.75R	100	M4.5 × 0.75	REG	P2	2.5	8.6	3	5.0	19.0	1	●		
4.5M0.5R	100	M4.5 × 0.5	REG	P2	2.5	5.8	3	5.0	19.0	1	●		
5M0.8R	100	M5 × 0.8	REG	P3	2.5	9.5	3	5.5	21.0	1	●		
5M0.8R+1			REG+1	P4									
5M0.8R+2			REG+2	P5									
5M0.5R	100	M5 × 0.5	REG	P2	2.5	5.8	3	5.5	21.0	1	●		
5M0.5R+1			REG+1	P3									
5.5M0.5R	100	M5.5 × 0.5	REG	P2	2.5	5.8	3	5.5	23.0	1	●		
6M1R	100	M6 × 1	REG	P3	2.5	11.5	3	6.0	25.0	1	●		
6M1R	150												
6M1R+1	100		REG+1	P4									
6M1R+1	150												
6M1R+2	100		REG+2	P5									
6M1R+2	150												
6M0.75R	100	M6 × 0.75	REG	P2	2.5	9.0	3	6.0	25.0	1	●		
6M0.75R	150												
6M0.75R+1	100		REG+1	P3									
6M0.75R+1	150												
7M1R	100	M7 × 1	REG	P3	2.5	11.5	3	6.2	25.3	2	●		
7M1R	150												
7M0.75R	100	M7 × 0.75	REG	P2	2.5	9.0	3	6.2	25.3	2	●		
7M0.75R	150												
8M1.25R	100	M8 × 1.25	REG	P3	2.5	15.1	3	6.2	28.0	3	●		
8M1.25R	150												
8M1.25R+1	100		REG+1	P4									
8M1.25R+1	150												
8M1.25R+2	100		REG+2	P5									
8M1.25R+2	150												
8M1R	100	M8 × 1	REG	P3	2.5	11.5	3	6.2	28.0	3	●		
8M1R	150												
8M1R+1	100		REG+1	P4									
8M1R+1	150												
8M0.75R	100	M8 × 0.75	REG	P3	2.5	9.0	3	6.2	28.0	3	●		
8M0.75R	150												
8M0.75R+1	100		REG+1	P4									
8M0.75R+1	150												
9M1.25R	100	M9 × 1.25	REG	P3	2.5	15.1	3	7.0	28.6	3	●		
9M1.25R	150												
9M1R	100	M9 × 1	REG	P3	2.5	11.5	3	7.0	28.6	3	●		
9M1R	150												
9M0.75R	100		REG	P3									
9M0.75R	150	M9 × 0.75	REG	P3	2.5	9.0	3	7.0	28.6	3	●		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

	编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	规格 Type	库存 Stock
新商品	10M1.5R	100	M10 × 1.5	REG	P3	2.5	18.8	3	7.0	31.9	3	●
	10M1.5R	150		REG+1	P4							
	10M1.5R+1	100		REG+2	P5							
	10M1.5R+1	150										
	10M1.5R+2	100										
硬质合金钻头	10M1.5R+2	150	M10 × 1.25	REG	P3	2.5	15.1	3	7.0	31.9	3	●
	10M1.25R	100		REG+1	P4							
	10M1.25R	150										
	10M1.25R+1	100										
	10M1.25R+1	150										
高速钢钻头	10M1R	100	M10 × 1	REG	P3	2.5	11.5	3	7.0	31.9	3	●
	10M1R	150		REG+1	P4							
	10M1R+1	100										
	10M1R+1	150										
	10M0.75R	100	M10 × 0.75	REG	P3	2.5	9.0	3	7.0	31.9	3	●
丝锥	10M0.75R	150		REG+1	P4							
	10M0.75R+1	100										
	10M0.75R+1	150										
	11M1.5R	100	M11 × 1.5	REG	P3	2.5	18.8	3	8.0	32.9	3	●
硬质合金立铣刀	11M1.5R	150										
	11M1R	100		REG	P3	2.5	11.5	3	8.0	32.9	3	●
	11M1R	150		REG+1	P4							
	12M1.75R	100	M12 × 1.75	REG	P4		22.4	3	8.5	35.2	3	●
高速钢立铣刀	12M1.75R	150		REG+1	P5							
	12M1.75R+1	100		REG+2	P6							
	12M1.75R+1	150										
	12M1.75R+2	100										
高速钢立铣刀	12M1.75R+2	150	M12 × 1.5	REG	P3	2.5	19.8	3	8.5	35.2	3	●
	12M1.5R	100		REG+1	P4							
	12M1.5R	150										
	12M1.5R+1	100										
	12M1.5R+1	150										
高速钢立铣刀	12M1.25R	100	M12 × 1.25	REG	P3	2.5	16.1	3	8.5	35.2	3	●
	12M1.25R	150		REG+1	P4							
	12M1.25R+1	100										
	12M1.25R+1	150										
	12M1R	100	M12 × 1	REG	P3	2.5	13.5	3	8.5	35.2	3	●
切削工具	12M1R	150		REG+1	P4							
	12M1R+1	100										
	12M1R+1	150										
	14M2R	150	M14 × 2	REG	P4	2.5	26.0	3	10.5	44.9	3	●
套装商品 其它	14M1.5R	150	M14 × 1.5	REG	P3	2.5	19.8	3	10.5	44.9	3	●
	14M1.25R	150	M14 × 1.25	REG	P3	2.5	16.1	3	10.5	44.9	3	●
	14M1R	150	M14 × 1	REG	P3	2.5	13.5	3	10.5	44.9	3	●
	15M1.5R	150	M15 × 1.5	REG	P3	2.5	19.8	3	10.5	48.2	3	●
	15M1R	150	M15 × 1	REG	P3	2.5	13.5	3	10.5	48.2	3	●
精密工具	16M2R	150	M16 × 2	REG	P4	2.5	26.0	3	12.5	47.4	3	●
	16M2R	200										
	16M1.5R	150		REG	P3							
	16M1R	150		REG	P3							
	17M1.5R	150	M17 × 1.5	REG	P3	2.5	19.8	3	13.0	50.4	3	●
技术资 索引	17M1R	150	M17 × 1	REG	P3	2.5	13.5	3	13.0	50.4	3	●
	18M2.5R	150	M18 × 2.5	REG	P5	2.5	32.5	3	14.0	48.7	3	●
	18M2R	150	M18 × 2	REG	P4	2.5	29.0	3	14.0	48.7	3	●
	18M1.5R	150	M18 × 1.5	REG	P4	2.5	19.8	3	14.0	48.7	3	●
	18M1R	150	M18 × 1	REG	P3	2.5	13.5	3	14.0	48.7	3	●
	20M2.5R	150	M20 × 2.5	REG	P5	2.5	32.5	4	15.0	53.7	3	●
	20M2.5R	200										
	20M2R	150		REG	P4							
	20M1.5R	150		REG	P4							
	20M1R	150		REG	P3							
	22M2.5R	150	M22 × 2.5	REG	P5	2.5	32.5	4	17.0	54.0	3	●
	22M2R	150	M22 × 2	REG	P4	2.5	29.0	4	17.0	54.0	3	●
	22M1.5R	150	M22 × 1.5	REG	P4	2.5	19.8	4	17.0	54.0	3	●
	22M1R	150	M22 × 1	REG	P3	2.5	13.5	4	17.0	54.0	3	●
	24M3R	150	M24 × 3	REG	P5	2.5	39.0	4	19.0	59.0	3	●
	24M3R	200										
	24M2R	150		REG	P4							
	24M1.5R	150		REG	P4							
	24M1R	150		REG	P3							

●难削材、钛合金的盲孔用丝锥。防止切屑的凝结及嵌入，可实现长寿命、稳定的加工。

Excellent taps for blind holes on Difficult-to-Cut Material and Titanium Alloy. Long tool life and stable tapping by less chip welding and jamming.




LIST 7958

订货方式 SGSP-T 编码

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	M3 × 0.5	REG	P3	2.5	46	5.6	3	4.0	20.0	2.35	1
3M0.35R	M3 × 0.35	REG	P2	2.5	46	4.4	3	4.0	20.0	2.55	1
4M0.7R	M4 × 0.7	REG	P3	2.5	52	8.1	3	5.0	22.5	3.15	1
4M0.5R	M4 × 0.5	REG	P3	2.5	52	6.1	3	5.0	22.5	3.35	1
5M0.8R	M5 × 0.8	REG	P3	2.5	60	9.4	3	5.5	26.0	4.05	1
5M0.5R	M5 × 0.5	REG	P3	2.5	60	6.1	3	5.5	26.0	4.35	1
6M1R	M6 × 1	REG	P3	2.5	62	12.0	3	6.0	29.0	4.75	1
6M0.75R	M6 × 0.75	REG	P3	2.5	62	9.2	3	6.0	29.0	5.05	1
6M0.5R	M6 × 0.5	REG	P3	2.5	62	6.1	3	6.0	29.0	5.35	1
8M1.25R	M8 × 1.25	REG	P3	2.5	70	15.4	3	6.2	33.0	6.55	2
8M1R	M8 × 1	REG	P3	2.5	70	12.4	3	6.2	27.0	6.75	2
8M0.75R	M8 × 0.75	REG	P3	2.5	70	9.2	3	6.2	24.5	7.05	2
10M1.5R	M10 × 1.5	REG	P3	2.5	75	18.9	3	7.0	36.5	8.25	2
10M1.25R	M10 × 1.25	REG	P3	2.5	75	15.7	3	7.0	33.0	8.55	2
10M1R	M10 × 1	REG	P3	2.5	75	12.4	3	7.0	27.0	8.75	2
10M0.75R	M10 × 0.75	REG	P3	2.5	75	9.2	3	7.0	24.5	9.05	2
12M1.75R	M12 × 1.75	REG	P4	2.5	82	22.4	3	8.5	41.5	9.95	2
12M1.5R	M12 × 1.5	REG	P3	2.5	82	20.9	3	8.5	40.0	10.25	2
12M1.25R	M12 × 1.25	REG	P3	2.5	82	17.2	3	8.5	34.5	10.55	2
12M1R	M12 × 1	REG	P3	2.5	82	13.5	3	8.5	32.5	10.75	2

加工钛合金时推荐的切削速度为 5 ~ 7m/min。 Recommended cutting speed is 5 ~ 7m/min for Titanium Alloy.

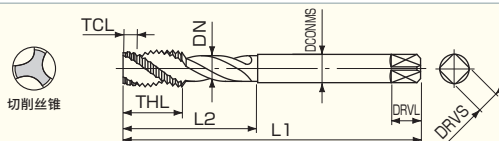

规格 1 2

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●可满足多种切削速度、加工机械、被削材要求的通孔用丝锥。

This tap is used for through holes and corresponding to every tapping speed, machines, work materials.

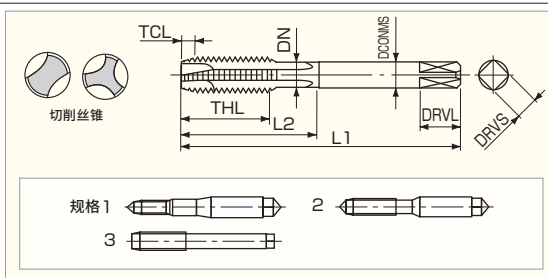

LIST 7950

订货方式 **SGPO** 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
1.4M0.3R	M1.4 × 0.3	REG P1	5	34	7.0	2	3.0	11	1.5*	1	●
1.6M0.35R	M1.6 × 0.35	REG P1.5	5	36	8.0	2	3.0	13	1.7*	1	●
1.7M0.35R	M1.7 × 0.35	REG P1.5	5	36	8.0	2	3.0	13	1.8*	1	●
2M0.4R	M2 × 0.4	REG P1.5	5	40	8.0	2	3.0	15	2.1*	1	●
2M0.25R	M2 × 0.25	REG P1	5	40	8.0	2	3.0	15	2.1*	1	●
2.2M0.45R	M2.2 × 0.45	REG P2	5	42	9.5	2	3.0	15	2.3*	1	●
2.2M0.25R	M2.2 × 0.25	REG P1	5	42	9.5	2	3.0	15	2.3*	1	●
2.3M0.4R	M2.3 × 0.4	REG P1.5	5	42	9.5	2	3.0	15	2.4*	1	●
2.5M0.45R	M2.5 × 0.45	REG P2	5	44	9.5	2	3.0	16	2.6*	1	●
2.5M0.35R	M2.5 × 0.35	REG P2	5	44	9.5	2	3.0	16	2.6*	1	●
2.6M0.45R	M2.6 × 0.45	REG P2	5	44	9.5	2	3.0	16	2.7*	1	●
3M0.5R		REG P3									
3M0.5R+1	M3 × 0.5	REG+1 P4	5	46	11.0	3	4.0	18	2.3	2	●
3M0.5R+2		REG+2 P5									
3M0.35R	M3 × 0.35	REG P2									
3M0.35R+1		REG+1 P3									
3.5M0.6R	M3.5 × 0.6	REG P2	5	48	13.0	3	4.0	19	2.8	2	●
3.5M0.35R	M3.5 × 0.35	REG P2	5	48	13.0	3	4.0	19	2.8	2	●
4M0.7R		REG P3									
4M0.7R+1	M4 × 0.7	REG+1 P4	5	52	13.0	3	5.0	21	3.1	2	●
4M0.7R+2		REG+2 P5									
4M0.5R	M4 × 0.5	REG P3									
4M0.5R+1		REG+1 P4									
4.5M0.75R	M4.5 × 0.75	REG P3	5	55	13.0	3	5.0	21	3.5	2	●
4.5M0.5R	M4.5 × 0.5	REG P3	5	55	13.0	3	5.0	21	3.5	2	●
5M0.8R		REG P3									
5M0.8R+1	M5 × 0.8	REG+1 P4	5	60	16.0	3	5.5	25	3.9	2	●
5M0.8R+2		REG+2 P5									
5M0.5R	M5 × 0.5	REG P3									
5M0.5R+1		REG+1 P4									
5.5M0.5R	M5.5 × 0.5	REG P3	5	60	16.0	3	5.5	25	4.4	2	●
6M1R		REG P3									
6M1R+1	M6 × 1	REG+1 P4	5	62	19.0	3	6.0	30	4.7	2	●
6M1R+2		REG+2 P5									
6M0.75R	M6 × 0.75	REG P3									
6M0.75R+1		REG+1 P4									
6M0.5R	M6 × 0.5	REG P3	5	62	19.0	3	6.0	30	4.7	2	●
6M0.5R+1		REG+1 P4									
7M1R	M7 × 1	REG P3									
7M0.75R	M7 × 0.75	REG P3	5	65	19.0	3	6.2	—	—	3	●
8M1.25R		REG P3									
8M1.25R+1	M8 × 1.25	REG+1 P4	5	70	22.0	3	6.2	—	—	3	●
8M1.25R+2		REG+2 P5									
8M1R	M8 × 1	REG P3									
8M1R+1		REG+1 P4									
8M0.75R	M8 × 0.75	REG P3	5	70	22.0	3	6.2	—	—	3	●
8M0.75R+1		REG+1 P4									
9M1.25R	M9 × 1.25	REG P3									
9M1R	M9 × 1	REG P3	5	72	22.0	3	7.0	—	—	3	●
9M0.75R	M9 × 0.75	REG P3	5	72	22.0	3	7.0	—	—	3	●
10M1.5R		REG P4									
10M1.5R+1	M10 × 1.5	REG+1 P5	5	75	24.0	3	7.0	—	—	3	●
10M1.5R+2		REG+2 P6									
10M1.25R	M10 × 1.25	REG P3									
10M1.25R+1		REG+1 P4									
10M1R	M10 × 1	REG P3	5	75	24.0	3	7.0	—	—	3	●
10M1R+1		REG+1 P4									
10M0.75R	M10 × 0.75	REG P3									
10M0.75R+1		REG+1 P4									

* : 螺纹直径 < 颈径。内螺纹加工深度较深时，如插入的长度超过螺纹长度，则会有折断的危险。

* : Thread Size < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

· 规格 1 ~ 2 为凸顶尖 Type 1 ~ 2 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
11M1.5R	M11 × 1.5	REG	P4	5	80	25.0	3	8.0	—	—	3	●
11M1R	M11 × 1	REG	P3	5	80	25.0	3	8.0	—	—	3	●
11M0.75R	M11 × 0.75	REG	P3	5	80	25.0	3	8.0	—	—	3	●
12M1.75R	M12 × 1.75	REG	P4	5	82	29.0	3	8.5	—	—	3	●
12M1.75R+1		REG+1	P5									
12M1.75R+2		REG+2	P6									
12M1.5R	M12 × 1.5	REG	P4	5	82	29.0	3	8.5	—	—	3	●
12M1.5R+1		REG+1	P5									
12M1.25R	M12 × 1.25	REG	P4	5	82	29.0	3	8.5	—	—	3	●
12M1.25R+1		REG+1	P5									
12M1R	M12 × 1	REG	P3	5	82	29.0	3	8.5	—	—	3	●
12M1R+1		REG+1	P4									
14M2R	M14 × 2	REG	P4	5	88	30.0	3	10.5	—	—	3	●
14M1.5R	M14 × 1.5	REG	P4	5	88	30.0	3	10.5	—	—	3	●
14M1.25R	M14 × 1.25	REG	P4	5	88	30.0	3	10.5	—	—	3	●
14M1R	M14 × 1	REG	P3	5	88	30.0	3	10.5	—	—	3	●
15M1.5R	M15 × 1.5	REG	P4	5	90	30.0	3	10.5	—	—	3	●
15M1R	M15 × 1	REG	P3	5	90	30.0	3	10.5	—	—	3	●
16M2R	M16 × 2	REG	P4	5	95	32.0	3	12.5	—	—	3	●
16M1.5R	M16 × 1.5	REG	P4	5	95	32.0	3	12.5	—	—	3	●
16M1R	M16 × 1	REG	P3	5	95	32.0	3	12.5	—	—	3	●
17M1.5R	M17 × 1.5	REG	P4	5	95	32.0	3	13.0	—	—	3	●
17M1R	M17 × 1	REG	P3	5	95	32.0	3	13.0	—	—	3	●
18M2.5R	M18 × 2.5	REG	P5	5	100	37.0	3	14.0	—	—	3	●
18M2R	M18 × 2	REG	P4	5	100	37.0	3	14.0	—	—	3	●
18M1.5R	M18 × 1.5	REG	P4	5	100	37.0	3	14.0	—	—	3	●
18M1R	M18 × 1	REG	P3	5	100	37.0	3	14.0	—	—	3	●
20M2.5R	M20 × 2.5	REG	P5	5	105	37.0	3	15.0	—	—	3	●
20M2R	M20 × 2	REG	P4	5	105	37.0	3	15.0	—	—	3	●
20M1.5R	M20 × 1.5	REG	P4	5	105	37.0	3	15.0	—	—	3	●
20M1R	M20 × 1	REG	P3	5	105	37.0	3	15.0	—	—	3	●
22M2.5R	M22 × 2.5	REG	P5	5	115	38.0	3	17.0	—	—	3	●
22M2R	M22 × 2	REG	P4	5	115	38.0	3	17.0	—	—	3	●
22M1.5R	M22 × 1.5	REG	P4	5	115	38.0	3	17.0	—	—	3	●
22M1R	M22 × 1	REG	P3	5	115	38.0	3	17.0	—	—	3	●
24M3R	M24 × 3	REG	P5	5	120	45.0	3	19.0	—	—	3	●
24M2R	M24 × 2	REG	P4	5	120	45.0	3	19.0	—	—	3	●
24M1.5R	M24 × 1.5	REG	P4	5	120	45.0	3	19.0	—	—	3	●
24M1R	M24 × 1	REG	P3	5	120	45.0	3	19.0	—	—	3	●

●当标准尺寸丝锥长度不够时，请使用本丝锥。

This tap is used when a standard SG Point Tap is too short.

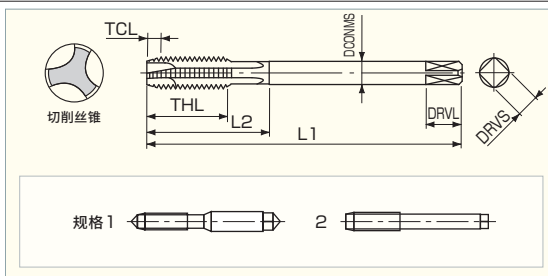

LIST 7952

订货方式 **SGPOL** 编码 × 全长

单位 (Unit) : mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	规格 Type	库存 Stock
3M0.5R	100	M3 × 0.5	REG	P3	5	11.0	3	4.0	18	1	●
3M0.5R+1			REG+1	P4							
3M0.5R+2			REG+2	P5							
3M0.35R	100	M3 × 0.35	REG	P2	5	7.8	3	4.0	18	1	●
3M0.35R+1			REG+1	P3							
3.5M0.6R			REG	P2							
3.5M0.35R	100	M3.5 × 0.35	REG	P2	5	7.8	3	4.0	19	1	●
4M0.7R	100	M4 × 0.7	REG	P3	5	13.0	3	5.0	21	1	●
4M0.7R+1			REG+1	P4							
4M0.7R+2			REG+2	P5							
4M0.5R	100	M4 × 0.5	REG	P3	5	10.0	3	5.0	21	1	●
4M0.5R+1			REG+1	P4							
4.5M0.75R			REG	P3							
4.5M0.5R	100	M4.5 × 0.5	REG	P3	5	10.0	3	5.0	21	1	●
5M0.8R	100	M5 × 0.8	REG	P3	5	16.0	3	5.5	25	1	●
5M0.8R+1			REG+1	P4							
5M0.8R+2			REG+2	P5							
5M0.5R	100	M5 × 0.5	REG	P3	5	10.0	3	5.5	25	1	●
5M0.5R+1			REG+1	P4							
5.5M0.5R			REG	P3							
6M1R	100	M6 × 1	REG	P3	5	19.0	3	6.0	30	1	●
6M1R	150										
6M1R+1	100		REG+1	P4							
6M1R+1	150										
6M1R+2	100		REG+2	P5							
6M1R+2	150										
6M0.75R	100	M6 × 0.75	REG	P3	5	13.9	3	6.0	30	1	●
6M0.75R	150										
6M0.75R+1	100		REG+1	P4							
6M0.75R+1	150										
7M1R	100	M7 × 1	REG	P3	5	19.0	3	6.2	—	2	●
7M1R	150										
7M0.75R	100	M7 × 0.75	REG	P3	5	13.9	3	6.2	—	2	●
7M0.75R	150										
8M1.25R	100	M8 × 1.25	REG	P3	5	22.0	3	6.2	—	2	●
8M1.25R	150										
8M1.25R+1	100		REG+1	P4							
8M1.25R+1	150										
8M1.25R+2	100		REG+2	P5							
8M1.25R+2	150										
8M1R	100	M8 × 1	REG	P3	5	17.0	3	6.2	—	2	●
8M1R	150										
8M1R+1	100		REG+1	P4							
8M1R+1	150										
8M0.75R	100	M8 × 0.75	REG	P3	5	13.9	3	6.2	—	2	●
8M0.75R	150										
8M0.75R+1	100		REG+1	P4							
8M0.75R+1	150										
9M1.25R	100	M9 × 1.25	REG	P3	5	22.0	3	7.0	—	2	●
9M1.25R	150										
9M1R	100	M9 × 1	REG	P3	5	17.0	3	7.0	—	2	●
9M1R	150										
9M0.75R	100	M9 × 0.75	REG	P3	5	13.9	3	7.0	—	2	●
9M0.75R	150										
10M1.5R	100	M10 × 1.5	REG	P4	5	24.0	3	7.0	—	2	●
10M1.5R	150										
10M1.5R+1	100		REG+1	P5							
10M1.5R+1	150										
10M1.5R+2	100		REG+2	P6							
10M1.5R+2	150										
10M1.25R	100	M10 × 1.25	REG	P3	5	22.0	3	7.0	—	2	●
10M1.25R	150										
10M1.25R+1	100		REG+1	P4							
10M1.25R+1	150										
10M1R	100	M10 × 1	REG	P3	5	17.0	3	7.0	—	2	●
10M1R	150										
10M1R+1	100		REG+1	P4							
10M1R+1	150										
10M0.75R	100	M10 × 0.75	REG	P3	5	13.9	3	7.0	—	2	●
10M0.75R	150										
10M0.75R+1	100		REG+1	P4							
10M0.75R+1	150										

· 规格 1 为凸顶尖 Type 1 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

单位 (Unit) : mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	规格 Type	库存 Stock
11M1.5R	100	M11 × 1.5	REG	P4	5	25.0	3	8.0	—	2	●
11M1.5R	150										
11M1R	100	M11 × 1	REG	P3	5	17.0	3	8.0	—	2	●
11M1R	150										
12M1.75R	100		REG	P4							
12M1.75R	150										
12M1.75R+1	100	M12 × 1.75	REG+1	P5	5	29.0	3	8.5	—	2	●
12M1.75R+1	150										
12M1.75R+2	100		REG+2	P6							
12M1.75R+2	150										
12M1.5R	100		REG	P4							
12M1.5R	150	M12 × 1.5	REG+1	P5	5	28.0	3	8.5	—	2	●
12M1.5R+1	100										
12M1.5R+1	150										
12M1.25R	100		REG	P4							
12M1.25R	150	M12 × 1.25	REG+1	P5	5	23.0	3	8.5	—	2	●
12M1.25R+1	100										
12M1.25R+1	150										
12M1R	100		REG	P3							
12M1R	150	M12 × 1	REG+1	P4	5	19.0	3	8.5	—	2	●
12M1R+1	100										
12M1R+1	150										
14M2R	150	M14 × 2	REG	P4	5	30.0	3	10.5	—	2	●
14M1.5R	150	M14 × 1.5	REG	P4	5	28.0	3	10.5	—	2	●
14M1.25R	150	M14 × 1.25	REG	P4	5	23.0	3	10.5	—	2	●
14M1R	150	M14 × 1	REG	P3	5	19.0	3	10.5	—	2	●
15M1.5R	150	M15 × 1.5	REG	P4	5	28.0	3	10.5	—	2	●
15M1R	150	M15 × 1	REG	P3	5	19.0	3	10.5	—	2	●
16M2R	150	M16 × 2	REG	P4	5	32.0	3	12.5	—	2	●
16M2R	200										
16M1.5R	150	M16 × 1.5	REG	P4	5	28.0	3	12.5	—	2	●
16M1R	150	M16 × 1	REG	P3	5	19.0	3	12.5	—	2	●
17M1.5R	150	M17 × 1.5	REG	P4	5	28.0	3	13.0	—	2	●
17M1R	150	M17 × 1	REG	P3	5	19.0	3	13.0	—	2	●
18M2.5R	150	M18 × 2.5	REG	P5	5	37.0	3	14.0	—	2	●
18M2R	150	M18 × 2	REG	P4	5	37.0	3	14.0	—	2	●
18M1.5R	150	M18 × 1.5	REG	P4	5	28.0	3	14.0	—	2	●
18M1R	150	M18 × 1	REG	P3	5	19.0	3	14.0	—	2	●
20M2.5R	150	M20 × 2.5	REG	P5	5	37.0	3	15.0	—	2	●
20M2.5R	200										
20M2R	150	M20 × 2	REG	P4	5	37.0	3	15.0	—	2	●
20M1.5R	150	M20 × 1.5	REG	P4	5	28.0	3	15.0	—	2	●
20M1R	150	M20 × 1	REG	P3	5	19.0	3	15.0	—	2	●
22M2.5R	150	M22 × 2.5	REG	P5	5	38.0	3	17.0	—	2	●
22M2R	150	M22 × 2	REG	P4	5	38.0	3	17.0	—	2	●
22M1.5R	150	M22 × 1.5	REG	P4	5	28.0	3	17.0	—	2	●
22M1R	150	M22 × 1	REG	P3	5	19.0	3	17.0	—	2	●
24M3R	150										
24M3R	200	M24 × 3	REG	P5	5	45.0	3	19.0	—	2	●
24M2R	150	M24 × 2	REG	P4	5	41.0	3	19.0	—	2	●
24M1.5R	150	M24 × 1.5	REG	P4	5	31.0	3	19.0	—	2	●
24M1R	150	M24 × 1	REG	P3	5	20.0	3	19.0	—	2	●

●是一种加工领域广且长寿命、偏差较小、高性能的
新式通用型丝锥。

High performance taps which have long tool life and stable
tapping in various cutting condition.
New general-purpose tap series for blind holes.

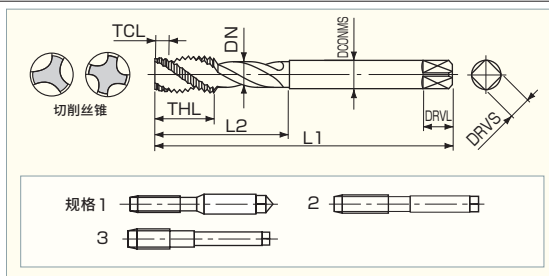

LIST 6850

订货方式 ZSP 编码

单位 (Unit): mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	M3 × 0.5	REG	P1	2.5	46	3	4.0	20.0	2.35	1	●
3M0.5R+1		REG+1	P2								●
3M0.5R+2		REG+2	P3								●
3M0.35R	M3 × 0.35	REG	P1	2.5	46	3	4.0	20.0	2.55	1	●
3M0.35R+1		REG+1	P2								●
3.5M0.6R		REG	P1								●
3.5M0.6R+1	M3.5 × 0.6	REG+1	P2	2.5	48	3	4.0	20.0	2.75	1	●
3.5M0.35R		REG	P1								●
3.5M0.35R+1		REG+1	P2								●
4M0.7R	M4 × 0.7	REG	P2	2.5	52	3	5.0	23.0	3.15	1	●
4M0.7R+1		REG+1	P3								●
4M0.7R+2		REG+2	P4								●
4M0.5R	M4 × 0.5	REG	P1	2.5	52	3	5.0	23.0	3.35	1	●
4M0.5R+1		REG+1	P2								●
4.5M0.75R		REG	P2								●
4.5M0.75R+1	M4.5 × 0.75	REG+1	P3	2.5	55	3	5.0	24.0	3.55	1	●
4.5M0.5R		REG	P1								●
4.5M0.5R+1		REG+1	P2								●
5M0.8R	M5 × 0.8	REG	P2	2.5	60	3	5.5	26.0	4.05	1	●
5M0.8R+1		REG+1	P3								●
5M0.8R+2		REG+2	P4								●
5M0.5R	M5 × 0.5	REG	P1	2.5	60	3	5.5	26.0	4.35	1	●
5M0.5R+1		REG+1	P2								●
5.5M0.5R		REG	P1								●
5.5M0.5R+1	M5.5 × 0.5	REG+1	P2	2.5	60	3	5.5	27.0	4.85	1	●
6M1R		REG	P2								●
6M1R+1		REG+1	P3								●
6M1R+2	M6 × 1	REG+2	P4	2.5	62	3	6.0	29.0	4.75	1	●
6M0.75R		REG	P2								●
6M0.75R+1		REG+1	P3								●
6M0.5R	M6 × 0.5	REG	P1	2.5	62	3	6.0	29.0	5.35	1	●
6M0.5R+1		REG+1	P2								●
7M1R		REG	P2								●
7M1R+1	M7 × 1	REG+1	P3	2.5	65	3	6.2	29.0	5.75	2	●
7M0.75R		REG	P2								●
7M0.75R+1		REG+1	P3								●
8M1.25R	M8 × 1.25	REG	P2	2.5	70	3	6.2	33.0	6.55	3	●
8M1.25R+1		REG+1	P3								●
8M1.25R+2		REG+2	P4								●
8M1R	M8 × 1	REG	P2	2.5	70	3	6.2	27.0	6.75	3	●
8M1R+1		REG+1	P3								●
8M0.75R		REG	P2								●
8M0.75R+1	M8 × 0.75	REG+1	P3	2.5	70	3	6.2	24.5	7.05	3	●
9M1.25R		REG	P2								●
9M1.25R+1		REG+1	P3								●
9M1R	M9 × 1.25	REG	P2	2.5	72	3	7.0	33.0	7.55	3	●
9M1R+1		REG+1	P3								●
9M0.75R		REG	P2								●
9M0.75R+1	M9 × 0.75	REG+1	P3	2.5	72	3	7.0	24.5	8.05	3	●
10M1.5R		REG	P2								●
10M1.5R+1		REG+1	P3								●
10M1.5R+2	M10 × 1.5	REG+2	P4	2.5	75	3	7.0	37.0	8.25	3	●
10M1.25R		REG	P2								●
10M1.25R+1		REG+1	P3								●
10M1R	M10 × 1.25	REG	P2	2.5	75	3	7.0	33.0	8.55	3	●
10M1R+1		REG+1	P3								●
10M1R+2		REG+2	P4								●
10M1R	M10 × 1	REG	P2	2.5	75	3	7.0	27.0	8.75	3	●
10M1R+1		REG+1	P3								●
10M0.75R		REG	P2								●
10M0.75R+1	M10 × 0.75	REG+1	P3	2.5	75	3	7.0	25.0	9.05	3	●
											●
											●

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
11M1.5R	M11 × 1.5	REG	P2	2.5	80	18.9	3	8.0	37.0	9.25	3	●
11M1.5R+1		REG+1	P3									●
11M1R	M11 × 1	REG	P2	2.5	80	12.4	3	8.0	27.0	9.75	3	●
11M1R+1		REG+1	P3									●
11M0.75R	M11 × 0.75	REG	P2	2.5	80	9.2	3	8.0	25.0	10.05	3	●
11M0.75R+1		REG+1	P3									●
12M1.75R	M12 × 1.75	REG	P3	2.5	82	22.4	3	8.5	42.0	9.95	3	●
12M1.75R+1		REG+1	P4									●
12M1.75R+2		REG+2	P5									●
12M1.5R	M12 × 1.5	REG	P2	2.5	82	20.9	3	8.5	40.0	10.25	3	●
12M1.5R+1		REG+1	P3									●
12M1.25R	M12 × 1.25	REG	P2	2.5	82	17.2	3	8.5	35.0	10.55	3	●
12M1.25R+1		REG+1	P3									●
12M1R	M12 × 1	REG	P2	2.5	82	13.5	3	8.5	33.0	10.75	3	●
12M1R+1		REG+1	P3									●
14M2R	M14 × 2	REG	P3	2.5	88	25.9	3	10.5	46.0	11.65	3	●
14M2R+1		REG+1	P4									●
14M1.5R	M14 × 1.5	REG	P2	2.5	88	20.9	3	10.5	40.0	12.25	3	●
14M1.5R+1		REG+1	P3									●
14M1.25R	M14 × 1.25	REG	P2	2.5	88	17.2	3	10.5	35.0	12.55	3	●
14M1R	M14 × 1	REG	P2	2.5	88	13.5	3	10.5	33.0	12.75	3	●
16M2R	M16 × 2	REG	P3	2.5	95	25.9	3	12.5	49.0	13.65	3	●
16M2R+1		REG+1	P4									●
16M1.5R	M16 × 1.5	REG	P2	2.5	95	20.9	3	12.5	40.0	14.25	3	●
16M1.5R+1		REG+1	P3									●
16M1R	M16 × 1	REG	P2	2.5	95	13.5	3	12.5	33.0	14.75	3	●
18M2.5R	M18 × 2.5	REG	P3	2.5	100	32.6	4	14.0	55.0	15.15	3	●
18M2.5R+1		REG+1	P4									●
18M2R	M18 × 2	REG	P3	2.5	100	29.0	4	14.0	49.0	15.65	3	●
18M1.5R	M18 × 1.5	REG	P2	2.5	100	20.9	4	14.0	40.0	16.25	3	●
18M1.5R+1		REG+1	P3									●
18M1R	M18 × 1	REG	P2	2.5	100	13.5	4	14.0	33.0	16.75	3	●
20M2.5R	M20 × 2.5	REG	P3	2.5	105	32.6	4	15.0	55.0	17.15	3	●
20M2.5R+1		REG+1	P4									●
20M2R	M20 × 2	REG	P3	2.5	105	29.0	4	15.0	49.0	17.65	3	●
20M1.5R	M20 × 1.5	REG	P2	2.5	105	20.9	4	15.0	40.0	18.25	3	●
20M1.5R+1		REG+1	P3									●
20M1R	M20 × 1	REG	P2	2.5	105	13.5	4	15.0	33.0	18.75	3	●
22M2.5R	M22 × 2.5	REG	P3	2.5	115	32.6	4	17.0	55.0	19.15	3	●
22M2.5R+1		REG+1	P4									●
22M2R	M22 × 2	REG	P3	2.5	115	29.0	4	17.0	49.0	19.65	3	●
22M1.5R	M22 × 1.5	REG	P2	2.5	115	20.9	4	17.0	40.0	20.25	3	●
22M1.5R+1		REG+1	P3									●
22M1R	M22 × 1	REG	P2	2.5	115	13.5	4	17.0	33.0	20.75	3	●
24M3R	M24 × 3	REG	P3	2.5	120	38.8	4	19.0	63.0	20.65	3	●
24M3R+1		REG+1	P4									●
24M2R	M24 × 2	REG	P3	2.5	120	30.8	4	19.0	53.0	21.65	3	●
24M1.5R	M24 × 1.5	REG	P2	2.5	120	22.4	4	19.0	50.0	22.25	3	●
24M1.5R+1		REG+1	P3									●
24M1R	M24 × 1	REG	P2	2.5	120	14.7	4	19.0	37.0	22.75	3	●

●当标准尺寸丝锥长度不够时，请使用本丝锥。
This tap is used when a standard Hyper Z Spiral Tap is too short.

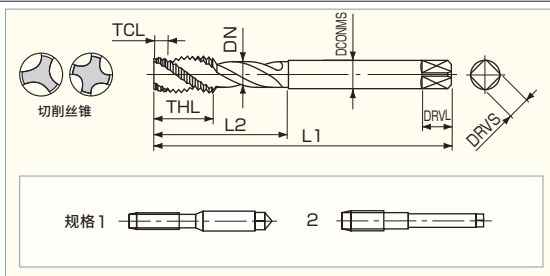

LIST 6854

订货方式 ZSPL 编码 × 全长

单位 (Unit): mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	100	M3 × 0.5	REG	P1	2.5	5.6	4.0	20.0	2.35	1	●
3M0.5R+1	100		REG+1	P2							●
3M0.5R+2	100		REG+2	P3							●
3M0.35R	100	M3 × 0.35	REG	P1	2.5	4.4	4.0	20.0	2.55	1	●
3M0.35R+1	100		REG+1	P2							●
4M0.7R	100		REG	P2							●
4M0.7R+1	100	M4 × 0.7	REG+1	P3	2.5	8.1	5.0	23.0	3.15	1	●
4M0.7R+2	100		REG+2	P4							●
4M0.5R	100		REG	P1	2.5	6.1	5.0	23.0	3.35	1	●
4M0.5R+1	100	M4 × 0.5	REG+1	P2							●
5M0.8R	100		REG	P2	2.5	9.4	5.5	26.0	4.05	1	●
5M0.8R+1	100	M5 × 0.8	REG+1	P3							●
5M0.8R+2	100		REG+2	P4							●
5M0.5R	100	M5 × 0.5	REG	P1	2.5	6.1	5.5	26.0	4.35	1	●
5M0.5R+1	100		REG+1	P2							●
6M1R	100		REG	P2	2.5	12.0	6.0	29.0	4.75	1	●
6M1R	150	M6 × 1	REG	P2							●
6M1R+1	100		REG+1	P3							●
6M1R+1	150		REG+1	P3							●
6M1R+2	100		REG+2	P4							●
6M1R+2	150		REG+2	P4							●
6M0.75R	100	M6 × 0.75	REG	P2	2.5	9.2	6.0	29.0	5.05	1	●
6M0.75R	150		REG	P2							●
6M0.75R+1	100		REG+1	P3							●
6M0.75R+1	150		REG+1	P3							●
8M1.25R	100	M8 × 1.25	REG	P2	2.5	15.4	6.2	33.0	6.55	2	●
8M1.25R	150		REG	P2							●
8M1.25R+1	100		REG+1	P3							●
8M1.25R+1	150		REG+1	P3							●
8M1.25R+2	100		REG+2	P4							●
8M1.25R+2	150		REG+2	P4							●
8M1R	100	M8 × 1	REG	P2	2.5	12.4	6.2	27.0	6.75	2	●
8M1R	150		REG	P2							●
8M1R+1	100		REG+1	P3							●
8M1R+1	150		REG+1	P3							●
8M0.75R	100		REG	P2	2.5	9.2	6.2	24.5	7.05	2	●
8M0.75R	150		REG	P2							●
8M0.75R+1	100	M8 × 0.75	REG+1	P3							●
8M0.75R+1	150		REG+1	P3							●
10M1.5R	100		REG	P2	2.5	18.9	7.0	36.5	8.25	2	●
10M1.5R	150		REG	P2							●
10M1.5R+1	100	M10 × 1.5	REG+1	P3							●
10M1.5R+1	150		REG+1	P3							●
10M1.5R+2	100		REG+2	P4							●
10M1.5R+2	150		REG+2	P4							●
10M1.25R	100	M10 × 1.25	REG	P2	2.5	15.7	7.0	33.0	8.55	2	●
10M1.25R	150		REG	P2							●
10M1.25R+1	100		REG+1	P3							●
10M1.25R+1	150		REG+1	P3							●
10M1R	100	M10 × 1	REG	P2	2.5	12.4	7.0	27.0	8.75	2	●
10M1R	150		REG	P2							●
10M1R+1	100		REG+1	P3							●
10M1R+1	150		REG+1	P3							●
10M0.75R	100	M10 × 0.75	REG	P2	2.5	9.2	7.0	24.5	9.05	2	●
10M0.75R	150		REG	P2							●
10M0.75R+1	100		REG+1	P3							●
10M0.75R+1	150		REG+1	P3							●

单位 (Unit) : mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
12M1.75R	100	M12 × 1.75	REG	P3	2.5	22.4	3	8.5	41.5	9.95	2	●
12M1.75R	150		REG	P3								●
12M1.75R+1	100		REG+1	P4								●
12M1.75R+1	150		REG+1	P4								●
12M1.75R+2	100		REG+2	P5								●
12M1.75R+2	150		REG+2	P5								●
12M1.5R	100	M12 × 1.5	REG	P2	2.5	20.9	3	8.5	40.0	10.25	2	●
12M1.5R	150		REG	P2								●
12M1.5R+1	100		REG+1	P3								●
12M1.5R+1	150	M12 × 1.25	REG+1	P3	2.5	17.2	3	8.5	34.5	10.55	2	●
12M1.25R	100		REG	P2								●
12M1.25R	150		REG	P2								●
12M1.25R+1	100	M12 × 1	REG+1	P3	2.5	13.5	3	8.5	32.5	10.75	2	●
12M1.25R+1	150		REG+1	P3								●
12M1R	100		REG	P2								●
12M1R	150		REG	P2								●
12M1R+1	100		REG+1	P3								●
12M1R+1	150		REG+1	P3								●
14M2R	150	M14 × 2	REG	P3	2.5	25.9	3	10.5	45.5	11.65	2	●
14M1.5R	150	M14 × 1.5	REG	P2	2.5	20.9	3	10.5	40.0	12.25	2	●
14M1.25R	150	M14 × 1.25	REG	P2	2.5	17.2	3	10.5	34.5	12.55	2	●
14M1R	150	M14 × 1	REG	P2	2.5	13.5	3	10.5	32.5	12.75	2	●
16M2R	150	M16 × 2	REG	P3	2.5	25.9	3	12.5	48.5	13.65	2	●
16M2R	200		REG	P3								●
16M1.5R	150	M16 × 1.5	REG	P2	2.5	20.9	3	12.5	40.0	14.25	2	●
16M1R	150	M16 × 1	REG	P2	2.5	13.5	3	12.5	32.5	14.75	2	●
18M2.5R	150	M18 × 2.5	REG	P3	2.5	32.6	4	14.0	55.0	15.15	2	●
18M2R	150	M18 × 2	REG	P3	2.5	29.0	4	14.0	48.5	15.65	2	●
18M1.5R	150	M18 × 1.5	REG	P2	2.5	20.9	4	14.0	40.0	16.25	2	●
18M1R	150	M18 × 1	REG	P2	2.5	13.5	4	14.0	32.5	16.75	2	●
20M2.5R	150	M20 × 2.5	REG	P3	2.5	32.6	4	15.0	55.0	17.15	2	●
20M2.5R	200		REG	P3								●
20M2R	150	M20 × 2	REG	P3	2.5	29.0	4	15.0	48.5	17.65	2	●
20M1.5R	150	M20 × 1.5	REG	P2	2.5	20.9	4	15.0	40.0	18.25	2	●
20M1R	150	M20 × 1	REG	P2	2.5	13.5	4	15.0	32.5	18.75	2	●
22M2.5R	150	M22 × 2.5	REG	P3	2.5	32.6	4	17.0	55.0	19.15	2	●
22M2R	150	M22 × 2	REG	P3	2.5	29.0	4	17.0	48.5	19.65	2	●
22M1.5R	150	M22 × 1.5	REG	P2	2.5	20.9	4	17.0	40.0	20.25	2	●
22M1R	150	M22 × 1	REG	P2	2.5	13.5	4	17.0	32.5	20.75	2	●
24M3R	150	M24 × 3	REG	P3	2.5	38.8	4	19.0	63.0	20.65	2	●
24M3R	200		REG	P3								●
24M2R	150	M24 × 2	REG	P3	2.5	30.8	4	19.0	53.0	21.65	2	●
24M1.5R	150	M24 × 1.5	REG	P2	2.5	22.4	4	19.0	49.5	22.25	2	●
24M1R	150	M24 × 1	REG	P2	2.5	14.7	4	19.0	36.5	22.75	2	●

ZSP-LS

Hyper Z 小螺旋角丝锥


Hyper Z Low Spiral Tap

切削条件 Cutting Condition C-46



●实现高硬度材、卧式加工中心也能稳定加工。

Achieves stable screw threads cutting even hardened steel, even horizontal machining center.

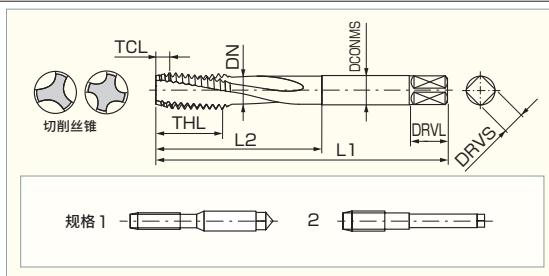

LIST 7962


订货方式 ZSP-LS 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	M3 × 0.5	REG	P3	3	46	5.6	3	4.0	20.0	2.35	1	●
4M0.7R	M4 × 0.7	REG	P3	3	52	8.1	3	5.0	23.0	3.15	1	●
5M0.8R	M5 × 0.8	REG	P3	3	60	9.4	3	5.5	26.0	4.05	1	●
6M1R	M6 × 1	REG	P3	3	62	12.0	3	6.0	29.0	4.75	1	●
8M1.25R	M8 × 1.25	REG	P3	3	70	15.4	3	6.2	33.0	6.55	2	●
10M1.5R	M10 × 1.5	REG	P3	3	75	18.9	3	7.0	37.0	8.25	2	●
10M1.25R	M10 × 1.25	REG	P3	3	75	15.7	3	7.0	33.0	8.55	2	●
12M1.75R	M12 × 1.75	REG	P3	3	82	22.4	3	8.5	42.0	9.95	2	●
12M1.5R	M12 × 1.5	REG	P3	3	82	20.9	3	8.5	40.0	10.25	2	●
12M1.25R	M12 × 1.25	REG	P4	3	82	17.2	3	8.5	35.0	10.55	2	●
14M2R	M14 × 2	REG	P4	3	88	25.9	3	10.5	46.0	11.65	2	●
14M1.5R	M14 × 1.5	REG	P3	3	88	20.9	3	10.5	40.0	12.25	2	●
16M2R	M16 × 2	REG	P4	3	95	25.9	4	12.5	49.0	13.65	2	●
16M1.5R	M16 × 1.5	REG	P3	3	95	20.9	4	12.5	40.0	14.25	2	●
18M2.5R	M18 × 2.5	REG	P4	3	100	32.6	4	14.0	55.0	15.15	2	●
18M1.5R	M18 × 1.5	REG	P4	3	100	20.9	4	14.0	40.0	16.25	2	●
20M2.5R	M20 × 2.5	REG	P4	3	105	32.6	4	15.0	55.0	17.15	2	●
20M1.5R	M20 × 1.5	REG	P4	3	105	20.9	4	15.0	40.0	18.25	2	●
22M2.5R	M22 × 2.5	REG	P4	3	115	32.6	4	17.0	55.0	19.15	2	●
22M1.5R	M22 × 1.5	REG	P4	3	115	20.9	4	17.0	40.0	20.25	2	●
24M3R	M24 × 3	REG	P4	3	120	38.8	4	19.0	63.0	20.65	2	●
24M1.5R	M24 × 1.5	REG	P4	3	120	22.4	4	19.0	50.0	22.25	2	●

●是一种在不锈钢加工领域中长寿命、偏差较小、高性能的丝锥。

In Stainless Steel processing, high performance tap which have long tool life with small fluctuations.

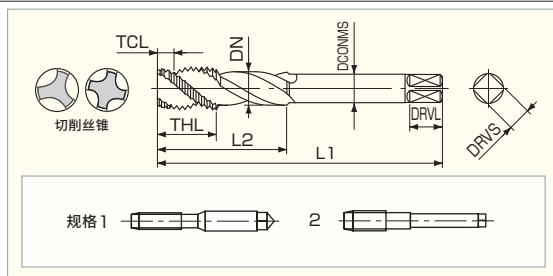

LIST 6858

订货方式 ZSP-SUS 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部(P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	M3 × 0.5	REG	P2	2.5	46	5.6	3	4.0	20	2.35	1
3M0.35R	M3 × 0.35	REG	P2	2.5	46	4.4	3	4.0	20	2.55	1
4M0.7R	M4 × 0.7	REG	P3	2.5	52	8.1	3	5.0	23	3.15	1
4M0.5R	M4 × 0.5	REG	P2	2.5	52	6.1	3	5.0	23	3.35	1
5M0.8R	M5 × 0.8	REG	P3	2.5	60	9.4	3	5.5	26	4.05	1
5M0.5R	M5 × 0.5	REG	P2	2.5	60	6.1	3	5.5	26	4.35	1
6M1R	M6 × 1	REG	P3	2.5	62	12.0	3	6.0	29	4.75	1
6M0.75R	M6 × 0.75	REG	P3	2.5	62	9.2	3	6.0	29	5.05	1
6M0.5R	M6 × 0.5	REG	P2	2.5	62	6.1	3	6.0	29	5.35	1
8M1.25R	M8 × 1.25	REG	P3	2.5	70	15.4	3	6.2	33	6.55	2
8M1R	M8 × 1	REG	P3	2.5	70	12.4	3	6.2	27	6.75	2
8M0.75R	M8 × 0.75	REG	P3	2.5	70	9.2	3	6.2	25	7.05	2
10M1.5R	M10 × 1.5	REG	P3	2.5	75	18.9	3	7.0	37	8.25	2
10M1.25R	M10 × 1.25	REG	P3	2.5	75	15.7	3	7.0	33	8.55	2
10M1R	M10 × 1	REG	P3	2.5	75	12.4	3	7.0	27	8.75	2
10M0.75R	M10 × 0.75	REG	P3	2.5	75	9.2	3	7.0	25	9.05	2
12M1.75R	M12 × 1.75	REG	P4	2.5	82	22.4	3	8.5	42	9.95	2
12M1.5R	M12 × 1.5	REG	P3	2.5	82	20.9	3	8.5	40	10.25	2
12M1.25R	M12 × 1.25	REG	P3	2.5	82	17.2	3	8.5	35	10.55	2
12M1R	M12 × 1	REG	P3	2.5	82	13.5	3	8.5	33	10.75	2
14M2R	M14 × 2	REG	P4	2.5	88	25.9	3	10.5	46	11.65	2
14M1.5R	M14 × 1.5	REG	P3	2.5	88	20.9	3	10.5	40	12.25	2
16M2R	M16 × 2	REG	P4	2.5	95	25.9	3	12.5	49	13.65	2
16M1.5R	M16 × 1.5	REG	P3	2.5	95	20.9	3	12.5	40	14.25	2
18M2.5R	M18 × 2.5	REG	P4	2.5	100	32.6	4	14.0	55	15.15	2
18M1.5R	M18 × 1.5	REG	P3	2.5	100	20.9	4	14.0	40	16.25	2
20M2.5R	M20 × 2.5	REG	P4	2.5	105	32.6	4	15.0	55	17.15	2
20M1.5R	M20 × 1.5	REG	P3	2.5	105	20.9	4	15.0	40	18.25	2
22M2.5R	M22 × 2.5	REG	P4	2.5	115	32.6	4	17.0	55	19.15	2
22M1.5R	M22 × 1.5	REG	P3	2.5	115	20.9	4	17.0	40	20.25	2
24M3R	M24 × 3	REG	P4	2.5	120	38.8	4	19.0	63	20.65	2
24M1.5R	M24 × 1.5	REG	P3	2.5	120	22.4	4	19.0	50	22.25	2

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●实现铁屑形状管理，使铁屑排出性稳定。 降低丝锥反转时铁屑咬入。

Achieves stable chip evacuation by controlling the chip shape.
Reduces chip biting when the tap is reversed.

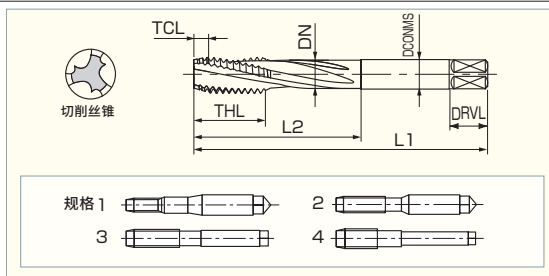

●公制螺纹用

订货方式 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部(P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
ZSP-T2.5M0.45	M2.5 × 0.45	REG	P2	2.5	44	9.5	3	3.0	16	2.55*	1	☐
ZSP-T2.6M0.45	M2.6 × 0.45	REG	P2	2.5	44	9.5	3	3.0	16	2.65*	1	☐
ZSP-T3M0.5	M3 × 0.5	REG	P3	2.5	46	5.6	3	4.0	20	2.35	2	☐
ZSP-T4M0.7	M4 × 0.7	REG	P3	2.5	52	8.1	3	5.0	23	3.15	2	☐
ZSP-T5M0.8	M5 × 0.8	REG	P3	2.5	60	9.4	3	5.5	26	4.05	2	☐
ZSP-T6M1	M6 × 1	REG	P3	2.5	62	12.0	3	6.0	29	4.75	2	☐
ZSP-T8M1.25	M8 × 1.25	REG	P3	2.5	70	15.4	3	6.2	33	6.55	4	☐
ZSP-T10M1.5	M10 × 1.5	REG	P3	2.5	75	18.9	3	7.0	37	8.25	4	☐
ZSP-T10M1.25	M10 × 1.25	REG	P3	2.5	75	15.7	3	7.0	33	8.55	4	☐
ZSP-T12M1.75	M12 × 1.75	REG	P4	2.5	82	22.4	3	8.5	42	9.95	4	☐
ZSP-T12M1.5	M12 × 1.5	REG	P3	2.5	82	20.9	3	8.5	40	10.25	4	☐
ZSP-T12M1.25	M12 × 1.25	REG	P3	2.5	82	17.2	3	8.5	35	10.55	4	☐
ZSP-T14M2	M14 × 2	REG	P4	2.5	88	25.9	3	10.5	46	11.65	4	☐
ZSP-T14M1.5	M14 × 1.5	REG	P3	2.5	88	20.9	3	10.5	40	12.25	4	☐
ZSP-T16M2	M16 × 2	REG	P4	2.5	95	25.9	3	12.5	49	13.65	4	☐
ZSP-T16M1.5	M16 × 1.5	REG	P3	2.5	95	20.9	3	12.5	40	14.25	4	☐

* : 螺纹直径 < 颈径，内螺纹加工深度较深时，如攻丝深度超过螺纹长度，则会有折断的危险。

* : Thread Size < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

●美制螺纹用


订货方式 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部(P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
ZSP-T4-40	No. 4-40UNC	REG	P3	2.5	44	6.9	3	3.0	16.0	2.05	2	☐
ZSP-T5-40	No. 5-40UNC	REG	P3	2.5	46	6.9	3	4.0	17.5	2.35	2	☐
ZSP-T6-32	No. 6-32UNC	REG	P3	2.5	48	9.5	3	4.0	21.0	2.55	2	☐
ZSP-T6-40	No. 6-40UNF	REG	P3	2.5	48	6.9	3	4.0	21.0	2.75	2	☐
ZSP-T8-32	No. 8-32UNC	REG	P3	2.5	52	9.5	3	5.0	21.0	3.15	2	☐
ZSP-T8-36	No. 8-36UNF	REG	P3	2.5	52	7.9	3	5.0	21.0	3.25	2	☐
ZSP-T10-24	No.10-24UNC	REG	P3	2.5	60	12.6	3	5.5	26.0	3.55	2	☐
ZSP-T10-32	No.10-32UNF	REG	P3	2.5	60	9.5	3	5.5	26.0	3.85	2	☐
ZSP-T12-24	No.12-24UNC	REG	P3	2.5	60	12.6	3	5.5	26.0	4.25	2	☐
ZSP-T1/4-20	1/4-20UNC	REG	P3	2.5	62	15.4	3	6.0	32.0	4.85	2	☐
ZSP-T1/4-28	1/4-28UNF	REG	P3	2.5	62	10.5	3	6.0	32.0	5.25	2	☐
ZSP-T5/16-18	5/16-18UNC	REG	P3	2.5	70	17.7	3	6.1	31.5	6.25	4	☐
ZSP-T5/16-24	5/16-24UNF	REG	P3	2.5	70	12.2	3	6.1	27.5	6.65	4	☐
ZSP-T3/8-16	3/8-16UNC	REG	P3	2.5	75	19.9	3	7.0	33.5	7.65	4	☐
ZSP-T3/8-24	3/8-24UNF	REG	P3	2.5	75	12.2	3	7.0	27.5	8.25	4	☐
ZSP-T7/16-14	7/16-14UNC	REG	P4	2.5	80	22.7	3	8.0	36.0	9.05	4	☐
ZSP-T7/16-20	7/16-20UNF	REG	P3	2.5	80	15.9	3	8.0	30.0	9.65	4	☐
ZSP-T1/2-13	1/2-13UNC	REG	P4	2.5	85	26.0	3	9.0	44.5	10.45	4	☐
ZSP-T1/2-20	1/2-20UNF	REG	P3	2.5	85	16.4	3	9.0	35.5	11.15	4	☐
ZSP-T5/8-11	5/8-11UNC	REG	P4	2.5	95	30.1	3	12.0	48.5	13.25	4	☐
ZSP-T5/8-18	5/8-18UNF	REG	P3	2.5	95	18.6	3	12.0	37.5	14.25	4	☐

- 实现铁屑形状管理，使铁屑排出性稳定。
降低丝锥反转时铁屑咬入。

Achieves stable chip evacuation by controlling the chip shape.
Reduces chip biting when the tap is reversed.

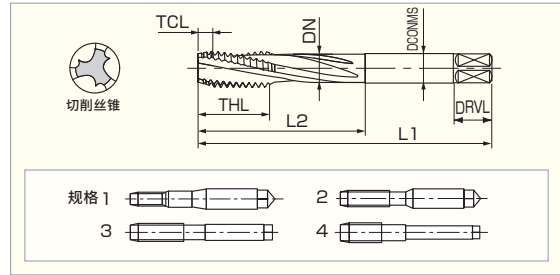

●公制航空航天螺纹用

订货方式 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部(P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
ZSP-T-HL2.5M0.45	M2.5 × 0.45	1b	2.5	44	5.0	3	4.0	17.0	2.45	2	☐
ZSP-T-HL2.6M0.45	M2.6 × 0.45	1b	2.5	44	5.0	3	4.0	17.0	2.55	2	☐
ZSP-T-HL3M0.5	M3 × 0.5	1b	2.5	46	5.6	3	4.0	20.0	2.95	2	☐
ZSP-T-HL4M0.7	M4 × 0.7	1b	2.5	52	8.1	3	5.5	23.0	4.05	2	☐
ZSP-T-HL5M0.8	M5 × 0.8	1b	2.5	60	9.4	3	6.0	26.0	5.05	2	☐
ZSP-T-HL6M1	M6 × 1	1b	2.5	62	12.0	3	6.2	29.0	6.05	3	☐
ZSP-T-HL8M1.25	M8 × 1.25	1b	2.5	70	15.4	3	7.0	33.0	8.15	4	☐
ZSP-T-HL10M1.5	M10 × 1.5	1b	2.5	75	18.9	3	8.5	36.5	10.15	4	☐
ZSP-T-HL10M1.25	M10 × 1.25	1b	2.5	75	15.7	3	8.5	33.0	10.15	4	☐
ZSP-T-HL12M1.75	M12 × 1.75	1b	2.5	82	22.4	3	10.5	41.5	12.25	4	☐
ZSP-T-HL12M1.5	M12 × 1.5	1b	2.5	82	20.9	3	10.5	40.0	12.15	4	☐
ZSP-T-HL12M1.25	M12 × 1.25	1b	2.5	82	17.2	3	10.5	34.5	12.15	4	☐
ZSP-T-HL14M2	M14 × 2	1b	2.5	88	25.9	3	13.0	46.0	14.25	4	☐
ZSP-T-HL14M1.5	M14 × 1.5	1b	2.5	88	20.9	3	12.5	40.0	14.15	4	☐
ZSP-T-HL16M2	M16 × 2	1b	2.5	95	25.9	3	14.0	49.0	16.25	4	☐
ZSP-T-HL16M1.5	M16 × 1.5	1b	2.5	95	20.9	3	14.0	40.0	16.15	4	☐

●美制航空航天螺纹用

订货方式 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部(P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
ZSP-T-HL4-40	No. 4-40UNC	1b	2.5	44	6.9	3	4.0	16.0	2.85	2	☐
ZSP-T-HL5-40	No. 5-40UNC	1b	2.5	46	6.9	3	5.0	17.5	3.15	2	☐
ZSP-T-HL6-32	No. 6-32UNC	1b	2.5	48	9.5	3	5.0	21.0	3.55	2	☐
ZSP-T-HL6-40	No. 6-40UNF	1b	2.5	48	6.9	3	5.0	21.0	3.55	2	☐
ZSP-T-HL8-32	No. 8-32UNC	1b	2.5	52	9.5	3	5.5	21.0	4.25	2	☐
ZSP-T-HL8-36	No. 8-36UNF	1b	2.5	52	7.9	3	5.5	21.0	4.15	2	☐
ZSP-T-HL10-24	No.10-24UNC	1b	2.5	60	12.6	3	6.0	26.0	4.95	2	☐
ZSP-T-HL10-32	No.10-32UNF	1b	2.5	60	9.5	3	6.0	26.0	4.85	2	☐
ZSP-T-HL12-24	No.12-24UNC	1b	2.5	60	12.6	3	6.2	26.0	5.55	3	☐
ZSP-T-HL1/4-20	1/4-20UNC	1b	2.5	62	15.4	3	6.2	30.0	6.45	4	☐
ZSP-T-HL1/4-28	1/4-28UNF	1b	2.5	62	10.5	3	6.2	25.0	6.45	4	☐
ZSP-T-HL5/16-18	5/16-18UNC	1b	2.5	70	17.7	3	7.0	31.5	8.15	4	☐
ZSP-T-HL5/16-24	5/16-24UNF	1b	2.5	70	12.2	3	7.0	27.5	8.05	4	☐
ZSP-T-HL3/8-16	3/8-16UNC	1b	2.5	75	19.9	3	8.5	33.5	9.75	4	☐
ZSP-T-HL3/8-24	3/8-24UNF	1b	2.5	75	12.2	3	8.0	27.5	9.65	4	☐
ZSP-T-HL7/16-14	7/16-14UNC	1b	2.5	80	22.7	3	10.5	36.0	11.35	4	☐
ZSP-T-HL7/16-20	7/16-20UNF	1b	2.5	80	15.9	3	9.0	30.0	11.25	4	☐
ZSP-T-HL1/2-13	1/2-13UNC	1b	2.5	85	26.0	3	12.0	44.5	12.95	4	☐
ZSP-T-HL1/2-20	1/2-20UNF	1b	2.5	85	16.4	3	10.5	35.5	12.85	4	☐
ZSP-T-HL5/8-11	5/8-11UNC	1b	2.5	95	30.1	3	14.0	48.5	16.25	4	☐
ZSP-T-HL5/8-18	5/8-18UNF	1b	2.5	95	18.6	3	14.0	37.5	16.05	4	☐

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

●是一种加工领域广且长寿命、偏差较小、高性能的
通孔用新式通用型丝锥。

High performance tap which have long tool life and stable tapping in various cutting condition.

New general-purpose tap series for through holes.

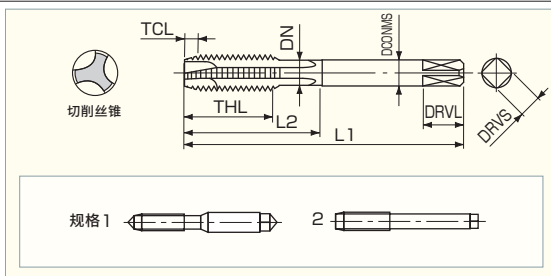

LIST 6852

订货方式 ZPO 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部(P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	M3 × 0.5	REG	P2	5	46	10.0	3	4.0	18	2.4	1	●
3M0.5R+1		REG+1	P3									●
3M0.5R+2		REG+2	P4									●
3M0.35R	M3 × 0.35	REG	P1	5	46	8.0	3	4.0	18	2.4	1	●
3M0.35R+1		REG+1	P2									●
3.5M0.6R	M3.5 × 0.6	REG	P2	5	48	11.0	3	4.0	18	2.8	1	●
3.5M0.6R+1		REG+1	P3									●
3.5M0.35R	M3.5 × 0.35	REG	P1	5	48	8.0	3	4.0	18	2.8	1	●
3.5M0.35R+1		REG+1	P2									●
4M0.7R	M4 × 0.7	REG	P2	5	52	12.5	3	5.0	18	3.1	1	●
4M0.7R+1		REG+1	P3									●
4M0.7R+2		REG+2	P4									●
4M0.5R	M4 × 0.5	REG	P2	5	52	10.0	3	5.0	18	3.1	1	●
4M0.5R+1		REG+1	P3									●
4.5M0.75R	M4.5 × 0.75	REG	P2	5	55	13.5	3	5.0	20	3.6	1	●
4.5M0.75R+1		REG+1	P3									●
4.5M0.5R	M4.5 × 0.5	REG	P2	5	55	10.0	3	5.0	20	3.6	1	●
4.5M0.5R+1		REG+1	P3									●
5M0.8R	M5 × 0.8	REG	P2	5	60	14.5	3	5.5	25	4.0	1	●
5M0.8R+1		REG+1	P3									●
5M0.8R+2		REG+2	P4									●
5M0.5R	M5 × 0.5	REG	P2	5	60	10.0	3	5.5	25	4.0	1	●
5M0.5R+1		REG+1	P3									●
5.5M0.5R	M5.5 × 0.5	REG	P2	5	60	10.0	3	5.5	26	4.4	1	●
5.5M0.5R+1		REG+1	P3									●
6M1R	M6 × 1	REG	P2	5	62	17.0	3	6.0	28	4.8	1	●
6M1R+1		REG+1	P3									●
6M1R+2		REG+2	P4									●
6M0.75R	M6 × 0.75	REG	P2	5	62	14.0	3	6.0	28	4.8	1	●
6M0.75R+1		REG+1	P3									●
6M0.5R	M6 × 0.5	REG	P2	5	62	10.0	3	6.0	28	4.8	1	●
6M0.5R+1		REG+1	P3									●
7M1R	M7 × 1	REG	P2	5	65	17.0	3	6.2	—	—	2	●
7M1R+1		REG+1	P3									●
7M0.75R	M7 × 0.75	REG	P2	5	65	14.0	3	6.2	—	—	2	●
7M0.75R+1		REG+1	P3									●
8M1.25R	M8 × 1.25	REG	P3	5	70	22.0	3	6.2	—	—	2	●
8M1.25R+1		REG+1	P4									●
8M1.25R+2		REG+2	P5									●
8M1R	M8 × 1	REG	P2	5	70	17.0	3	6.2	—	—	2	●
8M1R+1		REG+1	P3									●
8M0.75R	M8 × 0.75	REG	P2	5	70	14.0	3	6.2	—	—	2	●
8M0.75R+1		REG+1	P3									●
9M1.25R	M9 × 1.25	REG	P3	5	72	22.0	3	7.0	—	—	2	●
9M1.25R+1		REG+1	P4									●
9M1R	M9 × 1	REG	P2	5	72	17.0	3	7.0	—	—	2	●
9M1R+1		REG+1	P3									●
9M0.75R	M9 × 0.75	REG	P2	5	72	14.0	3	7.0	—	—	2	●
9M0.75R+1		REG+1	P3									●
10M1.5R	M10 × 1.5	REG	P3	5	75	27.0	3	7.0	—	—	2	●
10M1.5R+1		REG+1	P4									●
10M1.5R+2		REG+2	P5									●
10M1.25R	M10 × 1.25	REG	P3	5	75	22.0	3	7.0	—	—	2	●
10M1.25R+1		REG+1	P4									●
10M1R	M10 × 1	REG	P2	5	75	17.0	3	7.0	—	—	2	●
10M1R+1		REG+1	P3									●
10M0.75R	M10 × 0.75	REG	P2	5	75	14.0	3	7.0	—	—	2	●
10M0.75R+1		REG+1	P3									●

· 规格 1 为凸顶尖 Type 1 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部(P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
11M1.5R	M11 × 1.5	REG	P3	5	80	27.0	3	8.0	—	—	2	●
11M1.5R+1		REG+1	P4									●
11M1R	M11 × 1	REG	P2	5	80	17.0	3	8.0	—	—	2	●
11M1R+1		REG+1	P3									●
11M0.75R	M11 × 0.75	REG	P2	5	80	14.0	3	8.0	—	—	2	●
11M0.75R+1		REG+1	P3									●
12M1.75R	M12 × 1.75	REG	P4	5	82	32.0	3	8.5	—	—	2	●
12M1.75R+1		REG+1	P5									●
12M1.75R+2		REG+2	P6									●
12M1.5R	M12 × 1.5	REG	P3	5	82	28.0	3	8.5	—	—	2	●
12M1.5R+1		REG+1	P4									●
12M1.25R	M12 × 1.25	REG	P3	5	82	23.0	3	8.5	—	—	2	●
12M1.25R+1		REG+1	P4									●
12M1R	M12 × 1	REG	P2	5	82	19.0	3	8.5	—	—	2	●
12M1R+1		REG+1	P3									●
14M2R	M14 × 2	REG	P4	5	88	32.0	3	10.5	—	—	2	●
14M2R+1		REG+1	P5									●
14M1.5R	M14 × 1.5	REG	P3	5	88	28.0	3	10.5	—	—	2	●
14M1.5R+1		REG+1	P4									●
14M1.25R	M14 × 1.25	REG	P3	5	88	23.0	3	10.5	—	—	2	●
14M1R		REG	P2	5	88	19.0	3	10.5	—	—	2	●
16M2R	M16 × 2	REG	P4	5	95	32.0	3	12.5	—	—	2	●
16M2R+1		REG+1	P5									●
16M1.5R	M16 × 1.5	REG	P3	5	95	28.0	3	12.5	—	—	2	●
16M1.5R+1		REG+1	P4									●
16M1R	M16 × 1	REG	P2	5	95	19.0	3	12.5	—	—	2	●
18M2.5R		REG	P4	5	100	37.5	3	14.0	—	—	2	●
18M2.5R+1	M18 × 2.5	REG+1	P5									●
18M2R	M18 × 2	REG	P4	5	100	32.0	3	14.0	—	—	2	●
18M1.5R		REG	P3	5	100	28.0	3	14.0	—	—	2	●
18M1.5R+1	M18 × 1.5	REG+1	P4									●
18M1R	M18 × 1	REG	P2	5	100	19.0	3	14.0	—	—	2	●
20M2.5R		REG	P4	5	105	37.5	3	15.0	—	—	2	●
20M2.5R+1	M20 × 2.5	REG+1	P5									●
20M2R	M20 × 2	REG	P4	5	105	32.0	3	15.0	—	—	2	●
20M1.5R		REG	P3	5	105	28.0	3	15.0	—	—	2	●
20M1.5R+1	M20 × 1.5	REG+1	P4									●
20M1R	M20 × 1	REG	P2	5	105	19.0	3	15.0	—	—	2	●
22M2.5R		REG	P4	5	115	37.5	3	17.0	—	—	2	●
22M2.5R+1	M22 × 2.5	REG+1	P5									●
22M2R	M22 × 2	REG	P4	5	115	32.0	3	17.0	—	—	2	●
22M1.5R		REG	P3	5	115	28.0	3	17.0	—	—	2	●
22M1.5R+1	M22 × 1.5	REG+1	P4									●
22M1R	M22 × 1	REG	P2	5	115	19.0	3	17.0	—	—	2	●
24M3R		REG	P4	5	120	45.0	3	19.0	—	—	2	●
24M3R+1	M24 × 3	REG+1	P5									●
24M2R	M24 × 2	REG	P4	5	120	33.0	3	19.0	—	—	2	●
24M1.5R		REG	P3	5	120	31.0	3	19.0	—	—	2	●
24M1.5R+1	M24 × 1.5	REG+1	P4									●
24M1R	M24 × 1	REG	P2	5	120	20.0	3	19.0	—	—	2	●

●当标准尺寸丝锥长度不够时，请使用本丝锥。
This tap is used when a standard Hyper Z Point Tap is too short.

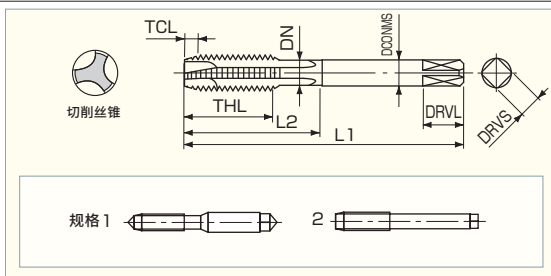

LIST 6856

订货方式 ZPOL 编码 × 全长

单位 (Unit) : mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部(P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	100	M3 × 0.5	REG P2	5	10.0	3	4.0	18	2.4	1	●
3M0.5R+1	100		REG+1 P3								●
3M0.5R+2	100		REG+2 P4								●
3M0.35R	100	M3 × 0.35	REG P1	5	8.0	3	4.0	18	2.4	1	●
3M0.35R+1	100		REG+1 P2								●
4M0.7R	100		REG P2								●
4M0.7R+1	100	M4 × 0.7	REG+1 P3	5	12.5	3	5.0	18	3.1	1	●
4M0.7R+2	100		REG+2 P4								●
4M0.5R	100		REG P2	5	10.0	3	5.0	18	3.1	1	●
4M0.5R+1	100	M4 × 0.5	REG+1 P3								●
5M0.8R	100		REG P2	5	14.5	3	5.5	25	4.0	1	●
5M0.8R+1	100	M5 × 0.8	REG+1 P3								●
5M0.8R+2	100		REG+2 P4								●
5M0.5R	100	M5 × 0.5	REG P2	5	10.0	3	5.5	25	4.0	1	●
5M0.5R+1	100		REG+1 P3								●
6M1R	100		REG P2	5	17.0	3	6.0	28	4.8	1	●
6M1R	150	M6 × 1	REG P2								●
6M1R+1	100		REG+1 P3								●
6M1R+1	150		REG+1 P3								●
6M1R+2	100		REG+2 P4								●
6M1R+2	150		REG+2 P4								●
6M0.75R	100	M6 × 0.75	REG P2	5	14.0	3	6.0	28	4.8	1	●
6M0.75R	150		REG P2								●
6M0.75R+1	100		REG+1 P3								●
6M0.75R+1	150		REG+1 P3								●
8M1.25R	100	M8 × 1.25	REG P3	5	22.0	3	6.2	-	-	2	●
8M1.25R	150		REG P3								●
8M1.25R+1	100		REG+1 P4								●
8M1.25R+1	150		REG+1 P4								●
8M1.25R+2	100		REG+2 P5								●
8M1.25R+2	150		REG+2 P5								●
8M1R	100	M8 × 1	REG P2	5	17.0	3	6.2	-	-	2	●
8M1R	150		REG P2								●
8M1R+1	100		REG+1 P3								●
8M1R+1	150		REG+1 P3								●
8M0.75R	100		REG P2	5	14.0	3	6.2	-	-	2	●
8M0.75R	150		REG P2								●
8M0.75R+1	100	M8 × 0.75	REG+1 P3								●
8M0.75R+1	150		REG+1 P3								●
10M1.5R	100		REG P3	5	27.0	3	7.0	-	-	2	●
10M1.5R	150		REG P3								●
10M1.5R+1	100	M10 × 1.5	REG+1 P4								●
10M1.5R+1	150		REG+1 P4								●
10M1.5R+2	100		REG+2 P5								●
10M1.5R+2	150		REG+2 P5								●
10M1.25R	100	M10 × 1.25	REG P3	5	22.0	3	7.0	-	-	2	●
10M1.25R	150		REG P3								●
10M1.25R+1	100		REG+1 P4								●
10M1.25R+1	150		REG+1 P4								●
10M1R	100	M10 × 1	REG P2	5	17.0	3	7.0	-	-	2	●
10M1R	150		REG P2								●
10M1R+1	100		REG+1 P3								●
10M1R+1	150		REG+1 P3								●
10M0.75R	100	M10 × 0.75	REG P2	5	14.0	3	7.0	-	-	2	●
10M0.75R	150		REG P2								●
10M0.75R+1	100		REG+1 P3								●
10M0.75R+1	150		REG+1 P3								●

· 规格 1 为凸顶尖 Type 1 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


单位 (Unit) : mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部(P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
12M1.75R	100	M12 × 1.75	REG	P4	5	32.0	3	8.5	—	—	2	●
12M1.75R	150		REG	P4								●
12M1.75R+1	100		REG+1	P5								●
12M1.75R+1	150		REG+1	P5								●
12M1.75R+2	100		REG+2	P6								●
12M1.75R+2	150		REG+2	P6								●
12M1.5R	100	M12 × 1.5	REG	P3	5	28.0	3	8.5	—	—	2	●
12M1.5R	150		REG	P3								●
12M1.5R+1	100		REG+1	P4								●
12M1.5R+1	150	M12 × 1.25	REG+1	P4	5	23.0	3	8.5	—	—	2	●
12M1.25R	100		REG	P3								●
12M1.25R	150		REG	P3								●
12M1.25R+1	100		REG+1	P4								●
12M1.25R+1	150	M12 × 1	REG+1	P4	5	19.0	3	8.5	—	—	2	●
12M1R	100		REG	P2								●
12M1R	150		REG	P2								●
12M1R+1	100		REG+1	P3								●
12M1R+1	150		REG+1	P3								●
14M2R	150	M14 × 2	REG	P4	5	32.0	3	10.5	—	—	2	●
14M1.5R	150	M14 × 1.5	REG	P3		28.0						●
14M1.25R	150	M14 × 1.25	REG	P3		23.0						●
14M1R	150	M14 × 1	REG	P2		19.0						●
16M2R	150	M16 × 2	REG	P4	5	32.0	3	12.5	—	—	2	●
16M2R	200		REG	P4		32.0						●
16M1.5R	150	M16 × 1.5	REG	P3		28.0						●
16M1R	150	M16 × 1	REG	P2		19.0						●
18M2.5R	150	M18 × 2.5	REG	P4	5	37.5	3	14.0	—	—	2	●
18M2R	150	M18 × 2	REG	P4		32.0						●
18M1.5R	150	M18 × 1.5	REG	P3		28.0						●
18M1R	150	M18 × 1	REG	P2		19.0						●
20M2.5R	150	M20 × 2.5	REG	P4	5	37.5	3	15.0	—	—	2	●
20M2.5R	200		REG	P4		37.5						●
20M2R	150	M20 × 2	REG	P4		32.0						●
20M1.5R	150	M20 × 1.5	REG	P3		28.0						●
20M1R	150	M20 × 1	REG	P2	5	19.0	3	17.0	—	—	2	●
22M2.5R	150	M22 × 2.5	REG	P4		37.5						●
22M2R	150	M22 × 2	REG	P4		32.0						●
22M1.5R	150	M22 × 1.5	REG	P3		28.0						●
22M1R	150	M22 × 1	REG	P2	5	19.0	3	19.0	—	—	2	●
24M3R	150	M24 × 3	REG	P4		45.0						●
24M3R	200		REG	P4		45.0						●
24M2R	150	M24 × 2	REG	P4		33.0						●
24M1.5R	150	M24 × 1.5	REG	P3		31.0						●
24M1R	150	M24 × 1	REG	P2		20.0						●

●是一种在不锈钢加工领域中长寿命、偏差较小、高性能的通孔用丝锥。

In Stainless Steel processing, high performance tap for through holes which have long tool life with small fluctuations.

新品

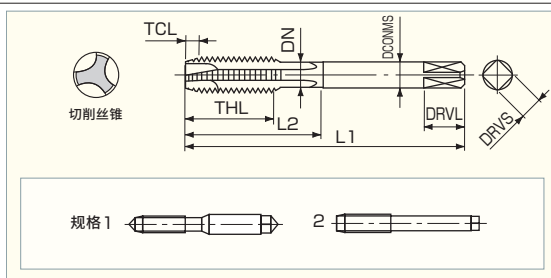

LIST 6860

订货方式 ZPO-SUS 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部(P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	M3 × 0.5	REG	P2	5	46	10.0	3	4.0	18	2.4	1	●
3M0.35R	M3 × 0.35	REG	P2	5	46	8.0	3	4.0	18	2.4	1	●
4M0.7R	M4 × 0.7	REG	P3	5	52	12.5	3	5.0	18	3.1	1	●
4M0.5R	M4 × 0.5	REG	P2	5	52	10.0	3	5.0	18	3.1	1	●
5M0.8R	M5 × 0.8	REG	P3	5	60	14.5	3	5.5	25	4.0	1	●
5M0.5R	M5 × 0.5	REG	P2	5	60	10.0	3	5.5	25	4.0	1	●
6M1R	M6 × 1	REG	P3	5	62	17.0	3	6.0	28	4.8	1	●
6M0.75R	M6 × 0.75	REG	P3	5	62	14.0	3	6.0	28	4.8	1	●
6M0.5R	M6 × 0.5	REG	P2	5	62	10.0	3	6.0	28	4.8	1	●
8M1.25R	M8 × 1.25	REG	P3	5	70	22.0	3	6.2	—	—	2	●
8M1R	M8 × 1	REG	P3	5	70	17.0	3	6.2	—	—	2	●
8M0.75R	M8 × 0.75	REG	P3	5	70	14.0	3	6.2	—	—	2	●
10M1.5R	M10 × 1.5	REG	P3	5	75	27.0	3	7.0	—	—	2	●
10M1.25R	M10 × 1.25	REG	P3	5	75	22.0	3	7.0	—	—	2	●
10M1R	M10 × 1	REG	P3	5	75	17.0	3	7.0	—	—	2	●
10M0.75R	M10 × 0.75	REG	P3	5	75	14.0	3	7.0	—	—	2	●
12M1.75R	M12 × 1.75	REG	P4	5	82	32.0	3	8.5	—	—	2	●
12M1.5R	M12 × 1.5	REG	P3	5	82	28.0	3	8.5	—	—	2	●
12M1.25R	M12 × 1.25	REG	P3	5	82	23.0	3	8.5	—	—	2	●
12M1R	M12 × 1	REG	P3	5	82	19.0	3	8.5	—	—	2	●
14M2R	M14 × 2	REG	P4	5	88	32.0	3	10.5	—	—	2	●
14M1.5R	M14 × 1.5	REG	P3	5	88	28.0	3	10.5	—	—	2	●
16M2R	M16 × 2	REG	P4	5	95	32.0	3	12.5	—	—	2	●
16M1.5R	M16 × 1.5	REG	P3	5	95	28.0	3	12.5	—	—	2	●
18M2.5R	M18 × 2.5	REG	P4	5	100	37.5	3	14.0	—	—	2	●
18M1.5R	M18 × 1.5	REG	P3	5	100	28.0	3	14.0	—	—	2	●
20M2.5R	M20 × 2.5	REG	P4	5	105	37.5	3	15.0	—	—	2	●
20M1.5R	M20 × 1.5	REG	P3	5	105	28.0	3	15.0	—	—	2	●
22M2.5R	M22 × 2.5	REG	P4	5	115	37.5	3	17.0	—	—	2	●
22M1.5R	M22 × 1.5	REG	P3	5	115	28.0	3	17.0	—	—	2	●
24M3R	M24 × 3	REG	P4	5	120	45.0	3	19.0	—	—	2	●
24M1.5R	M24 × 1.5	REG	P3	5	120	31.0	3	19.0	—	—	2	●

· 规格 1 为凸顶尖 Type 1 with External Center


套装商品
其它

精密工具

技术资料
索引

● 表面未经处理的通用型丝锥。

This non-coated spiral tap is used universally.

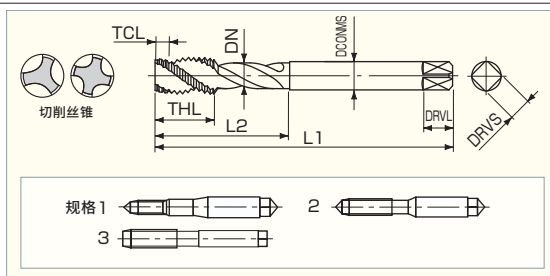

LIST 6900

订货方式 **NSP** 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
2MO.4R	M2 × 0.4	REG P1	2.5	40	9.0	3	3.0	15	2.1 *	1	●
2MO.4R+1		REG+1 P2									
2MO.4R+2		REG+2 P3									
2.2MO.45R	M2.2 × 0.45	REG P1	2.5	42	9.5	3	3.0	15	2.3 *	1	●
2.3MO.4R	M2.3 × 0.4	REG P1	2.5	42	9.5	3	3.0	15	2.4 *	1	●
2.5MO.45R	M2.5 × 0.45	REG P1	2.5	44	10.0	3	3.0	16	2.7 *	1	●
2.5MO.45R+1		REG+1 P2									
2.5MO.45R+2		REG+2 P3									
2.5MO.35R	M2.5 × 0.35	REG P1	2.5	44	10.0	3	3.0	16	2.7 *	1	●
2.6MO.45R	M2.6 × 0.45	REG P1	2.5	44	10.0	3	3.0	16	2.7 *	1	●
2.6MO.45R+1		REG+1 P2									
2.6MO.45R+2		REG+2 P3									
3MO.5R	M3 × 0.5	REG P2	2.5	46	5.0	3	4.0	18	2.4	2	●
3MO.5R+1		REG+1 P3									
3MO.5R+2		REG+2 P4									
3MO.35R	M3 × 0.35	REG P1	2.5	46	5.0	3	4.0	18	2.4	2	●
3.5MO.6R	M3.5 × 0.6	REG P1	2.5	48	6.0	3	4.0	18	2.8	2	●
3.5MO.6R+1		REG+1 P2									
3.5MO.6R+2		REG+2 P3									
4MO.7R	M4 × 0.7	REG P2	2.5	52	7.0	3	5.0	20	3.1	2	●
4MO.7R+1		REG+1 P3									
4MO.7R+2		REG+2 P4									
4MO.5R	M4 × 0.5	REG P2	2.5	52	7.0	3	5.0	20	3.1	2	●
5MO.8R	M5 × 0.8	REG P2	2.5	60	8.0	3	5.5	22	4.0	2	●
5MO.8R+1		REG+1 P3									
5MO.8R+2		REG+2 P4									
5MO.5R	M5 × 0.5	REG P2	2.5	60	8.0	3	5.5	22	4.0	2	●
6M1R	M6 × 1	REG P2	2.5	62	10.0	3	6.0	25	4.8	2	●
6M1R+1		REG+1 P3									
6M1R+2		REG+2 P4									
6MO.75R	M6 × 0.75	REG P2	2.5	62	10.0	3	6.0	25	4.8	2	●
6MO.75R+1		REG+1 P3									
6MO.75R+2		REG+2 P4									
6MO.5R	M6 × 0.5	REG P2	2.5	62	10.0	3	6.0	25	4.8	2	●
7M1R	M7 × 1	REG P2	2.5	65	10.0	3	6.2	26	5.8	3	●
7MO.75R		REG P2									
8M1.25R		REG P3									
8M1.25R+1	M8 × 1.25	REG+1 P4	2.5	70	12.0	3	6.2	34	6.0	3	●
8M1.25R+2		REG+2 P5									
8M1R		REG P2									
8M1R+1	M8 × 1	REG+1 P3	2.5	70	12.0	3	6.2	34	6.0	3	●
8M1R+2		REG+2 P4									
8MO.75R		REG P2									
8MO.5R	M8 × 0.5	REG P2	2.5	70	12.0	3	6.2	34	6.0	3	●
9M1.25R	M9 × 1.25	REG P3	2.5	72	12.0	3	7.0	38	6.9	3	●
9M1R		REG P2									
10M1.5R		REG P3									
10M1.5R+1	M10 × 1.5	REG+1 P4	2.5	75	15.0	3	7.0	39	6.8	3	●
10M1.5R+2		REG+2 P5									
10M1.25R		REG P3									
10M1.25R+1	M10 × 1.25	REG+1 P4	2.5	75	15.0	3	7.0	39	6.8	3	●
10M1.25R+2		REG+2 P5									
10M1R		REG P2									
10M1R+1	M10 × 1	REG+1 P3	2.5	75	15.0	3	7.0	39	6.8	3	●
10M1R+2		REG+2 P4									
10MO.75R		REG P2									

* : 螺纹直径 < 颈径。内螺纹加工深度较深时, 如插入的长度超过螺纹长度, 则会有折断的危险。

* : Thread Size < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

· 规格 1 ~ 2 为凸顶尖 Type 1 ~ 2 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


← 上一页 Previous Page

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
12M1.75R	M12 × 1.75	REG	P3	2.5	82	17.0	3	8.5	43	8.3	3	●
12M1.75R+1		REG+1	P4									
12M1.75R+2		REG+2	P5									
12M1.5R	M12 × 1.5	REG	P3	2.5	82	17.0	3	8.5	43	8.3	3	●
12M1.5R+1		REG+1	P4									
12M1.5R+2		REG+2	P5									
12M1.25R	M12 × 1.25	REG	P3	2.5	82	17.0	3	8.5	43	8.3	3	●
12M1.25R+1		REG+1	P4									
12M1.25R+2		REG+2	P5									
12M1R	M12 × 1	REG	P2	2.5	82	17.0	3	8.5	43	8.3	3	●
12M0.75R	M12 × 0.75	REG	P2	2.5	82	17.0	3	8.5	43	8.3	3	△
12M0.5R	M12 × 0.5	REG	P2	2.5	82	17.0	3	8.5	43	8.3	3	△
13M1.75R	M13 × 1.75	REG	P2	2.5	88	17.0	3	9.5	43	9.3	3	△
14M2R	M14 × 2	REG	P2	2.5	88	20.0	3	10.5	44	10.3	3	●
14M1.5R	M14 × 1.5	REG	P2	2.5	88	20.0	3	10.5	44	10.3	3	●
14M1.25R	M14 × 1.25	REG	P2	2.5	88	20.0	3	10.5	44	10.3	3	●
14M1R	M14 × 1	REG	P2	2.5	88	20.0	3	10.5	44	10.3	3	●
15M2R	M15 × 2	REG	P2	2.5	90	20.0	3	10.5	47	10.3	3	△
15M1.5R	M15 × 1.5	REG	P2	2.5	90	20.0	3	10.5	47	10.3	3	●
16M2R	M16 × 2	REG	P2	2.5	95	20.0	3	12.5	50	12.3	3	●
16M1.5R	M16 × 1.5	REG	P2	2.5	95	20.0	3	12.5	50	12.3	3	●
16M1R	M16 × 1	REG	P2	2.5	95	20.0	3	12.5	50	12.3	3	●
18M2.5R	M18 × 2.5	REG	P3	2.5	100	25.0	3	14.0	56	13.8	3	●
18M2R	M18 × 2	REG	P3	2.5	100	25.0	3	14.0	56	13.8	3	●
18M1.5R	M18 × 1.5	REG	P2	2.5	100	25.0	3	14.0	56	13.8	3	●
19M2.5R	M19 × 2.5	REG	P3	2.5	105	25.0	3	14.0	56	13.8	3	△
19M1.5R	M19 × 1.5	REG	P2	2.5	105	25.0	3	14.0	56	13.8	3	△
19M1R	M19 × 1	REG	P2	2.5	105	25.0	3	14.0	56	13.8	3	△
20M2.5R	M20 × 2.5	REG	P3	2.5	105	25.0	4	15.0	57	14.8	3	●
20M2R	M20 × 2	REG	P3	2.5	105	25.0	4	15.0	57	14.8	3	●
20M1.5R	M20 × 1.5	REG	P2	2.5	105	25.0	4	15.0	57	14.8	3	●
22M2.5R	M22 × 2.5	REG	P3	2.5	115	25.0	4	17.0	62	16.8	3	●
22M2R	M22 × 2	REG	P3	2.5	115	25.0	4	17.0	62	16.8	3	●
22M1.5R	M22 × 1.5	REG	P2	2.5	115	25.0	4	17.0	62	16.8	3	●
22M1R	M22 × 1	REG	P2	2.5	115	25.0	4	17.0	62	16.8	3	●
23M2.5R	M23 × 2.5	REG	P3	2.5	120	25.0	4	18.0	67	17.8	3	△
23M2R	M23 × 2	REG	P3	2.5	120	25.0	4	18.0	67	17.8	3	△
24M3R	M24 × 3	REG	P3	2.5	120	30.0	4	19.0	67	18.8	3	●
24M2R	M24 × 2	REG	P3	2.5	120	30.0	4	19.0	67	18.8	3	●
24M1.5R	M24 × 1.5	REG	P2	2.5	120	30.0	4	19.0	67	18.8	3	●
24M1R	M24 × 1	REG	P2	2.5	120	30.0	4	19.0	67	18.8	3	●
25M3R	M25 × 3	REG	P3	2.5	125	30.0	4	19.0	67	18.8	3	△
25M1.5R	M25 × 1.5	REG	P2	2.5	125	30.0	4	19.0	67	18.8	3	●
26M3R	M26 × 3	REG	P3	2.5	125	30.0	4	20.0	67	19.7	3	△
26M1.5R	M26 × 1.5	REG	P2	2.5	125	30.0	4	20.0	67	19.7	3	●
27M3R	M27 × 3	REG	P3	2.5	130	30.0	4	20.0	67	19.7	3	●
27M2R	M27 × 2	REG	P3	2.5	130	30.0	4	20.0	67	19.7	3	●
27M1.5R	M27 × 1.5	REG	P2	2.5	130	30.0	4	20.0	67	19.7	3	●
28M3R	M28 × 3	REG	P3	2.5	130	30.0	4	21.0	67	20.7	3	△
28M2R	M28 × 2	REG	P3	2.5	130	30.0	4	21.0	67	20.7	3	●
28M1.5R	M28 × 1.5	REG	P2	2.5	130	30.0	4	21.0	67	20.7	3	●
30M3.5R	M30 × 3.5	REG	P3	2.5	135	35.0	4	23.0	72	22.7	3	●
30M3R	M30 × 3	REG	P3	2.5	135	30.0	4	23.0	72	22.7	3	●
30M2R	M30 × 2	REG	P3	2.5	135	30.0	4	23.0	72	22.7	3	●
30M1.5R	M30 × 1.5	REG	P2	2.5	135	30.0	4	23.0	72	22.7	3	●
32M1.5R	M32 × 1.5	REG	P3	2.5	145	30.0	4	24.0	72	23.7	3	●
33M3.5R	M33 × 3.5	REG	P3	2.5	145	35.0	4	25.0	77	24.7	3	●
33M2R	M33 × 2	REG	P3	2.5	145	30.0	4	25.0	77	24.7	3	●
33M1.5R	M33 × 1.5	REG	P3	2.5	145	30.0	4	25.0	77	24.7	3	●
35M1.5R	M35 × 1.5	REG	P3	2.5	155	30.0	4	26.0	77	25.7	3	●
36M4R	M36 × 4	REG	P4	2.5	155	40.0	4	28.0	82	27.7	3	●
36M3R	M36 × 3	REG	P4	2.5	155	30.0	4	28.0	82	27.7	3	●
36M2R	M36 × 2	REG	P3	2.5	155	30.0	4	28.0	82	27.7	3	●
36M1.5R	M36 × 1.5	REG	P3	2.5	155	30.0	4	28.0	82	27.7	3	●

●当标准尺寸丝锥长度不够时，请使用本丝锥。

This tap is used when a standard N Spiral Tap is too short.

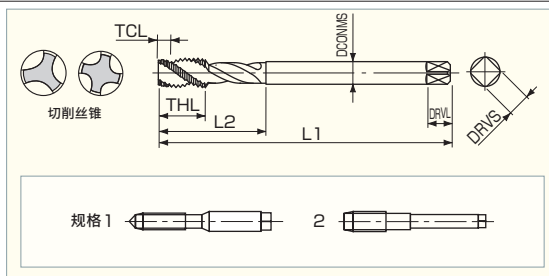

LIST 6902

订货方式 **NSPL** 编码 × 全长

单位 (Unit) : mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	规格 Type	库存 Stock
3M0.5R	100	M3 × 0.5	REG	P2	2.5	5.0	3	4.0	18.0	1	●
3M0.5R	120										
3M0.5R	150										
4M0.7R	100	M4 × 0.7	REG	P2	2.5	7.0	3	5.0	20.0	1	●
4M0.7R	120										
4M0.7R	150										
5M0.8R	100	M5 × 0.8	REG	P2	2.5	8.0	3	5.5	22.0	1	●
5M0.8R	120										
5M0.8R	150										
6M1R	100	M6 × 1	REG	P2	2.5	7.0	3	6.0	31.0	1	●
6M1R	120										
6M1R	150										
8M1.25R	100	M8 × 1.25	REG	P3	2.5	8.8	3	6.2	30.0	2	●
8M1.25R	120										
8M1.25R	150										
10M1.5R	100	M10 × 1.5	REG	P3	2.5	10.5	3	7.0	31.4	2	●
10M1.5R	120										
10M1.5R	150										
10M1.25R	100	M10 × 1.25	REG	P3	2.5	10.5	3	7.0	31.4	2	●
10M1.25R	120										
10M1.25R	150										
12M1.75R	150	M12 × 1.75	REG	P3	2.5	12.3	3	8.5	38.0	2	●
12M1.75R	200										
12M1.5R	150	M12 × 1.5	REG	P3	2.5	12.3	3	8.5	38.0	2	●
12M1.25R	150	M12 × 1.25	REG	P3	2.5	12.3	3	8.5	38.0	2	●
14M2R	150	M14 × 2	REG	P2	2.5	14.0	3	10.5	42.0	2	●
14M2R	200										
14M1.5R	150	M14 × 1.5	REG	P2	2.5	14.0	3	10.5	42.0	2	●
16M2R	150	M16 × 2	REG	P2	2.5	14.0	3	12.5	45.0	2	●
16M2R	200										
16M1.5R	150	M16 × 1.5	REG	P2	2.5	14.0	3	12.5	45.0	2	●
18M2.5R	150	M18 × 2.5	REG	P3	2.5	17.5	3	14.0	48.0	2	●
18M2.5R	200										
18M1.5R	150	M18 × 1.5	REG	P2	2.5	17.5	3	14.0	48.0	2	●
20M2.5R	150	M20 × 2.5	REG	P3	2.5	17.5	4	15.0	50.0	2	●
20M2.5R	200										
20M1.5R	150	M20 × 1.5	REG	P2	2.5	17.5	4	15.0	50.0	2	●
22M2.5R	200	M22 × 2.5	REG	P3	2.5	17.5	4	17.0	55.0	2	●
22M1.5R	150	M22 × 1.5	REG	P2	2.5	17.5	4	17.0	55.0	2	●
24M3R	150	M24 × 3	REG	P3	2.5	21.0	4	19.0	58.0	2	●
24M3R	200										
24M1.5R	150	M24 × 1.5	REG	P2	2.5	21.0	4	19.0	58.0	2	●

· 规格 1 为凸顶尖 Type 1 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●表面未经处理的通用型丝锥。

This non-coated point tap is used universally.

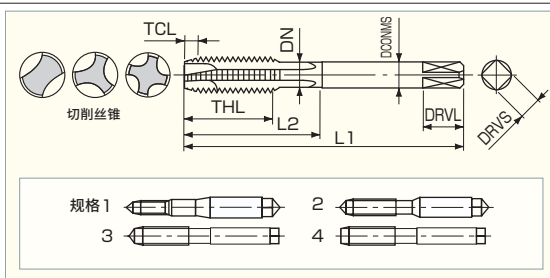

LIST 6906

订货方式 **NPO** 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
1.4M0.3R	M1.4 × 0.3	REG	P1	5	34	7.0	2	3.0	11	1.5 *	1 ●
1.4M0.3R+1		REG+1	P2								
1.4M0.3R+2		REG+2	P3								
1.6M0.35R	M1.6 × 0.35	REG	P1	5	36	8.0	2	3.0	13	1.7 *	1 ●
1.6M0.35R+1		REG+1	P2								
1.6M0.35R+2		REG+2	P3								
1.7M0.35R	M1.7 × 0.35	REG	P1	5	36	8.0	2	3.0	13	1.8 *	1 ●
1.7M0.35R+1		REG+1	P2								
1.7M0.35R+2		REG+2	P3								
2M0.4R	M2 × 0.4	REG	P1	5	40	9.0	2	3.0	15	2.1 *	1 ●
2M0.4R+1		REG+1	P2								
2M0.4R+2		REG+2	P3								
2.2M0.45R	M2.2 × 0.45	REG	P2	5	42	9.5	2	3.0	15	2.3 *	1 ●
2.3M0.4R	M2.3 × 0.4	REG	P1	5	42	9.5	2	3.0	15	2.4 *	1 ●
2.3M0.4R+1		REG+1	P2								
2.3M0.4R+2		REG+2	P3								
2.5M0.45R	M2.5 × 0.45	REG	P2	5	44	10.0	2	3.0	16	2.7 *	1 ●
2.5M0.45R+1		REG+1	P3								
2.5M0.45R+2		REG+2	P4								
2.6M0.45R	M2.6 × 0.45	REG	P2	5	44	10.0	2	3.0	16	2.7 *	1 ●
2.6M0.45R+1		REG+1	P3								
2.6M0.45R+2		REG+2	P4								
3M0.5R	M3 × 0.5	REG	P2	5	46	11.0	3	4.0	18	2.4	2 ●
3M0.5R+1		REG+1	P3								
3M0.5R+2		REG+2	P4								
3.5M0.6R	M3.5 × 0.6	REG	P2	5	48	13.0	3	4.0	18	2.8	2 ●
3.5M0.6R+1		REG+1	P3								
3.5M0.6R+2		REG+2	P4								
4M0.7R	M4 × 0.7	REG	P2	5	52	13.0	3	5.0	20	3.1	2 ●
4M0.7R+1		REG+1	P3								
4M0.7R+2		REG+2	P4								
4M0.5R	M4 × 0.5	REG	P2	5	52	13.0	3	5.0	20	3.1	2 ●
5M0.8R	M5 × 0.8	REG	P2	5	60	16.0	3	5.5	22	4.0	2 ●
5M0.8R+1		REG+1	P3								
5M0.8R+2		REG+2	P4								
6M1R	M6 × 1	REG	P2	5	62	19.0	3	6.0	27	4.8	2 ●
6M1R+1		REG+1	P3								
6M1R+2		REG+2	P4								
6M0.75R	M6 × 0.75	REG	P2	5	62	19.0	3	6.0	27	4.8	2 ●
6M0.75R+1		REG+1	P3								
6M0.75R+2		REG+2	P4								
8M1.25R	M8 × 1.25	REG	P3	5	70	22.0	3	6.2	34	6.0	3 ●
8M1.25R+1		REG+1	P4								
8M1.25R+2		REG+2	P5								
8M1R	M8 × 1	REG	P2	5	70	22.0	3	6.2	34	6.0	3 ●
8M1R+1		REG+1	P3								
8M1R+2		REG+2	P4								
10M1.5R	M10 × 1.5	REG	P3	5	75	24.0	3	7.0	39	6.8	3 ●
10M1.5R+1		REG+1	P4								
10M1.5R+2		REG+2	P5								
10M1.25R	M10 × 1.25	REG	P3	5	75	24.0	3	7.0	39	6.8	3 ●
10M1.25R+1		REG+1	P4								
10M1.25R+2		REG+2	P5								
10M1R	M10 × 1	REG	P3	5	75	24.0	3	7.0	39	6.8	3 ●
10M1R+1		REG+1	P4								
10M1R+2		REG+2	P5								

* : 螺纹直径 < 颈径。内螺纹加工深度较深时，如插入的长度超过螺纹长度，则会有折断的危险。

* : Thread Size < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.


· 规格 1 ~ 3 为凸顶尖 Type 1 ~ 3 with External Center

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
12M1.75R	M12 × 1.75	REG	P4	5	82	29.0	3	8.5	43	8.3	4	●
12M1.75R+1		REG+1	P5									
12M1.75R+2		REG+2	P6									
12M1.5R	M12 × 1.5	REG	P3	5	82	29.0	3	8.5	43	8.3	4	●
12M1.5R+1		REG+1	P4									
12M1.5R+2		REG+2	P5									
12M1.25R	M12 × 1.25	REG	P4	5	82	29.0	3	8.5	43	8.3	4	●
12M1.25R+1		REG+1	P5									
12M1.25R+2		REG+2	P6									
12M1R	M12 × 1	REG	P3	5	82	29.0	3	8.5	43	8.3	4	●
12M1R+1		REG+1	P4									
12M1R+2		REG+2	P5									
14M2R	M14 × 2	REG	P4	5	88	30.0	3	10.5	49	10.3	4	●
14M1.5R	M14 × 1.5	REG	P3	5	88	30.0	3	10.5	49	10.3	4	●
14M1R	M14 × 1	REG	P3	5	88	30.0	3	10.5	49	10.3	4	●
16M2R	M16 × 2	REG	P4	5	95	32.0	3	12.5	52	12.3	4	●
16M1.5R	M16 × 1.5	REG	P3	5	95	32.0	3	12.5	52	12.3	4	●
18M2.5R	M18 × 2.5	REG	P4	5	100	37.0	3	14.0	56	13.8	4	●
18M1.5R	M18 × 1.5	REG	P4	5	100	37.0	3	14.0	56	13.8	4	●
18M1R	M18 × 1	REG	P3	5	100	37.0	3	14.0	56	13.8	4	●
20M2.5R	M20 × 2.5	REG	P4	5	105	37.0	3	15.0	57	14.8	4	●
20M1.5R	M20 × 1.5	REG	P4	5	105	37.0	3	15.0	57	14.8	4	●
20M1R	M20 × 1	REG	P3	5	105	37.0	3	15.0	57	14.8	4	●
22M2.5R	M22 × 2.5	REG	P4	5	115	38.0	3	17.0	62	16.8	4	●
22M1.5R	M22 × 1.5	REG	P4	5	115	38.0	3	17.0	62	16.8	4	●
24M3R	M24 × 3	REG	P4	5	120	45.0	3	19.0	67	18.8	4	●
24M2R	M24 × 2	REG	P4	5	120	45.0	3	19.0	67	18.8	4	●
24M1.5R	M24 × 1.5	REG	P4	5	120	45.0	3	19.0	67	18.8	4	●
25M1.5R	M25 × 1.5	REG	P4	5	125	45.0	3	19.0	67	18.8	4	●
26M1.5R	M26 × 1.5	REG	P4	5	125	45.0	4	20.0	67	19.7	4	●
27M3R	M27 × 3	REG	P4	5	130	45.0	4	20.0	67	19.7	4	●
27M1.5R	M27 × 1.5	REG	P4	5	130	45.0	4	20.0	67	19.7	4	●
30M3.5R	M30 × 3.5	REG	P5	5	135	48.0	4	23.0	72	22.7	4	●
30M3R	M30 × 3	REG	P4	5	135	48.0	4	23.0	72	22.7	4	●
30M2R	M30 × 2	REG	P4	5	135	48.0	4	23.0	72	22.7	4	●
30M1.5R	M30 × 1.5	REG	P4	5	135	48.0	4	23.0	72	22.7	4	●
30M1R	M30 × 1	REG	P2	5	135	48.0	4	23.0	72	22.7	4	●
32M1.5R	M32 × 1.5	REG	P4	5	145	51.0	4	24.0	72	23.7	4	●
33M3.5R	M33 × 3.5	REG	P5	5	145	51.0	4	25.0	77	24.7	4	●
33M2R	M33 × 2	REG	P3	5	145	51.0	4	25.0	77	24.7	4	●
33M1.5R	M33 × 1.5	REG	P4	5	145	51.0	4	25.0	77	24.7	4	●
35M1.5R	M35 × 1.5	REG	P4	5	155	51.0	4	26.0	77	25.7	4	●
36M4R	M36 × 4	REG	P5	5	155	57.0	4	28.0	82	27.7	4	●
36M3R	M36 × 3	REG	P4	5	155	57.0	4	28.0	82	27.7	4	●
36M2R	M36 × 2	REG	P3	5	155	57.0	4	28.0	82	27.7	4	●
36M1.5R	M36 × 1.5	REG	P4	5	155	57.0	4	28.0	82	27.7	4	●

●当标准尺寸丝锥长度不够时，请使用本丝锥。

This tap is used when a standard N Point Tap is too short.

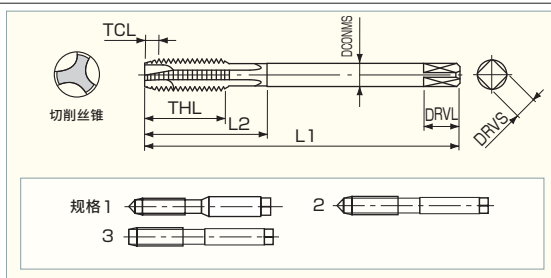

LIST 6908

订货方式 **NPOL** 编码 × 全长


单位 (Unit) : mm

编码 Code No.	全长 L	螺纹尺寸 Thread Size	等级 TAP Limit		切削锥部 (P) TCL (P)	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	规格 Type	库存 Stock
3M0.5R	100	M3 × 0.5	REG	P2	5	11	3	4.0	18	1	●
3M0.5R	120										
3M0.5R	150										
4M0.7R	100	M4 × 0.7	REG	P2	5	13	3	5.0	20	1	●
4M0.7R	120										
4M0.7R	150										
5M0.8R	100	M5 × 0.8	REG	P2	5	16	3	5.5	22	1	●
5M0.8R	120										
5M0.8R	150										
6M1R	100	M6 × 1	REG	P2	5	19	3	6.0	27	1	●
6M1R	120										
6M1R	150										
8M1.25R	100	M8 × 1.25	REG	P3	5	22	3	6.2	34	2	●
8M1.25R	120										
8M1.25R	150										
10M1.5R	100	M10 × 1.5	REG	P3	5	24	3	7.0	39	2	●
10M1.5R	120										
10M1.5R	150										
10M1.25R	100	M10 × 1.25	REG	P3	5	24	3	7.0	39	2	●
10M1.25R	120										
10M1.25R	150										
12M1.75R	150	M12 × 1.75	REG	P3	5	29	3	8.5	45	3	●
12M1.75R	200										
12M1.5R	150	M12 × 1.5	REG	P3	5	29	3	8.5	45	3	●
12M1.25R	150	M12 × 1.25	REG	P3	5	29	3	8.5	45	3	●
14M2R	150	M14 × 2	REG	P2	5	30	3	10.5	49	3	●
14M2R	200										
14M1.5R	150										
16M2R	150	M16 × 2	REG	P2	5	32	3	12.5	52	3	●
16M2R	200										
16M1.5R	150										
16M1.5R	200	M16 × 1.5	REG	P2	5	32	3	12.5	52	3	●
18M2.5R	150										
18M2.5R	200										
18M1.5R	150	M18 × 1.5	REG	P2	5	37	3	14.0	56	3	●
18M1.5R	200										
20M2.5R	150										
20M2.5R	200	M20 × 2.5	REG	P3	5	37	3	15.0	57	3	●
20M1.5R	150										
20M1.5R	200										
22M2.5R	200	M22 × 2.5	REG	P3	5	38	3	17.0	62	3	●
22M1.5R	150										
22M1.5R	200										
24M3R	150	M24 × 3	REG	P3	5	45	3	19.0	67	3	●
24M3R	200										
24M1.5R	150										
24M1.5R	200	M24 × 1.5	REG	P2	5	45	3	19.0	67	3	●

· 规格 1 ~ 2 为凸顶尖 Type 1 ~ 2 with External Center

●可用于多个方面的通用型丝锥。

This is standard taps that can be used in all applications.

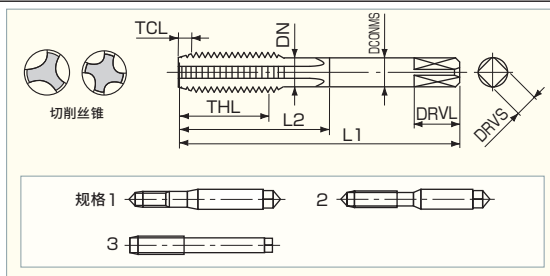

LIST 908

订货方式 HT 编码 × 切削锥部

单位 (Unit) : mm

编码 Code No.	切削锥部 (P) TCL (P)	螺纹尺寸 Thread Size	等级 TAP Limit	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5	5	M3 × 0.5	JIS2 级	46	18	3	4.0	22	2.6*	1	●
3M0.5	1.5	M3 × 0.5	JIS2 级	46	18	3	4.0	22	2.6*	1	●
4M0.7	5	M4 × 0.7	JIS2 级	52	20	3	5.0	24	3.5*	1	●
4M0.7	1.5	M4 × 0.7	JIS2 级	52	20	3	5.0	24	3.5*	1	●
5M0.8	5	M5 × 0.8	JIS2 级	60	22	3	5.5	27	4.4*	1	●
5M0.8	1.5	M5 × 0.8	JIS2 级	60	22	3	5.5	27	4.4*	1	●
6M1	5	M6 × 1	JIS2 级	62	24	3	6.0	29	5.3*	2	●
6M1	1.5	M6 × 1	JIS2 级	62	24	3	6.0	29	5.3*	2	●
8M1.25	5	M8 × 1.25	JIS2 级	70	30	4	6.2	—	—	3	●
8M1.25	1.5	M8 × 1.25	JIS2 级	70	30	4	6.2	—	—	3	●
8M1	5	M8 × 1	JIS2 级	70	30	4	6.2	—	—	3	●
8M1	1.5	M8 × 1	JIS2 级	70	30	4	6.2	—	—	3	●
10M1.5	5	M10 × 1.5	JIS2 级	75	32	4	7.0	—	—	3	●
10M1.5	1.5	M10 × 1.5	JIS2 级	75	32	4	7.0	—	—	3	●
10M1.25	5	M10 × 1.25	JIS2 级	75	32	4	7.0	—	—	3	●
10M1.25	1.5	M10 × 1.25	JIS2 级	75	32	4	7.0	—	—	3	●
10M1	5	M10 × 1	JIS2 级	70	30	4	7.0	—	—	3	●
10M1	1.5	M10 × 1	JIS2 级	70	30	4	7.0	—	—	3	●
12M1.75	5	M12 × 1.75	JIS2 级	82	38	4	8.5	—	—	3	●
12M1.75	1.5	M12 × 1.75	JIS2 级	82	38	4	8.5	—	—	3	●
12M1.5	5	M12 × 1.5	JIS2 级	82	38	4	8.5	—	—	3	●
12M1.5	1.5	M12 × 1.5	JIS2 级	82	38	4	8.5	—	—	3	●
12M1.25	5	M12 × 1.25	JIS2 级	80	38	4	8.5	—	—	3	●
12M1.25	1.5	M12 × 1.25	JIS2 级	80	38	4	8.5	—	—	3	●
14M2	5	M14 × 2	JIS2 级	88	42	4	10.5	—	—	3	●
14M2	1.5	M14 × 2	JIS2 级	88	42	4	10.5	—	—	3	●
14M1.5	5	M14 × 1.5	JIS2 级	88	42	4	10.5	—	—	3	●
14M1.5	1.5	M14 × 1.5	JIS2 级	88	42	4	10.5	—	—	3	●
16M2	5	M16 × 2	JIS2 级	95	45	4	12.5	—	—	3	●
16M2	1.5	M16 × 2	JIS2 级	95	45	4	12.5	—	—	3	●
16M1.5	5	M16 × 1.5	JIS2 级	95	45	4	12.5	—	—	3	●
16M1.5	1.5	M16 × 1.5	JIS2 级	95	45	4	12.5	—	—	3	●
18M2.5	5	M18 × 2.5	JIS2 级	100	48	4	14.0	—	—	3	●
18M2.5	1.5	M18 × 2.5	JIS2 级	100	48	4	14.0	—	—	3	●
18M1.5	5	M18 × 1.5	JIS2 级	95	45	4	14.0	—	—	3	●
18M1.5	1.5	M18 × 1.5	JIS2 级	95	45	4	14.0	—	—	3	●
20M2.5	5	M20 × 2.5	JIS2 级	105	50	4	15.0	—	—	3	●
20M2.5	1.5	M20 × 2.5	JIS2 级	105	50	4	15.0	—	—	3	●
20M1.5	5	M20 × 1.5	JIS2 级	95	45	4	15.0	—	—	3	●
20M1.5	1.5	M20 × 1.5	JIS2 级	95	45	4	15.0	—	—	3	●
22M2.5	5	M22 × 2.5	JIS2 级	115	55	4	17.0	—	—	3	●
22M2.5	1.5	M22 × 2.5	JIS2 级	115	55	4	17.0	—	—	3	●
24M3	5	M24 × 3	JIS2 级	120	58	4	19.0	—	—	3	●
24M3	1.5	M24 × 3	JIS2 级	120	58	4	19.0	—	—	3	●

* : 螺谷直径 < 颈径。内螺纹加工深度较深时，如插入的长度超过螺纹长度，则会有折断的危险。

* : Root diameter < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

· 规格 1 ~ 2 为凸顶尖 Type 1 ~ 2 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引



新商品

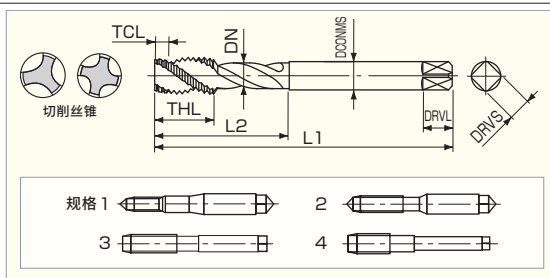

LIST 6866

订货方式 **STSP** 编码


单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
2M0.4R	M2 × 0.4	REG	P1	2.5	40	9.0	3	3.0	15	2.10*	1 ●
2M0.4R+1		REG+1	P2								
2.5M0.45R	M2.5 × 0.45	REG	P1	2.5	44	10.0	3	3.0	16	2.70*	1 ●
2.5M0.45R+1		REG+1	P2								
2.6M0.45R	M2.6 × 0.45	REG	P1	2.5	44	10.0	3	3.0	16	2.70*	1 ●
2.6M0.45R+1		REG+1	P2								
3M0.5R	M3 × 0.5	REG	P2	2.5	46	5.0	3	4.0	18	2.40	2 ●
3M0.5R+1		REG+1	P3								
3.5M0.6R	M3.5 × 0.6	REG	P2	2.5	48	6.0	3	4.0	18	2.80	2 ●
3.5M0.6R+1		REG+1	P3								
4M0.7R	M4 × 0.7	REG	P2	2.5	52	7.0	3	5.0	20	3.10	2 ●
4M0.7R+1		REG+1	P3								
5M0.8R	M5 × 0.8	REG	P2	2.5	60	8.0	3	5.5	22	4.00	2 ●
5M0.8R+1		REG+1	P3								
6M1R	M6 × 1	REG	P2	2.5	62	12.0	3	6.0	29	4.75	2 ●
6M1R+1		REG+1	P3								
6M0.75R	M6 × 0.75	REG	P2	2.5	62	9.2	3	6.0	29	5.05	2 ●
6M0.75R+1		REG+1	P3								
7M1R	M7 × 1	REG	P2	2.5	65	12.0	3	6.2	29	5.75	3 ●
7M1R+1		REG+1	P3								
8M1.25R	M8 × 1.25	REG	P3	2.5	70	15.4	3	6.2	33	6.55	4 ●
8M1.25R+1		REG+1	P4								
8M1R	M8 × 1	REG	P2	2.5	70	12.4	3	6.2	27	6.75	4 ●
8M1R+1		REG+1	P3								
8M1R+2		REG+2	P4								
10M1.5R	M10 × 1.5	REG	P3	2.5	75	18.9	3	7.0	37	8.25	4 ●
10M1.5R+1		REG+1	P4								
10M1.25R	M10 × 1.25	REG	P3	2.5	75	15.7	3	7.0	33	8.55	4 ●
10M1.25R+1		REG+1	P4								
10M1R	M10 × 1	REG	P2	2.5	75	12.4	3	7.0	27	8.75	4 ●
10M1R+1		REG+1	P3								
10M1R+2		REG+2	P4								
12M1.75R	M12 × 1.75	REG	P3	2.5	82	22.4	3	8.5	42	9.95	4 ●
12M1.75R+1		REG+1	P4								
12M1.5R	M12 × 1.5	REG	P3	2.5	82	20.9	3	8.5	40	10.25	4 ●
12M1.5R+1		REG+1	P4								
12M1.25R	M12 × 1.25	REG	P3	2.5	82	17.2	3	8.5	35	10.55	4 ●
12M1.25R+1		REG+1	P4								
14M2R	M14 × 2	REG	P2	2.5	88	25.9	3	10.5	46	11.65	4 ●
14M2R+2		REG+2	P4								
14M1.5R	M14 × 1.5	REG	P2	2.5	88	20.9	3	10.5	40	12.25	4 ●
14M1.5R+2		REG+2	P4								
16M2R	M16 × 2	REG	P2	2.5	95	25.9	3	12.5	49	13.65	4 ●
16M2R+2		REG+2	P4								
16M1.5R	M16 × 1.5	REG	P2	2.5	95	20.9	3	12.5	40	14.25	4 ●
16M1.5R+2		REG+2	P4								
18M2.5R	M18 × 2.5	REG	P3	2.5	100	32.6	4	14.0	55	15.15	4 ●
18M2.5R+2		REG+2	P5								
18M1.5R	M18 × 1.5	REG	P2	2.5	100	20.9	4	14.0	40	16.25	4 ●
18M1.5R+2		REG+2	P4								
20M2.5R	M20 × 2.5	REG	P3	2.5	105	32.6	4	15.0	55	17.15	4 ●
20M2.5R+2		REG+2	P5								
20M1.5R	M20 × 1.5	REG	P2	2.5	105	20.9	4	15.0	40	18.25	4 ●
20M1.5R+2		REG+2	P4								
22M2.5R	M22 × 2.5	REG	P3	2.5	115	32.6	4	17.0	55	19.15	4 ●
22M2.5R+2		REG+2	P5								
22M1.5R	M22 × 1.5	REG	P2	2.5	115	20.9	4	17.0	40	20.25	4 ●
22M1.5R+2		REG+2	P4								
24M3R	M24 × 3	REG	P3	2.5	120	38.8	4	19.0	63	20.65	4 ●
24M3R+2		REG+2	P5								
24M1.5R	M24 × 1.5	REG	P2	2.5	120	22.4	4	19.0	50	22.25	4 ●
24M1.5R+2		REG+2	P4								

* : 螺纹直径 < 颈径, 内螺纹加工深度较深时, 如攻丝深度超过螺纹长度, 则会有折断的危险。

* : Thread Size < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

· 规格 1 ~ 2 为凸顶尖 Type 1 ~ 2 with External Center

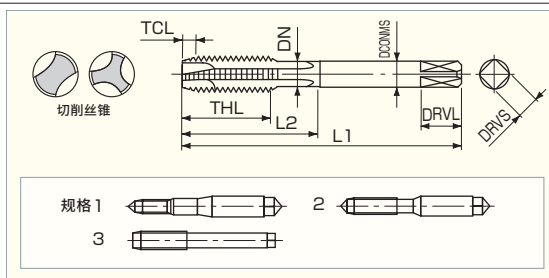

LIST 6868

订货方式 **STPO** 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
2M0.4R	M2 × 0.4	REG	P1	5	40	9.0	2	3.0	15	2.1*	1 ●
2M0.4R+1	M2 × 0.4	REG+1	P2	5	40	9.0	2	3.0	15	2.1*	1 ●
2.5M0.45R	M2.5 × 0.45	REG	P2	5	44	10.0	2	3.0	16	2.7*	1 ●
2.5M0.45R+1	M2.5 × 0.45	REG+1	P3	5	44	10.0	2	3.0	16	2.7*	1 ●
2.6M0.45R	M2.6 × 0.45	REG	P2	5	44	10.0	2	3.0	16	2.7*	1 ●
2.6M0.45R+1	M2.6 × 0.45	REG+1	P3	5	44	10.0	2	3.0	16	2.7*	1 ●
3M0.5R	M3 × 0.5	REG	P2	5	46	11.0	3	4.0	18	2.4	2 ●
3M0.5R+1	M3 × 0.5	REG+1	P3	5	46	11.0	3	4.0	18	2.4	2 ●
3.5M0.6R	M3.5 × 0.6	REG	P2	5	48	13.0	3	4.0	18	2.8	2 ●
3.5M0.6R+1	M3.5 × 0.6	REG+1	P3	5	48	13.0	3	4.0	18	2.8	2 ●
4M0.7R	M4 × 0.7	REG	P2	5	52	13.0	3	5.0	20	3.1	2 ●
4M0.7R+1	M4 × 0.7	REG+1	P3	5	52	13.0	3	5.0	20	3.1	2 ●
5M0.8R	M5 × 0.8	REG	P2	5	60	16.0	3	5.5	22	4.0	2 ●
5M0.8R+1	M5 × 0.8	REG+1	P3	5	60	16.0	3	5.5	22	4.0	2 ●
6M1R	M6 × 1	REG	P2	5	62	17.0	3	6.0	28	4.8	2 ●
6M1R+1	M6 × 1	REG+1	P3	5	62	17.0	3	6.0	28	4.8	2 ●
6M0.75R	M6 × 0.75	REG	P2	5	62	14.0	3	6.0	28	4.8	2 ●
6M0.75R+1	M6 × 0.75	REG+1	P3	5	62	14.0	3	6.0	28	4.8	2 ●
7M1R	M7 × 1	REG	P2	5	65	17.0	3	6.2	—	—	3 ●
7M1R+1	M7 × 1	REG+1	P3	5	65	17.0	3	6.2	—	—	3 ●
8M1.25R	M8 × 1.25	REG	P3	5	70	22.0	3	6.2	—	—	3 ●
8M1.25R+1	M8 × 1.25	REG+1	P4	5	70	22.0	3	6.2	—	—	3 ●
8M1R	M8 × 1	REG	P2	5	70	17.0	3	6.2	—	—	3 ●
8M1R+1	M8 × 1	REG+1	P3	5	70	17.0	3	6.2	—	—	3 ●
8M1R+2	M8 × 1	REG+2	P4	5	70	17.0	3	6.2	—	—	3 ●
10M1.5R	M10 × 1.5	REG	P3	5	75	27.0	3	7.0	—	—	3 ●
10M1.5R+1	M10 × 1.5	REG+1	P4	5	75	27.0	3	7.0	—	—	3 ●
10M1.25R	M10 × 1.25	REG	P3	5	75	22.0	3	7.0	—	—	3 ●
10M1.25R+1	M10 × 1.25	REG+1	P4	5	75	22.0	3	7.0	—	—	3 ●
10M1R	M10 × 1	REG	P2	5	75	17.0	3	7.0	—	—	3 ●
10M1R+1	M10 × 1	REG+1	P3	5	75	17.0	3	7.0	—	—	3 ●
10M1R+2	M10 × 1	REG+2	P4	5	75	17.0	3	7.0	—	—	3 ●
12M1.75R	M12 × 1.75	REG	P4	5	82	32.0	3	8.5	—	—	3 ●
12M1.75R+1	M12 × 1.75	REG+1	P5	5	82	32.0	3	8.5	—	—	3 ●
12M1.5R	M12 × 1.5	REG	P3	5	82	28.0	3	8.5	—	—	3 ●
12M1.5R+1	M12 × 1.5	REG+1	P4	5	82	28.0	3	8.5	—	—	3 ●
12M1.25R	M12 × 1.25	REG	P4	5	82	23.0	3	8.5	—	—	3 ●
12M1.25R+1	M12 × 1.25	REG+1	P5	5	82	23.0	3	8.5	—	—	3 ●
14M2R	M14 × 2	REG	P4	5	88	32.0	3	10.5	—	—	3 ●
14M2R+1	M14 × 2	REG+1	P5	5	88	32.0	3	10.5	—	—	3 ●
14M1.5R	M14 × 1.5	REG	P3	5	88	28.0	3	10.5	—	—	3 ●
14M1.5R+1	M14 × 1.5	REG+1	P4	5	88	28.0	3	10.5	—	—	3 ●
16M2R	M16 × 2	REG	P4	5	95	32.0	3	12.5	—	—	3 ●
16M2R+1	M16 × 2	REG+1	P5	5	95	32.0	3	12.5	—	—	3 ●
16M1.5R	M16 × 1.5	REG	P3	5	95	28.0	3	12.5	—	—	3 ●
16M1.5R+1	M16 × 1.5	REG+1	P4	5	95	28.0	3	12.5	—	—	3 ●
18M2.5R	M18 × 2.5	REG	P4	5	100	37.5	3	14.0	—	—	3 ●
18M2.5R+1	M18 × 2.5	REG+1	P5	5	100	37.5	3	14.0	—	—	3 ●
18M1.5R	M18 × 1.5	REG	P4	5	100	28.0	3	14.0	—	—	3 ●
18M1.5R+1	M18 × 1.5	REG+1	P5	5	100	28.0	3	14.0	—	—	3 ●
20M2.5R	M20 × 2.5	REG	P4	5	105	37.5	3	15.0	—	—	3 ●
20M2.5R+1	M20 × 2.5	REG+1	P5	5	105	37.5	3	15.0	—	—	3 ●
20M1.5R	M20 × 1.5	REG	P4	5	105	28.0	3	15.0	—	—	3 ●
20M1.5R+1	M20 × 1.5	REG+1	P5	5	105	28.0	3	15.0	—	—	3 ●
22M2.5R	M22 × 2.5	REG	P4	5	115	37.5	3	17.0	—	—	3 ●
22M2.5R+1	M22 × 2.5	REG+1	P5	5	115	37.5	3	17.0	—	—	3 ●
22M1.5R	M22 × 1.5	REG	P4	5	115	28.0	3	17.0	—	—	3 ●
22M1.5R+1	M22 × 1.5	REG+1	P5	5	115	28.0	3	17.0	—	—	3 ●
24M3R	M24 × 3	REG	P4	5	120	45.0	3	19.0	—	—	3 ●
24M3R+1	M24 × 3	REG+1	P5	5	120	45.0	3	19.0	—	—	3 ●
24M1.5R	M24 × 1.5	REG	P4	5	120	31.0	3	19.0	—	—	3 ●
24M1.5R+1	M24 × 1.5	REG+1	P5	5	120	31.0	3	19.0	—	—	3 ●

* : 螺纹直径 < 颈径, 内螺纹加工深度较深时, 如攻丝深度超过螺纹长度, 则会有折断的危险。

* : Thread Size < Neck diameter (DN) When depth of cutting a female thread is deep, if putting the screw length or more in length, there is a risk of breakage.

· 规格 1 ~ 2 为凸顶尖 Type 1 ~ 2 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具



套装商品
其它

精密工具

技术资料
索引

●本品选用超硬型母材在铝、铸铁等材料螺丝时可实现其长寿命。

This tap made of carbide is suitable for long life tapping of Aluminum, Cast Iron.

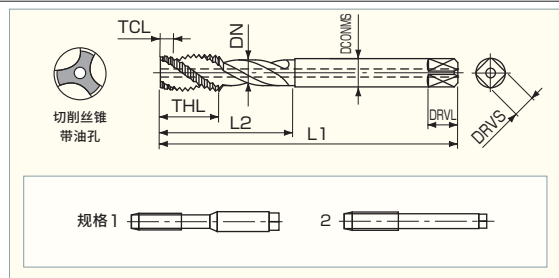

LIST 9238

订货方式 **ESP** 编码

单位 (Unit) : mm

编码 Code No.	螺纹尺寸 Thread Size	切削锥部 (P) TCL (P)	等级 TAP Limit	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
4M0.7	M4 × 0.7	2.5	GT5	52	7	3	5.0	20	3.1	1	●
5M0.8	M5 × 0.8	2.5	GT5	60	8	3	5.5	22	3.9	1	●
6M1	M6 × 1	2.5	GT5	62	10	3	6.0	25	4.7	1	●
8M1.25	M8 × 1.25	2.5	GT6	70	13	3	6.2	—	—	2	●
10M1.5	M10 × 1.5	2.5	GT6	75	15	3	7.0	—	—	2	●
12M1.75	M12 × 1.75	2.5	GT7	82	18	3	8.5	—	—	2	●

· 带油孔。 With Oil Hole.

新品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适用于铝、铸铁等材料长寿命攻丝。

This tap made of carbide is suitable for long life tapping of Aluminum, Cast Iron.

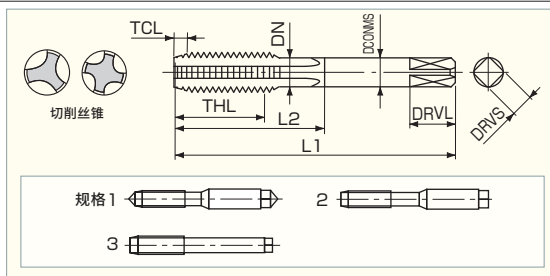

LIST 9236

订货方式 **EHT** 编码 × 切削锥部

单位 (Unit) : mm

编码 Code No.	切削锥部 (P) TCL (P)	螺纹尺寸 Thread Size	等级 TAP Limit	全长 L1	螺纹长度 THL	沟槽数 NOF	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5	3	M3 × 0.5	GT5	46	11	3	4.0	18	2.30	1	●
3M0.5	1.5										
4M0.7	3	M4 × 0.7	GT5	52	13	3	5.0	21	3.05	1	●
4M0.7	1.5										
5M0.8	3	M5 × 0.8	GT5	60	16	3	5.5	25	3.90	1	●
5M0.8	1.5										
6M1	3	M6 × 1	GT5	62	19	3	6.0	30	4.70	2	●
6M1	1.5										
8M1.25	3	M8 × 1.25	GT6	70	22	3	6.2	—	—	3	●
8M1.25	1.5										
10M1.5	3	M10 × 1.5	GT6	75	24	3	7.0	—	—	3	●
10M1.5	1.5										
12M1.75	3	M12 × 1.75	GT7	82	29	4	8.5	—	—	3	●
12M1.75	1.5										

· 规格 1 为凸顶尖 Type 1 with External Center

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●可实现较长寿命和低扭矩的挤压丝锥。

Overwhelmingly long tool life and low torque forming tap

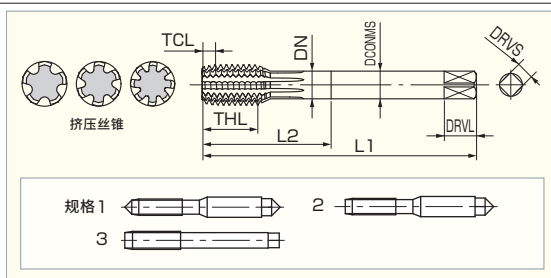

LIST 8800

订货方式 **ZTF** 编码 - 切削锥部


单位 (Unit) : mm

编码 Code No.	切削锥部 (P) TCL (P)	螺纹尺寸 Thread Size	等级 TAP Limit	全长 L1	螺纹长度 THL	沟槽数 Lobes	柄径 DCONMS	颈长 L2	颈径 DN	规格 Type	库存 Stock
3M0.5R	P	M3 × 0.5	REG	R5	46	5.6	4.0	18	2.35	1	●
3M0.5R	B									2	
4M0.7R	P	M4 × 0.7	REG	R6	52	8.1	5.0	20	3.15	1	●
4M0.7R	B									2	
5M0.8R	P	M5 × 0.8	REG	R6	60	9.4	5.5	22	4.05	1	●
5M0.8R	B									2	
6M1R	P	M6 × 1	REG	R7	62	9.0	6.0	24	4.75	1	●
6M1R	B									2	
8M1.25R	P	M8 × 1.25	REG	R7	70	11.6	6.2	-	-	3	●
8M1.25R	B										
8M1R	P	M8 × 1	REG	R7	70	9.3	6.2	-	-	3	●
8M1R	B										
10M1.5R	P	M10 × 1.5	REG	R7	75	14.2	7.0	-	-	3	●
10M1.5R	B										
10M1.25R	P	M10 × 1.25	REG	R7	75	11.8	7.0	-	-	3	●
10M1.25R	B										
10M1R	P	M10 × 1	REG	R7	75	9.3	7.0	-	-	3	●
10M1R	B										
12M1.75R	P	M12 × 1.75	REG	R8	82	16.8	8.5	-	-	3	●
12M1.75R	B										
12M1.5R	P	M12 × 1.5	REG	R7	82	15.7	8.5	-	-	3	●
12M1.5R	B										
12M1.25R	P	M12 × 1.25	REG	R7	82	12.9	8.5	-	-	3	●
12M1.25R	B										
12M1R	P	M12 × 1	REG	R7	82	10.1	8.5	-	-	3	●
12M1R	B										
14M2R	P	M14 × 2	REG	R10	88	19.4	10.5	-	-	3	●
14M2R	B										
14M1.5R	P	M14 × 1.5	REG	R9	88	15.7	10.5	-	-	3	●
14M1.5R	B										
16M2R	P	M16 × 2	REG	R10	95	19.4	12.5	-	-	3	●
16M2R	B										
16M1.5R	P	M16 × 1.5	REG	R9	95	15.7	12.5	-	-	3	●
16M1.5R	B										

· 切削锥部 B 形 =2P、P 形 =4P TCL : B=2P、P=4P

●适用于铝等有色金属的挤压螺纹加工。

This forming tap is suited to tap Aluminum, Magnesium, and Non-Ferrous Metal.

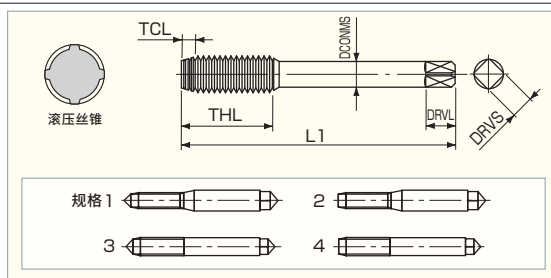

LIST 6952

订货方式 **TFS** 编码 × 等级 × 切削锥部

单位 (Unit) : mm

编码 Code No.	等级 TAP Limit	切削锥部 (P) TCL (P)	螺纹尺寸 Thread Size	全长 L1	螺纹长度 THL	圆弧刃数 Radial	柄径 DCONMS	规格 Type	库存 Stock
1.4M0.3	4	P	M1.4 × 0.3	34	7	4	3.0	1	●
1.7M0.35	4	P	M1.7 × 0.35	36	8	4	3.0	1	●
2M0.4	4	P	M2 × 0.4	40	9	4	3.0	1	●
2M0.4		B						2	●
2.3M0.4	4	P	M2.3 × 0.4	42	9	4	3.0	1	●
2.3M0.4		B						2	●
2.5M0.45	4	P	M2.5 × 0.45	44	10	4	3.0	1	●
2.5M0.45		B						2	●
2.6M0.45	4	P	M2.6 × 0.45	44	10	4	3.0	1	●
2.6M0.45		B						2	●
3M0.5	5	P	M3 × 0.5	46	11	4	4.0	1	●
3M0.5		B						2	●
3.5M0.6	5	P	M3.5 × 0.6	48	11	4	4.0	1	●
3.5M0.6		B						2	●
4M0.7	6	P	M4 × 0.7	52	12	4	5.0	1	●
4M0.7		B						2	●
5M0.8	6	P	M5 × 0.8	60	13	4	5.5	1	●
5M0.8		B						2	●
6M1	7	P	M6 × 1	62	14	4	6.0	3	●
6M1		B						4	●

· 切削锥部 B形是 M2 以下时为凸顶尖、P 形是 M6 以下时为凸顶尖 B:M2 or less with External Center/P:M6 or less with External Center
切削锥部 B 形 =2P、P 形 =4P TCL:B=2P、P=4P

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适用于铝等有色金属的挤压螺纹加工。

This forming tap is suited to tap Aluminum, Magnesium, and Non-Ferrous Metal.

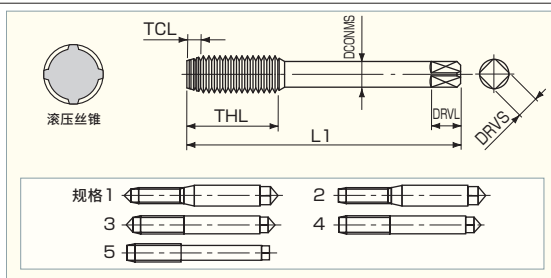

LIST 6950

订货方式 TFL 编码 × 等级 × 切削锥部


单位 (Unit) : mm

编码 Code No.	等级 TAP Limit	切削锥部 (P) TCL (P)	螺纹尺寸 Thread Size	全长 L1	螺纹长度 THL	圆弧刃数 Radial	柄径 DCONMS	规格 Type	库存 Stock
1.4M0.3	4	P	M1.4 × 0.3	34	11	4	3.0	1	●
1.7M0.35	4	P	M1.7 × 0.35	36	13	4	3.0	1	●
2M0.4	4	P	M2 × 0.4	40	15	4	3.0	1	●
2M0.4		B							
2.3M0.4	4	P	M2.3 × 0.4	42	15	4	3.0	1	●
2.3M0.4		B						2	●
2.5M0.45	4	P	M2.5 × 0.45	44	16	4	3.0	1	●
2.5M0.45		B						2	●
2.6M0.45	4	P	M2.6 × 0.45	44	16	4	3.0	1	●
2.6M0.45		B						2	●
3M0.5	5	P	M3 × 0.5	46	18	4	4.0	1	●
3M0.5		B						2	●
3.5M0.6	5	P	M3.5 × 0.6	48	18	4	4.0	1	●
3.5M0.6		B						2	●
4M0.7	6	P	M4 × 0.7	52	20	4	5.0	1	●
4M0.7		B						2	●
4M0.5	6	P	M4 × 0.5	52	15	4	5.0	1	●
4M0.5		B						2	●
5M0.8	6	P	M5 × 0.8	60	22	4	5.5	1	●
5M0.8		B						2	●
5M0.5	6	P	M5 × 0.5	52	15	4	5.5	1	●
5M0.5		B						2	●
6M1	7	P	M6 × 1	62	24	4	6.0	3	●
6M1		B						4	●
6M0.75	6	P	M6 × 0.75	62	20	4	6.0	3	●
6M0.75		B						4	●
6M0.5	6	P	M6 × 0.5	55	15	4	6.0	3	●
6M0.5		B						4	●
8M1.25	7	P	M8 × 1.25	70	30	4	6.2	5	●
8M1.25		B							
8M1	7	P	M8 × 1	70	30	4	6.2	5	●
8M1		B							
10M1.5	7	P	M10 × 1.5	75	32	4	7.0	5	●
10M1.5		B							
10M1.25	7	P	M10 × 1.25	75	32	4	7.0	5	●
10M1.25		B							
10M1	7	P	M10 × 1	70	30	4	7.0	5	●
10M1		B							

· 切削锥部 B 形是 M2 以下时为凸顶尖、P 形是 M6 以下时为凸顶尖 B:M2 or less with External Center/P:M6 or less with External Center
切削锥部 B 形=2P、P 形=4P TCL:B=2P、P=4P

●当标准尺寸丝锥长度不够时，请使用本丝锥。

This tap is used when a standard TAFLET-L is too short.

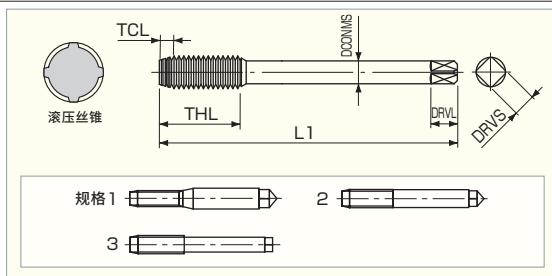

LIST 6970

订货方式 **TFL** 编码 × 等级 × 切削锥部 × 全长

单位 (Unit) : mm

编码 Code No.	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L	螺纹尺寸 Thread Size	螺纹长度 THL	圆弧刃数 Radial	柄径 DCONMS	规格 Type	库存 Stock
3M0.5	5	B	70	M3 × 0.5	18	4	4.0	1	●
3M0.5			100						
3M0.5			120						
4M0.7	6	B	70	M4 × 0.7	20	4	5.0	1	●
4M0.7			100						
4M0.7			120						
5M0.8	6	B	100	M5 × 0.8	22	4	5.5	1	●
5M0.8			120						
5M0.8			150						
6M1	7	B	100	M6 × 1	24	4	6.0	2	●
6M1			120						
6M1			150						
8M1.25	7	B	100	M8 × 1.25	30	4	6.2	3	●
8M1.25			120						
8M1.25			150						
10M1.5	7	B	100	M10 × 1.5	32	4	7.0	3	●
10M1.5			120						
10M1.5			150						
10M1.25	7	B	100	M10 × 1.25	32	4	7.0	3	●
10M1.25			120						
10M1.25			150						

· 切削锥部 B 形=2P TCL:B=2P

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适用于软钢、不锈钢等硬度 20HRC 以下的挤压螺纹加工。

This forming tap is suited to tap Mild Steel, Alloy Steel, and Stainless Steel.

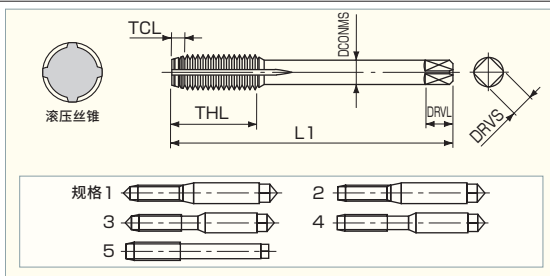

LIST 6954

订货方式 **TFST** 编码 × 等级 × 切削锥部


单位 (Unit) : mm

编码 Code No.	等级 TAP Limit	切削锥部 (P) TCL (P)	螺纹尺寸 Thread Size	全长 L1	螺纹长度 THL	圆弧刃数 Radial	柄径 DCONMS	规格 Type	库存 Stock
1.4M0.3	4	P	M1.4 × 0.3	34	7.0	4	3.0	1	●
1.6M0.35	4	P	M1.6 × 0.35	36	8.0	4	3.0	1	●
1.7M0.35	4	P	M1.7 × 0.35	36	8.0	4	3.0	1	●
2M0.4	4	P	M2 × 0.4	40	9.0	4	3.0	1	●
2M0.4		B							
2.3M0.4	4	P	M2.3 × 0.4	42	9.0	4	3.0	1	●
2.3M0.4		B						2	●
2.5M0.45	4	P	M2.5 × 0.45	44	9.0	4	3.0	1	●
2.5M0.45		B						2	●
2.6M0.45	4	P	M2.6 × 0.45	44	10.0	4	3.0	1	●
2.6M0.45		B						2	●
3M0.5	5	P	M3 × 0.5	46	12.5	4	4.0	1	●
3M0.5		B						2	●
3.5M0.6	5	P	M3.5 × 0.6	48	12.5	4	4.0	1	●
3.5M0.6		B						2	●
4M0.7	6	P	M4 × 0.7	52	14.0	4	5.0	1	●
4M0.7		B						2	●
5M0.8	6	P	M5 × 0.8	60	10.0	4	5.5	3	●
5M0.8		B						4	●
6M1	7	P	M6 × 1	62	10.0	4	6.0	3	●
6M1		B						4	●
8M1.25	7	P	M8 × 1.25	70	18.0	6	6.2	5	●
8M1.25		B							
8M1	7	P	M8 × 1	70	18.0	6	6.2	5	●
8M1		B							
10M1.5	7	P	M10 × 1.5	75	19.0	8	7.0	5	●
10M1.5		B							
10M1.25	7	P	M10 × 1.25	75	19.0	8	7.0	5	●
10M1.25		B							
10M1	7	P	M10 × 1	70	19.0	8	7.0	5	●
10M1		B							

· 切削锥部 B 形是 M2 以下时为凸顶尖、P 形是 M6 以下时为凸顶尖 B:M2 or less with External Center/P:M6 or less with External Center
切削锥部 B 形 =2P、P 形 =4P TCL:B=2P、P=4P

●当标准尺寸丝锥长度不够时，请使用本丝锥。

This tap is used when a standard TAFLET for Steel is too short.

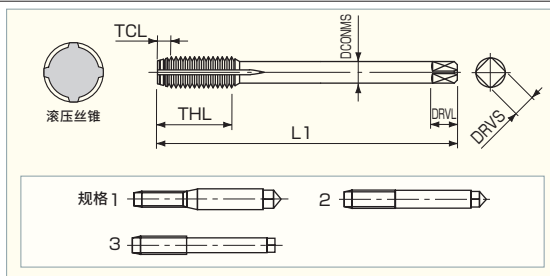

LIST 6974

订货方式 **TFSTL** 编码 × 等级 × 切削锥部 × 全长

单位 (Unit) : mm

编码 Code No.	等级 TAP Limit	切削锥部 (P) TCL (P)	全长 L1	螺纹尺寸 Thread Size	螺纹长度 THL	圆弧刃数 Radial	柄径 DCONMS	规格 Type	库存 Stock
3M0.5	5	B	70	M3 × 0.5	18	4	4.0	1	●
3M0.5			100						
3M0.5			120						
4M0.7	6	B	70	M4 × 0.7	20	4	5.0	1	●
4M0.7			100						
4M0.7			120						
5M0.8	6	B	100	M5 × 0.8	22	4	5.5	1	●
5M0.8			120						
5M0.8			150						
6M1	7	B	100	M6 × 1	24	4	6.0	2	●
6M1			120						
6M1			150						
8M1.25	7	B	100	M8 × 1.25	30	6	6.2	3	●
8M1.25			120						
8M1.25			150						
10M1.5	7	B	100	M10 × 1.5	32	8	7.0	3	●
10M1.5			120						
10M1.5			150						
10M1.25	7	B	100	M10 × 1.25	32	8	7.0	3	●
10M1.25			120						
10M1.25			150						

· 切削锥部 B 形 = 2P TCL:B=2P

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

丝锥的基准切削条件

Standard Cutting Condition for Taps

		切削速度 (m/min) Recommended Cutting Speed											
系列 Series	被削材 Work Materials	一般结构用钢 SS Structural Steel	低碳钢 S15C Low Carbon Steel	中碳钢 S40C Medium Carbon Steel	高碳钢 S50C High Carbon Steel	合金钢 SCM,SCr Alloy Steel		高硬度钢 Hardened Steel	不锈钢 SUS Stainless Steel	铸铁 FC Cast Iron	球墨铸铁 FCD Ductile Cast Iron	铝合金 AC,ADC Aluminum Alloy	钛合金 Ti Titanium Alloy
	商品编码 Code	~200HB	~200HB	~200HB	~200HB	~200HB	20~30HRC	30~40HRC					
SG 系列 SG Series	SGSP/ SGSPL	15~30	15~30	10~50	10~50	15~50	8~15	5~15	5~10	—	10~30	15~50	—
	SGSP- 1.5P	10~20	15~30	10~30	10~30	10~30	8~15	5~15	5~10	—	10~30	15~50	—
	SGSP-T	—	—	—	5~15	5~15	—	—	—	—	—	—	5~7
	SGPO/ SGPOL	15~50	15~30	15~50	10~50	15~50	10~30	8~20	5~15	15~50	15~30	15~50	—
Hyper Z 系列 Hyper Z Series	ZSP/ZSPL	5~20	5~20	5~20	5~20	5~20	5~10	—	—	—	5~20	10~25	—
	ZSP-LS	—	—	—	5~15	—	—	3~15	—	3~15	3~15	—	—
	ZSP-SUS	5~10	5~10	5~10	5~10	—	—	—	5~10	—	—	10~25	—
	ZSP-T/ ZSP-T-HL	—	—	—	—	—	—	—	—	3~15	3~15	10~20	3~5
	ZPO/ ZPOL	8~20	10~25	6~25	6~25	6~25	5~10	—	—	8~20	6~25	10~30	—
	ZPO-SUS	5~15	5~15	5~15	5~15	—	—	—	5~10	—	—	10~30	—
N 系列 N Series	NSP/ NSPL	5~10	5~15	5~10	5~10	5~10	5~8	—	—	—	—	10~20	—
	NPO/ NPOL	6~12	10~18	6~12	6~12	6~12	5~10	—	—	—	—	10~20	—
	HT	6~12	6~12	6~12	6~10	6~12	4~8	—	—	5~15	5~10	10~20	—
ST 系列 ST Series	STSP	5~15	5~15	5~15	5~15	5~15	5~8	—	—	—	5~15	10~20	—
	STPO	6~20	6~20	6~20	6~20	6~20	5~10	—	—	—	6~20	10~20	—
EXCEL 系列 EXCEL Series	ESP/EHT	—	—	—	—	—	—	—	—	12~30	12~20	15~50	—
挤压丝锥 系列 Forming Tap Series	ZTF	10~50	10~50	10~50	10~40	10~30	5~20	5~20	3~15*	—	—	10~50	—
	TFS/TFLL TFST/TFSTL	8~15	10~20	8~15	5~10	8~15	5~10	—	5~10	—	—	15~30	—
推荐切削油剂 Cutting Fluids		极压活性型非水溶性 Extreme pressure property non-water soluble 水溶性 Water soluble								水溶性 Water soluble Oil		极压活性型非水溶性 Extreme pressure property non-water soluble 水溶性 Water soluble	

- 注) 1. 表中的数值为一般标准值, 请根据使用条件变更切削条件。
2. 表中的数值以螺丝深度 2D (螺纹直径的 2 倍) 为基准。
3. 不锈钢加工时, 推荐使用非水溶性切削油剂。
4. ZTF 在加工不锈钢时, 推荐使用高润滑水溶性油剂或油性切削油剂。
1. These are general cutting condition, and may be altered by your condition.
2. These condition are for Thread depth of 2 × D
3. Recommend non-water soluble cutting fluid for Stainless Steel.
4. Recommend highly lubricated water-soluble oil or oily when ZTF used to cutting for Stainless Steel.

NACHI的提案 钻头&丝锥

NACHI Recommends Threaded Holes Cutting Tools Drills and Taps

内螺纹加工需要倒角、底孔加工、攻丝等多个工序。

NACHI提出了以组合钻头和丝锥的整套工序,实现内螺纹加工优化方案。

NACHI recommends threaded holes cutting tools

Cutting for internal thread needs many processes, Chamfering, Drilling prepared holes, tapping etc. Drill and Tap with set NACHI proposes that optimize by omitting processes

硬质合金钻头 Carbide Drills

AQUA REVO 短刃钻 AQRVDS

AQUA REVO 油孔钻 AQRVDOH3D/5D/8D

AQUA EX 3刃油孔钻 AQDEXOH3F

AQUA EX VF钻 AQDEXVF

高速钢钻头 HSS Drills

SG-ESS 钻头 SGESS

SG-ESR 钻头 SGESR

AG-SUS 钻头 AGSUSS

导向孔加工用钻头 Guide holes Drills

AQUA EX 油孔引导钻 AQDEXOHPLT

深孔用钻头 Drills for deep holes

AQUA EX 油孔深孔钻 AQDEXOH10D~50D

AG 强力长刃钻 AGPLSD

平头钻 FLAT Drills

AQUA EX 平头钻 AQDEXZ

AQUA EX 油孔平头钻 AQDEXZOH3D

AQUA EX VF平头钻 AQDEXVF1.5D+TVFZ

SG 平头钻 SGEZ

定心钻头 Centering Drills

AQUA EX 定心钻 AQDEXST

AG 定心钻 AGSTD

沉孔专用钻头 Spot facing Drills

沉孔专用钻头系列 HCD/SCD/RCD

	钻头 Drills	丝锥 Taps
盲孔螺纹孔 Blind hole	AQDEXS/AQDEXOH3F SGESS 等 AQDEXST AGSTD	ZSP/ZSP-SUS SGSP/STSP 等
盲孔螺纹孔 [深孔] Blind hole(Deep Hole)	AGSTDLS AQDEXE AGPLSD AGSTDLS	ZSPL/SGSPL 等
曲面螺纹孔 Curved surface	AQDEXZ AQDEXZOH3D AQDEXST AGSTD	ZSP/ZSP-SUS SGSP 等
沉孔、螺纹孔 [倾斜面] Slop, Spot facing	AQDEXZ AQDEXVF1.5D+TVFZ AQDEXST AGSTD AQDEXOH3D/AQRVDS SGESS 等	ZPO/ZPO-SUS SGPO/STPO 等
薄板螺纹孔 Thin board	AQDEXST AGSTD AQDEXZ AQDEXZOH3D	ZPO/ZPO-SUS SGPO 等
盲孔螺纹孔 [薄板] Blind hole(Thin board)	AQDEXST AGSTD AQDEXZ	SGSP-1.5P/GHT
带螺纹深孔 Deep hole	AQDEXOHPLT AQDEXOH10D~50D AQDEXST/AGSTD	ZSP/ZSP-SUS SGSP/STSP 等

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具



套装商品
其它

精密工具

技术资料
索引

Hyper Z 系列、SG 系列、N 系列、ST 系列丝锥的精度等级 P 级
NACHI P Limits (Hyper Z series, SG series, N series, ST series)



- NACHI P 级表示切削丝锥的有效直径的精度等级。
- 采用阶段法是对标准有效直径设定精度等级的公差范围。
- NACHI REG 精度以可获得前 JIS 2 级或前 JIS 2 级以上的内螺纹精度的 P 级为 REG (REGULAR 的缩写)。(+1、+2 表示超规格尺寸。)
- 可根据您的不同需求，制作标准库存品以外精度等级的丝锥。
- NACHI P Limit System is applied to Cutting Taps.(Hyper Z series, SG series, N series, ST series)
- NACHI P Limit System uses the step method to basic pitch diameter.
- NACHI REG precision expresses REG:REGULAR as P grade satisfies internal thread precision of previous JIS 2 grade or over. (" + 1", " + 2" expresses over size.)
- Tap limit does not guarantee thread limit for the internal thread after tapping.

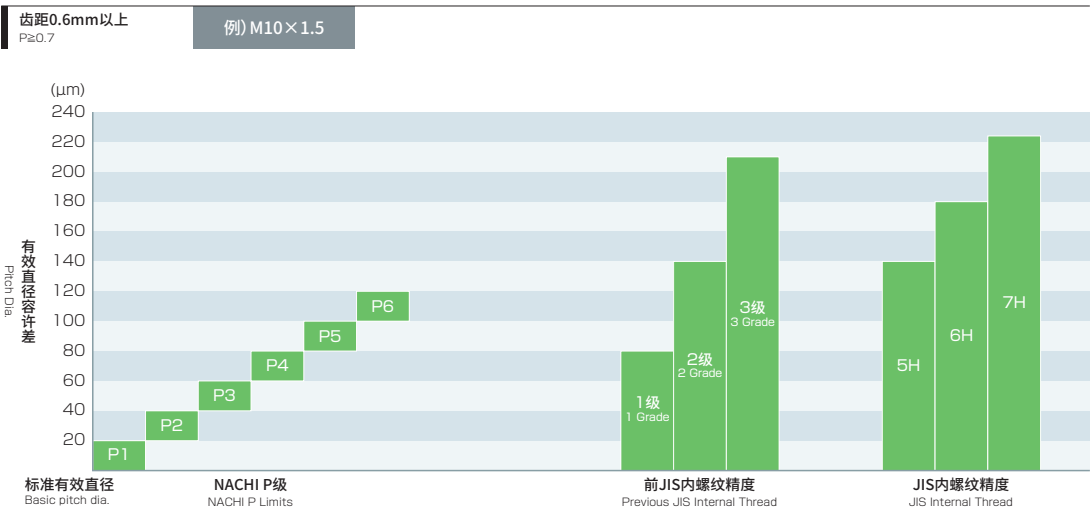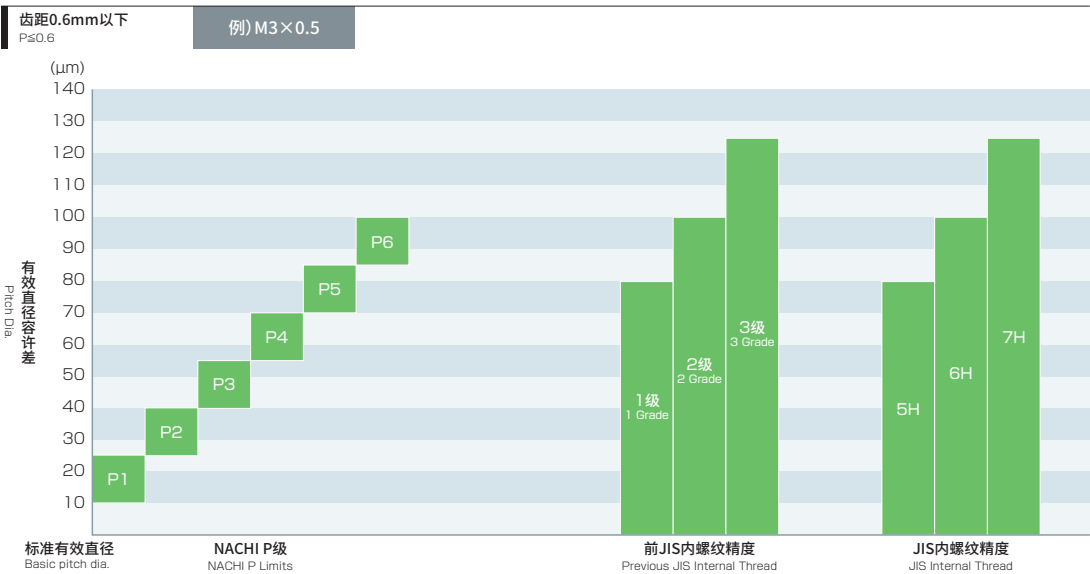

EXCEL 系列的精度等级 NACHI GT 级


NACHI GT Limits (EXCEL series)

- NACHI GT 级表示切削丝锥的有效直径的精度等级。
- 采用阶段法是对标准有效直径设定精度等级的公差范围。
- 为保证 EXCEL 系列的标准库存品可获得前 JIS 2 级或前 JIS 2 级以上的内螺纹精度，设定了 NACHI GT 级。
- 可根据您的不同需求，制作标准库存品以外精度等级的丝锥。
- NACHI GT Limit System is applied to Cutting Taps. (EXCEL series)
- NACHI GT Limit System uses the step method to basic pitch diameter.
- Stocked Taps (EXCEL series) satisfy previous JIS 2 grade precision.
- Tap limit does not guarantee thread limit for the internal thread after tapping.

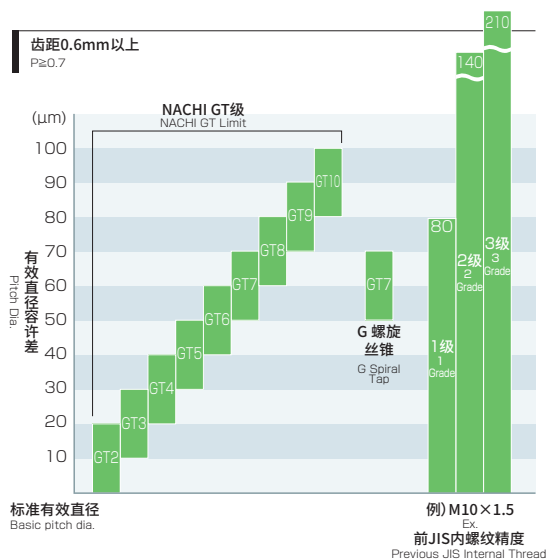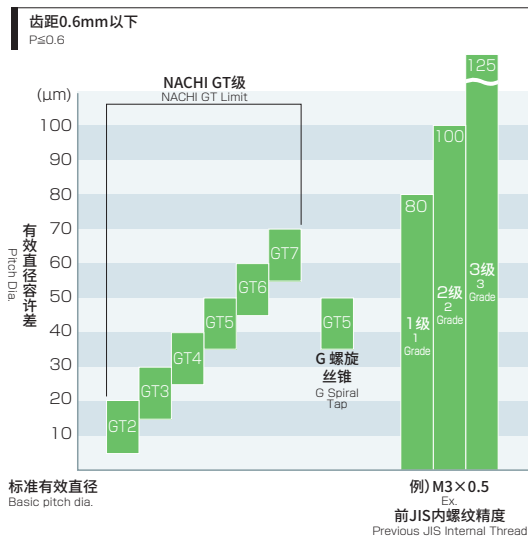

手用丝锥的精度 (JIS2 级)

Limits of Hand Tap (JIS 2 grade)

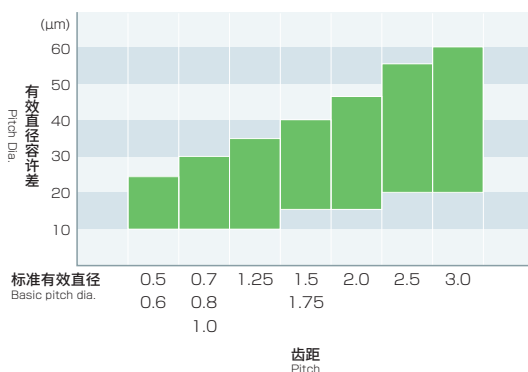

挤压丝锥系列的精度

Limits of TAFLET

- 无沟槽挤压丝锥系列的有效直径的精度等级用等级编码表示。
- 采用阶段法按 13μm 的公差幅度对标准有效直径设定精度等级。
- 挤压丝锥系列的标准库存品可满足前 JIS 2 级内螺纹精度的要求。
- 挤压内螺纹时，依被切削材质及切削条件不同，有时需要改变丝锥的精度等级。
- 可根据您的不同需求，制作标准库存品以外精度等级的丝锥。
- Tap limit of TAFLET is indicated by class number.
- The limits are established by increments of 13 μm.
- Stocked sizes of TAFLET satisfy previous JIS 2 grade precision.
- You may change Tap limit to satisfy the precision because minor diameter is changed by cutting condition or work material.
- Tap limit does not guarantee thread limit for the internal thread after tapping.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

公制航空航天螺纹用
For Metric screw threads helisert

单位 (Unit) : mm

螺纹直径 Thread Size	等级 Class	大径基准尺寸 Major diameter basic size	有效径 Pitch diameter			小径基准尺寸 Minor diameter basic size
			基本尺寸 Basic Size	上许容差 Upper tolerance	下许容差 Lower tolerance	
M2.5 × 0.45	1b	3.085	2.792	18	6	2.598
M2.6 × 0.45	1b	3.185	2.892	18	6	2.698
M3 × 0.5	1b	3.650	3.324	18	6	3.108
M4 × 0.7	1b	4.909	4.454	18	6	4.151
M5 × 0.8	1b	6.039	5.519	18	6	5.173
M6 × 1	1b	7.299	6.649	18	6	6.216
M8 × 1.25	1b	9.624	8.812	18	6	8.271
M10 × 1.5	1b	11.948	10.974	22	7	10.324
M10 × 1.25	1b	11.624	10.812	18	6	10.271
M12 × 1.75	1b	14.273	13.136	22	7	12.379
M12 × 1.5	1b	13.948	12.974	21	7	12.324
M12 × 1.25	1b	13.624	12.812	21	7	12.271
M14 × 2	1b	16.598	15.299	22	7	14.433
M14 × 1.5	1b	15.948	14.974	21	7	14.324
M16 × 2	1b	18.598	17.299	22	7	16.433
M16 × 1.5	1b	17.948	16.974	21	7	16.324

美制航空航天螺纹用
For Unified screw threads helisert


单位 (Unit) : mm

螺纹直径 Thread Size	等级 Class	大径基准尺寸 Major diameter basic size	有效径 Pitch diameter			小径基准尺寸 Minor diameter basic size
			基本尺寸 Basic Size	上许容差 Upper tolerance	下许容差 Lower tolerance	
No.4-40UNC	1b	3.670	3.258	18	6	2.981
No.5-40UNC	1b	4.000	3.589	18	6	3.312
No.6-32UNC	1b	4.536	4.021	18	6	3.678
No.6-40UNF	1b	4.330	3.919	18	6	3.642
No.8-32UNC	1b	5.197	4.681	18	6	4.338
No.8-36UNF	1b	5.083	4.625	18	6	4.318
No.10-24UNC	1b	6.201	5.513	18	6	5.055
No.10-32UNF	1b	5.857	5.341	18	6	4.998
No.12-24UNC	1b	6.861	6.173	18	6	5.716
1/4-20UNC	1b	8.000	7.174	22	7	6.626
1/4-28UNF	1b	7.528	6.939	18	6	6.545
5/16-18UNC	1b	9.771	8.854	22	7	8.244
5/16-24UNF	1b	9.313	8.624	18	6	8.167
3/8-16UNC	1b	11.587	10.556	22	7	9.867
3/8-24UNF	1b	10.900	10.212	18	6	9.754
7/16-14UNC	1b	13.469	12.291	22	7	11.506
7/16-20UNF	1b	12.762	11.937	18	6	11.388
1/2-13UNC	1b	15.238	13.968	30	10	13.122
1/2-20UNF	1b	14.350	13.524	18	6	12.976
5/8-11UNC	1b	18.875	17.376	30	10	16.376
5/8-18UNF	1b	17.708	16.791	21	7	16.181

ZT 系列的精度等级 NACHI R 级

NACHI R Limits (ZT Series)

- NACHI R 级表示挤压丝锥的有效直径的精度等级。
- 采用阶段法是对标准有效直径设定精度等级的公差范围。
- NACHI REG 精度是前 JIS 2 级精度同等或同等以上内螺纹精度得到的等级,作为 REG(REGULAR 的缩写)。
- 丝锥精度不能保证内螺纹精度。
- NACHI R grade indicates the accuracy grade of the effective diameter of the forming tap.
- For the accuracy grade, the tolerance range is set step by step with respect to the standard effective diameter.
- NACHI REG precision expresses REG:REGULAR as grade satisfies internal thread precision of previous JIS 2 grade or over.
- Tap accuracy does not guarantee internal threads accuracy.

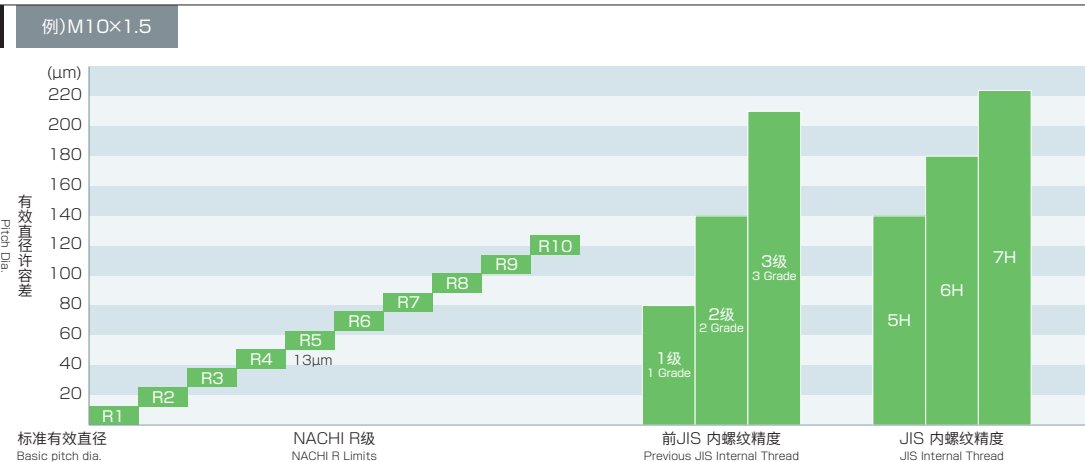

钻柄四棱部分尺寸 凸顶尖长度

Square Portion Size of Shank Length of External Center

钻柄四棱部分尺寸

Square Portion Size of Shank

柄径 DCONMS	钻柄四棱部 宽度 DRVS	钻柄四棱部 长度 DRVL
3.0	2.5	5.0
4.0	3.2	6.0
5.0	4.0	7.0
5.5	4.5	7.0
6.0	4.5	7.0
6.1	5.0	8.0
6.2	5.0	8.0
7.0	5.5	8.0
8.0	6.0	9.0
8.5	6.5	9.0
10.0	8.0	11.0
10.5	8.0	11.0
12.0	9.0	12.0
12.5	10.0	13.0
13.0	10.0	13.0
14.0	11.0	14.0
15.0	12.0	15.0
17.0	13.0	16.0
18.0	14.0	17.0
19.0	15.0	18.0
20.0	15.0	18.0
21.0	17.0	20.0
23.0	17.0	20.0
24.0	19.0	22.0
25.0	19.0	22.0
26.0	21.0	24.0
28.0	21.0	24.0

钻柄四棱部分尺寸

Length of External Center

尺寸 Size	长度 Length
M1.4	(0.7)
M1.6	(0.8)
M1.7	(0.8)
M2	(1.0)
M2.2	(1.1)
M2.3	(1.2)
M2.5	(1.2)
M2.6	(1.3)
M3	(1.5)
M3.5	(1.7)
M4	(2.0)
M4.5	(2.2)
M5	(2.5)
M5.5	(3.0)
M6	(3.0)
M8	(4.0)
M10	(5.0)
M12	(6.0)

※ 凸顶尖长度为参考值。
The lengths above are for reference only.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

螺纹底孔直径

Recommended Tap Drill Sizes

切削丝锥的螺丝底孔钻头直径

For Metric screw thread

单位 (Unit) : mm

螺纹直径 Thread size	推荐钻头直径 Recommended drill dia.		最小内螺纹 内径 Minimum internal thread inner dia.	最大内螺纹内径 D ₁ Maximum internal thread inner dia. D ₁		
	标准 钻头 Standard Drill	高性能 钻头 High performance drill		4H	5H	6H
M1 × 0.25	0.75	0.78	0.729	0.774	0.785	0.799
M1 × 0.2	0.8	0.83	0.783	0.821	0.831	0.843
M1.1 × 0.25	0.85	0.88	0.829	0.874	0.885	0.899
M1.1 × 0.2	0.9	0.93	0.883	0.921	0.931	0.943
M1.2 × 0.25	0.95	0.98	0.929	0.974	0.985	0.999
M1.2 × 0.2	1.0	1.03	0.983	1.021	1.031	1.043
M1.4 × 0.3	1.1	1.15	1.075	1.128	1.142	1.160
M1.4 × 0.2	1.2	1.23	1.183	1.221	1.231	1.243
M1.6 × 0.35	1.25	1.3	1.221	1.284	1.301	1.321
M1.6 × 0.2	1.4	1.44	1.383	1.421	1.431	1.443
* M1.7 × 0.35	1.35	1.4	1.321	1.384	1.401	1.421
* M1.7 × 0.2	1.5	1.54	1.483	1.521	1.531	1.543
M1.8 × 0.35	1.45	1.52	1.421	1.484	1.501	1.521
M1.8 × 0.2	1.6	1.64	1.583	1.621	1.631	1.643
M2 × 0.4	1.6	1.65	1.567	1.638	1.657	1.679
M2 × 0.25	1.75	1.79	1.729	1.774	1.785	1.799
M2.2 × 0.45	1.75	1.8	1.713	1.793	1.813	1.838
M2.2 × 0.25	1.95	1.99	1.929	1.974	1.985	1.999
* M2.3 × 0.4	1.9	1.95	1.867	1.938	1.957	1.979
* M2.3 × 0.25	2.05	2.09	2.029	2.074	2.085	2.099
M2.5 × 0.45	2.05	2.1	2.013	2.093	2.113	2.138
M2.5 × 0.35	2.15	2.2	2.121	2.184	2.201	2.221
* M2.6 × 0.45	2.15	2.2	2.113	2.193	2.213	2.238
* M2.6 × 0.35	2.25	2.32	2.221	2.284	2.301	2.321
M3 × 0.5	2.5	2.55	2.459	2.549	2.571	2.599
M3 × 0.35	2.65	2.7	2.621	2.684	2.701	2.721
M3.5 × 0.6	2.9	2.95	2.850	2.950	2.975	3.010
M3.5 × 0.35	3.15	3.22	3.121	3.184	3.201	3.221
M4 × 0.7	3.3	3.4	3.242	3.354	3.382	3.422
M4 × 0.5	3.5	3.55	3.459	3.549	3.571	3.599
M4.5 × 0.75	3.8	3.87	3.688	3.806	3.838	3.878
M4.5 × 0.5	4.0	4.09	3.959	4.049	4.071	4.099
M5 × 0.8	4.2	4.3	4.134	4.259	4.294	4.334
M5 × 0.5	4.5	4.55	4.459	4.549	4.571	4.599
M5.5 × 0.5	5.0	5.09	4.959	5.049	5.071	5.099
M6 × 1	5.0	5.1	4.917	5.067	5.107	5.153
M6 × 0.75	5.3	5.35	5.188	5.306	5.338	5.378
* M6 × 0.5	5.5	5.5	5.459	5.549	5.571	5.599
M7 × 1	6.0	6.1	5.917	6.067	6.107	6.153
M7 × 0.75	6.3	6.35	6.188	6.306	6.338	6.378
* M7 × 0.5	6.4	6.5	6.459	6.549	6.571	6.599
M8 × 1.25	6.8	6.9	6.647	6.817	6.859	6.912
M8 × 1	7.0	7.1	6.917	7.067	7.107	7.153
M8 × 0.75	7.3	7.35	7.188	7.306	7.338	7.378
* M8 × 0.5	7.5	7.55	7.459	7.549	7.571	7.599
M9 × 1.25	7.8	7.9	7.647	7.817	7.859	7.912
M9 × 1	8.0	8.1	7.917	8.067	8.107	8.153
M9 × 0.75	8.3	8.35	8.188	8.306	8.338	8.378
M10 × 1.5	8.5	8.6	8.376	8.566	8.612	8.676
M10 × 1.25	8.8	8.9	8.647	8.817	8.859	8.912
M10 × 1	9.0	9.1	8.917	9.067	9.107	9.153
M10 × 0.75	9.3	9.35	9.188	9.306	9.338	9.378
* M10 × 0.5	9.5	9.60	9.459	9.549	9.571	9.599
M11 × 1.5	9.6	9.65	9.376	9.566	9.612	9.676
M11 × 1	10.0	10.1	9.917	10.067	10.107	10.153
M11 × 0.75	10.2	10.3	10.188	10.306	10.338	10.378
M12 × 1.75	10.2	10.3	10.106	10.318	10.371	10.441
M12 × 1.5	10.5	10.6	10.376	10.566	10.612	10.676
M12 × 1.25	10.8	10.9	10.647	10.817	10.859	10.912

螺纹直径 Thread size	推荐钻头直径 Recommended drill dia.		最小内螺纹 内径 Minimum internal thread inner dia.	最大内螺纹内径 D ₁ Maximum internal thread inner dia. D ₁		
	标准 钻头 Standard Drill	高性能 钻头 High performance drill		4H	5H	6H
M12 × 1	11.0	11.1	10.917	11.067	11.107	11.153
M12 × 0.75	11.3	11.35	11.188	11.306	11.338	11.378
* M12 × 0.5	11.5	11.55	11.459	11.549	11.571	11.599
M13 × 1.75	11.2	11.3	11.106	11.318	11.371	11.441
M14 × 2	12.0	12.1	11.835	12.071	12.135	12.210
M14 × 1.5	12.5	12.6	12.376	12.566	12.612	12.676
M14 × 1.25	12.8	12.85	12.647	12.817	12.859	12.912
M14 × 1	13.0	13.1	12.917	13.067	13.107	13.153
M15 × 2	13.0	13.1	12.835	13.071	13.135	13.210
M15 × 1.5	13.5	13.6	13.376	13.566	13.612	13.676
M15 × 1	14.0	14.1	13.917	14.067	14.107	14.153
M16 × 2	14.0	14.1	13.835	14.071	14.135	14.210
M16 × 1.5	14.5	14.6	14.376	14.566	14.612	14.676
M16 × 1	15.0	15.1	14.917	15.067	15.107	15.153
M17 × 1.5	15.5	15.6	15.376	15.566	15.612	15.676
M17 × 1	16.0	16.1	15.917	16.067	16.107	16.153
M18 × 2.5	15.5	15.6	15.294	15.574	15.649	15.744
M18 × 2	16.0	16.1	15.835	16.071	16.135	16.210
M18 × 1.5	16.5	16.6	16.376	16.566	16.612	16.676
M18 × 1	17.0	17.1	16.917	17.067	17.107	17.153
M19 × 2.5	16.5	16.6	16.294	16.574	16.649	16.744
M19 × 1.5	17.5	17.6	17.376	17.566	17.612	17.676
M19 × 1	18.0	18.1	17.917	18.067	18.107	18.153
M20 × 2.5	17.5	17.6	17.294	17.574	17.649	17.744
M20 × 2	18.0	18.1	17.835	18.071	18.135	18.210
M20 × 1.5	18.5	18.6	18.376	18.566	18.612	18.676
M20 × 1	19.0	19.1	18.917	19.067	19.107	19.153
M22 × 2.5	19.5	19.6	19.294	19.574	19.649	19.744
M22 × 2	20.0	20.0	19.835	20.071	20.135	20.210
M22 × 1.5	20.5	20.6	20.376	20.566	20.612	20.676
M22 × 1	21.0	21.0	20.917	21.067	21.107	21.153
M23 × 2.5	20.5	20.5	20.294	20.574	20.649	20.744
M23 × 2	21.0	21.0	20.835	21.071	21.135	21.210
M24 × 3	21.0	21.1	20.752	21.067	21.152	21.252
M24 × 2	22.0	22.0	21.835	22.071	22.135	22.210
M24 × 1.5	22.5	22.6	22.376	22.566	22.612	22.676
M24 × 1	23.0	23.0	22.917	23.067	23.107	23.153
M25 × 3	22.0	22.0	21.752	22.067	22.152	22.252
M25 × 2	23.0	23.0	22.835	23.071	23.135	23.210
M25 × 1.5	23.5	23.5	23.376	23.566	23.612	23.676
M25 × 1	24.0	24.0	23.917	24.067	24.107	24.153
M26 × 3	23.0	23.0	22.752	23.067	23.152	23.252
M26 × 1.5	24.5	24.5	24.376	24.566	24.612	24.676
M27 × 3	24.0	24.1	23.752	24.067	24.152	24.252
M27 × 2	25.0	25.0	24.835	25.071	25.135	25.210
M27 × 1.5	25.5	25.6	25.376	25.566	25.612	25.676
M27 × 1	26.0	26.0	25.917	26.067	26.107	26.153
M28 × 3	25.0	25.0	24.752	25.067	25.152	25.252
M28 × 2	26.0	26.0	25.835	26.071	26.135	26.210
M28 × 1.5	26.5	26.5	26.376	26.566	26.612	26.676
M28 × 1	27.0	27.0	26.917	27.067	27.107	27.153
M30 × 3.5	26.5	26.6	26.211	26.566	26.661	26.771
M30 × 3	27.0	27.0	26.752	27.067	27.152	27.252
M30 × 2	28.0	28.0	27.835	28.071	28.135	28.210
M30 × 1.5	28.5	28.6	28.376	28.566	28.612	28.676
M30 × 1	29.0	29.0	28.917	29.067	29.107	29.153
M32 × 2	30.0	30.0	29.835	30.071	30.135	30.210
M32 × 1.5	30.5	30.5	30.376	30.566	30.612	30.676
M33 × 3.5	29.5	29.5	29.211	29.566	29.661	29.771

单位 (Unit) : mm

螺纹直径 Thread size	推荐钻头直径 Recommended drill dia.		最小内螺纹 内径 Minimum internal thread inner dia.	最大内螺纹内径 D ₁ Maximum internal thread inner dia. D ₁		
	标准 钻头 Standard Drill	高性能 钻头 High performance drill		4H	5H	6H
M33 × 3	30.0	30.0	29.752	30.067	30.152	30.252
M33 × 2	31.0	31.0	30.835	31.071	31.135	31.210
M33 × 1.5	31.5	31.5	31.376	31.566	31.612	31.676
M35 × 1.5	33.5	33.5	33.376	33.566	33.612	33.676
M36 × 4	32.0	32.0	31.670	32.045	32.145	32.270
M36 × 3	33.0	33.0	32.752	33.067	33.152	33.252
M36 × 2	34.0	34.0	33.835	34.071	34.135	34.210
M36 × 1.5	34.5	34.5	34.376	34.566	34.612	34.676
M38 × 1.5	36.5	36.5	36.376	36.566	36.612	36.676
M39 × 4	35.0	35.0	34.670	35.045	35.145	35.270
M39 × 3	36.0	36.0	35.752	36.067	36.152	36.252
M39 × 2	37.0	37.0	36.835	37.071	37.135	37.210
M39 × 1.5	37.5	37.5	37.376	37.566	37.612	37.676
M40 × 3	37.0	37.0	36.752	37.067	37.152	37.252
M40 × 2	38.0	38.0	37.835	38.071	38.135	38.210
M40 × 1.5	38.5	38.5	38.376	38.566	38.612	38.676
M42 × 4.5	37.5	37.5	37.129	37.554	37.659	37.799
M42 × 4	38.0	38.0	37.670	38.045	38.145	38.270
M42 × 3	39.0	39.0	38.752	39.067	39.152	39.252
M42 × 2	40.0	40.0	39.835	40.071	40.135	40.210
M42 × 1.5	40.5	—	40.376	40.566	40.612	40.676
M45 × 4.5	40.5	—	40.129	40.554	40.659	40.799
M45 × 4	41.0	41.0	40.670	41.045	41.145	41.270
M45 × 3	42.0	42.0	41.752	42.067	42.152	42.252
M45 × 2	43.0	43.0	42.835	43.071	43.135	43.210
M45 × 1.5	43.5	—	43.376	43.566	43.612	43.676

螺纹直径 Thread size	推荐钻头直径 Recommended drill dia.		最小内螺纹 内径 Minimum internal thread inner dia.	最大内螺纹内径 D ₁ Maximum internal thread inner dia. D ₁		
	标准 钻头 Standard Drill	高性能 钻头 High performance drill		4H	5H	6H
M48 × 5	43.0	43.0	42.587	43.037	43.147	43.297
M48 × 4	44.0	44.0	43.670	44.045	44.145	44.270
M48 × 3	45.0	45.0	44.752	45.067	45.152	45.252
M48 × 2	46.0	46.0	45.835	46.071	46.135	46.210
M48 × 1.5	46.5	—	46.376	46.566	46.612	46.676
M50 × 3	47.0	47.0	46.752	47.067	47.152	47.252
M50 × 2	48.0	48.0	47.835	48.071	48.135	48.210
M50 × 1.5	48.5	—	48.376	48.566	48.612	48.676
M52 × 5	47.0	47.0	46.587	47.037	47.147	47.297
M52 × 4	48.0	48.0	47.670	48.045	48.145	48.270
M52 × 3	49.0	49.0	48.752	49.067	49.152	49.252
M52 × 2	50.0	50.0	49.835	50.071	50.135	50.210
M52 × 1.5	50.5	—	50.376	50.566	50.612	50.676
M55 × 4	51.0	51.0	50.670	51.045	51.145	51.270
M55 × 3	52.0	52.0	51.752	52.067	52.152	52.252
M55 × 2	53.0	—	52.835	53.071	53.135	53.210
M55 × 1.5	53.5	—	53.376	53.566	53.612	53.676
M56 × 5.5	50.5	—	50.046	50.521	50.646	50.796
M56 × 4	52.0	—	51.670	52.045	52.145	52.270
M56 × 3	53.0	—	52.752	53.067	53.152	53.252
M56 × 2	54.0	—	53.835	54.071	54.135	54.210
M56 × 1.5	54.5	—	54.376	54.566	54.612	54.676
M60 × 5.5	54.5	—	54.046	54.521	54.646	54.796
M64 × 6	58.0	—	57.505	58.005	58.135	58.305
M68 × 6	62.0	—	61.505	62.005	62.135	62.305

挤压丝锥系列的螺纹底孔直径

Recommended Drill Hole Size of TAFLET series

公制粗牙螺纹

Coarse screw thread

单位 (Unit) : mm

螺纹直径 Thread size	齿距 Pitch	等级 Class	螺纹辅助孔直径 (重合度) Tap drill hole (percentage of thread engagement) 70%~100%
M 1.4	0.30	4	1.28 ~ 1.23
M 1.7	0.35	4	1.56 ~ 1.50
M 2	0.40	4	1.84 ~ 1.77
M 2.3	0.40	4	2.14 ~ 2.07
M 2.5	0.45	4	2.32 ~ 2.24
M 2.6	0.45	4	2.42 ~ 2.34
M 3	0.50	5	2.80 ~ 2.72
M 3.5	0.60	5	3.26 ~ 3.16
M 4	0.70	6	3.72 ~ 3.60
M 5	0.80	6	4.68 ~ 4.55
M 6	1.00	7	5.60 ~ 5.43
M 8	1.25	7	7.50 ~ 7.29
M10	1.50	7	9.40 ~ 9.15

公制细牙螺纹

Fine screw thread

单位 (Unit) : mm

螺纹直径 Thread size	齿距 Pitch	等级 Class	螺纹辅助孔直径 (重合度) Tap drill hole (percentage of thread engagement) 70%~100%
M 4	0.50	6	3.80 ~ 3.72
M 5	0.50	6	4.80 ~ 4.72
M 6	0.75	7	5.70 ~ 5.57
M 6	0.50	7	5.80 ~ 5.72
M 8	1.00	7	7.60 ~ 7.43
M10	1.25	7	9.50 ~ 9.29
M10	1.00	7	9.60 ~ 9.43

关于螺纹底孔直径表

About the list of tap drill hole

D₁ : 表示 JIS 6H (2 级) 的内螺纹内径。

D₁ : is expressing JIS 6H (class 2) of internal thread inner dia.

螺距 0.3 以下表示粗螺纹的 5H (2 级)、细螺纹的 4H、5H (1 级)。

For pitch below 0.3, please check JIS 5H (class2) in coarse screw thread; check JIS 4H/5H (class 1) in fine screw thread.

* : 是指从 JIS 上删除的尺寸。

* : removed size from JIS

螺纹底孔直径咬合率的计算公式
Formula of the percentage of thread engagement per tapped hole size

咬合率 (%) =
Percentage of thread engagement

外螺纹大径的标准尺寸—螺 纹 底 孔 直 径

Standard size of outside diameter Dia. of tap drill hole

$$2 \times (\text{标准牙形高度}) \times 100$$

(Standard height of percentage of thread engagement)

标准牙形高度 : 公 制 0.5413P

Standard height of percentage of thread engagement; Metric 0.5413P

管 用 0.6403P P=螺距
Pipe 0.6403P P=pitch

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

螺纹底孔直径
 Recommended Tap Drill Sizes

公制航空航天螺纹用
 For Metric screw threads helisert

单位 (Unit) : mm

螺纹直径 Thread size	推荐钻头直径 Recommended drill dia.		最小内螺纹 Minimum internal thread inner dia.	最大内螺纹 Maximum internal thread inner dia. D1
	标准钻头 Standard Drill	高性能钻头 High performance drill		
M2.5 × 0.45	2.60	2.65	2.60	2.68
M2.6 × 0.45	2.70	2.75	2.70	2.78
M3 × 0.5	3.10	3.15	3.12	3.20
M4 × 0.7	4.20	4.25	4.17	4.30
M5 × 0.8	5.25	5.30	5.16	5.33
M6 × 1	6.30	6.40	6.25	6.42
M8 × 1.25	8.40	8.50	8.31	8.52
M10 × 1.5	10.50	10.60	10.37	10.62
M10 × 1.25	10.40	10.50	10.31	10.52
M12 × 1.75	12.60	12.70	12.43	12.73
M12 × 1.5	12.50	12.60	12.37	12.62
M12 × 1.25	12.40	12.50	12.31	12.52
M14 × 2	14.70	14.80	14.49	14.83
M14 × 1.5	14.50	14.60	14.37	14.62
M16 × 2	16.70	16.80	16.49	16.83
M16 × 1.5	16.50	16.60	16.37	16.62

* 螺纹的内径是通过参考航空航天制造商资料制成的。
 The internal thread inner diameter is based on the data of the helisert manufacturer.

美制航空航天螺纹用
 For Unified screw threads helisert

单位 (Unit) : mm

螺纹直径 Thread size	推荐钻头直径 Recommended drill dia.		最小内螺纹 Minimum internal thread inner dia.	最大内螺纹 Maximum internal thread inner dia. D1
	标准钻头 Standard Drill	高性能钻头 High performance drill		
No.4-40UNC	3.10	3.15	2.985	3.180
No.5-40UNC	3.40	3.45	3.315	3.487
No.6-32UNC	3.80	3.85	3.678	3.878
No.6-40UNF	3.75	3.80	3.645	3.817
No.8-32UNC	4.45	4.50	4.339	4.523
No.8-36UNF	4.40	4.45	4.321	4.498
No.10-24UNC	5.20	5.25	5.055	5.283
No.10-32UNF	5.10	5.15	4.999	5.184
No.12-24UNC	5.85	5.90	5.715	5.943
1/4-20UNC	6.70	6.80	6.625	6.868
1/4-28UNF	6.60	6.70	6.546	6.720
5/16-18UNC	8.30	8.40	8.243	8.488
5/16-24UNF	8.20	8.30	8.167	8.351
3/8-16UNC	10.00	10.10	9.868	10.126
3/8-24UNF	9.80	9.90	9.754	9.931
7/16-14UNC	11.60	11.70	11.507	11.783
7/16-20UNF	11.40	11.50	11.387	11.584
1/2-13UNC	13.20	13.30	13.122	13.393
1/2-20UNF	13.00	13.10	12.975	13.172
5/8-11UNC	16.50	16.60	16.376	16.672
5/8-18UNF	16.20	16.30	16.180	16.385

* 螺纹的内径是通过参考航空航天制造商资料制成的。
 The internal thread inner diameter is based on the data of the helisert manufacturer.

美制螺纹用
 For Unified screw threads

单位 (Unit) : mm

螺纹直径 Thread size	推荐钻头直径 Recommended drill dia.		最小内螺纹 Minimum internal thread inner dia.	最大内螺纹 Maximum internal thread inner dia. D1
	标准钻头 Standard Drill	高性能钻头 High performance drill		
No.4-40UNC	2.25	2.3	2.157	2.385
No.5-40UNC	2.55	2.6	2.487	2.697
No.6-32UNC	2.75	2.8	2.642	2.895
No.6-40UNF	2.95	3.0	2.820	3.022
No.8-32UNC	3.40	3.5	3.302	3.530
No.8-36UNF	3.50	3.6	3.404	3.606
No.10-24UNC	3.80	3.9	3.683	3.962
No.10-32UNF	4.00	4.1	3.963	4.165
No.12-24UNC	4.40	4.5	4.344	4.597
1/4-20UNC	5.10	5.2	4.979	5.257
1/4-28UNF	5.40	5.5	5.360	5.588
5/16-18UNC	6.60	6.7	6.401	6.731
5/16-24UNF	6.90	7.0	6.782	7.035
3/8-16UNC	8.00	8.1	7.798	8.153
3/8-24UNF	8.50	8.6	8.382	8.636
7/16-14UNC	9.40	9.5	9.144	9.550
7/16-20UNF	9.90	10.0	9.729	10.033
1/2-13UNC	10.90	11.0	10.592	11.023
1/2-20UNF	11.50	11.6	11.329	11.607
5/8-11UNC	13.70	13.8	13.386	13.868
5/8-18UNF	14.50	14.6	14.351	14.681

* 螺纹的内径表示 2B (JIS B 0210 和 JIS B 0212)。
 The internal thread inner diameter represents 2B(JIS B 0210 and JIS B 0212)

ZT 系列的螺纹底孔直径

Recommended Drill Hole Size of ZT series

单位 (Unit) : mm

丝锥 Taps			钻头 Drills				
螺旋尺寸 Thread size	螺距 Pitch	推荐 R 级精度 Recommended R	底孔径咬合率 Percentage of thread engagement per diameter of prepared hole				
			80%	85%	90%	95%	100%
3	0.5	R5	2.78	2.77	2.76	2.74	2.73
4	0.7	R6	3.70	3.68	3.66	3.64	3.62
5	0.8	R6	4.65	4.63	4.61	4.59	4.57
6	1	R7	5.57	5.54	5.51	5.49	5.46
8	1.25	R7	7.46	7.43	7.39	7.36	7.32
8	1	R7	7.57	7.54	7.51	7.49	7.46
10	1.5	R7	9.35	9.31	9.27	9.23	9.19
10	1.25	R7	9.46	9.43	9.39	9.36	9.32
10	1	R7	9.57	9.54	9.51	9.49	9.46
12	1.75	R8	11.24	11.20	11.15	11.10	11.05
12	1.5	R7	11.35	11.31	11.27	11.23	11.19
12	1.25	R7	11.46	11.43	11.39	11.36	11.32
12	1	R7	11.57	11.54	11.51	11.49	11.46
14	2	R10	13.13	13.08	13.03	12.97	12.92
14	1.5	R9	13.35	13.31	13.27	13.23	13.19
16	2	R10	15.13	15.08	15.03	14.97	14.92
16	1.5	R9	15.35	15.31	15.27	15.23	15.19

* 内螺纹的挤压成形取决于被削材和切削条件等。上表中的底孔径作为参考。

* 底孔有弯曲、倾斜、中心位移等场合，易发生内螺纹精度不良和工具损伤等情况。请注意底孔的精度。

The forming of the internal threads varies depending on the work material and tapping conditions. Use the diameter of prepared hole in the above table as a guide.

If the prepared hole is bent, wavy, or misaligned, the internal threads may be inaccurate or the tool may be damaged. Pay attention to the accuracy of the prepared hole.

NACHI 钻头的推荐加工

Recommended processing with NACHI drills

从底孔到倒角、攻丝加工，可以用 NACHI 的钻头和丝锥完成。


选用 ZT 挤压丝锥时推荐 NACHI 钻头一起使用。

From drilling prepared hole to chamfering and tapping, all can be done with NACHI drills and taps.

Please use the NACHI drills together with the ZT Forming Tap.



AquaRVO 钻头
AquaREVO Drills



AquaEX 定心钻
AQUA Drills EX
Starting



ZT 挤压丝锥
ZT Forming Tap

①	②	③
底孔加工 Drilling prepared hole	倒角加工 Chamfering	丝锥加工 Tapping
AquaRVO 钻头 AQRVDS	AquaEX 定心钻 AQDEXST	ZT 挤压丝锥 ZTF
2.78mm	φ 4.0 - 90°	M 3 × 0.5
3.68mm	φ 5.0 - 90°	M 4 × 0.7
4.64mm	φ 6.0 - 90°	M 5 × 0.8
5.54mm	φ 8.0 - 90°	M 6 × 1
7.40mm	φ 10.0 - 90°	M 8 × 1.25
7.50mm	φ 10.0 - 90°	M 8 × 1
9.30mm	φ 12.0 - 90°	M10 × 1.5
9.40mm	φ 12.0 - 90°	M10 × 1.25
9.50mm	φ 12.0 - 90°	M10 × 1
11.20mm	φ 16.0 - 90°	M12 × 1.75
11.30mm	φ 16.0 - 90°	M12 × 1.5
11.40mm	φ 16.0 - 90°	M12 × 1.25
11.50mm	φ 16.0 - 90°	M12 × 1
13.10mm	φ 16.0 - 90°	M14 × 2
13.30mm	φ 16.0 - 90°	M14 × 1.5
15.10mm	φ 20.0 - 90°	M16 × 2
15.30mm	φ 20.0 - 90°	M16 × 1.5

* 内螺纹的挤压成形取决于被削材和切削条件等。上表中的底孔径作为参考。

The forming of the internal threads varies depending on the work material and tapping conditions.

Use the diameter of prepared hole in the above table as a guide.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀

Carbide End Mills



商品一览
Product List

D-2

各类被削材选型基准表
Selection Chart According to Work Materials

D-6

尺寸表
Size List

D-14

硬质合金立铣刀的基准切削条件
Standard Cutting Condition for Carbide End Mills

D-98

新商品

页 Page	商品编码 Code	品名 Product Name	表面处理 Coating	刃数、形状 Appearance	尺寸 Size
D-14	GSX2C-1.5D	GSX 铣刀 2 刃型 1.5D GSX MILL Two Flutes 1.5D	GSX	2 刃型	$\phi 1 \sim \phi 20$
D-14	GSX2C-2D	GSX 铣刀 2 刃型 2D GSX MILL Two Flutes 2D	GSX		$\phi 1 \sim \phi 20$
D-15	2GS	GS 铣刀 2 刃型 GS MILL Two Flutes	GS		$\phi 0.2 \sim \phi 20$
D-16	2PLXS	X's 铣刀 2 刃型 X's-mill Two Flutes	X's		$\phi 0.3 \sim \phi 30$
D-18	2CE	超硬铣刀 2 刃型 ANCHOR V Two Flutes	—	2 刃型	$\phi 1 \sim \phi 20$
D-18	2MNE	超硬微型铣刀 2 刃型 Carbide Mini-Square End Mills Two Flutes	—		$\phi 0.1 \sim \phi 2$
D-19	GSX2C-2.5D	GSX 铣刀 2 刃型 2.5D GSX MILL Two Flutes 2.5D	GSX		$\phi 0.2 \sim \phi 20$
D-20	GSX2P-2.5D	GSX 铣刀 2 刃 P 型 2.5D GSX MILL Two Flutes 2.5D P Type	GSX		$\phi 1 \sim \phi 20$
D-20	GSX2C-3D	GSX 铣刀 2 刃型 3D GSX MILL Two Flutes 3D	GSX	3 刃型	$\phi 1 \sim \phi 20$
D-21	GSX2C-4D	GSX 铣刀 2 刃型 4D GSX MILL Two Flutes 4D	GSX		$\phi 1 \sim \phi 20$
D-21	GSX3C-1.5D	GSX 铣刀 3 刃型 1.5D GSX MILL Three Flutes 1.5D	GSX		$\phi 1 \sim \phi 20$
D-22	GSX3C-2D	GSX 铣刀 3 刃型 2D GSX MILL Three Flutes 2D	GSX		$\phi 1 \sim \phi 20$
D-22	GSXSLT-1.5D	GSX 铣刀 开槽型 1.5D GSX MILL SLOT 1.5D	GSX	3 刃型	$\phi 1 \sim \phi 16$
D-23	GSSLT	GS 铣刀 开槽型 GS MILL SLOT	GS		$\phi 3 \sim \phi 16$
D-23	GEOSLT	X's 铣刀 GEO 开槽型 X's-mill Geo SLOT	X's GEO		$\phi 1 \sim \phi 16$
D-24	GSXVLSLT3-2.5D	GSX 铣刀 VL 开槽型 2.5D GSX MILL VL SLOT 2.5D	GSX II		$\phi 3 \sim \phi 16$
D-25	GSX4C-1D	GSX 铣刀 4 刃型 1D GSX MILL Four Flutes 1D	GSX	4 刃型	$\phi 1 \sim \phi 20$
D-25	GSX4C-1.5D	GSX 铣刀 4 刃型 1.5D GSX MILL Four Flutes 1.5D	GSX		$\phi 1 \sim \phi 20$
D-26	GSX4C-2D	GSX 铣刀 4 刃型 2D GSX MILL Four Flutes 2D	GSX		$\phi 1 \sim \phi 20$
D-26	4GS	GS 铣刀 4 刃型 GS MILL Four Flutes	GS		$\phi 1 \sim \phi 20$
D-27	GSXVL4XT-2D	GSX 铣刀 VL 型超级装夹用 不锈钢钛合金专用 2D GSX MILL VL 2D for X-Treme chuck for Ti · SUS	GSX II	4 刃型	$\phi 12 \sim \phi 25$
D-27	4CE	超硬铣刀 4 刃型 ANCHOR V Four Flutes	—		$\phi 2 \sim \phi 20$
D-28	4XSGEO	X's 铣刀 GEO 型 X's-mill Geo	X's GEO		$\phi 2 \sim \phi 32$
D-29	4PLXS	X's 铣刀 4 刃型 X's-mill Four Flutes	X's		$\phi 2 \sim \phi 25$
D-30	GSXVL4-2.5D	GSX 铣刀 VL 型 2.5D GSX MILL VL 2.5D	GSX II	4 刃型	$\phi 3 \sim \phi 20$
D-30	GSXVL4T-2.5D	GSX 铣刀 VL 型 耐热合金用 2.5D GSX MILL VL 2.5D for Ti · SUS	GSX II		$\phi 3 \sim \phi 20$
D-31	GSX4C-2.5D	GSX 铣刀 4 刃型 2.5D GSX MILL Four Flutes 2.5D	GSX		$\phi 1 \sim \phi 20$
D-32	GSX4P-2.5D	GSX 铣刀 4 刃 P 型 2.5D GSX MILL Four Flutes 2.5D P Type	GSX		$\phi 1 \sim \phi 20$
D-32	GSX4C-3D	GSX 铣刀 4 刃型 3D GSX MILL Four Flutes 3D	GSX	4 刃型	$\phi 1 \sim \phi 20$
D-33	4GEOM	X's 铣刀 GEO 通用型 X's-mill Geo Medium	X's GEO		$\phi 2 \sim \phi 20$
D-33	GSXVL4-4D	GSX 铣刀 VL 型 4D GSX MILL VL 4D	GSX II		$\phi 3 \sim \phi 20$
D-34	GSXVL4T-4D	GSX 铣刀 VL 型 耐热合金用 4D GSX MILL VL 4D for Ti · SUS	GSX II		$\phi 3 \sim \phi 20$
D-34	GSX4C-4D	GSX 铣刀 4 刃型 4D GSX MILL Four Flutes 4D	GSX	4 刃型	$\phi 1 \sim \phi 20$
D-35	GSXVL4XT-4D	GSX 铣刀 VL 型超级装夹用 不锈钢钛合金专用 4D GSX MILL VL 4D for X-Treme chuck for Ti · SUS	GSX II		$\phi 12 \sim \phi 25$

高速钢钻头

硬质合金钻头

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

页 Page	商品编码 Code	品名 Product Name	表面处理 Coating	刃数、形状 Appearance	尺寸 Size
D-35	SL4GEO	X's 铣刀 GEO 长刃型 X's-mill Geo Long	X's GEO	4 刃型	$\phi 3 \sim \phi 20$
D-36	4MNE	超硬微型铣刀 4 刃型 Carbide Mini-Square End Mills Four Flutes	—		$\phi 1 \sim \phi 2$
D-36	GSXVLLS4-1.5D	GSX 铣刀 VL 长柄型 1.5D GSX MILL VL Long Shank 1.5D	GSX II		$\phi 3 \sim \phi 20$
D-37	GSXVLLS4T-1.5D	GSX 铣刀 VL 长柄型 1.5D 耐热合金用 GSX MILL VL Long Shank 1.5D for Ti · SUS	GSX II		$\phi 3 \sim \phi 20$
D-37	4GEO LS	X's 铣刀 GEO 长柄型 X's-mill Geo Long Shank	X's GEO	6 刃型	$\phi 3 \sim \phi 20$
D-38	GSXVL6-2.5D	GSX 铣刀 VL 多刃型 2.5D GSX MILL VL Multi-Flutes 2.5D	GSX II		$\phi 6 \sim \phi 20$
D-38	GSXVL6T-2.5D	GSX 铣刀 VL 多刃型 2.5D 耐热合金用 GSX MILL VL Multi-Flutes 2.5D for Ti · SUS	GSX II		$\phi 6 \sim \phi 20$
D-39	GSXVLH6-2.5D	GSX 铣刀 VL 高硬型 2.5D GSX MILL VL Hard 2.5D	GSX II		$\phi 6 \sim \phi 20$
D-39	GSH	GS 铣刀 高硬型 GS MILL Hard	GS	4 ~ 8 刃型	$\phi 1 \sim \phi 20$
D-40	SLXSMH	X's 铣刀 高硬长刃型 X's-mill Hard Long	X's	6 ~ 8 刃型	$\phi 6 \sim \phi 20$
D-40	GSHV	GS 铣刀 重切削型 GS MILL HEAVY	GS	重切削	$\phi 6 \sim \phi 20$
D-41	GSXVLR4-2.5D	GSX 粗铣刀 VL 型 2.5D GSX MILL VL Roughing 2.5D	GSX II	梳齿铣刀	$\phi 4 \sim \phi 20$
D-41	GSXRE-2.5D	GSX 粗铣刀 2.5D GSX MILL Roughing 2.5D	GSX		$\phi 4 \sim \phi 20$
D-42	GSRE	GS 铣刀 粗铣型 GS MILL Roughing	GS		$\phi 6 \sim \phi 20$
D-42	XSRE	X's 铣刀 粗铣型 X's-mill Roughing	X's		$\phi 6 \sim \phi 20$
D-43	GSXVLSLT3-R-2.5D	GSX 铣刀 VL 开槽 圆角型 2.5D GSX MILL VL SLOT Radius 2.5D	GSX II	圆角型	$\phi 3 \sim \phi 16$
D-43	GS4-R	GS 铣刀 圆角型 GS MILL Radius	GS		$\phi 3 \sim \phi 12$
D-44	GSXVL4XT-R-2D	GSX 铣刀 VL 圆角型超级装夹用 不锈钢钛合金专用 2D GSX MILL VL Radius 2D for X-Treme chuck for Ti · SUS	GSX II		$\phi 12 \sim \phi 25$
D-44	4XS GEO-R	X's 铣刀 GEO 圆角型 X's-mill Geo Radius	X's GEO		$\phi 3 \sim \phi 20$
D-45	GSXVL4-R-2.5D	GSX 铣刀 VL 圆角型 2.5D GSX MILL VL Radius 2.5D	GSX II	圆角型	$\phi 6 \sim \phi 20$
D-45	GSXVL4T-R-2.5D	GSX 铣刀 VL 圆角型 2.5D 不锈钢钛合金专用 GSX MILL VL Radius 2.5D for Ti · SUS	GSX II		$\phi 6 \sim \phi 20$
D-46	GSXVL4-R-4D	GSX 铣刀 VL 圆角型 4D GSX MILL VL Radius 4D	GSX II		$\phi 6 \sim \phi 20$
D-46	GSXVL4T-R-4D	GSX 铣刀 VL 圆角型 4D 不锈钢钛合金专用 GSX MILL VL Radius 4D for Ti · SUS	GSX II		$\phi 6 \sim \phi 20$
D-47	GSXVL4XT-R-4D	GSX 铣刀 VL 型超级装夹用 不锈钢钛合金专用 4D GSX MILL VL Radius 4D for X-Treme chuck for Ti · SUS	GSX II	圆角型	$\phi 12 \sim \phi 25$
D-47	GSXVLLS4-R-1.5D	GSX 铣刀 VL 圆角长柄型 1.5D GSX MILL VL Long Shank Radius 1.5D	GSX II		$\phi 3 \sim \phi 20$
D-48	GSXVLLS4T-R-1.5D	GSX 铣刀 VL 圆角长柄型 1.5D 不锈钢钛合金专用 GSX MILL VL Long Shank Radius 1.5D for Ti · SUS	GSX II		$\phi 3 \sim \phi 20$
D-48	4GEO LS-R	X's 铣刀 GEO 长柄 圆角型 X's-mill Geo Radius Long Shank	X's GEO		$\phi 3 \sim \phi 20$
D-49	GSXVL6-R-2.5D	GSX 铣刀 VL 多刃圆角型 2.5D GSX MILL VL Multi-Flutes Radius 2.5D	GSX II	圆角型	$\phi 6 \sim \phi 20$
D-49	GSXVL6T-R-2.5D	GSX 铣刀 VL 多刃圆角型 2.5D 耐热合金用 GSX MILL VL Multi-Flutes Radius 2.5D for Ti · SUS	GSX II		$\phi 6 \sim \phi 20$
D-50	GSH-R	GS 铣刀 高硬圆角型 GS MILL Hard Radius	GS		$\phi 6 \sim \phi 20$
D-50	GSRE-R	GS 铣刀 粗铣圆角型 GS MILL Roughing Radius	GS		$\phi 6 \sim \phi 20$
D-51	GSXB	GSX 球头 铣刀 GSX MILL Ball	GSX II	球头型	RE0.2 ~ RE10
D-51	2GSR	GS 球头 铣刀 GS MILL Ball	GS		RE0.5 ~ RE6
D-52	2GEOR	X's 铣刀 GEO 球型 X's-mill Geo Ball	X's GEO		RE0.5 ~ RE15

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀




高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

	页 Page	商品编码 Code	品名 Product Name		表面处理 Coating	刃数、形状 Appearance	尺寸 Size
新商品	D-53	2PLXSR	X's 球头 铣刀 X's-mill Ball		X's	球头型	RE0.2 ~ RE15
	D-54	2CER	超硬槽刀 V 球头型 ANCHOR V Ball		—		RE1.5 ~ RE10
	D-54	2MNER	超硬铣刀 微球型 2 刃型 Carbide Mini-Ball End Mills Two Flutes		—		RE0.05 ~ RE1
硬质合金钻头	D-55	2GEOLSR	X's 铣刀 GEO 长柄 球型 X's-mill Geo Ball Long Shank		X's GEO		RE0.5 ~ RE15
	D-55	2MMR	模具用 球型 Mold Meister Ball		X's GEO		RE0.5 ~ RE6
	D-56	OVM	椭圆形 铣刀 Oval mills		X's GEO		φ6 ~ φ20
	D-57	GSBH	GS 铣刀 高硬球头型 GS MILL Hard Ball		GS		RE0.2 ~ RE6
高速钢钻头	D-58	BNBP	CBN 模具精 铣刀 CBN Mold Finish Master		—	1,2 刃型	RE0.2 ~ RE1
	D-59	NBNES	CBN 螺旋精 铣刀 CBN Helical Finish Master		—		φ6 ~ φ12
	D-60	2DLCM	DLC 铣刀 铝材用 DLC-mill for Aluminum		DLC	2 刃型	φ1 ~ φ20
	D-61	2DLCSC	DLC 铣刀 锋利型 2 刃型 DLC-mill Sharp Corner		DLC		φ1 ~ φ20
丝锥	D-61	2CEAL	铝用 铣刀 ANCHOR V for Aluminum		—		φ2 ~ φ20
	D-62	SL2DLCSC	DLC 铣刀 长颈锋利型 2 刃型 DLC-mill Long Sharp Corner		DLC	3 刃型	φ3 ~ φ20
	D-62	DLCSLTLS	DLC 铣刀 开槽 长柄型 DLC-mill SLOT Long Shank		DLC		φ2 ~ φ20
	D-63	DLCVLSLT3-2.5D	DLC 铣刀 VL 开槽型 2.5D DLC MILL VL SLOT 2.5D		DLC	4 刃型	φ3 ~ φ16
硬质合金立铣刀	D-64	DLCVLSLT3-1.5D	DLC 铣刀 VL 开槽 长柄型 1.5D DLC MILL VL SLOT Long Shank 1.5D		DLC		φ3 ~ φ16
	D-64	DLCVL4-2.5D	DLC 铣刀 VL 型 2.5D DLC MILL VL 2.5D		DLC		φ3 ~ φ20
	D-65	DLCVL4-4D	DLC 铣刀 VL 型 4D DLC MILL VL 4D		DLC		φ3 ~ φ20
高速钢立铣刀	D-65	DLCVL4-5D	DLC 铣刀 VL 型 5D DLC MILL VL 5D		DLC	6 刃型	φ3 ~ φ20
	D-66	DLCVLS4-1.5D	DLC 铣刀 VL 长柄型 1.5D DLC MILL VL Long Shank 1.5D		DLC		φ3 ~ φ20
	D-66	DLCVL6-2.5D	DLC 铣刀 VL 多刃型 2.5D DLC MILL VL Multi-Flutes 2.5D		DLC	圆角型	φ6 ~ φ20
	D-67	2DLCM-R	DLC 铣刀 圆角型 DLC-mill Radius		DLC		φ2 ~ φ20
切削工具	D-67	DLCVLSLT3-R-2.5D	DLC 铣刀 VL 开槽 圆角型 2.5D DLC MILL VL SLOT Radius 2.5D		DLC		φ3 ~ φ16
	D-68	DLCVL4-R-2.5D	DLC 铣刀 VL 圆角型 2.5D DLC MILL VL Radius 2.5D		DLC		φ6 ~ φ20
套装商品 其它	D-68	DLCVL4-R-4D	DLC 铣刀 VL 圆角型 4D DLC MILL VL Radius 4D		DLC		φ6 ~ φ20
	D-69	DLCVLS4-R-1.5D	DLC 铣刀 VL 长柄 圆角型 1.5D DLC MILL VL Long Shank Radius 1.5D		DLC	球头型	φ3 ~ φ20
精密工具	D-69	DLCVL6-R-2.5D	DLC 铣刀 VL 多刃 圆角型 2.5D DLC MILL VL Multi-Flutes Radius 2.5D		DLC		φ6 ~ φ20
	D-70	2DLCR	DLC 铣刀 球头型 DLC-mill Ball		DLC	2 刃型	RE0.5 ~ RE10
	D-70	2DSE	金刚石涂层 铣刀 Diamond Coating Stub End Mills		DIA		φ1 ~ φ20
技术资料 索引	D-71	2DCE	金刚石涂层 铣刀 2 刃型 Diamond Coating End Mills Two Flutes		DIA	6 ~ 16 刃型	φ0.5 ~ φ12
	D-71	DCECFF	金刚石涂层 纤维 铣刀 Crystal Diamond Coat Fiber Mill		DIA		φ3 ~ φ20
	D-72	DCRE	金刚石涂层 球头 铣刀 Diamond Coating Ball End Mills		DIA	球头型	RE0.5 ~ RE6
	D-73	CU2	铜加工用 2 刃 铣刀 Two Flutes End Mill for Copper		CrN	2 刃型	φ0.5 ~ φ12
	D-74	CU4	铜加工用 4 刃 铣刀 Four Flutes End Mill for Copper		CrN	4 刃型	φ1 ~ φ12

页 Page	商品编码 Code	品名 Product Name		表面处理 Coating	刃数、形状 Appearance	尺寸 Size
D-74	CUB2	铜加工用 球头 铣刀 Ball End Mill for Copper		CrN	球头型	RE0.5 ~ RE6
D-75	GSN2	GS 铣刀 长颈 2 刃型 GS MILL Long Neck Two Flutes		GS	2 刃型	φ0.2 ~ φ6
D-77	GSN4	GS 铣刀 长颈 4 刃型 GS MILL Long Neck Four Flutes		GS	4 刃型	φ1 ~ φ10
D-78	GSBNH2	GS 铣刀 长颈 高硬型 GS MILL Long Neck Hard Ball		GS	球头型	RE0.1 ~ RE3
D-82	CURIB	铜加工用 2 刃 铣刀 长颈型 Long Neck Two Flutes for Copper		CrN	2 刃型	φ0.3 ~ φ6
D-85	CURIBR	铜加工用 球头 铣刀 长颈型 Long Neck Ball for Copper		CrN	球头型	RE0.1 ~ RE3
D-88	NWEX2000	WAVY 铣刀 NWEX2000 WAVY MILL NWEX2000		—		φ14 ~ φ63
D-90	NWEX3000	WAVY 铣刀 NWEX3000 WAVY MILL NWEX3000		—	平头型	φ25 ~ φ125
D-93	XSWMM	X's 铣刀 WAVY 多功能 X's-mill WAVY Multi		—		φ20 ~ φ40
D-95	XSWBMR	X's 铣刀 WAVY 球头型 X's-mill WAVY Ball		—		RE10 ~ RE15
D-96	XSWBMF	X's 铣刀 WAVY 球头型 (WBMF) X's-mill WAVY Ball (WBMF)		—	球头型	RE8 ~ RE15

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表

Selection Chart According to Work Materials










硬质合金立铣刀

Carbide End Mills

	商品编码 Code	品名 Product Name	刊载页数 Page		刃数 No. of Flutes	*1 刃尖 倒角 Corner	刃长・种类 Length of Cut	尺寸 Size	表面 处理 Coating	用途・特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition								
新商品	GSX2C-1.5D	GSX 铣刀 2 刃型 1.5D GSX MILL Two Flutes 1.5D	D-14	D-98	2	G	短刃 Short	$\phi 1 \sim \phi 20$	GSX		●	
硬质合金钻头	GSX2C-2D	GSX 铣刀 2 刃型 2D GSX MILL Two Flutes 2D	D-14	D-98	2	G	标准刃 Regular	$\phi 1 \sim \phi 20$	GSX		●	
	2GS	GS 铣刀 2 刃型 GS MILL Two Flutes	D-15	D-99	2	S	标准刃 Regular	$\phi 0.2 \sim \phi 20$	GS		●	
	2PLXS	X's 铣刀 2 刃型 X's-mill Two Flutes	D-16	D-99	2	S	标准刃 Regular	$\phi 0.3 \sim \phi 30$	X's		□	
高速钢钻头	2CE	超硬铣刀 2 刃型 ANCHOR V Two Flutes	D-18	D-99	2	S	标准刃 Regular	$\phi 1 \sim \phi 20$	—		●	
	2MNE	超硬微型铣刀 2 刃型 Carbide Mini-Square End Mills Two Flutes	D-18	D-101	2	S	标准刃 Regular	$\phi 0.1 \sim \phi 2$	—		●	
	GSX2C-2.5D	GSX 铣刀 2 刃型 2.5D GSX MILL Two Flutes 2.5D	D-19	D-100	2	G	标准刃 Regular	$\phi 0.2 \sim \phi 20$	GSX		●	
丝锥	GSX2P-2.5D	GSX 铣刀 2刃P型 2.5D GSX MILL Two Flutes 2.5D P Type	D-20	D-99	2	S	标准刃 Regular	$\phi 1 \sim \phi 20$	GSX		●	
	GSX2C-3D	GSX 铣刀 2 刃型 3D GSX MILL Two Flutes 3D	D-20	D-100	2	G	中长刃 Medium	$\phi 1 \sim \phi 20$	GSX		●	
	GSX2C-4D	GSX 铣刀 2 刃型 4D GSX MILL Two Flutes 4D	D-21	D-100	2	G	长刃 Long	$\phi 1 \sim \phi 20$	GSX		●	
	GSX3C-1.5D	GSX 铣刀 3 刃型 1.5D GSX MILL Three Flutes 1.5D	D-21	D-101	3	G	短刃 Short	$\phi 1 \sim \phi 20$	GSX		●	
硬质合金立铣刀	GSX3C-2D	GSX 铣刀 3 刃型 2D GSX MILL Three Flutes 2D	D-22	D-101	3	G	标准刃 Regular	$\phi 1 \sim \phi 20$	GSX		●	
	GSXSLT-1.5D	GSX 铣刀 开槽型 1.5D GSX MILL SLOT 1.5D	D-22	D-102	3	G	短刃 Short	$\phi 1 \sim \phi 16$	GSX	复合加工 Combined processing	●	
	GSSLT	GS 铣刀 开槽型 GS MILL SLOT	D-23	D-103	3	G	标准刃 Regular	$\phi 3 \sim \phi 16$	GS	复合加工 Combined processing	●	
高速钢立铣刀	GEOSLT	X's 铣刀 GEO 开槽型 X's-mill Geo SLOT	D-23	D-104	3	G	标准刃 Regular	$\phi 1 \sim \phi 16$	X's	复合加工 Combined processing	●	
	GSXVLSLT3-2.5D	GSX 铣刀 VL 开槽型 2.5D GSX MILL VL SLOT 2.5D	D-24	D-105	3	G	标准刃 Regular	$\phi 3 \sim \phi 16$	GSX II	复合加工 Combined processing	●□	
	GSX4C-1D	GSX 铣刀 4 刃型 1D GSX MILL Four Flutes 1D	D-25	D-106	4	G	短刃 Short	$\phi 1 \sim \phi 20$	GSX	高精度 High precision	●	
切削工具	GSX4C-1.5D	GSX 铣刀 4 刃型 1.5D GSX MILL Four Flutes 1.5D	D-25	D-107	4	G	短刃 Short	$\phi 1 \sim \phi 20$	GSX		●	
	GSX4C-2D	GSX 铣刀 4 刃型 2D GSX MILL Four Flutes 2D	D-26	D-107	4	G	标准刃 Regular	$\phi 1 \sim \phi 20$	GSX		●	
	4GS	GS 铣刀 4 刃型 GS MILL Four Flutes	D-26	D-108	4	S	标准刃 Regular	$\phi 1 \sim \phi 20$	GS		●	
	GSXVL4XT-2D	GSX 铣刀 VL 型超组装夹用 不锈钢钛合金专用 2D GSX MILL VL 2D for X-Treme chuck for Ti・SUS	D-27	D-109	4	G	标准刃 Regular	$\phi 12 \sim \phi 25$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	□	
套装商品 其它	4CE	超硬铣刀 4 刃型 ANCHOR V Four Flutes	D-27	D-110	4	S	标准刃 Regular	$\phi 2 \sim \phi 20$	—		●	
	4XSGEO	X's 铣刀 GEO 型 X's-mill Geo	D-28	D-110	4	G	标准刃 Regular	$\phi 2 \sim \phi 32$	X's		●	
	4PLXS	X's 铣刀 4 刃型 X's-mill Four Flutes	D-29	D-108	4	S	标准刃 Regular	$\phi 2 \sim \phi 25$	X's		□	
精密工具	GSXVL4-2.5D	GSX 铣刀 VL 型 2.5D GSX MILL VL 2.5D	D-30	D-111	4	G	标准刃 Regular	$\phi 3 \sim \phi 20$	GSX II		●□	
	GSXVL4T-2.5D	GSX 铣刀 VL 型 耐热合金用 2.5D GSX MILL VL 2.5D for Ti・SUS	D-30	D-112	4	G	标准刃 Regular	$\phi 3 \sim \phi 20$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	●□	
	GSX4C-2.5D	GSX 铣刀 4 刃型 2.5D GSX MILL Four Flutes 2.5D	D-31	D-113	4	G	标准刃 Regular	$\phi 1 \sim \phi 20$	GSX		●	
	GSX4P-2.5D	GSX 铣刀 4 刃 P 型 2.5D GSX MILL Four Flutes 2.5D P Type	D-32	D-108	4	S	标准刃 Regular	$\phi 1 \sim \phi 20$	GSX		●	
	GSX4C-3D	GSX 铣刀 4 刃型 3D GSX MILL Four Flutes 3D	D-32	D-113	4	G	中长刃 Medium	$\phi 1 \sim \phi 20$	GSX		●	
技术资料 索引	4GEOM	X's 铣刀 GEO 通用型 X's-mill Geo Medium	D-33	D-113	4	G	中长刃 Medium	$\phi 2 \sim \phi 20$	X's		●	
	GSXVL4-4D	GSX 铣刀 VL 型 4D GSX MILL VL 4D	D-33	D-114	4	G	长刃 Long	$\phi 3 \sim \phi 20$	GSX II		□	
	GSXVL4T-4D	GSX 铣刀 VL 型 耐热合金用 4D GSX MILL VL 4D for Ti・SUS	D-34	D-114	4	G	长刃 Long	$\phi 3 \sim \phi 20$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	□	

*1 G：耐崩型 Gasland、S：锋利型 Sharp corner

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

	商品照片 Product Photography	被削材 Work Materials														
		一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢 Alloy Steel	预硬钢 Pre-Hardened Steel	调质钢・模具钢 Heat-Treated Steel/Mold Steel	高硬度钢 Hardened Steel			不锈钢 Stainless Steel	钛合金・耐热合金 Titanium Alloy/Heat-Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy	石墨 Graphite	
							30~45 HRC	45~55 HRC	55~60 HRC							60~66 HRC
		SS400	S45C S50C	SCM SCR	NAK	30~45 HRC	45~55 HRC	55~60 HRC	60~66 HRC	SUS304 SUS316		FC FCD	Al/AC ADC	Cu		
		○	○	○	○	○	○	○	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	○	—	◎	○	○	—	—	—	
		○	◎	○	○	○	◎	—	—	◎	○	○	—	—	—	
		○	◎	◎	◎	◎	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	—	—	—	—	—	○	○	○	—	
		○	○	○	○	○	—	—	—	—	—	○	○	○	—	
		◎	◎	◎	◎	◎	◎	○	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表

Selection Chart According to Work Materials










硬质合金立铣刀

Carbide End Mills

	商品编码 Code	品名 Product Name	刊载页数 Page		刃数 No. of Flutes	*1 刃尖 倒角 Corner	刃长・种类 Length of Cut	尺寸 Size	表面 处理 Coating	用途・特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition								
新商品	GSX4C-4D	GSX 铣刀 4 刃型 4D GSX MILL Four Flutes 4D	D-34	D-115	4	G	长刃 Long	$\phi 1 \sim \phi 20$	GSX		●	
硬质合金钻头	GSXVL4XT-4D	GSX 铣刀 VL 型超级装夹用 不锈钢钛合金专用 4D GSX MILL VL 4D for X-Treme chuck for Ti・SUS	D-35	D-109	4	G	长刃 Long	$\phi 12 \sim \phi 25$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	□	
	SL4GEO	X's 铣刀 GEO 长刃型 X's-mill Geo Long	D-35	D-115	4	G	长刃 Long	$\phi 3 \sim \phi 20$	X's		●	
高速钢钻头	4MNE	超硬微型铣刀 4 刃型 Carbide Mini-Square End Mills Four Flutes	D-36	D-101	4	S	标准刃 Regular	$\phi 1 \sim \phi 2$	—		●	
	GSXVLS4-1.5D	GSX 铣刀 VL 长柄型 1.5D GSX MILL VL Long Shank 1.5D	D-36	D-116	4	G	长柄 Long Shank	$\phi 3 \sim \phi 20$	GSX II		●	
	GSXVLS4T-1.5D	GSX 铣刀 VL 长柄型 1.5D 耐热合金用 GSX MILL VL Long Shank 1.5D for Ti・SUS	D-37	D-117	4	G	长柄 Long Shank	$\phi 3 \sim \phi 20$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	●	
	4GEOLS	X's 铣刀 GEO 长柄型 X's-mill Geo Long Shank	D-37	D-117	4	G	长柄 Long Shank	$\phi 3 \sim \phi 20$	X's		●	
丝锥	GSXVL6-2.5D	GSX 铣刀 VL 多刃型 2.5D GSX MILL VL Multi-Flutes 2.5D	D-38	D-118	6	G	标准刃 Regular	$\phi 6 \sim \phi 20$	GSX II		●	
	GSXVL6T-2.5D	GSX 铣刀 VL 多刃型 2.5D 耐热合金用 GSX MILL VL Multi-Flutes 2.5D for Ti・SUS	D-38	D-118	6	G	标准刃 Regular	$\phi 6 \sim \phi 20$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	●	
	GSXVLH6-2.5D	GSX 铣刀 VL 高硬型 2.5D GSX MILL VL Hard 2.5D	D-39	D-119	6	G	标准刃 Regular	$\phi 6 \sim \phi 20$	GSX II	高硬度钢用 For Hardened Steel	●	
	GSH	GS 铣刀 高硬型 GS MILL Hard	D-39	D-120	4~8	G	中长刃 Medium	$\phi 1 \sim \phi 20$	GS	高硬度钢用 For Hardened Steel	●	
硬质合金立铣刀	SLXSMH	X's 铣刀 高硬长刃型 X's-mill Hard Long	D-40	D-121	6~8	G	长刃 Long	$\phi 6 \sim \phi 20$	X's	高硬度钢用 For Hardened Steel	●	
	GSHV	GS 铣刀 重切削型 GS MILL HEAVY	D-40	D-121	4	G	标准刃 Regular	$\phi 6 \sim \phi 20$	GS	半精加工 Semi finishing	●	
高速钢立铣刀	GSXVLR4-2.5D	GSX 粗铣刀 VL 型 2.5D GSX MILL VL Roughing 2.5D	D-41	D-122	4	G	标准刃 Regular	$\phi 4 \sim \phi 20$	GSX II	粗加工 Roughing	●	
	GSXRE-2.5D	GSX 粗铣刀 2.5D GSX MILL Roughing 2.5D	D-41	D-123	4	G	标准刃 Regular	$\phi 4 \sim \phi 20$	GSX	粗加工 Roughing	●	
	GSRE	GS 铣刀 粗铣型 GS MILL Roughing	D-42	D-123	4	G	标准刃 Regular	$\phi 6 \sim \phi 20$	GS	粗加工 Roughing	●	
	XSRE	X's 铣刀 粗铣型 X's-mill Roughing	D-42	D-123	4	G	标准刃 Regular	$\phi 6 \sim \phi 20$	X's	粗加工 Roughing	□	
切削工具	GSXVLSLT3-R-2.5D	GSX 铣刀 VL 开槽 圆角型 2.5D GSX MILL VL SLOT Radius 2.5D	D-43	D-105	3	圆角型	标准刃 Regular	$\phi 3 \sim \phi 16$	GSX II	复合加工 Combined processing	□	
	GS4-R	GS 铣刀 圆角型 GS MILL Radius	D-43	D-124	4	圆角型	标准刃 Regular	$\phi 3 \sim \phi 12$	GS		●	
	GSXVL4XT-R-2D	GSX 铣刀 VL 圆角型超级装夹用 不锈钢钛合金专用 2D GSX MILL VL Radius 2D for X-Treme chuck for Ti・SUS	D-44	D-109	4	圆角型	标准刃 Regular	$\phi 12 \sim \phi 25$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	□	
套装商品 其它	4XS GEO-R	X's 铣刀 GEO 圆角型 X's-mill Geo Radius	D-44	D-110	4	圆角型	标准刃 Regular	$\phi 3 \sim \phi 20$	X's		●	
	GSXVL4-R-2.5D	GSX 铣刀 VL 圆角型 2.5D GSX MILL VL Radius 2.5D	D-45	D-111	4	圆角型	标准刃 Regular	$\phi 6 \sim \phi 20$	GSX II		□	
	GSXVL4T-R-2.5D	GSX 铣刀 VL 圆角型 2.5D 不锈钢钛合金专用 GSX MILL VL Radius 2.5D for Ti・SUS	D-45	D-112	4	圆角型	标准刃 Regular	$\phi 6 \sim \phi 20$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	●	
	GSXVL4-R-4D	GSX 铣刀 VL 圆角型 4D GSX MILL VL Radius 4D	D-46	D-114	4	圆角型	长刃 Long	$\phi 6 \sim \phi 20$	GSX II		□	
精密工具	GSXVL4T-R-4D	GSX 铣刀 VL 圆角型 4D 不锈钢钛合金专用 GSX MILL VL Radius 4D for Ti・SUS	D-46	D-114	4	圆角型	长刃 Long	$\phi 6 \sim \phi 20$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	□	
	GSXVL4XT-R-4D	GSX 铣刀 VL 型超级装夹用 不锈钢钛合金专用 4D GSX MILL VL Radius 4D for X-Treme chuck for Ti・SUS	D-47	D-109	4	圆角型	长刃 Long	$\phi 12 \sim \phi 25$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	□	
	GSXVLS4-R-1.5D	GSX 铣刀 VL 圆角长柄型 1.5D GSX MILL VL Long Shank Radius 1.5D	D-47	D-116	4	圆角型	长柄 Long Shank	$\phi 3 \sim \phi 20$	GSX II		●	
	GSXVLS4T-R-1.5D	GSX 铣刀 VL 圆角长柄型 1.5D 不锈钢钛合金专用 GSX MILL VL Long Shank Radius 1.5D for Ti・SUS	D-48	D-117	4	圆角型	长柄 Long Shank	$\phi 3 \sim \phi 20$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	●	
技术资料 索引	4GEOLS-R	X's 铣刀 GEO 长柄圆角型 X's-mill Geo Radius Long Shank	D-48	D-117	4	圆角型	长柄 Long Shank	$\phi 3 \sim \phi 20$	X's		●	
	GSXVL6-R-2.5D	GSX 铣刀 VL 多刃圆角型 2.5D GSX MILL VL Multi-Flutes Radius 2.5D	D-49	D-118	6	圆角型	标准刃 Regular	$\phi 6 \sim \phi 20$	GSX II		●	
	GSXVL6T-R-2.5D	GSX 铣刀 VL 多刃圆角型 2.5D 耐热合金用 GSX MILL VL Multi-Flutes Radius 2.5D for Ti・SUS	D-49	D-118	6	圆角型	标准刃 Regular	$\phi 6 \sim \phi 20$	GSX II	SUS・耐热合金用 For Heat Resistant Alloy・SUS	●	
	GSH-R	GS 铣刀 高硬圆角型 GS MILL Hard Radius	D-50	D-120	6~8	圆角型	标准刃 Regular	$\phi 6 \sim \phi 20$	GS	高硬度钢用 For Hardened Steel	●	

*1 G：耐崩型 Gasland、S：锋利型 Sharp corner

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

	商品照片 Product Photography	被削材 Work Materials														
		一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢 Alloy Steel	预硬钢 Pre-Hardened Steel	调质钢・模具钢 Heat Treated Steel/Tool Steel	高硬度钢 Hardened Steel			不锈钢 Stainless Steel	钛合金・耐热合金 Titanium Alloy/Heat Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy	石墨 Graphite	
							45~55 HRC	55~60 HRC	60~66 HRC							
		SS400	S45C S50C	SCM SCR	NAK	30~45 HRC	45~55 HRC	55~60 HRC	60~66 HRC	SUS304 SUS316		FC FCD	Al AC ADC	Cu		
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		—	—	—	—	—	—	—	—	◎	◎	—	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	—	—	—	—	—	○	○	○	—	
		○	○	○	○	○	○	—	—	—	—	◎	—	—	—	
		—	—	—	—	—	—	—	—	◎	◎	—	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	○	—	—	—	◎	—	—	—	
		—	—	—	—	—	—	—	—	◎	◎	—	—	—	—	
		—	○	○	○	○	○	○	○	—	—	—	—	—	—	
		—	○	○	○	○	○	○	○	—	—	—	—	—	—	
		—	—	—	○	○	○	○	○	—	—	—	—	—	—	
		○	○	○	○	○	—	—	—	○	○	○	○	○	—	
		○	○	○	○	○	—	—	—	○	○	○	○	○	○	
		○	○	○	○	○	—	—	—	○	○	○	○	○	—	
		○	○	○	○	○	—	—	—	○	○	○	○	○	—	
		○	○	○	○	○	—	—	—	○	○	○	○	○	—	
		○	○	○	○	○	—	—	—	○	○	○	○	○	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	
		○	○	○	○	○	○	—	—	○	○	○	—	—	—	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表

Selection Chart According to Work Materials








硬质合金立铣刀

Carbide End Mills

	商品编码 Code	品名 Product Name	刊载页数 Page		刃数 No. of Flutes	*1 刃尖 倒角 Corner	刃长・种类 Length of Cut	尺寸 Size	表面 处理 Coating	用途・特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition								
新商品	GSRE-R	GS 铣刀 粗铣圆角型 GS MILL Roughing Radius	D-50	D-123	4	圆角型	标准刃 Regular	$\phi 6 \sim \phi 20$	GS	粗加工 Roughing	●	
硬质合金钻头	GSXB	GSX 球头 铣刀 GSX MILL Ball	D-51	D-125	2	球头型	短刃 Short	RE0.2~RE10	GSX II		●	
	2GSR	GS 球头 铣刀 GS MILL Ball	D-51	D-125	2	球头型	短刃 Short	RE0.5~RE6	GS		●	
高速钢钻头	2GEOR	X's 铣刀 GEO 球型 X's-mill Geo Ball	D-52	D-126	2	球头型	短刃 Short	RE0.5~RE15	X's		●	
	2PLXSR	X's 球头 铣刀 X's-mill Ball	D-53	D-127	2	球头型	标准刃 Regular	RE0.2~RE15	X's		□	
	2CER	超硬槽刀 V 球头型 ANCHOR V Ball	D-54	D-127	2	球头型	标准刃 Regular	RE1.5~RE10	—		●	
	2MNER	超硬铣刀 微球型 2 刃型 Carbide Mini-Ball End Mills Two Flutes	D-54	D-128	2	球头型	标准刃 Regular	RE0.05~RE1	—		●	
丝锥	2GEOLSR	X's 铣刀 GEO 长柄 球型 X's-mill Geo Ball Long Shank	D-55	D-126	2	球头型	长柄 Long Shank	RE0.5~RE15	X's		●	
	2MMR	模具用 球型 Mold Meister Ball	D-55	D-126	2	球头型	短刃 Short	RE0.5~RE6	X's	高精度 High precision	●	
	OVM	椭圆形 铣刀 Oval mills	D-56	D-128	2	球头型	短刃 Short	$\phi 6 \sim \phi 20$	X's		●	
	GSBH	GS 铣刀 高硬球头型 GS MILL Hard Ball	D-57	D-129	2	球头型	短刃 Short	RE0.2~RE6	GS	高硬度钢用 For Hardened Steel	●	
硬质合金立铣刀	BNBP	CBN 模具精 铣刀 CBN Mold Finish Master	D-58	D-58	2	球头型	短刃 Short	RE0.2~RE1	—	高速高精度 High speed High precision	●	
	NBNES	CBN 螺旋精 铣刀 CBN Helical Finish Master	D-59	D-59	1,2	球头型	短刃 Short	$\phi 6 \sim \phi 12$	—	高硬度钢用 For Hardened Steel	□	
高速钢立铣刀	2DLCM	DLC 铣刀 铝材用 DLC-mill SLOT Long Shank	D-60	D-130	2	G	标准刃 Regular	$\phi 1 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	●□	
	2DLCSC	DLC 铣刀 锋利型 2 刃型 DLC-mill Sharp Corner	D-61	D-130	2	S	标准刃 Regular	$\phi 1 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	●	
	2CEAL	铝用 铣刀 ANCHOR V for Aluminum	D-61	D-131	2	S	标准刃 Regular	$\phi 2 \sim \phi 20$	—	铝、有色金属用 For Aluminum・Non-Ferrous Metal	●	
	SL2DLCSC	DLC 铣刀 长颈锋利型 2 刃型 DLC-mill Long Sharp Corner	D-62	D-130	2	S	长刃 Long	$\phi 3 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	●	
切削工具	DLCSLTLS	DLC 铣刀 开槽 长柄型 DLC-mill VL Long Shank	D-62	D-134	3	G	长柄 Long Shank	$\phi 2 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	●	
	DLCVLSLT3-2.5D	DLC 铣刀 VL 开槽型 2.5D DLC MILL VL SLOT 2.5D	D-63	D-132	3	G	标准刃 Regular	$\phi 3 \sim \phi 16$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
	DLCVLSLT3-1.5D	DLC 铣刀 VL 开槽 长柄型 1.5D DLC MILL VL SLOT Long Shank 1.5D	D-64	D-133	3	G	长柄 Long Shank	$\phi 3 \sim \phi 16$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
	DLCVL4-2.5D	DLC 铣刀 VL 型 2.5D DLC MILL VL 2.5D	D-64	D-136	4	G	标准刃 Regular	$\phi 3 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
套装商品	DLCVL4-4D	DLC 铣刀 VL 型 4D DLC MILL VL 4D	D-65	D-136	4	G	长刃 Long	$\phi 3 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
其它	DLCVL4-5D	DLC 铣刀 VL 型 5D DLC MILL VL 5D	D-65	D-131	4	G	长刃 Long	$\phi 3 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
	DLCVLS4-1.5D	DLC 铣刀 VL 长柄型 1.5D DLC MILL VL Long Shank 1.5D	D-66	D-137	4	G	长柄 Long Shank	$\phi 3 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
精密工具	DLCVL6-2.5D	DLC 铣刀 VL 多刃型 2.5D DLC MILL VL Multi-Flutes 2.5D	D-66	D-137	6	G	标准刃 Regular	$\phi 6 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
	2DLCM-R	DLC 铣刀 圆角型 DLC-mill Radius	D-67	D-130	2	圆角型	标准刃 Regular	$\phi 2 \sim \phi 20$	DLC		●	
	DLCVLSLT3-R-2.5D	DLC 铣刀 VL 开槽 圆角型 2.5D DLC MILL VL SLOT Radius 2.5D	D-67	D-132	3	圆角型	标准刃 Regular	$\phi 3 \sim \phi 16$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
	DLCVL4-R-2.5D	DLC 铣刀 VL 圆角型 2.5D DLC MILL VL Radius 2.5D	D-68	D-136	4	圆角型	标准刃 Regular	$\phi 6 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
	DLCVL4-R-4D	DLC 铣刀 VL 圆角型 4D DLC MILL VL Radius 4D	D-68	D-136	4	圆角型	长刃 Long	$\phi 6 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
	DLCVLS4-R-1.5D	DLC 铣刀 VL 长柄 圆角型 1.5D DLC MILL VL Long Shank Radius 1.5D	D-69	D-137	4	圆角型	长柄 Long Shank	$\phi 3 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
	DLCVL6-R-2.5D	DLC 铣刀 VL 多刃 圆角型 2.5D DLC MILL VL Multi-Flutes Radius 2.5D	D-69	D-137	6	圆角型	标准刃 Regular	$\phi 6 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	□	
技术资料索引	2DLCR	DLC 铣刀 球头型 DLC-mill Ball	D-70	D-138	2	球头型	长柄 Long Shank	RE0.5~RE10	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	●	

*1 G: 耐崩型 Gasland, S: 锋利型 Sharp corner

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

	商品照片 Product Photography	被削材 Work Materials													
		一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢 Alloy Steel	预硬钢 Pre-Hardened Steel	调质钢・模具钢 Heat Treated Steel / Mold Steel	高硬度钢 Hardened Steel			不锈钢 Stainless Steel	钛合金・耐热合金 Titanium Alloy / Heat Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy	石墨 Graphite
							45~55 HRC	55~60 HRC	60~66 HRC						
		SS400	S45C S50C	SCM SCR	NAK	30~45 HRC	45~55 HRC	55~60 HRC	60~66 HRC	SUS304 SUS316		FC FCD	Al AC ADC	Cu	
		◎	◎	◎	◎	◎	—	—	—	◎	○	◎	○	○	—
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—
		◎	◎	◎	◎	◎	◎	—	—	◎	○	○	—	—	—
		◎	◎	◎	◎	◎	◎	○	—	◎	○	○	—	—	—
		◎	◎	◎	◎	◎	—	—	—	◎	○	○	—	○	—
		○	○	○	○	○	—	—	—	—	—	○	○	○	—
		◎	◎	◎	◎	◎	◎	◎	—	◎	○	○	—	—	—
		◎	◎	◎	◎	◎	◎	○	—	◎	○	○	—	—	—
		◎	◎	◎	◎	◎	—	—	—	◎	○	○	—	—	—
		—	—	—	○	◎	◎	◎	◎	—	—	—	—	—	—
		—	—	—	—	○	◎	◎	◎	—	—	—	—	—	—
		—	—	—	—	—	—	◎	◎	—	—	—	—	—	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—
		—	—	—	—	—	—	—	—	—	—	—	◎	○	—

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表






Selection Chart According to Work Materials

硬质合金立铣刀

Carbide End Mills

	商品编码 Code	品名 Product Name	刊载页数 Page		刃数 No. of Flutes	*1 刃尖 倒角 Corner	刃长·种类 Length of Cut	尺寸 Size	表面 处理 Coating	用途·特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition								
新品	2DSE	金刚石涂层 铣刀 Diamond Coating Stub End Mills	D-70	D-138	2	G	标准刃 Regular	$\phi 1 \sim \phi 20$	DIA	铝、有色金属用 For Aluminum・Non-Ferrous Metal	☐	
硬质合金钻头	2DCE	金刚石涂层 铣刀 2 刃型 Diamond Coating End Mills Two Flutes	D-71	D-139	2	G	长颈 Long Neck	$\phi 0.5 \sim \phi 12$	DIA	铝、有色金属用 For Aluminum・Non-Ferrous Metal	☐	
	DCECFF	金刚石涂层 纤维 铣刀 Crystal Diamond Coat Fiber Mill	D-71	D-139	6~16	纤维型	标准刃 Regular	$\phi 3 \sim \phi 20$	DIA	铝、有色金属用 For Aluminum・Non-Ferrous Metal	☐	
	DCRE	金刚石涂层 球头 铣刀 Diamond Coating Ball End Mills	D-72	D-139	2	球头型	长颈 Long Neck	RE0.5~RE6	DIA	铝、有色金属用 For Aluminum・Non-Ferrous Metal	☐	
高速钢钻头	CU2	铜加工用 2 刃 铣刀 Two Flutes End Mill for Copper	D-73	D-155	2	S	标准刃 Regular	$\phi 0.5 \sim \phi 12$	CrN	铝、有色金属用 For Aluminum・Non-Ferrous Metal	☐	
	CU4	铜加工用 4 刃 铣刀 Four Flutes End Mill for Copper	D-74	D-155	4	S	标准刃 Regular	$\phi 1 \sim \phi 12$	CrN	铝、有色金属用 For Aluminum・Non-Ferrous Metal	☐	
	CUB2	铜加工用 球头 铣刀 Ball End Mill for Copper	D-74	D-155	2	球头型	长柄 Long Shank	RE0.5~RE6	CrN	铝、有色金属用 For Aluminum・Non-Ferrous Metal	☐	
丝锥	GSN2	GS 铣刀 长颈 2 刃型 GS MILL Long Neck Two Flutes	D-75	D-140	2	S	长颈 Long Neck	$\phi 0.2 \sim \phi 6$	GS		●	
	GSN4	GS 铣刀 长颈 4 刃型 GS MILL Long Neck Four Flutes	D-77	D-144	4	S	长颈 Long Neck	$\phi 1 \sim \phi 10$	GS		●	
	GSBNH2	GS 铣刀 长颈 高硬型 GS MILL Long Neck Hard Ball	D-78	D-148	2	球头型	长颈 Long Neck	RE0.1~RE3	GS		●	
硬质合金立铣刀	CURIB	铜加工用 2 刃 铣刀 长颈型 Long Neck Two Flutes for Copper	D-82	D-154	2	S	长颈 Long Neck	$\phi 0.3 \sim \phi 6$	CrN	铝、有色金属用 For Aluminum・Non-Ferrous Metal	● ☐	
	CURIBR	铜加工用 球头 铣刀 长颈型 Long Neck Ball for Copper	D-85	D-155	2	球头型	长颈 Long Neck	RE0.1~RE3	CrN	铝、有色金属用 For Aluminum・Non-Ferrous Metal	● ☐	
高速钢立铣刀	NWEX2000E	WAVY 铣刀 NWEX2000E 型 WAVY MILL NWEX2000E	D-88	D-156	1~8	—		$\phi 14 \sim \phi 63$	—		●	
	NWEX2000EL	WAVY 铣刀 NWEX2000EL 型 WAVY MILL NWEX2000EL	D-88	D-156	1,2	—	长柄 Long Shank	$\phi 14 \sim \phi 40$	—		●	
	NWEX3000E	WAVY 铣刀 NWEX3000E 型 WAVY MILL NWEX3000E	D-90	D-156	2~6	—	短刃 Short	$\phi 25 \sim \phi 63$	—		●	
	NWEX3000ES	WAVY 铣刀 NWEX3000ES 型 WAVY MILL NWEX3000ES	D-90	D-156	5,6	—	短刃 Short	$\phi 50 \sim \phi 63$	—		●	
	NWEX3000EL	WAVY 铣刀 NWEX3000EL 型 WAVY MILL NWEX3000EL	D-90	D-156	2	—	长柄 Long Shank	$\phi 25 \sim \phi 40$	—		●	
切削工具	NWEX3000E-C	WAVY 铣刀 NWEX3000E-C 型 WAVY MILL NWEX3000E-C	D-90	D-156	3,4	—		$\phi 40 \sim \phi 63$	—	刻模 Coarse pitch	●	
	NWEX3000ES-C	WAVY 铣刀 NWEX3000ES-C 型 WAVY MILL NWEX3000ES-C	D-90	D-156	3,4	—	短刃 Short	$\phi 50 \sim \phi 63$	—	刻模 Coarse pitch	●	
	NWEX2000F	WAVY 铣刀 NWEX2000F 型 WAVY MILL NWEX2000F	D-89	D-156	6,7,8	—		$\phi 40 \sim \phi 63$	—		●	
	NWEX3000F	WAVY 铣刀 NWEX3000F 型 WAVY MILL NWEX3000F	D-91	D-156	4,5,6	—		$\phi 40 \sim \phi 63$	—		●	
套装商品	NWEX3000R	WAVY 铣刀 NWEX3000R 型 WAVY MILL NWEX3000R	D-91	D-156	4,5,6	—		$\phi 80 \sim \phi 125$	—		●	
其它	NWEXF3000R	WAVY 铣刀 NWEXF3000R 型 WAVY MILL NWEXF3000R	D-91	D-156	7,8,9	—		$\phi 80 \sim \phi 125$	—		●	
	XSWMM2000E	X's 铣刀 WAVY 多功能 2000E 型 X's-mill WAVY Multi 2000E	D-93	D-157	3,4	—		$\phi 20 \sim \phi 25$	—	复合加工 Combined processing	●	
	XSWMM2000EL	X's 铣刀 WAVY 多功能 2000EL 型 X's-mill WAVY Multi 2000EL	D-93	D-157	3,4	—	长柄 Long Shank	$\phi 20 \sim \phi 25$	—		●	
精密工具	XSWMM3000E	X's 铣刀 WAVY 多功能 3000E 型 X's-mill WAVY Multi 3000E	D-94	D-157	4 (1)	—		$\phi 32 \sim \phi 40$	—	复合加工 Combined processing	●	
	XSWMM3000EL	X's 铣刀 WAVY 多功能 3000EL 型 X's-mill WAVY Multi 3000EL	D-94	D-157	4 (1)	—	长柄 Long Shank	$\phi 32 \sim \phi 40$	—		●	
	XSWBMR	X's 铣刀 WAVY 球头型 X's-mill WAVY Ball	D-95	D-157	2	—		$\phi 20 \sim \phi 30$	—		●	
技术资料	XSWBMF	X's 铣刀 WAVY 球头型 (WBMF) X's-mill WAVY Ball (WBMF)	D-96	D-157	2	—		$\phi 16 \sim \phi 30$	—	高精度 High precision	●	
索引	*1 G: 耐崩型 Gasland, S: 锋利型 Sharp corner											

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

商品照片 Product Photography	被削材 Work Materials													
	一般结构用钢 Structural Steel	碳钢 Carbon Steel	合金钢 Alloy Steel	预硬钢 Pre-Hardened Steel	调质钢・模具钢 Heat Treated Steel, Mold Steel	高硬度钢 Hardened Steel			不锈钢 Stainless Steel	钛合金・耐热合金 Titanium Alloy, Heat Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy	铜合金 Copper Alloy	石墨 Graphite
						45~55 HRC	55~60 HRC	60~66 HRC						
	SS400	S45C S50C	SCM SCR	NAK	30~45 HRC				SUS304 SUS316		FC FCD	Al AC ADC	Cu	
	×	×	×	×	×	×	×	×	×	×	×	○	○	○
	×	×	×	×	×	×	×	×	×	×	×	○	○	○
	×	×	×	×	×	×	×	×	×	×	×	○	○	○
	×	×	×	×	×	×	×	×	×	×	×	○	○	○
	—	—	—	—	—	—	—	—	—	—	—	○	○	—
	—	—	—	—	—	—	—	—	—	—	—	○	○	—
	—	—	—	—	—	—	—	—	—	—	—	○	○	—
	○	○	○	○	○	○	—	—	○	○	○	—	—	—
	○	○	○	○	○	○	—	—	○	○	○	—	—	—
	○	○	○	○	○	○	○	○	○	○	○	—	—	—
	—	—	—	—	—	—	—	—	—	—	—	○	○	—
	—	—	—	—	—	—	—	—	—	—	—	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	○	○	—
	○	○	○	○	○	—	×	×	○	○	○	—	—	—
	○	○	○	○	○	—	×	×	○	○	○	—	—	—

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

GSX2C-1.5D



GSX 铣刀 2 刃型 1.5D
GSX MILL Two Flutes 1.5D

GSX2C-2D

GSX 铣刀 2 刃型 2D
GSX MILL Two Flutes 2D

- 适用于从软钢的湿式切削到高硬度钢的高速干切削加工。刃尖为耐崩型。

This end mill can be done from wet milling in Unhardened Steel to high-speed dry process in Hardened Steel.



LIST 9150

订货方式 商品编码

切削条件 Cutting Condition ● D-98

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX20100C-1.5D	1.0	1.5	40	4	●
GSX20150C-1.5D	1.5	2.3			
GSX20200C-1.5D	2.0	3.0			
GSX20250C-1.5D	2.5	3.8	45	6	
GSX20300C-1.5D	3.0	4.5			
GSX20350C-1.5D	3.5	5.3			
GSX20400C-1.5D	4.0	6.0	50	8	
GSX20450C-1.5D	4.5	6.8			
GSX20500C-1.5D	5.0	7.5			
GSX20550C-1.5D	5.5	8.3	60	10	
GSX20600C-1.5D	6.0	9.0			
GSX20700C-1.5D	7.0	11.0			
GSX20800C-1.5D	8.0	12.0	70	12	
GSX20900C-1.5D	9.0	14.0			
GSX21000C-1.5D	10.0	15.0			
GSX21200C-1.5D	12.0	18.0	75	16	
GSX21400C-1.5D	14.0	21.0			
GSX21500C-1.5D	15.0	23.0			
GSX21600C-1.5D	16.0	24.0	90	20	
GSX22000C-1.5D	20.0	30.0			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.025

LIST 9168

订货方式 商品编码

切削条件 Cutting Condition ● D-98

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX20100C-2D	1.0	2	40	4	●
GSX20150C-2D	1.5	3			
GSX20200C-2D	2.0	4			
GSX20250C-2D	2.5	5	45	6	
GSX20300C-2D	3.0	6			
GSX20350C-2D	3.5	7			
GSX20400C-2D	4.0	8	50	8	
GSX20450C-2D	4.5	9			
GSX20500C-2D	5.0	10			
GSX20550C-2D	5.5	11	60	10	
GSX20600C-2D	6.0	12			
GSX20700C-2D	7.0	14			
GSX20800C-2D	8.0	16	70	12	
GSX20900C-2D	9.0	18			
GSX21000C-2D	10.0	20			
GSX21200C-2D	12.0	24	75	16	
GSX21400C-2D	14.0	28			
GSX21500C-2D	15.0	30			
GSX21600C-2D	16.0	32	90	20	
GSX22000C-2D	20.0	40			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适用于从新材到淬火钢的多种材料。适用于精加工。

This end mill is suitable for workpiece materials from Unhardened Steel to Hardened Steel, and for finish milling.



LIST 9382

订货方式 商品编码

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2GS0.2	0.2	0.40	40	4	●
2GS0.3	0.3	0.60			
2GS0.4	0.4	0.80			
2GS0.5 × 4	0.5	1.25			
2GS0.6	0.6				
2GS0.7	0.7	1.50			
2GS0.8	0.8	2.00			
2GS0.9	0.9				
2GS1 × 4	1.0	2.50			
2GS1.1	1.1				
2GS1.2	1.2				
2GS1.3	1.3	3.00			
2GS1.4	1.4				
2GS1.5 × 4	1.5	3.75			
2GS1.6	1.6	4.00			
2GS1.7	1.7				
2GS1.8	1.8				
2GS1.9	1.9	5.00			
2GS2 × 4	2.0				
2GS2.1	2.1				
2GS2.2	2.2	6.00			
2GS2.3	2.3				
2GS2.4	2.4				
2GS2.5 × 4	2.5	6.25			
2GS2.6	2.6		45	6	●
2GS2.7	2.7	7.00			
2GS2.8	2.8				
2GS2.9	2.9				
2GS3 × 6	3.0	7.50			
2GS3.1	3.1				
2GS3.2	3.2	8.00			
2GS3.3	3.3				
2GS3.4	3.4				
2GS3.5	3.5	10.00			
2GS3.6	3.6				
2GS3.7	3.7				
2GS3.8	3.8		50	6	●
2GS3.9	3.9				
2GS4 × 6	4.0				
2GS4.1	4.1	11.00			
2GS4.2	4.2				
2GS4.3	4.3				
2GS4.4	4.4				
2GS4.5	4.5				
2GS4.6	4.6				
2GS4.7	4.7				
2GS4.8	4.8				
2GS4.9	4.9				
2GS5	5.0		50	6	●
2GS5.1	5.1				
2GS5.2	5.2				
2GS5.3	5.3	13.00			
2GS5.4	5.4				
2GS5.5	5.5				
2GS5.6	5.6				
2GS5.7	5.7				
2GS5.8	5.8				
2GS5.9	5.9				
2GS6	6.0				
2GS7 × 8	7.0	16.00	60	8	

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2GS8	8.0	19.00	60	8	●
2GS9 × 10	9.0		70	10	
2GS10	10.0	22.00			
2GS11 × 12	11.0		75	12	
2GS12	12.0				
2GS13	13.0	26.00			
2GS14	14.0		90	16	
2GS15	15.0				
2GS16	16.0	32.00			
2GS18	18.0		100	20	
2GS20	20.0	38.00			

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2GS0.5	0.5	1.25	38	3	●
2GS1	1.0	2.50			
2GS1.5	1.5	3.75			
2GS2	2.0	5.00			
2GS2.5	2.5	6.25			
2GS3	3.0	7.50			
2GS4	4.0	11.00	45	4	

外径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●适用于从新材到淬火钢的多种材料。

This end mill is workpiece materials from Unhardened Steel to Hardened Steel.



LIST 9470

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2PLXS0.3	0.3	0.6	38	3	
2PLXS0.4	0.4	0.8			
2PLXS0.5	0.5	1.0			
2PLXS0.6	0.6	1.2			
2PLXS0.7	0.7	1.4			
2PLXS0.8	0.8	1.6			
2PLXS0.9	0.9	2.0	40	4	
2PLXS1	1.0	3.0			
2PLXS1.1	1.1				
2PLXS1.2	1.2				
2PLXS1.3	1.3				
2PLXS1.4	1.4				
2PLXS1.5	1.5	4.0			
2PLXS1.6	1.6				
2PLXS1.7	1.7				
2PLXS1.8	1.8	5.0			
2PLXS1.9	1.9				
2PLXS2	2.0	6.0			
2PLXS2.1	2.1				
2PLXS2.2	2.2				
2PLXS2.3	2.3	8.0			
2PLXS2.4	2.4				
2PLXS2.5	2.5				
2PLXS2.6	2.6				
2PLXS2.7	2.7				
2PLXS2.8	2.8				
2PLXS2.9	2.9				
2PLXS3	3.0	45	6		
2PLXS3.1	3.1				
2PLXS3.2	3.2				
2PLXS3.3	3.3				
2PLXS3.4	3.4				
2PLXS3.5	3.5				
2PLXS3.6	3.6				
2PLXS3.7	3.7				
2PLXS3.8	3.8				
2PLXS3.9	3.9				
2PLXS4	4.0	11.0			
2PLXS4.1	4.1				
2PLXS4.2	4.2				
2PLXS4.3	4.3				
2PLXS4.4	4.4				
2PLXS4.5	4.5	13.0			
2PLXS4.6	4.6				
2PLXS4.7	4.7				
2PLXS4.8	4.8				
2PLXS4.9	4.9				
2PLXS5	5.0	50			
2PLXS5.1	5.1				
2PLXS5.2	5.2				
2PLXS5.3	5.3				
2PLXS5.4	5.4				
2PLXS5.5	5.5				
2PLXS5.6	5.6				
2PLXS5.7	5.7				
2PLXS5.8	5.8				
2PLXS5.9	5.9				
2PLXS6	6.0	16.0	60	8	
2PLXS6.1	6.1				
2PLXS6.2	6.2				

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2PLXS6.3	6.3	16.0	60	8	□
2PLXS6.4	6.4				
2PLXS6.5	6.5				
2PLXS6.6	6.6				
2PLXS6.7	6.7				
2PLXS6.8	6.8				
2PLXS6.9	6.9				
2PLXS7	7.0				
2PLXS7.1	7.1				
2PLXS7.2	7.2				
2PLXS7.3	7.3				
2PLXS7.4	7.4				
2PLXS7.5	7.5	19.0	70	10	
2PLXS7.6	7.6				
2PLXS7.7	7.7				
2PLXS7.8	7.8				
2PLXS7.9	7.9				
2PLXS8	8.0				
2PLXS8.1	8.1				
2PLXS8.2	8.2				
2PLXS8.3	8.3				
2PLXS8.4	8.4				
2PLXS8.5	8.5				
2PLXS8.6	8.6				
2PLXS8.7	8.7	22.0	75	12	
2PLXS8.8	8.8				
2PLXS8.9	8.9				
2PLXS9	9.0				
2PLXS9.1	9.1				
2PLXS9.2	9.2				
2PLXS9.3	9.3				
2PLXS9.4	9.4				
2PLXS9.5	9.5				
2PLXS9.6	9.6				
2PLXS9.7	9.7				
2PLXS9.8	9.8				
2PLXS9.9	9.9	26.0			
2PLXS10	10.0				
2PLXS10.1	10.1				
2PLXS10.2	10.2				
2PLXS10.3	10.3				
2PLXS10.4	10.4				
2PLXS10.5	10.5				
2PLXS10.6	10.6				
2PLXS10.7	10.7				
2PLXS10.8	10.8				
2PLXS10.9	10.9				
2PLXS11	11.0				
2PLXS11.1	11.1				
2PLXS11.2	11.2				
2PLXS11.3	11.3				
2PLXS11.4	11.4				
2PLXS11.5	11.5				
2PLXS11.6	11.6				
2PLXS11.7	11.7				
2PLXS11.8	11.8				
2PLXS11.9	11.9				
2PLXS12	12.0				
2PLXS12.1	12.1				
2PLXS12.2	12.2				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2PLXS12.3	12.3	26.0	75	12	□
2PLXS12.4	12.4				
2PLXS12.5	12.5				
2PLXS12.6	12.6				
2PLXS12.7	12.7				
2PLXS12.8	12.8				
2PLXS12.9	12.9				
2PLXS13	13.0				
2PLXS13.1	13.1				
2PLXS13.2	13.2				
2PLXS13.3	13.3				
2PLXS13.4	13.4				
2PLXS13.5	13.5				
2PLXS13.6	13.6				
2PLXS13.7	13.7				
2PLXS13.8	13.8				
2PLXS13.9	13.9				
2PLXS14	14.0				
2PLXS14.1	14.1				
2PLXS14.2	14.2				
2PLXS14.3	14.3	32.0	90	16	
2PLXS14.4	14.4				
2PLXS14.5	14.5				
2PLXS14.6	14.6				
2PLXS14.7	14.7				
2PLXS14.8	14.8				
2PLXS14.9	14.9				
2PLXS15	15.0				
2PLXS15.1	15.1				
2PLXS15.2	15.2				
2PLXS15.3	15.3				
2PLXS15.4	15.4				
2PLXS15.5	15.5				
2PLXS15.6	15.6				
2PLXS15.7	15.7				
2PLXS15.8	15.8				
2PLXS15.9	15.9				
2PLXS16	16.0				
2PLXS16.1	16.1				
2PLXS16.2	16.2				
2PLXS16.3	16.3				
2PLXS16.4	16.4				
2PLXS16.5	16.5				
2PLXS16.6	16.6				
2PLXS16.7	16.7				
2PLXS16.8	16.8				
2PLXS16.9	16.9				
2PLXS17.0	17.0				
2PLXS17.1	17.1				
2PLXS17.2	17.2				
2PLXS17.3	17.3				
2PLXS17.4	17.4				
2PLXS17.5	17.5				
2PLXS17.6	17.6				
2PLXS17.7	17.7				
2PLXS17.8	17.8				
2PLXS17.9	17.9				
2PLXS18	18.0				
2PLXS18.1	18.1				
2PLXS18.2	18.2				

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2PLXS18.3	18.3	32.0	100	20	
2PLXS18.4	18.4				
2PLXS18.5	18.5				
2PLXS18.6	18.6				
2PLXS18.7	18.7				
2PLXS18.8	18.8				
2PLXS18.9	18.9				
2PLXS19.0	19.0				
2PLXS19.1	19.1				
2PLXS19.2	19.2				
2PLXS19.3	19.3				
2PLXS19.4	19.4				
2PLXS19.5	19.5				
2PLXS19.6	19.6				
2PLXS19.7	19.7				
2PLXS19.8	19.8				
2PLXS19.9	19.9				
2PLXS20	20.0				
2PLXS22	22.0				
2PLXS24	24.0				
2PLXS25	25.0				
2PLXS28	28.0				
2PLXS30	30.0				
		45.0	120	25	
		50.0	130		

外径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
	3	- 0.014 ~ - 0.028
3	6	- 0.020 ~ - 0.038
6	10	- 0.025 ~ - 0.047
10		- 0.032 ~ - 0.059

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	◎	◎	◎	◎	○	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	○	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

※ 涂层从 X's 涂层变更为 GSX 涂层生产。
※ Manufactured by changing from X's coating to GSX coating.


2CE

超硬铣刀 2 刃型

ANCHOR V Two Flutes

- 泛用硬质合金立铣刀。
- 适用于槽加工。

This is general carbide end mill for grooving.



LIST 9450

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2CE1	1.0	3	50	4	●
2CE1.5	1.5	4			
2CE2	2.0	6			
2CE2.5	2.5	8			
2CE3	3.0	10		6	
2CE3.5	3.5				
2CE4	4.0				
2CE4.5	4.5	13			
2CE5	5.0				
2CE5.5	5.5				
2CE6	6.0	16	63	8	
2CE6.5	6.5				
2CE7	7.0				
2CE7.5	7.5				
2CE8	8.0	19	70	10	
2CE8.5	8.5				
2CE9	9.0				
2CE9.5	9.5				
2CE10	10.0	22	75	12	
2CE11	11.0				
2CE12	12.0	26	89	16	
2CE13	13.0				
2CE14	14.0				
2CE15	15.0				
2CE16	16.0	32	100	20	
2CE17	17.0				
2CE18	18.0				
2CE19	19.0				
2CE20	20.0	38			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.005 ~ -0.028
3	6	-0.015 ~ -0.038
6	18	-0.020 ~ -0.047
18		-0.020 ~ -0.053

柄径 DCONMS (mm)	公差 Tolerance (mm)
4 ~ 16	-0.003 ~ -0.010
20	-0.003 ~ -0.013


2MNE

超硬微型铣刀 2 刃型

Carbide Mini-Square End Mills Two Flutes

- 硬质合金整体型小直径立铣刀。
- 适用于精密模具、精密零部件的槽加工。

This is miniature carbide end mill for precision molds or precision parts.



LIST 9294

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2MNE0.1	0.10	0.2	40	3	●
2MNE0.15	0.15	0.3			
2MNE0.2	0.20	0.4			
2MNE0.25	0.25	0.5			
2MNE0.3	0.30	1.0			
2MNE0.35	0.35				
2MNE0.4	0.40				
2MNE0.45	0.45				
2MNE0.5	0.50	2.0			
2MNE0.55	0.55				
2MNE0.6	0.60				
2MNE0.65	0.65				
2MNE0.7	0.70	2.5			
2MNE0.75	0.75				
2MNE0.8	0.80				
2MNE0.85	0.85				
2MNE0.9	0.90	3.0			
2MNE0.95	0.95				
2MNE1	1.00				
2MNE1.1	1.10				
2MNE1.2	1.20	5.0			
2MNE1.3	1.30				
2MNE1.4	1.40				
2MNE1.5	1.50				
2MNE1.6	1.60	6.0			
2MNE1.7	1.70				
2MNE1.8	1.80				
2MNE1.9	1.90				
2MNE2	2.00				

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

GSX2C-2.5D

GSX 铣刀 2 刃型 2.5D

GSX MILL Two Flutes 2.5D

切削条件 Cutting Condition ▶▶D-100



工具材料

涂层

螺旋角


耐崩型

柄直径公差

外径范围

●适用于从软钢的湿式切削到高硬度钢高速干切削加工。刃尖为耐崩型。

This end mill can be done from wet milling in Unhardened Steel to high-speed dry process in Hardened Steel.



LIST 9170

订货方式 商品编码

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX20020C-2.5D	0.2	0.5	40	4	●
GSX20030C-2.5D	0.3	0.8			
GSX20040C-2.5D	0.4	1.0			
GSX20050C-2.5D	0.5	1.3			
GSX20060C-2.5D	0.6	1.5			
GSX20070C-2.5D	0.7	1.8			
GSX20080C-2.5D	0.8	2.0			
GSX20090C-2.5D	0.9	2.3			
GSX20100C-2.5D	1.0	2.5			
GSX20110C-2.5D	1.1	2.8			
GSX20120C-2.5D	1.2	3.0			
GSX20130C-2.5D	1.3	3.3			
GSX20140C-2.5D	1.4	3.5			
GSX20150C-2.5D	1.5	3.8			
GSX20160C-2.5D	1.6	4.0			
GSX20170C-2.5D	1.7	4.3			
GSX20180C-2.5D	1.8	4.5			
GSX20190C-2.5D	1.9	4.8			
GSX20200C-2.5D	2.0	5.0			
GSX20210C-2.5D	2.1	5.3			
GSX20220C-2.5D	2.2	5.5	45	6	●
GSX20230C-2.5D	2.3	5.8			
GSX20240C-2.5D	2.4	6.0			
GSX20250C-2.5D	2.5	6.3			
GSX20260C-2.5D	2.6	6.5			
GSX20270C-2.5D	2.7	6.8			
GSX20280C-2.5D	2.8	7.0			
GSX20290C-2.5D	2.9	7.3			
GSX20300C-2.5D	3.0	7.5			
GSX20310C-2.5D	3.1	7.8			
GSX20320C-2.5D	3.2	8.0			
GSX20330C-2.5D	3.3	8.3			
GSX20340C-2.5D	3.4	8.5			
GSX20350C-2.5D	3.5	8.8			
GSX20360C-2.5D	3.6	9.0			
GSX20370C-2.5D	3.7	9.3			
GSX20380C-2.5D	3.8	9.5			
GSX20390C-2.5D	3.9	9.8			
GSX20400C-2.5D	4.0	10.0			
GSX20410C-2.5D	4.1	10.3	50	6	●
GSX20420C-2.5D	4.2	10.5			
GSX20430C-2.5D	4.3	10.8			
GSX20440C-2.5D	4.4	11.0			
GSX20450C-2.5D	4.5	11.3			
GSX20460C-2.5D	4.6	11.5			
GSX20470C-2.5D	4.7	11.8			
GSX20480C-2.5D	4.8	12.0			
GSX20490C-2.5D	4.9	12.3			
GSX20500C-2.5D	5.0	12.5			
GSX20510C-2.5D	5.1	12.8	60	8	●
GSX20520C-2.5D	5.2	13.0			
GSX20530C-2.5D	5.3	13.3			
GSX20540C-2.5D	5.4	13.5			
GSX20550C-2.5D	5.5	13.8			
GSX20560C-2.5D	5.6	14.0			
GSX20570C-2.5D	5.7	14.3			
GSX20580C-2.5D	5.8	14.5			
GSX20590C-2.5D	5.9	14.8			
GSX20600C-2.5D	6.0	15.0			
GSX20700C-2.5D	7.0	17.5	60	8	●

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX20800C-2.5D	8.0	20.0	60	8	●
GSX20900C-2.5D	9.0	22.5	70	10	
GSX21000C-2.5D	10.0	25.0			
GSX21100C-2.5D	11.0	27.5	75	12	
GSX21200C-2.5D	12.0	30.0			
GSX21300C-2.5D	13.0	32.5			
GSX21400C-2.5D	14.0	35.0	90	16	
GSX21500C-2.5D	15.0	37.5			
GSX21600C-2.5D	16.0	40.0			
GSX21800C-2.5D	18.0	45.0	100	20	
GSX22000C-2.5D	20.0	50.0			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

技术资料
索引

GSX2P-2.5D

GSX 铣刀 2 刃 P 型 2.5D

GSX MILL Two Flutes 2.5D P Type

GSX2C-3D

GSX 铣刀 2 刃型 3D



GSX MILL Two Flutes 3D

- 适用于从新材到淬火钢的多种材料。适用于精加工。刃尖为锋利型。

This end mill is suitable for workpiece materials from Unhardened Steel to Hardened Steel, and for finish milling.

- 适用于从新材的湿式加工到高硬度钢的干式加工。

This end mill can be done from wet milling in Unhardened Steel to dry process in Hardened Steel.

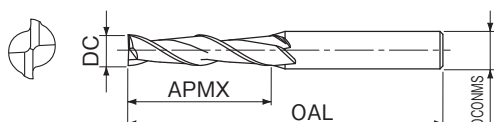

LIST 9178

切削条件 Cutting Condition ●D-99

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX20100P-2.5D	1.0	2.5	40	4	●
GSX20150P-2.5D	1.5	3.8			
GSX20200P-2.5D	2.0	5.0			
GSX20250P-2.5D	2.5	6.3	45	6	
GSX20300P-2.5D	3.0	7.5			
GSX20350P-2.5D	3.5	8.8			
GSX20400P-2.5D	4.0	10.0	50	8	
GSX20450P-2.5D	4.5	11.3			
GSX20500P-2.5D	5.0	12.5			
GSX20550P-2.5D	5.5	13.8	60	10	
GSX20600P-2.5D	6.0	15.0			
GSX20700P-2.5D	7.0	17.5			
GSX20800P-2.5D	8.0	20.0	70	12	
GSX20900P-2.5D	9.0	22.5			
GSX21000P-2.5D	10.0	25.0			
GSX21200P-2.5D	12.0	30.0	75	16	
GSX21400P-2.5D	14.0	35.0			
GSX21500P-2.5D	15.0	37.5			
GSX21600P-2.5D	16.0	40.0	90	20	
GSX22000P-2.5D	20.0	50.0			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

LIST 9152

切削条件 Cutting Condition ●D-100

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX20100C-3D	1.0	3.0	40	4	●
GSX20150C-3D	1.5	4.5			
GSX20200C-3D	2.0	6.0			
GSX20250C-3D	2.5	7.5	50	6	
GSX20300C-3D	3.0	9.0			
GSX20400C-3D	4.0	12.0			
GSX20500C-3D	5.0	15.0	70	8	
GSX20600C-3D	6.0	18.0			
GSX20800C-3D	8.0	24.0			
GSX21000C-3D	10.0	30.0	90	10	
GSX21200C-3D	12.0	36.0		12	
GSX21600C-3D	16.0	48.0		16	
GSX22000C-3D	20.0	60.0	120	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


GSX2C-4D

GSX 铣刀 2 刃型 4D

GSX MILL Two Flutes 4D

●适用于从新材的湿式加工到高硬度钢的干式加工。

This end mill can be done from wet milling in Unhardened Steel to dry process in Hardened Steel.

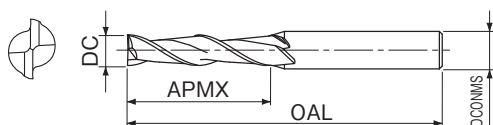

LIST 9154

订货方式 商品编码

切削条件 Cutting Condition ◆D-100

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX20100C-4D	1.0	4	40	4	●
GSX20150C-4D	1.5	6			
GSX20200C-4D	2.0	8			
GSX20250C-4D	2.5	10	50	6	
GSX20300C-4D	3.0	12			
GSX20400C-4D	4.0	16			
GSX20500C-4D	5.0	20	60	8	
GSX20600C-4D	6.0	24			
GSX20800C-4D	8.0	32	80	8	
GSX21000C-4D	10.0	40	90	10	
GSX21200C-4D	12.0	48	100	12	
GSX21600C-4D	16.0	64	120	16	
GSX22000C-4D	20.0	80	140	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030


GSX3C-1.5D

GSX 铣刀 3 刃型 1.5D

GSX MILL Three Flutes 1.5D

●适用于从软钢的湿式切削到高硬度钢高速干切削加工。

This end mill can be done from wet milling in Unhardened Steel to high-speed dry process in Hardened Steel.



LIST 9156

订货方式 商品编码

切削条件 Cutting Condition ◆D-101

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX30100C-1.5D	1.0	1.5	40	4	●
GSX30150C-1.5D	1.5	2.3			
GSX30200C-1.5D	2.0	3.0			
GSX30250C-1.5D	2.5	3.8	45	6	
GSX30300C-1.5D	3.0	4.5			
GSX30400C-1.5D	4.0	6.0			
GSX30500C-1.5D	5.0	7.5	50		
GSX30600C-1.5D	6.0	9.0			
GSX30700C-1.5D	7.0	11.0	60	8	
GSX30800C-1.5D	8.0	12.0			
GSX30900C-1.5D	9.0	14.0	70	10	
GSX31000C-1.5D	10.0	15.0			
GSX31200C-1.5D	12.0	18.0	75	12	
GSX31600C-1.5D	16.0	24.0	90	16	
GSX32000C-1.5D	20.0	30.0	100	20	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


技术资料
索引

GSX3C-2D

GSX 铣刀 3 刃型 2D
GSX MILL Three Flutes 2D

- 适用于从软钢的湿式切削到高硬度钢高速干切削加工。

This end mill can be done from wet milling in Unhardened Steel to high-speed dry process in Hardened Steel.



LIST 9158

订货方式 商品编码

切削条件 Cutting Condition ▶▶D-101

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX30100C-2D	1.0	2.5	40	4	●
GSX30150C-2D	1.5	3.8			
GSX30200C-2D	2.0	5.0			
GSX30250C-2D	2.5	6.3	45	6	
GSX30300C-2D	3.0	7.5			
GSX30400C-2D	4.0	11.0			
GSX30500C-2D	5.0	13.0	50	8	
GSX30600C-2D	6.0				
GSX30700C-2D	7.0				
GSX30800C-2D	8.0	19.0	70	10	
GSX30900C-2D	9.0				
GSX31000C-2D	10.0				
GSX31200C-2D	12.0	26.0	75	12	
GSX31600C-2D	16.0	32.0	90	16	
GSX32000C-2D	20.0	40.0	100	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030


GSXSLT-1.5D

GSX 铣刀 开槽型 1.5D
GSX MILL SLOT 1.5D

- 从孔加工到槽切削，一般都能实现连续高效率的加工。
- 适合于夹持力较弱的薄板和小型机床。

Continuous high efficiency machining is possible from hole cutting to grooving.

Ideal for thin plates and small machines with weak clamping force.



LIST 9166

订货方式 商品编码

切削条件 Cutting Condition ▶▶D-102

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXSLT0100C-1.5D	1.0	1.5	40	4	●
GSXSLT0150C-1.5D	1.5	2.3			
GSXSLT0200C-1.5D	2.0	3.0			
GSXSLT0250C-1.5D	2.5	3.8	45	6	
GSXSLT0300C-1.5D	3.0	4.5			
GSXSLT0400C-1.5D	4.0	6.0			
GSXSLT0500C-1.5D	5.0	7.5	50	8	
GSXSLT0600C-1.5D	6.0	9.0			
GSXSLT0700C-1.5D	7.0	11.0			
GSXSLT0800C-1.5D	8.0	12.0	60	10	
GSXSLT0900C-1.5D	9.0	14.0			
GSXSLT1000C-1.5D	10.0	15.0			
GSXSLT1200C-1.5D	12.0	18.0	75	12	
GSXSLT1600C-1.5D	16.0	24.0	90	16	

套装商品
其它

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—


◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

3 刃型兼具了 2 刃型和 4 刃型的特长。推荐想要 1 根集多种功能的立铣刀时选购。
GSXSLT-1.5D 相比 3 刃型立铣刀 GSX3C-1.5D (D-21)、GSX3C-2D (D-22)，切屑排出性更加出色，孔加工和槽加工的功能得到了提升。

- 从孔加工到槽切削，一般都能实现连续高效率的加工。
- 适用于夹持力较弱的薄板和小型机床。

Continuous high efficiency machining is possible from hole cutting to grooving.

Ideal for thin plates and small machines with weak clamping force.



LIST 9432

订货方式 商品编码

切削条件 Cutting Condition * D-103


单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSSLT3030SF	3	8	50	6	●
GSSLT3040SF	4	11			
GSSLT3050SF	5	13			
GSSLT3060SF	6	19			
GSSLT3080SF	8	19	80	8	
GSSLT3100SF	10	22	90	10	
GSSLT3120SF	12	26		12	
GSSLT3160SF	16	32	115	16	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
3		0 ~ -0.015
	3	0 ~ -0.030

- 适用于从新材到淬火材料等的多种材料，从孔加工到槽切削，一般都能实现连续高效率的加工。

This end mill is suitable for workpiece materials from Unhardened Steel to Hardened Steel. Continuous high efficiency machining is possible from hole cutting to grooving.



LIST 9338

订货方式 商品编码

切削条件 Cutting Condition * D-104

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GEOSLT1	1.0	3	50	4	●
GEOSLT1.5	1.5	4			
GEOSLT2	2.0	6			
GEOSLT2.5	2.5	8			
GEOSLT3	3.0	10			
GEOSLT3.5	3.5	11	60	6	
GEOSLT4	4.0	13			
GEOSLT4.5	4.5	16			
GEOSLT5	5.0	70			
GEOSLT5.5	5.5	19	80	8	
GEOSLT6	6.0	22			
GEOSLT6.5	6.5	26			
GEOSLT7	7.0	32			
GEOSLT7.5	7.5	32	90	10	
GEOSLT8	8.0	32			
GEOSLT8.5	8.5	32			
GEOSLT9	9.0	32			
GEOSLT9.5	9.5	32	100	12	
GEOSLT10	10.0	32			
GEOSLT11	11.0	32			
GEOSLT12	12.0	32			
GEOSLT13	13.0	26	110	16	
GEOSLT14	14.0	32			
GEOSLT15	15.0	32			
GEOSLT16	16.0	32	115		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.014 ~ -0.028
3	6	-0.020 ~ -0.038
6	10	-0.025 ~ -0.047
10		-0.032 ~ -0.059

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	○	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	○	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	○	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	○	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

GSXVLSLT3-2.5D

GSX 铣刀 VL 开槽型 2.5D
GSX MILL VL SLOT 2.5D

切削条件 Cutting Condition : D-105



工具材料

涂层

螺旋角


耐崩型

柄直径公差

外径范围

●可抑制颤动，从孔加工到槽切削，一般都能实现连续高效率的加工。

This end mill suppresses chatter vibration. It is available for grooving continuously into slotting.

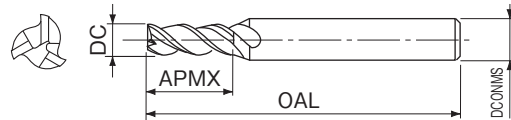

LIST 9198

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVLSLT3030-2.5D	3.0	7.5	45	6	●
GSXVLSLT3031-2.5D	3.1	7.8			
GSXVLSLT3032-2.5D	3.2	8.0			
GSXVLSLT3033-2.5D	3.3	8.3			
GSXVLSLT3034-2.5D	3.4	8.5			
GSXVLSLT3035-2.5D	3.5	8.8			□
GSXVLSLT3036-2.5D	3.6	9.0			
GSXVLSLT3037-2.5D	3.7	9.3			
GSXVLSLT3038-2.5D	3.8	9.5			
GSXVLSLT3039-2.5D	3.9	9.8			●
GSXVLSLT3040-2.5D	4.0	10.0	50	6	
GSXVLSLT3041-2.5D	4.1	10.3			
GSXVLSLT3042-2.5D	4.2	10.5			
GSXVLSLT3043-2.5D	4.3	10.8			
GSXVLSLT3044-2.5D	4.4	11.0			
GSXVLSLT3045-2.5D	4.5	11.3			□
GSXVLSLT3046-2.5D	4.6	11.5			
GSXVLSLT3047-2.5D	4.7	11.8			
GSXVLSLT3048-2.5D	4.8	12.0			
GSXVLSLT3049-2.5D	4.9	12.3			●
GSXVLSLT3050-2.5D	5.0	12.5	60	8	
GSXVLSLT3051-2.5D	5.1	12.8			
GSXVLSLT3052-2.5D	5.2	13.0			
GSXVLSLT3053-2.5D	5.3	13.3			
GSXVLSLT3054-2.5D	5.4	13.5			
GSXVLSLT3055-2.5D	5.5	13.8			□
GSXVLSLT3056-2.5D	5.6	14.0			
GSXVLSLT3057-2.5D	5.7	14.3			
GSXVLSLT3058-2.5D	5.8	14.5			
GSXVLSLT3059-2.5D	5.9	14.8			●
GSXVLSLT3060-2.5D	6.0	15.0	70	10	
GSXVLSLT3061-2.5D	6.1	15.3			
GSXVLSLT3062-2.5D	6.2	15.5			
GSXVLSLT3063-2.5D	6.3	15.8			
GSXVLSLT3064-2.5D	6.4	16.0			
GSXVLSLT3065-2.5D	6.5	16.3			□
GSXVLSLT3066-2.5D	6.6	16.5			
GSXVLSLT3067-2.5D	6.7	16.8			
GSXVLSLT3068-2.5D	6.8	17.0			
GSXVLSLT3069-2.5D	6.9	17.3			●
GSXVLSLT3070-2.5D	7.0	17.5	80	12	
GSXVLSLT3071-2.5D	7.1	17.8			
GSXVLSLT3072-2.5D	7.2	18.0			
GSXVLSLT3073-2.5D	7.3	18.3			
GSXVLSLT3074-2.5D	7.4	18.5			
GSXVLSLT3075-2.5D	7.5	18.8			□
GSXVLSLT3076-2.5D	7.6	19.0			
GSXVLSLT3077-2.5D	7.7	19.3			
GSXVLSLT3078-2.5D	7.8	19.5			
GSXVLSLT3079-2.5D	7.9	19.8			●
GSXVLSLT3080-2.5D	8.0	20.0	90	16	
GSXVLSLT3081-2.5D	8.1	20.3			
GSXVLSLT3082-2.5D	8.2	20.5			
GSXVLSLT3083-2.5D	8.3	20.8			
GSXVLSLT3084-2.5D	8.4	21.0			□
GSXVLSLT3085-2.5D	8.5	21.3			
GSXVLSLT3086-2.5D	8.6	21.5			
GSXVLSLT3087-2.5D	8.7	21.8			
GSXVLSLT3088-2.5D	8.8	22.0			
GSXVLSLT3089-2.5D	8.9	22.3			●

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVLSLT3090-2.5D	9.0	22.5	70	10	●
GSXVLSLT3091-2.5D	9.1	22.8			
GSXVLSLT3092-2.5D	9.2	23.0			
GSXVLSLT3093-2.5D	9.3	23.3			
GSXVLSLT3094-2.5D	9.4	23.5			
GSXVLSLT3095-2.5D	9.5	23.8			□
GSXVLSLT3096-2.5D	9.6	24.0			
GSXVLSLT3097-2.5D	9.7	24.3			
GSXVLSLT3098-2.5D	9.8	24.5			
GSXVLSLT3099-2.5D	9.9	24.8			●
GSXVLSLT3100-2.5D	10.0	25.0	75	12	
GSXVLSLT3105-2.5D	10.5	26.3			
GSXVLSLT3110-2.5D	11.0	27.5			□
GSXVLSLT3115-2.5D	11.5	28.8			
GSXVLSLT3120-2.5D	12.0	30.0			●
GSXVLSLT3125-2.5D	12.5	31.3			
GSXVLSLT3130-2.5D	13.0	32.5			
GSXVLSLT3135-2.5D	13.5	33.8			
GSXVLSLT3140-2.5D	14.0	35.0			□
GSXVLSLT3145-2.5D	14.5	36.3			
GSXVLSLT3150-2.5D	15.0	37.5	90	16	
GSXVLSLT3155-2.5D	15.5	38.8			●
GSXVLSLT3160-2.5D	16.0	40.0			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ -0.015
3	12	0 ~ -0.02
12		0 ~ -0.03

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	◎	—	—	—


◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

GSX4C-1D

GSX 铣刀 4 刃型 1D
GSX MILL Four Flutes 1D

●适用于从软钢的湿式切削到高强度钢高速干切削加工。

This end mill can be done from wet milling in Unhardened Steel to high-speed dry process in Hardened Steel.



LIST 9180

订货方式 商品编码

切削条件 Cutting Condition ▶▶D-106

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX40100C-1D	1.0	1.0	40	4	●
GSX40150C-1D	1.5	1.5			
GSX40200C-1D	2.0	2.0			
GSX40250C-1D	2.5	2.5	45	6	
GSX40300C-1D	3.0	3.0			
GSX40350C-1D	3.5	3.5			
GSX40400C-1D	4.0	4.0	50	8	
GSX40450C-1D	4.5	4.5			
GSX40500C-1D	5.0	5.0			
GSX40550C-1D	5.5	5.5	60	10	
GSX40600C-1D	6.0	6.0			
GSX40700C-1D	7.0	7.0			
GSX40800C-1D	8.0	8.0	70	12	
GSX40900C-1D	9.0	9.0			
GSX41000C-1D	10.0	10.0			
GSX41200C-1D	12.0	12.0	90	16	
GSX41400C-1D	14.0	14.0			
GSX41500C-1D	15.0	15.0			
GSX41600C-1D	16.0	16.0	100	20	
GSX42000C-1D	20.0	20.0			


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

GSX4C-1.5D

GSX 铣刀 4 刃型 1.5D
GSX MILL Four Flutes 1.5D

●适用于从软钢的湿式切削到高强度钢高速干切削加工。

This end mill can be done from wet milling in Unhardened Steel to high-speed dry process in Hardened Steel.



LIST 9160

订货方式 商品编码

切削条件 Cutting Condition ▶▶D-107

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX40100C-1.5D	1.0	1.5	40	4	●
GSX40150C-1.5D	1.5	2.3			
GSX40200C-1.5D	2.0	3.0			
GSX40250C-1.5D	2.5	3.8	45	6	
GSX40300C-1.5D	3.0	4.5			
GSX40350C-1.5D	3.5	5.3			
GSX40400C-1.5D	4.0	6.0	50	8	
GSX40450C-1.5D	4.5	6.8			
GSX40500C-1.5D	5.0	7.5			
GSX40550C-1.5D	5.5	8.3	60	10	
GSX40600C-1.5D	6.0	9.0			
GSX40700C-1.5D	7.0	11.0			
GSX40800C-1.5D	8.0	12.0	70	12	
GSX40900C-1.5D	9.0	14.0			
GSX41000C-1.5D	10.0	15.0			
GSX41200C-1.5D	12.0	18.0	90	16	
GSX41400C-1.5D	14.0	21.0			
GSX41500C-1.5D	15.0	23.0			
GSX41600C-1.5D	16.0	24.0	100	20	
GSX42000C-1.5D	20.0	30.0			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

底面加工时, 推荐使用 **GSX4C-1D**。
追求耐久性、防崩刃时, 推荐使用 **GSX4C-1.5D**。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

GSX4C-2D

GSX 铣刀 4 刃型 2D
GSX MILL Four Flutes 2D

- 适用于从软钢的湿式切削到高硬度钢高速干切削加工。

This end mill can be done from wet milling in Unhardened Steel to high-speed dry process in Hardened Steel.



LIST 9172

订货方式 商品编码

切削条件 Cutting Condition ●D-107

单位 (Unit) : mm


商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX40100C-2D	1.0	2	40	4	●
GSX40150C-2D	1.5	3			
GSX40200C-2D	2.0	4			
GSX40250C-2D	2.5	5	45	6	
GSX40300C-2D	3.0	6			
GSX40350C-2D	3.5	7			
GSX40400C-2D	4.0	8	50	8	
GSX40450C-2D	4.5	9			
GSX40500C-2D	5.0	10			
GSX40550C-2D	5.5	11	60	10	
GSX40600C-2D	6.0	12			
GSX40700C-2D	7.0	14			
GSX40800C-2D	8.0	16	70	12	
GSX40900C-2D	9.0	18			
GSX41000C-2D	10.0	20			
GSX41200C-2D	12.0	24	75	16	
GSX41400C-2D	14.0	28			
GSX41500C-2D	15.0	30			
GSX41600C-2D	16.0	32	90	20	
GSX42000C-2D	20.0	40			

4GS

GS 铣刀 4 刃型
GS MILL Four Flutes

- 适用于从新材到淬火钢的多种材料。适用于槽、侧面的精加工。

This end mill is suitable for workpiece materials from Unhardened Steel to Hardened Steel, and finish milling.



LIST 9384

订货方式 商品编码

切削条件 Cutting Condition ●D-108

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4GS1 × 4	1	2.5	40	4	●
4GS2 × 4	2	5.0			
4GS3 × 6	3	7.5	45	6	
4GS4 × 6	4	11.0			
4GS5	5	13.0			
4GS6	6				
4GS8	8	19.0	60	8	
4GS10	10	22.0	70	10	
4GS12	12	26.0	75	12	
4GS13	13		90	16	
4GS14	14				
4GS15	15	32.0	100	20	
4GS16	16				
4GS18	18				
4GS20	20	38.0			

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4GS1	1	2.5	38	3	●
4GS2	2	5.0			
4GS3	3	7.5			
4GS4	4	11.0	45	4	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


GSXVL4XT-2D

GSX 铣刀 VL 型超级装夹用 不锈钢钛合金专用 2D

GSX MILL VL 2D for X-Treme chuck for Ti · SUS

- 通过采用抑制颤动并防止工具脱落的特殊柄，实现高效率加工。

Realize high efficient milling by using special shank to suppress chattering and to prevent tools from falling out.

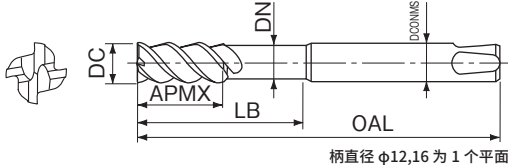

切削条件 Cutting Condition ◆D-109

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4120XT-2D	12	24	30.0	11.5	90	12	□
GSXVL4140XT-2D	14	28	34.0	13.5	105	16	
GSXVL4150XT-2D	15	30	34.5	14.5			
GSXVL4160XT-2D	16	32	40.0	15.5	110		
GSXVL4180XT-2D	18	36	46.0	17.5	120		
GSXVL4200XT-2D	20	40	52.0	19.5	125		
GSXVL4220XT-2D	22	44	54.0	21.5	135		
GSXVL4250XT-2D	25	50	60.5	24.5	140	25	


4CE

超硬铣刀 4 刃型

ANCHOR V Four Flutes

- 泛用硬质合金立铣刀。
- 适用于侧面加工。

This is general carbide end mill for side milling.



LIST 9452

切削条件 Cutting Condition ◆D-110

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4CE2	2.0	6	50	4	●
4CE2.5	2.5	8		6	
4CE3	3.0	10			
4CE3.5	3.5				
4CE4	4.0				
4CE4.5	4.5	11			
4CE5	5.0				
4CE5.5	5.5	13			
4CE6	6.0				
4CE6.5	6.5	16			
4CE7	7.0				
4CE7.5	7.5				
4CE8	8.0	19			
4CE8.5	8.5				
4CE9	9.0				
4CE9.5	9.5				
4CE10	10.0	22			
4CE11	11.0				
4CE12	12.0	26			
4CE13	13.0				
4CE14	14.0				
4CE15	15.0				
4CE16	16.0	32			
4CE17	17.0				
4CE18	18.0				
4CE19	19.0	38			
4CE20	20.0				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.005 ~ -0.028
3	6	-0.015 ~ -0.038
6	18	-0.020 ~ -0.047
18		-0.020 ~ -0.053

柄径 DCONMS (mm)		公差 Tolerance (mm)
4 ~ 16		-0.003 ~ -0.010
20		-0.003 ~ -0.013

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
○	○	○	○	○	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 可在槽加工中实现高进给、高效率的加工。
- 适用于从模具钢到难削材的多种材料。

This end mill realizes feed speed of 2000mm/min, and is adaptable in workpiece material from Mold Steel to Hard-to-Cut Material.



LIST 9322

订货方式 商品编码

单位 (Unit) : mm


商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4XSGEO2	2.0	6	50	4	
4XSGEO2.1	2.1				
4XSGEO2.2	2.2				
4XSGEO2.3	2.3				
4XSGEO2.4	2.4				
4XSGEO2.5	2.5				
4XSGEO2.6	2.6	8			
4XSGEO2.7	2.7				
4XSGEO2.8	2.8				
4XSGEO2.9	2.9				
4XSGEO3	3.0				
4XSGEO3.1	3.1				
4XSGEO3.2	3.2	10			
4XSGEO3.3	3.3				
4XSGEO3.4	3.4				
4XSGEO3.5	3.5				
4XSGEO3.6	3.6				
4XSGEO3.7	3.7	11			
4XSGEO3.8	3.8				
4XSGEO3.9	3.9				
4XSGEO4	4.0	11			
4XSGEO4.1	4.1				
4XSGEO4.2	4.2				
4XSGEO4.3	4.3				
4XSGEO4.4	4.4				
4XSGEO4.5	4.5	13			
4XSGEO4.6	4.6				
4XSGEO4.7	4.7				
4XSGEO4.8	4.8				
4XSGEO4.9	4.9				
4XSGEO5	5.0	13			
4XSGEO5.1	5.1				
4XSGEO5.2	5.2				
4XSGEO5.3	5.3				
4XSGEO5.4	5.4				
4XSGEO5.5	5.5				
4XSGEO5.6	5.6				
4XSGEO5.7	5.7				
4XSGEO5.8	5.8				
4XSGEO5.9	5.9				
4XSGEO6	6.0	16			
4XSGEO6.1	6.1				
4XSGEO6.2	6.2				
4XSGEO6.3	6.3				
4XSGEO6.4	6.4				
4XSGEO6.5	6.5				
4XSGEO6.6	6.6				
4XSGEO6.7	6.7				
4XSGEO6.8	6.8				
4XSGEO6.9	6.9				
4XSGEO7	7.0	19			
4XSGEO7.1	7.1				
4XSGEO7.2	7.2				
4XSGEO7.3	7.3				
4XSGEO7.4	7.4				
4XSGEO7.5	7.5				
4XSGEO7.6	7.6				
4XSGEO7.7	7.7				
4XSGEO7.8	7.8				
4XSGEO7.9	7.9				

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4XSGEO8	8.0	19	80	8	
4XSGEO8.1	8.1				
4XSGEO8.2	8.2				
4XSGEO8.3	8.3				
4XSGEO8.4	8.4				
4XSGEO8.5	8.5				
4XSGEO8.6	8.6				
4XSGEO8.7	8.7				
4XSGEO8.8	8.8				
4XSGEO8.9	8.9				
4XSGEO9	9.0				
4XSGEO9.1	9.1	22	90	10	
4XSGEO9.2	9.2				
4XSGEO9.3	9.3				
4XSGEO9.4	9.4				
4XSGEO9.5	9.5				
4XSGEO9.6	9.6				
4XSGEO9.7	9.7				
4XSGEO9.8	9.8				
4XSGEO9.9	9.9				
4XSGEO10	10.0				
4XSGEO10.1	10.1	26	110	12	
4XSGEO10.2	10.2				
4XSGEO10.3	10.3				
4XSGEO10.4	10.4				
4XSGEO10.5	10.5				
4XSGEO10.6	10.6				
4XSGEO10.7	10.7				
4XSGEO10.8	10.8				
4XSGEO10.9	10.9				
4XSGEO11	11.0				
4XSGEO11.1	11.1	32	120	16	
4XSGEO11.2	11.2				
4XSGEO11.3	11.3				
4XSGEO11.4	11.4				
4XSGEO11.5	11.5				
4XSGEO11.6	11.6				
4XSGEO11.7	11.7				
4XSGEO11.8	11.8				
4XSGEO11.9	11.9				
4XSGEO12	12.0				
4XSGEO14	14.0	36	140	20	
4XSGEO15	15.0				
4XSGEO16	16.0				
4XSGEO18	18.0				
4XSGEO20	20.0				
4XSGEO22	22.0				
4XSGEO25	25.0				
4XSGEO28	28.0				
4XSGEO30	30.0				
4XSGEO32	32.0				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.014 ~ -0.028
3	6	-0.020 ~ -0.038
6	10	-0.025 ~ -0.047
10		-0.032 ~ -0.059

●适用于从新材到淬火钢的多种材料。适用于侧面加工。

This end mill is suitable for high-speed and long life milling of workpiece materials from Unhardened Steel to Hardened Steel.



新商品

LIST 9472

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4PLXS2	2.0	6	40	4	
4PLXS2.1	2.1				
4PLXS2.2	2.2				
4PLXS2.3	2.3				
4PLXS2.4	2.4				
4PLXS2.5	2.5	8			
4PLXS2.6	2.6				
4PLXS2.7	2.7				
4PLXS2.8	2.8				
4PLXS2.9	2.9				
4PLXS3	3.0	10	45	6	□
4PLXS3.1	3.1				
4PLXS3.2	3.2				
4PLXS3.3	3.3				
4PLXS3.4	3.4				
4PLXS3.5	3.5	11			
4PLXS3.6	3.6				
4PLXS3.7	3.7				
4PLXS3.8	3.8				
4PLXS3.9	3.9				
4PLXS4	4.0	13	50	8	
4PLXS4.1	4.1				
4PLXS4.2	4.2				
4PLXS4.3	4.3				
4PLXS4.4	4.4				
4PLXS4.5	4.5	16			
4PLXS4.6	4.6				
4PLXS4.7	4.7				
4PLXS4.8	4.8				
4PLXS4.9	4.9				
4PLXS5	5.0	19	60	8	
4PLXS5.1	5.1				
4PLXS5.2	5.2				
4PLXS5.3	5.3				
4PLXS5.4	5.4				
4PLXS5.5	5.5	22			
4PLXS5.6	5.6				
4PLXS5.7	5.7				
4PLXS5.8	5.8				
4PLXS5.9	5.9				
4PLXS6	6.0	26	70	10	
4PLXS6.1	6.1				
4PLXS6.2	6.2				
4PLXS6.3	6.3				
4PLXS6.4	6.4				
4PLXS6.5	6.5	32			
4PLXS6.6	6.6				
4PLXS6.7	6.7				
4PLXS6.8	6.8				
4PLXS6.9	6.9				
4PLXS7	7.0	38	80	12	
4PLXS7.1	7.1				
4PLXS7.2	7.2				
4PLXS7.3	7.3				
4PLXS7.4	7.4				
4PLXS7.5	7.5	45			
4PLXS7.6	7.6				
4PLXS7.7	7.7				
4PLXS7.8	7.8				
4PLXS7.9	7.9				

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4PLXS8	8.0	19	60	8	□
4PLXS8.1	8.1		70	10	
4PLXS8.2	8.2				
4PLXS8.3	8.3				
4PLXS8.4	8.4				
4PLXS8.5	8.5				
4PLXS8.6	8.6				
4PLXS8.7	8.7				
4PLXS8.8	8.8				
4PLXS8.9	8.9				
4PLXS9	9.0	22			
4PLXS9.1	9.1		75	12	
4PLXS9.2	9.2				
4PLXS9.3	9.3				
4PLXS9.4	9.4				
4PLXS9.5	9.5				
4PLXS9.6	9.6				
4PLXS9.7	9.7				
4PLXS9.8	9.8				
4PLXS9.9	9.9				
4PLXS10	10.0	26			
4PLXS10.5	10.5		90	16	
4PLXS11	11.0				
4PLXS11.5	11.5				
4PLXS12	12.0				
4PLXS12.5	12.5				
4PLXS13	13.0				
4PLXS14	14.0	32			
4PLXS15	15.0		100	20	
4PLXS16	16.0				
4PLXS17	17.0				
4PLXS18	18.0	38			
4PLXS19	19.0				
4PLXS20	20.0				
4PLXS22	22.0	45			
4PLXS24	24.0				
4PLXS25	25.0				

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

外径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
	3	- 0.014 ~ - 0.028
3	6	- 0.020 ~ - 0.038
6	10	- 0.025 ~ - 0.047
10		- 0.032 ~ - 0.059

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	◎	◎	◎	◎	○	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	○	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

※涂层从 X's 涂层变更为 GSX 涂层生产。

※ Manufactured by changing from X's coating to GSX coating.


槽加工时推荐使用 **GSX4C-1.5D (D-25)**、**GSX4C-2D (D-26)**、**4XSgeo (D-28)**。

GSXVL4-2.5D

GSX 铣刀 VL 型 2.5D
GSX MILL VL 2.5D

- 通过采用不等分、不等导程，抑制了高速高效率加工时易于产生的颤动。

Using unequal spacing of teeth and variable leads suppresses the chattering that often occurs during high-speed and high-productivity work.



LIST 9188

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4030-2.5D	3	7.5	45	6	●
GSXVL4040-2.5D	4	10.0			
GSXVL4050-2.5D	5	12.5	50	8	●
GSXVL4060-2.5D	6	15.0			
GSXVL4070-2.5D	7	17.5	60	10	●
GSXVL4080-2.5D	8	20.0			
GSXVL4090-2.5D	9	22.5	70	12	●
GSXVL4100-2.5D	10	25.0			
GSXVL4110-2.5D	11	27.5	75	14	●
GSXVL4120-2.5D	12	30.0			
GSXVL4130-2.5D	13	32.5	80	16	●
GSXVL4140-2.5D	14	35.0			
GSXVL4150-2.5D	15	37.5	90	18	●
GSXVL4160-2.5D	16	40.0			
GSXVL4180-2.5D	18	45.0	100	20	●
GSXVL4200-2.5D	20	50.0			


外径公差 Tolerance (mm)
0.015~0

GSXVL4T-2.5D

GSX 铣刀 VL 型 耐热合金用 2.5D
GSX MILL VL 2.5D for Ti · SUS

- 通过采用不等分、不等导程以及锋利的刀尖形状抑制了颤动，适用于耐热合金的加工。

Suitable for difficult materials such as Heat Resistant Alloy it has unequal tooth spacing and variable leads and a cutting edge shape with good bite to suppress chattering.



LIST 9190

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4030T-2.5D	3	7.5	45	6	●
GSXVL4040T-2.5D	4	10.0			
GSXVL4050T-2.5D	5	12.5	50	8	●
GSXVL4060T-2.5D	6	15.0			
GSXVL4070T-2.5D	7	17.5	60	10	●
GSXVL4080T-2.5D	8	20.0			
GSXVL4090T-2.5D	9	22.5	70	12	●
GSXVL4100T-2.5D	10	25.0			
GSXVL4110T-2.5D	11	27.5	75	14	●
GSXVL4120T-2.5D	12	30.0			
GSXVL4130T-2.5D	13	32.5	80	16	●
GSXVL4140T-2.5D	14	35.0			
GSXVL4150T-2.5D	15	37.5	90	18	●
GSXVL4160T-2.5D	16	40.0			
GSXVL4180T-2.5D	18	45.0	100	20	●
GSXVL4200T-2.5D	20	50.0			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
◎	◎	◎	◎	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
—	—	—	◎	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
—	◎	◎	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

GSX4C-2.5D

GSX 铣刀 4 刃型 2.5D
GSX MILL Four Flutes 2.5D

切削条件 Cutting Condition ▶ D-113



工具材料

涂层

螺旋角


耐崩型

柄直径公差

外径范围

●适用于从新材的湿式加工到高硬度钢的干式加工。

This end mill can be done from wet milling in Unhardened Steel to dry process in Hardened Steel.



LIST 9174

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX40100C-2.5D	1.0	2.5	40	4	
GSX40110C-2.5D	1.1	2.8			
GSX40120C-2.5D	1.2	3.0			
GSX40130C-2.5D	1.3	3.3			
GSX40140C-2.5D	1.4	3.5			
GSX40150C-2.5D	1.5	3.8			
GSX40160C-2.5D	1.6	4.0			
GSX40170C-2.5D	1.7	4.3			
GSX40180C-2.5D	1.8	4.5			
GSX40190C-2.5D	1.9	4.8			
GSX40200C-2.5D	2.0	5.0			
GSX40210C-2.5D	2.1	5.3			
GSX40220C-2.5D	2.2	5.5			
GSX40230C-2.5D	2.3	5.8			
GSX40240C-2.5D	2.4	6.0			
GSX40250C-2.5D	2.5	6.3			
GSX40260C-2.5D	2.6	6.5			
GSX40270C-2.5D	2.7	6.8			
GSX40280C-2.5D	2.8	7.0			
GSX40290C-2.5D	2.9	7.3			
GSX40300C-2.5D	3.0	7.5	45	6	
GSX40310C-2.5D	3.1	7.8			
GSX40320C-2.5D	3.2	8.0			
GSX40330C-2.5D	3.3	8.3			
GSX40340C-2.5D	3.4	8.5			
GSX40350C-2.5D	3.5	8.8			
GSX40360C-2.5D	3.6	9.0			
GSX40370C-2.5D	3.7	9.3			
GSX40380C-2.5D	3.8	9.5			
GSX40390C-2.5D	3.9	9.8			
GSX40400C-2.5D	4.0	10.0			
GSX40410C-2.5D	4.1	10.3			
GSX40420C-2.5D	4.2	10.5			
GSX40430C-2.5D	4.3	10.8			
GSX40440C-2.5D	4.4	11.0			
GSX40450C-2.5D	4.5	11.3			
GSX40460C-2.5D	4.6	11.5			
GSX40470C-2.5D	4.7	11.8			
GSX40480C-2.5D	4.8	12.0	50	8	
GSX40490C-2.5D	4.9	12.3			
GSX40500C-2.5D	5.0	12.5			
GSX40510C-2.5D	5.1	12.8			
GSX40520C-2.5D	5.2	13.0			
GSX40530C-2.5D	5.3	13.3			
GSX40540C-2.5D	5.4	13.5			
GSX40550C-2.5D	5.5	13.8			
GSX40560C-2.5D	5.6	14.0			
GSX40570C-2.5D	5.7	14.3			
GSX40580C-2.5D	5.8	14.5			
GSX40590C-2.5D	5.9	14.8			
GSX40600C-2.5D	6.0	15.0			
GSX40700C-2.5D	7.0	17.5			
GSX40800C-2.5D	8.0	20.0			
GSX40900C-2.5D	9.0	22.5			
GSX41000C-2.5D	10.0	25.0			
GSX41200C-2.5D	12.0	30.0	75	12	
GSX41300C-2.5D	13.0	32.5			
GSX41400C-2.5D	14.0	35.0			
GSX41500C-2.5D	15.0	37.5	90	16	
GSX41600C-2.5D	16.0	40.0			
GSX41800C-2.5D	18.0	45.0			
GSX42000C-2.5D	20.0	50.0	100	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

技术资料
索引


GSX4P-2.5D

GSX 铣刀 4 刃 P 型 2.5D

GSX MILL Four Flutes 2.5D P Type

●适用于从新材到淬火钢的多种材料。适用于槽、侧面的精加工。

This end mill is suitable for workpiece materials from Unhardened Steel to Hardened Steel, and finish milling.



LIST 9182

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX40100P-2.5D	1.0	2.5	40	4	●
GSX40150P-2.5D	1.5	3.8			
GSX40200P-2.5D	2.0	5.0			
GSX40250P-2.5D	2.5	6.3	45	6	
GSX40300P-2.5D	3.0	7.5			
GSX40350P-2.5D	3.5	8.8			
GSX40400P-2.5D	4.0	10.0	50	8	
GSX40450P-2.5D	4.5	11.3			
GSX40500P-2.5D	5.0	12.5			
GSX40550P-2.5D	5.5	13.8	60	10	
GSX40600P-2.5D	6.0	15.0			
GSX40700P-2.5D	7.0	17.5			
GSX40800P-2.5D	8.0	20.0	70	12	
GSX40900P-2.5D	9.0	22.5			
GSX41000P-2.5D	10.0	25.0			
GSX41200P-2.5D	12.0	30.0	75	16	
GSX41400P-2.5D	14.0	35.0			
GSX41500P-2.5D	15.0	37.5			
GSX41600P-2.5D	16.0	40.0	90	20	
GSX42000P-2.5D	20.0	50.0			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030


GSX4C-3D

GSX 铣刀 4 刃型 3D

GSX MILL Four Flutes 3D

●适用于从新材的湿式加工到高硬度钢的干式加工。

This end mill can be done from wet milling in Unhardened Steel to dry process in Hardened Steel.

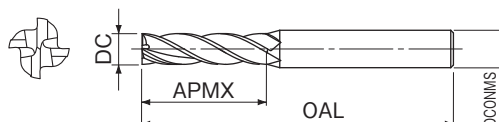

LIST 9162

订货方式 商品编码

切削条件 Cutting Condition ●D-113

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX40100C-3D	1.0	3.0	40	4	●
GSX40150C-3D	1.5	4.5			
GSX40200C-3D	2.0	6.0			
GSX40250C-3D	2.5	7.5	50	6	
GSX40300C-3D	3.0	9.0			
GSX40400C-3D	4.0	12.0			
GSX40500C-3D	5.0	15.0	70	8	
GSX40600C-3D	6.0	18.0			
GSX40800C-3D	8.0	24.0			
GSX41000C-3D	10.0	30.0	90	10	
GSX41200C-3D	12.0	36.0		12	
GSX41600C-3D	16.0	48.0		16	
GSX42000C-3D	20.0	60.0	120	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


4GEOM

X's 铣刀 GEO 通用型

X's-mill Geo Medium

●适用于从新材到高硬度钢的多种材料。

This end mill is suitable for workpiece materials from Unhardened Steel to Hardened Steel.



LIST 9350

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4GEOM2	2	10	50	4	●
4GEOM3	3	15		6	
4GEOM4	4	17	60	8	
4GEOM6	6	20		10	
4GEOM8	8	30	80	12	
4GEOM10	10	34	90	16	□
4GEOM12	12	40	115	20	
4GEOM16	16	50	125	20	
4GEOM20	20	56			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.014 ~ -0.028
3	6	-0.020 ~ -0.038
6	10	-0.025 ~ -0.047
10		-0.032 ~ -0.059


GSXVL4-4D

GSX 铣刀 VL 型 4D

GSX MILL VL 4D

●可抑制颤动、实现高效率加工的钢用长刃型立铣刀。

Long cutting length end mill for steel suppresses chattering and is very efficient.

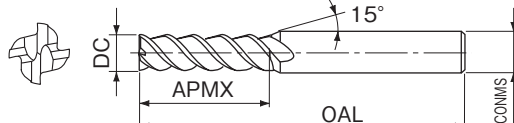

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4030-4D	3	12	50	6	□
GSXVL4040-4D	4	16		8	
GSXVL4050-4D	5	20	60	10	
GSXVL4060-4D	6	24		12	
GSXVL4080-4D	8	32	80	16	
GSXVL4100-4D	10	40	90	20	
GSXVL4120-4D	12	48	100	20	
GSXVL4160-4D	16	64	120	20	
GSXVL4200-4D	20	80	140	20	

外径公差 Tolerance (mm)
0.015 ~ 0

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎:优选 Excellent ○:适用 Good X:不适用 Not Used —:不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	◎	—	—	—

◎:优选 Excellent ○:适用 Good X:不适用 Not Used —:不推荐 Not recommended

技术资料
索引

GSXVL4T-4D

GSX 铣刀 VL 型 耐热合金用 4D

GSX MILL VL 4D for Ti · SUS

GSX4C-4D

GSX 铣刀 4 刃型 4D

GSX MILL Four Flutes 4D



●可抑制颤动、实现高效率加工的长刃型立铣刀。

Suppress chattering, do high-performance work with long cutting length.

●适用于从新材的湿式加工到高硬度钢的干式加工。

This end mill can be done from wet milling in Unhardened Steel to dry process in Hardened Steel.

新商品

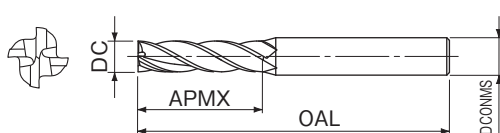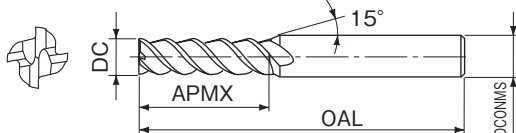

订货方式

商品编码

切削条件 Cutting Condition ▶▶D-114

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4030T-4D	3	12	50	6	□
GSXVL4040T-4D	4	16			
GSXVL4050T-4D	5	20			
GSXVL4060T-4D	6	24			
GSXVL4080T-4D	8	32	80	8	
GSXVL4100T-4D	10	40	90	10	
GSXVL4120T-4D	12	48	100	12	
GSXVL4160T-4D	16	64	120	16	
GSXVL4200T-4D	20	80	140	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

LIST 9164

订货方式

商品编码

切削条件 Cutting Condition ▶▶D-115

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSX40100C-4D	1.0	4	40	4	●
GSX40150C-4D	1.5	6			
GSX40200C-4D	2.0	8			
GSX40250C-4D	2.5	10	50	6	
GSX40300C-4D	3.0	12			
GSX40400C-4D	4.0	16	60	8	
GSX40500C-4D	5.0	20			
GSX40600C-4D	6.0	24			
GSX40800C-4D	8.0	32	80	8	
GSX41000C-4D	10.0	40	90	10	
GSX41200C-4D	12.0	48	100	12	
GSX41600C-4D	16.0	64	120	16	
GSX42000C-4D	20.0	80	140	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	◎	—	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—


◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

GSXVL4XT-4D

GSX 铣刀 VL 型超级装夹用 不锈钢钛合金专用 4D
GSX MILL VL 4D for X-Treme chuck for Ti · SUS

- 通过采用抑制颤动并防止工具脱落的特殊柄，实现高效率加工的长刃型立铣刀。

High efficient end mills with long teeth length as well as special shank to suppress chattering and to prevent tools from falling out.

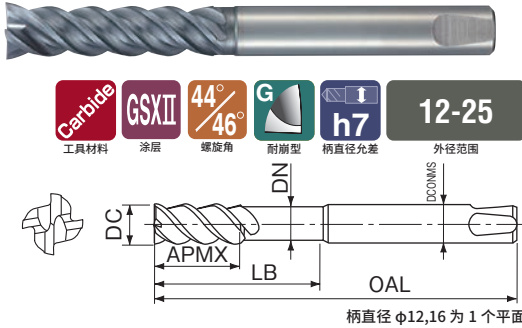

切削条件 Cutting Condition ▶ D-109

订货方式 商品编码 单位 (Unit) : mm


商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4120XT-4D	12	48	55.0	11.5	115	12	□
GSXVL4140XT-4D	14	56	64.0	13.5	135	16	
GSXVL4150XT-4D	15	60	69.5	14.5	140	20	
GSXVL4160XT-4D	16	64	70.0	15.5	155	25	
GSXVL4180XT-4D	18	72	81.0	17.5	165	20	
GSXVL4200XT-4D	20	80	92.0	19.5	180	25	
GSXVL4220XT-4D	22	88	99.0	21.5	190		
GSXVL4250XT-4D	25	100	110.5	24.5			

SL4GEO

X's 铣刀 GEO 长刃型
X's-mill Geo Long

- 适用于大面积的侧面加工、深位置的侧面加工。

This end mill is used in long side milling.

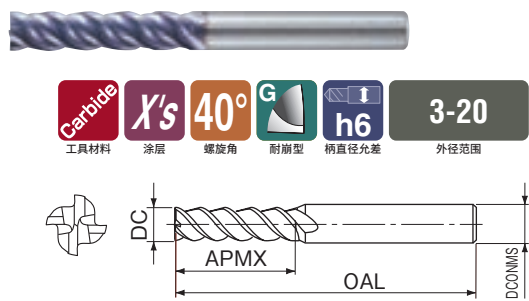

切削条件 Cutting Condition ▶ D-115

LIST 9388

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
SL4GE03	3	18	60	6	●
SL4GE04	4	20			
SL4GE06	6	25	80	8	
SL4GE08	8	35			
SL4GE010	10	45	100	10	
SL4GE012	12	55	120	12	
SL4GE016	16	65	135	16	
SL4GE020	20	75	155	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	- 0.014 ~ - 0.028
3	6	- 0.020 ~ - 0.038
6	10	- 0.025 ~ - 0.047
10		- 0.032 ~ - 0.059

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	○	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended


4MNE

超硬微型铣刀 4 刃型

Carbide Mini-Square End Mills Four Flutes

- 硬质合金整体型小直径立铣刀。
- 适用于精密模具、精密零部件的侧面加工。

This is miniature carbide end mill for precision molds or precision parts.



LIST 9296

切削条件 Cutting Condition: D-101

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4MNE1	1.0	3	40	4	●
4MNE1.1	1.1				
4MNE1.2	1.2				
4MNE1.3	1.3				
4MNE1.4	1.4				
4MNE1.5	1.5	5			
4MNE1.6	1.6				
4MNE1.7	1.7				
4MNE1.8	1.8				
4MNE1.9	1.9				
4MNE2	2.0	6			


GSXVLLS4-1.5D

GSX 铣刀 VL 长柄型 1.5D

GSX MILL VL Long Shank 1.5D

- 在垂直面或深壁加工中也可抑制振刀，实现高效率、高质量加工。钢用。

High performance and quality drilling are possible by suppressing chatter while working on vertical faces or shaping. For Steel.



LIST 9114

切削条件 Cutting Condition: D-116

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
GSXVLLS4030-1.5D	3	4.5	15	2.9	60	6	●
GSXVLLS4040-1.5D	4	6.0	20	3.8			
GSXVLLS4050-1.5D	5	7.5	25	4.8			
GSXVLLS4060-1.5D	6	9.0	30	5.8			
GSXVLLS4070-1.5D	7	10.5	—	—	80	8	
GSXVLLS4080-1.5D	8	12.0	40	7.7			
GSXVLLS4090-1.5D	9	13.5	—	—	90	10	
GSXVLLS4100-1.5D	10	15.0	50	9.7	100		
GSXVLLS4110-1.5D	11	16.5	—	—	110	12	
GSXVLLS4120-1.5D	12	18.0	60	11.7			
GSXVLLS4130-1.5D	13	19.5	—	—	120	16	
GSXVLLS4160-1.5D	16	24.0	80	15.5	140		
GSXVLLS4170-1.5D	17	25.5	—	—	150	20	
GSXVLLS4200-1.5D	20	30.0	100	19.5	160		

外径公差 Tolerance (mm)
0.015 ~ 0

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	◎	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


GSXVLLS4T-1.5D

GSX 铣刀 VL 长柄型 1.5D 耐热合金用

GSX MILL VL Long Shank 1.5D for Ti · SUS

- 在垂直面或深壁加工中也可抑制振刀，实现高效率、高质量加工。

High performance and quality drilling are possible by suppressing chatter while working on vertical faces or shaping.

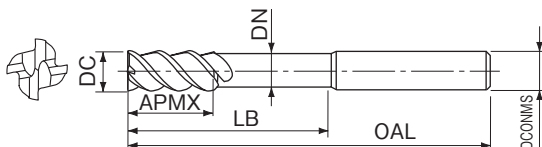

LIST 9112

切削条件 Cutting Condition ▶ D-117

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
GSXVLLS4030T-1.5D	3	4.5	15	2.9	60	6	●
GSXVLLS4040T-1.5D	4	6.0	20	3.8			
GSXVLLS4050T-1.5D	5	7.5	25	4.8			
GSXVLLS4060T-1.5D	6	9.0	30	5.8			
GSXVLLS4070T-1.5D	7	10.5	-	-	80	8	
GSXVLLS4080T-1.5D	8	12.0	40	7.7			
GSXVLLS4090T-1.5D	9	13.5	-	-	90	10	
GSXVLLS4100T-1.5D	10	15.0	50	9.7	100		
GSXVLLS4110T-1.5D	11	16.5	-	-	110	12	
GSXVLLS4120T-1.5D	12	18.0	60	11.7			
GSXVLLS4130T-1.5D	13	19.5	-	-	120	16	
GSXVLLS4160T-1.5D	16	24.0	80	15.5	140		
GSXVLLS4170T-1.5D	17	25.5	-	-	150		
GSXVLLS4200T-1.5D	20	30.0	100	19.5	160		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ 0.015
3	12	0 ~ 0.020
12		0 ~ 0.030


4GEOLS

X's 铣刀 GEO 长柄型

X's-mill Geo Long Shank

- 在深壁加工中，也能实现高精度加工。

This end mill meets accurate surface in deep side face.

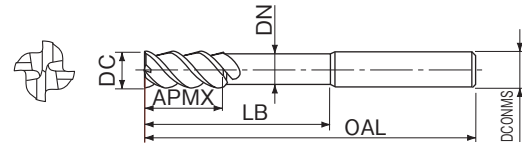

LIST 9346

切削条件 Cutting Condition ▶ D-117

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
4GEOLS3	3	4.5	12	2.9	60	6	●
4GEOL4	4	6.0	16	3.8			
4GEOLS5	5	7.5	20	4.8			
4GEOL6	6	9.0	24	5.8			
4GEOL7	7	10.5	—	—	80	8	
4GEOL8	8	12.0	34	7.7			
4GEOL9	9	13.5	—	—	90	10	
4GEOL10	10	15.0	42	9.7	100		
4GEOL11	11	16.5	—	—	120	12	
4GEOL12	12	18.0	50	11.7			
4GEOL13	13	19.5	—	—	130	16	
4GEOL16	16	24.0	66	15.5	160		
4GEOL17	17	25.5	—	—	170		
4GEOL20	20	30.0	82	19.5	200	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	- 0.014 ~ - 0.028
3	6	- 0.020 ~ - 0.038
6	10	- 0.025 ~ - 0.047
10		- 0.032 ~ - 0.059

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	◎	—	—	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

GSXVL6-2.5D

GSX 铣刀 VL 多刃型 2.5D
GSX MILL VL Multi-Flutes 2.5D

- 通过采用不等分割、不等导程，实现高速、高质量加工。钢用。

Using unequal spacing of teeth and variable leads make high-speed and high-quality work possible. For Steel.

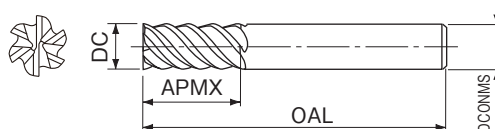

LIST 9118

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL6060-2.5D	6	15	50	6	●
GSXVL6080-2.5D	8	20	60	8	
GSXVL6100-2.5D	10	25	70	10	
GSXVL6120-2.5D	12	30	75	12	
GSXVL6160-2.5D	16	40	90	16	
GSXVL6200-2.5D	20	50	100	20	


外径公差 Tolerance (mm)
0.015 ~ 0

GSXVL6T-2.5D

GSX 铣刀 VL 多刃型 2.5D 耐热合金用
GSX MILL VL Multi-Flutes 2.5D for Ti · SUS

- 通过采用不等分割、不等导程，实现高速、高质量加工。

Using unequal spacing of teeth and variable leads make high-speed and high-quality work possible.

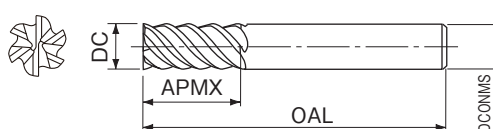

LIST 9116

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL6060T-2.5D	6	15	50	6	●
GSXVL6080T-2.5D	8	20	60	8	
GSXVL6100T-2.5D	10	25	70	10	
GSXVL6120T-2.5D	12	30	75	12	
GSXVL6160T-2.5D	16	40	90	16	
GSXVL6200T-2.5D	20	50	100	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	12	0 ~ 0.02
12		0 ~ 0.03

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	◎	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	◎	—	—	—	—


◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

GSXVLH6-2.5D

GSX 铣刀 VL 高硬型 2.5D
GSX MILL VL Hard 2.5D

- 通过采用不等分割、不等导程，实现高速、高质量加工。高硬度钢用。

Using unequal spacing of teeth and variable leads make high-speed and high-quality work possible. For high Hardness Steel.

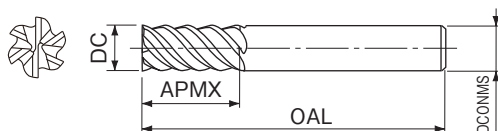

LIST 9318

切削条件 Cutting Condition ▶ D-119

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVLH6060-2.5D	6	15	50	6	●
GSXVLH6080-2.5D	8	20	60	8	
GSXVLH6100-2.5D	10	25	70	10	
GSXVLH6120-2.5D	12	30	75	12	
GSXVLH6160-2.5D	16	40	90	16	
GSXVLH6200-2.5D	20	50	100	20	


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	12	0 ~ -0.02
12		0 ~ -0.03

GSH

GS 铣刀 高硬型
GS MILL Hard

- 经过 GS 硬涂层处理，适合用于高硬度钢的超高速加工。

This end mill is most suitable for super-high-speed machining of hardened material by "GS Hard Coat".

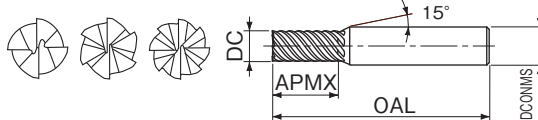

LIST 9398

切削条件 Cutting Condition ▶ D-120

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock	
GSH4010SF	1.0	3	50	6	4	●	
GSH4015SF	1.5	4					
GSH4020SF	2.0	6					
GSH6030SF	3.0	8					
GSH6040SF	4.0	11					
GSH6050SF	5.0	13	60	8	6		
GSH6060SF	6.0						
GSH6080SF	8.0	19			60		8
GSH6100SF	10.0	22			70		10
GSH6120SF	12.0	26			75		12
GSH8160SF	16.0	32	90	16	8		
GSH8200SF	20.0	38	100	20			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ -0.015
3		0 ~ -0.030

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	○	○	◎	◎	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
◎	—	—	—	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	○	○	◎	◎	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
◎	—	—	—	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

适用于淬硬钢。选购新材加工用的铣刀，请参照 [GSX4C-1.5D\(D-25\)](#)、[GSX4C-3D\(D-32\)](#)、[GSXVL6-2.5D \(D-38\)](#)。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 可以对淬火钢进行高效率加工。
- 适用于大面积的侧面精加工。

This end mill having long flutes is suitable for high efficiency milling of Hardened Steel of 60HRC.

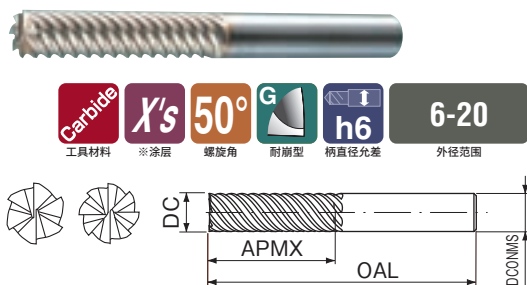

LIST 9288

订货方式

商品编码


单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SLXSMH6	6	25	70	6	6	●
SLXSMH8	8	35	90	8		
SLXSMH10	10	45	100	10		
SLXSMH12	12	55	120	12	8	
SLXSMH16	16	65	135	16		
SLXSMH20	20	75	155	20		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	6	-0.020 ~ -0.038
6	10	-0.025 ~ -0.047
10		-0.032 ~ -0.059

- 适用于从普通钢到不锈钢的粗加工、半精加工。
- 切削阻力小，使用 BT30 的机床也能进行高效率加工。

This end mill is suitable for high-speed rough milling and semi-finish milling.

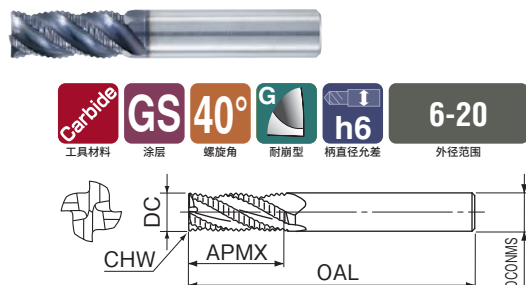

LIST 9430

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	倒角 CHW	柄径 DCONMS	库存 Stock
GSHV4060SF	6	13	50	0.3	6	●
GSHV4080SF	8	19	60	0.4	8	
GSHV4100SF	10	22	70	0.5	10	
GSHV4120SF	12	26	75	0.6	12	
GSHV4160SF	16	32	90	0.8	16	
GSHV4200SF	20	38	100	1.0	20	

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	○	○	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
◎	—	—	—	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

※ SLXSMH 的涂层从 X's 涂层变更为 GSX 涂层生产。
※ Manufactured by changing from X's coating to GSX coating.
GSHV 外径公差 Tolerance of Mill Dia. : 0 ~ -0.030mm


GSXVLRE4-2.5D

GSX 粗铣刀 VL 型 2.5D

GSX MILL VL Roughing 2.5D

- 通过采用不等分割、不等导程，提高了高速高效率加工时的耐磨损性能。粗加工用。

Improving resistance to chipping during high-speed high-performance work. For roughing.



LIST 9448

订货方式 商品编码

切削条件 Cutting Condition ▶ D-122

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	倒角 CHW	柄径 DCONMS	库存 Stock
GSXVLRE4040-2.5D	4	10.0	45	0.2	6	●
GSXVLRE4050-2.5D	5	12.5	50	0.3	8	
GSXVLRE4060-2.5D	6	15.0	60	0.4	10	
GSXVLRE4070-2.5D	7	17.5	70	0.5	12	
GSXVLRE4080-2.5D	8	20.0	80	0.6	16	
GSXVLRE4090-2.5D	9	22.5	90	0.7	20	
GSXVLRE4100-2.5D	10	25.0	100	0.8		
GSXVLRE4110-2.5D	11	27.5		0.9		
GSXVLRE4120-2.5D	12	30.0		1.0		
GSXVLRE4140-2.5D	14	35.0				
GSXVLRE4160-2.5D	16	40.0				
GSXVLRE4180-2.5D	18	45.0				
GSXVLRE4200-2.5D	20	50.0				

外径公差 Outer diameter tolerance : ± 0.050


GSXRE-2.5D

GSX 粗铣刀 2.5D

GSX MILL Roughing 2.5D

- 提高了高速高效率加工时的耐磨损性能。通过采用 GSX 涂层，进一步提高了耐热性、耐磨性。

Improving resistance to chipping during high-speed high-performance work. GSX coating for greater heat and wear resistance.



LIST 9176

订货方式 商品编码

切削条件 Cutting Condition ▶ D-123

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	倒角 CHW	柄径 DCONMS	库存 Stock
GSXRE4040-2.5D	4	10.0	45	0.2	6	●
GSXRE4050-2.5D	5	12.5	50	0.3	8	
GSXRE4060-2.5D	6	15.0	60	0.4	10	
GSXRE4070-2.5D	7	17.5	70	0.5	12	
GSXRE4080-2.5D	8	20.0	80	0.6	16	
GSXRE4090-2.5D	9	22.5	90	0.7	20	
GSXRE4100-2.5D	10	25.0	100	0.8		
GSXRE4110-2.5D	11	27.5		0.9		
GSXRE4120-2.5D	12	30.0		1.0		
GSXRE4140-2.5D	14	35.0				
GSXRE4160-2.5D	16	40.0				
GSXRE4180-2.5D	18	45.0				
GSXRE4200-2.5D	20	50.0				

外径公差 Outer diameter tolerance : ± 0.050

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	◎	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	◎	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具



技术资料
索引

●从普通钢到不锈钢均可进行高速、高效率粗加工。

This end mill is suitable for high speed and high efficiency rough milling from Steel to Stainless Steel.

●从普通钢到不锈钢均可进行高效率粗加工。

This end mill is suitable for high efficiency rough milling from Steel to Stainless Steel.



LIST 9420

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	倒角 CHW	柄径 DCONMS	库存 Stock
GSRE4060SF	6	13	50	0.3	6	●
GSRE4070SF	7	16	60		8	
GSRE4080SF	8	19	70	0.4	10	
GSRE4090SF	9				10	
GSRE4100SF	10	22		0.5	12	
GSRE4110SF	11		75	0.6	12	
GSRE4120SF	12	26		0.7	16	
GSRE4140SF	14		90	0.8	16	
GSRE4160SF	16	32		0.9	20	
GSRE4180SF	18		100	1.0	20	
GSRE4200SF	20	38				

切削条件 Cutting Condition ●D-123

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
XSRE6	6	13	80	6	□
XSRE8	8	19	85	8	
XSRE10	10	22	100	10	
XSRE12	12		110	12	
XSRE14	14	26		16	
XSRE15	15		120	16	
XSRE16	16	32	125	20	
XSRE18	18		140	20	
XSRE20	20	38			

切削条件 Cutting Condition ●D-123

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	◎	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

※ XSRE 的涂层从 X's 涂层变更到 GSX 涂层生产。

※ Manufactured by changing from X's coating to GSX coating.

粗铣型的外径公差 Tolerance of Mill Dia. : $\pm 0.050\text{mm}$ 选购角型粗加工用铣刀, 请参照 [GSRE-R\(D-50\)](#)。


GSRE 低切削阻力型的立铣刀。适用于小型机床的高效率加工。

GSXVLSLT3-R-2.5D

GSX 铣刀 VL 开槽 圆角型 2.5D
GSX MILL VL SLOT Radius 2.5D

●可抑制颤动，从孔加工到槽切削，都能实现连续高效率的加工。

This end mill suppresses chatter vibration. It is available for grooving continuously into slotting.



切削条件 Cutting Condition ▶▶D-105

订货方式 商品编码

单位 (Unit) : mm



商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVLSLT3030-R02-2.5D	3	0.2	7.5	45	6	□
GSXVLSLT3030-R05-2.5D		0.5				
GSXVLSLT3040-R02-2.5D	4	0.2	10.0	50		
GSXVLSLT3040-R05-2.5D		0.5				
GSXVLSLT3050-R02-2.5D	5	0.2	12.5	60		
GSXVLSLT3050-R05-2.5D		0.5				
GSXVLSLT3060-R03-2.5D	6	0.3	15.0	70		
GSXVLSLT3060-R05-2.5D		0.5				
GSXVLSLT3060-R10-2.5D		1.0				
GSXVLSLT3070-R03-2.5D	7	0.3	17.5	80		
GSXVLSLT3070-R05-2.5D		0.5				
GSXVLSLT3070-R10-2.5D	8	1.0	20.0	90		
GSXVLSLT3080-R03-2.5D		0.3				
GSXVLSLT3080-R05-2.5D	8	0.5	20.0	100		
GSXVLSLT3080-R10-2.5D		1.0				
GSXVLSLT3090-R03-2.5D	9	0.3	22.5	110		
GSXVLSLT3090-R05-2.5D		0.5				
GSXVLSLT3090-R10-2.5D		1.0				
GSXVLSLT3100-R03-2.5D	10	0.3	25.0	120		
GSXVLSLT3100-R05-2.5D		0.5				
GSXVLSLT3100-R10-2.5D		1.0				
GSXVLSLT3100-R20-2.5D		2.0				
GSXVLSLT3120-R03-2.5D	12	0.3	30.0	130		
GSXVLSLT3120-R05-2.5D		0.5				
GSXVLSLT3120-R10-2.5D		1.0				
GSXVLSLT3120-R20-2.5D		2.0				
GSXVLSLT3160-R10-2.5D	16	1.0	40.0	140		
GSXVLSLT3160-R20-2.5D		2.0				
GSXVLSLT3160-R30-2.5D		3.0				

GS4-R

GS 铣刀 圆角型
GS MILL Radius

●适用于模具和机械零部件的 R 角和高速仿形加工。

This end mill having corner radius is used for corner radius milling and high speed profile milling.



LIST 9424

切削条件 Cutting Condition ▶▶D-124

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GS4030SF-R02	3	0.2	7.5	45	6	●
GS4030SF-R05		0.5				
GS4040SF-R02	4	0.2	11.0			
GS4040SF-R05		0.5				
GS4040SF-R10	5	1.0	50			
GS4050SF-R02		0.2				
GS4050SF-R05	0.5	13.0				
GS4050SF-R10	1.0					
GS4060SF-R02	6		0.2	19.0		
GS4060SF-R05			0.5			
GS4060SF-R10		1.0				
GS4060SF-R15		1.5				
GS4080SF-R02	8	0.2	60	8		
GS4080SF-R05		0.5				
GS4080SF-R10		1.0				
GS4080SF-R15		1.5				
GS4100SF-R02	10	0.2	70	10		
GS4100SF-R05		0.5				
GS4100SF-R10		1.0				
GS4100SF-R15		1.5				
GS4100SF-R20	12	2.0	22.0	75	12	
GS4120SF-R02		0.2				
GS4120SF-R05		0.5				
GS4120SF-R10		1.0				
GS4120SF-R15	16	1.5	26.0	120	16	
GS4120SF-R20		2.0				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ -0.015
3		0 ~ -0.030

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

GSXVL4XT-R-2D

GSX 铣刀 VL 圆角型超级装夹用 不锈钢钛合金专用 2D
GSX MILL VL Radius 2D for X-Treme chuck for Ti · SUS

- 通过采用抑制颤动并防止工具脱落的特殊柄，实现高效率加工。

Realize high efficient milling by using special shank to suppress chattering and to prevent tools from falling out.

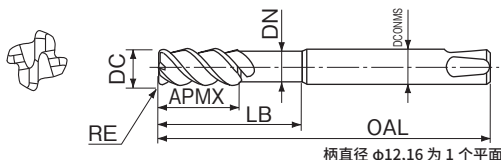

柄直径 $\phi 12, 16$ 为 1 个平面

切削条件 Cutting Condition **D-109**

订货方式 商品编码

单位 (Unit) : mm



商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4120XT-R10-2D	12	1	24	30.0	11.5	90	12	
GSXVL4120XT-R20-2D		2						
GSXVL4120XT-R30-2D		3						
GSXVL4140XT-R10-2D	14	1	28	34.0	13.5	105	16	
GSXVL4140XT-R20-2D		2						
GSXVL4140XT-R30-2D		3						
GSXVL4150XT-R10-2D	15	1	30	34.5	14.5	110	20	
GSXVL4150XT-R20-2D		2						
GSXVL4150XT-R30-2D		3						
GSXVL4160XT-R10-2D	16	1	32	40.0	15.5	120	25	
GSXVL4160XT-R20-2D		2						
GSXVL4160XT-R30-2D		3						
GSXVL4180XT-R10-2D	18	1	36	46.0	17.5	125	30	
GSXVL4180XT-R20-2D		2						
GSXVL4180XT-R30-2D		3						
GSXVL4200XT-R10-2D	20	1	40	52.0	19.5	135	35	
GSXVL4200XT-R20-2D		2						
GSXVL4200XT-R30-2D		3						
GSXVL4220XT-R10-2D	22	1	44	54.0	21.5	140	40	
GSXVL4220XT-R20-2D		2						
GSXVL4220XT-R30-2D		3						
GSXVL4250XT-R10-2D	25	1	50	60.5	24.5	140	45	
GSXVL4250XT-R20-2D		2						
GSXVL4250XT-R30-2D		3						
GSXVL4250XT-R40-2D		4						
GSXVL4250XT-R50-2D		5						
GSXVL4250XT-R60-2D		6						

4XSGEO-R

X's 铣刀 GEO 圆角型
X's-mill Geo Radius

- 适合于模具和机械零部件的 R 角和仿形加工。

This end mill having corner radius is used for corner radius milling and profile milling.



切削条件 Cutting Condition **D-110**

LIST 9324

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4XSGEO3R0.2	3	0.2	8	50	6	
4XSGEO3R0.5		0.5				
4XSGEO4R0.2	4	0.2	11	60	8	
4XSGEO4R0.5		0.5				
4XSGEO4R1		1.0				
4XSGEO5R0.2	5	0.2	13	80	10	
4XSGEO5R0.5		0.5				
4XSGEO5R1		1.0				
4XSGEO6R0.3	6	0.3	19	90	12	
4XSGEO6R0.5		0.5				
4XSGEO6R1		1.0				
4XSGEO6R1.5		1.5				
4XSGEO8R0.3	8	0.3	22	115	16	
4XSGEO8R0.5		0.5				
4XSGEO8R1		1.0				
4XSGEO8R1.5		1.5				
4XSGEO8R2		2.0				
4XSGEO10R0.3	10	0.3	26	125	20	
4XSGEO10R0.5		0.5				
4XSGEO10R1		1.0				
4XSGEO10R1.5		1.5				
4XSGEO10R2		2.0				
4XSGEO12R0.5	12	0.5	32	140	25	
4XSGEO12R1		1.0				
4XSGEO12R1.5		1.5				
4XSGEO12R2		2.0				
4XSGEO12R3		3.0				
4XSGEO16R1	16	1.0	38	150	30	
4XSGEO16R1.5		1.5				
4XSGEO16R2		2.0				
4XSGEO16R3		3.0				
4XSGEO20R1	20	1.0	40	160	35	
4XSGEO20R1.5		1.5				
4XSGEO20R2		2.0				
4XSGEO20R3		3.0				


外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	3	-0.014 ~ -0.028	
3	6	-0.020 ~ -0.038	+0.02 ~ -0.01
6	10	-0.025 ~ -0.047	
10		-0.032 ~ -0.059	

GSXVL4-R-2.5D

GSX 铣刀 VL 圆角型 2.5D
GSX MILL VL Radius 2.5D

●可抑制颤动、实现高效率加工的钢用立铣刀。

End mill for steel suppresses chatter and is very efficient.



切削条件 Cutting Condition ▶▶D-111

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4060-R03-2.5D	6	0.3	15	50	6	□
GSXVL4060-R05-2.5D		0.5				
GSXVL4060-R10-2.5D		1.0				
GSXVL4080-R03-2.5D	8	0.3	20	60	8	
GSXVL4080-R05-2.5D		0.5				
GSXVL4080-R10-2.5D		1.0				
GSXVL4100-R03-2.5D	10	0.3	25	70	10	
GSXVL4100-R05-2.5D		0.5				
GSXVL4100-R10-2.5D		1.0				
GSXVL4100-R20-2.5D	10	2.0				
GSXVL4120-R05-2.5D		0.5				
GSXVL4120-R10-2.5D		1.0				
GSXVL4120-R20-2.5D	12	2.0	30	75	12	
GSXVL4120-R30-2.5D		3.0				
GSXVL4160-R10-2.5D		1.0				
GSXVL4160-R20-2.5D	16	2.0	40	90	16	
GSXVL4160-R30-2.5D		3.0				
GSXVL4200-R10-2.5D		1.0				
GSXVL4200-R20-2.5D	20	2.0	50	100	20	
GSXVL4200-R30-2.5D		3.0				


公差 Tolerance (mm)	
外径 Dc	RE
0.015 ~ 0	+0.02 ~ -0.01

GSXVL4T-R-2.5D

GSX 铣刀 VL 圆角型 2.5D 不锈钢钛合金专用
GSX MILL VL Radius 2.5D for Ti · SUS

●通过采用不等分割、不等导程以及锋利的刀尖形状抑制了颤动，适用于耐热合金的加工。

Suitable for difficult materials such as Heat Resistant Alloy it has unequal tooth spacing and variable leads and a cutting edge shape with good bite to suppress chatter.



切削条件 Cutting Condition ▶▶D-112

LIST 9192

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4060T-R03-2.5D	6	0.3	15	50	6	●
GSXVL4060T-R05-2.5D		0.5				
GSXVL4060T-R10-2.5D		1.0				
GSXVL4080T-R03-2.5D	8	0.3	20	60	8	
GSXVL4080T-R05-2.5D		0.5				
GSXVL4080T-R10-2.5D		1.0				
GSXVL4100T-R03-2.5D	10	0.3	25	70	10	
GSXVL4100T-R05-2.5D		0.5				
GSXVL4100T-R10-2.5D		1.0				
GSXVL4100T-R20-2.5D	10	2.0				
GSXVL4120T-R05-2.5D		0.5				
GSXVL4120T-R10-2.5D		1.0				
GSXVL4120T-R20-2.5D	12	2.0	30	75	12	
GSXVL4120T-R30-2.5D		3.0				
GSXVL4160T-R10-2.5D		1.0				
GSXVL4160T-R20-2.5D	16	2.0	40	90	16	
GSXVL4160T-R30-2.5D		3.0				
GSXVL4200T-R10-2.5D		1.0				
GSXVL4200T-R20-2.5D	20	2.0	50	100	20	
GSXVL4200T-R30-2.5D		3.0				

外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	3	0 ~ -0.015	+0.02 ~ -0.01
3	12	0 ~ -0.020	
12		0 ~ -0.030	

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	◎	—	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	◎	—	—	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速立铣刀

切削工具

套装商品
其它

精密工具



技术资料
索引

GSXVL4-R-4D

GSX 铣刀 VL 圆角型 4D
GSX MILL VL Radius 4D

●可抑制颤动、实现高效率加工的钢用长刃型立铣刀。

Long cutting length end mill for Steel suppresses chattering and is very efficient.



切削条件 Cutting Condition ▶▶D-114

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4060-R03-4D	6	0.3	24	60	6	□
GSXVL4060-R05-4D		0.5				
GSXVL4060-R10-4D		1.0				
GSXVL4080-R03-4D	8	0.3	32	80	8	
GSXVL4080-R05-4D		0.5				
GSXVL4080-R10-4D		1.0				
GSXVL4100-R03-4D	10	0.3	40	90	10	
GSXVL4100-R05-4D		0.5				
GSXVL4100-R10-4D		1.0				
GSXVL4100-R20-4D	12	2.0	48	100	12	
GSXVL4120-R05-4D		0.5				
GSXVL4120-R10-4D		1.0				
GSXVL4120-R20-4D	16	2.0	64	120	16	
GSXVL4160-R10-4D		3.0				
GSXVL4160-R20-4D		1.0				
GSXVL4160-R30-4D	20	2.0	80	140	20	
GSXVL4200-R10-4D		3.0				
GSXVL4200-R20-4D		1.0				
GSXVL4200-R30-4D		2.0				



公差 Tolerance (mm)	
外径 DC	RE
0.015~0	+ 0.02 ~ - 0.01

GSXVL4T-R-4D

GSX 铣刀 VL 圆角型 4D 不锈钢钛合金专用
GSX MILL VL Radius 4D for Ti · SUS

●可抑制颤动、实现高效率加工的长刃型立铣刀。

Suppress chattering, do high-performance work with long cutting length.



切削条件 Cutting Condition ▶▶D-114

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4060T-R03-4D	6	0.3	24	60	6	□
GSXVL4060T-R05-4D		0.5				
GSXVL4060T-R10-4D		1.0				
GSXVL4080T-R03-4D	8	0.3	32	80	8	
GSXVL4080T-R05-4D		0.5				
GSXVL4080T-R10-4D		1.0				
GSXVL4100T-R03-4D	10	0.3	40	90	10	
GSXVL4100T-R05-4D		0.5				
GSXVL4100T-R10-4D		1.0				
GSXVL4100T-R20-4D	12	2.0	48	100	12	
GSXVL4120T-R05-4D		0.5				
GSXVL4120T-R10-4D		1.0				
GSXVL4120T-R20-4D	16	2.0	64	120	16	
GSXVL4160T-R10-4D		3.0				
GSXVL4160T-R20-4D		1.0				
GSXVL4160T-R30-4D	20	2.0	80	140	20	
GSXVL4200T-R10-4D		3.0				
GSXVL4200T-R20-4D		1.0				
GSXVL4200T-R30-4D		2.0				

外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	12	0 ~ - 0.02	+ 0.02 ~ - 0.01
12		0 ~ - 0.03	- 0.01

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	◎	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	◎	—	—	—	—


◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

GSXVL4XT-R-4D

GSX 铣刀 VL 型超级装夹用 不锈钢钛合金专用 4D
GSX MILL VL Radius 4D for X-Treme chuck for Ti · SUS

●通过采用抑制颤动并防止工具脱落的特殊柄，实现高效率加工的长刃型立铣刀。

High efficient end mills with long teeth length as well as special shank to suppress chattering and to prevent tools from falling out.



柄直径 $\phi 12,16$ 为 1 个平面

切削条件 Cutting Condition $\blacktriangleright$ D-109

订货方式 商品编码

单位 (Unit) : mm



商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL4120XT-R10-4D	12	1	48	55.0	11.5	115	12	
GSXVL4120XT-R20-4D		2						
GSXVL4120XT-R30-4D		3						
GSXVL4140XT-R10-4D	14	1	56	64.0	13.5	135	16	
GSXVL4140XT-R20-4D		2						
GSXVL4140XT-R30-4D		3						
GSXVL4150XT-R10-4D	15	1	60	69.5	14.5	140	16	
GSXVL4150XT-R20-4D		2						
GSXVL4150XT-R30-4D		3						
GSXVL4160XT-R10-4D	16	1	64	70.0	15.5	155	18	
GSXVL4160XT-R20-4D		2						
GSXVL4160XT-R30-4D		3						
GSXVL4180XT-R10-4D	18	1	72	81.0	17.5	175	20	
GSXVL4180XT-R20-4D		2						
GSXVL4180XT-R30-4D		3						
GSXVL4200XT-R10-4D	20	1	80	92.0	19.5	195	22	
GSXVL4200XT-R20-4D		2						
GSXVL4200XT-R30-4D		3						
GSXVL4220XT-R10-4D	22	1	88	99.0	21.5	215	25	
GSXVL4220XT-R20-4D		2						
GSXVL4220XT-R30-4D		3						
GSXVL4250XT-R10-4D	25	1	100	110.5	24.5	245	25	
GSXVL4250XT-R20-4D		2						
GSXVL4250XT-R30-4D		3						

GSXVLLS4-R-1.5D

GSX 铣刀 VL 圆角长柄型 1.5D
GSX MILL VL Long Shank Radius 1.5D

●在垂直面或深壁加工中也可抑制振刀，实现高效率、高质量加工。钢用。

High performance and quality drilling are possible by suppressing chatter while working on vertical faces or shaping. For Steel.



LIST 9106

切削条件 Cutting Condition $\blacktriangleright$ D-116

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
GSXVLLS4030-R02-1.5D	3	0.2	4.5	15	2.9	60	6	
GSXVLLS4030-R05-1.5D		0.5						
GSXVLLS4040-R02-1.5D	4	0.2	6.0	20	3.8	80	8	
GSXVLLS4040-R05-1.5D		0.5						
GSXVLLS4050-R02-1.5D	5	0.2	7.5	25	4.8	100	10	
GSXVLLS4050-R05-1.5D		0.5						
GSXVLLS4060-R03-1.5D	6	0.3	9.0	30	5.8	120	12	
GSXVLLS4060-R05-1.5D		0.5						
GSXVLLS4070-R03-1.5D	7	0.3	10.5	—	—	140	14	
GSXVLLS4070-R05-1.5D		0.5						
GSXVLLS4080-R03-1.5D	8	0.3	12.0	40	7.7	160	16	
GSXVLLS4080-R05-1.5D		0.5						
GSXVLLS4090-R03-1.5D	9	0.3	13.5	—	—	180	18	
GSXVLLS4090-R05-1.5D		0.5						
GSXVLLS4100-R03-1.5D	10	0.3	15.0	50	9.7	200	20	
GSXVLLS4100-R05-1.5D		0.5						
GSXVLLS4110-R03-1.5D	11	0.3	16.5	—	—	220	22	
GSXVLLS4110-R05-1.5D		0.5						
GSXVLLS4120-R03-1.5D	12	0.3	18.0	60	11.7	240	24	
GSXVLLS4120-R05-1.5D		0.5						
GSXVLLS4130-R03-1.5D	13	0.3	19.5	—	—	260	26	
GSXVLLS4130-R05-1.5D		0.5						
GSXVLLS4140-R03-1.5D	14	0.3	21.0	—	—	280	28	
GSXVLLS4140-R05-1.5D		0.5						
GSXVLLS4150-R03-1.5D	15	0.3	22.5	—	—	300	30	
GSXVLLS4150-R05-1.5D		0.5						

外径公差: $+0.015 \sim 0$ 圆弧半径公差: $+0.02 \sim -0.01$

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

GSXVLLS4T-R-1.5D

GSX 铣刀 VL 圆角长柄型 1.5D 不锈钢钛合金专用
GSX MILL VL Long Shank Radius 1.5D for Ti - SUS

- 在垂直面或深壁加工中也可抑制振刀，实现高效率、高质量加工。

High performance and quality drilling are possible by suppressing chatter while working on vertical faces or shaping.

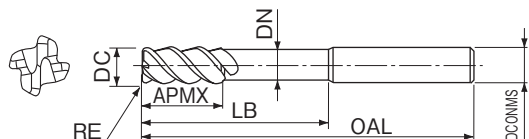

LIST 9104

切削条件 Cutting Condition ▶▶D-117

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
GSXVLLS4030T-R02-1.5D	3	0.2	4.5	15	2.9			
GSXVLLS4030T-R05-1.5D		0.5						
GSXVLLS4040T-R02-1.5D	4	0.2	6.0	20	3.8			
GSXVLLS4040T-R05-1.5D		0.5						
GSXVLLS4050T-R02-1.5D	5	0.2	7.5	25	4.8			
GSXVLLS4050T-R05-1.5D		0.5						
GSXVLLS4060T-R03-1.5D	6	0.3	9.0	30	5.8			
GSXVLLS4060T-R05-1.5D		0.5						
GSXVLLS4060T-R10-1.5D		1.0						
GSXVLLS4070T-R03-1.5D	7	0.3	10.5	—	—			
GSXVLLS4070T-R05-1.5D		0.5						
GSXVLLS4070T-R10-1.5D		1.0						
GSXVLLS4080T-R03-1.5D	8	0.3	12.0	40	7.7			
GSXVLLS4080T-R05-1.5D		0.5						
GSXVLLS4080T-R10-1.5D		1.0						
GSXVLLS4090T-R03-1.5D	9	0.3	13.5	—	—			
GSXVLLS4090T-R05-1.5D		0.5						
GSXVLLS4090T-R10-1.5D		1.0						
GSXVLLS4100T-R03-1.5D	10	0.3	15.0	50	9.7	100		
GSXVLLS4100T-R05-1.5D		0.5						
GSXVLLS4100T-R10-1.5D		1.0						
GSXVLLS4100T-R20-1.5D		2.0						
GSXVLLS4110T-R03-1.5D	11	0.3	16.5	—	—			
GSXVLLS4110T-R05-1.5D		0.5						
GSXVLLS4110T-R10-1.5D		1.0						
GSXVLLS4110T-R20-1.5D		2.0						
GSXVLLS4120T-R03-1.5D	12	0.3	18.0	60	11.7			
GSXVLLS4120T-R05-1.5D		0.5						
GSXVLLS4120T-R10-1.5D		1.0						
GSXVLLS4120T-R20-1.5D		2.0						
GSXVLLS4120T-R30-1.5D		3.0						
GSXVLLS4130T-R05-1.5D	13	0.5	19.5	—	—	120		
GSXVLLS4130T-R10-1.5D		1.0						
GSXVLLS4130T-R20-1.5D		2.0						
GSXVLLS4130T-R30-1.5D		3.0						
GSXVLLS4160T-R10-1.5D	16	1.0	24.0	80	15.5	140		
GSXVLLS4160T-R20-1.5D		2.0						
GSXVLLS4160T-R30-1.5D		3.0						
GSXVLLS4170T-R10-1.5D	17	1.0	25.5	—	—	150		
GSXVLLS4170T-R20-1.5D		2.0						
GSXVLLS4170T-R30-1.5D		3.0						
GSXVLLS4200T-R10-1.5D	20	1.0	30.0	100	19.5	160	20	
GSXVLLS4200T-R20-1.5D		2.0						
GSXVLLS4200T-R30-1.5D		3.0						

圆弧半径公差：+ 0.02 ~ - 0.01



外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ - 0.015
3	12	0 ~ - 0.020
12		0 ~ - 0.030

4GEOLS-R

X's 铣刀 GEO 长柄 圆角型
X's-mill Geo Radius Long Shank

- 适用于模具和机械零部件的深位置 R 角加工。
- 在深壁加工中，也能实现高精度加工。

This end mill meets accurate surface in deep side face, and is used for corner radius.

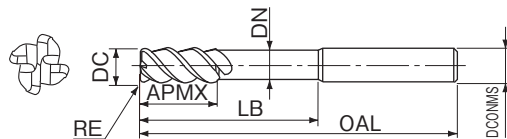

LIST 9348

切削条件 Cutting Condition ▶▶D-117

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
4GEOLS3R0.2	3	0.2	4.5	12	2.9			
4GEOLS3R0.5		0.5						
4GEOLS4R0.2	4	0.2	6.0	16	3.8			
4GEOLS4R0.5		0.5						
4GEOLS5R0.2	5	0.2	7.5	20	4.8			
4GEOLS5R0.5		0.5						
4GEOLS6R0.3	6	0.3	9.0	24	5.8			
4GEOLS6R0.5		0.5						
4GEOLS7R0.3	7	0.3	10.5	—	—			
4GEOLS7R0.5		0.5						
4GEOLS8R0.5	8	0.5	12.0	34	7.7			
4GEOLS8R1		1.0						
4GEOLS9R0.5	9	0.5	13.5	—	—	90		
4GEOLS9R1		1.0						
4GEOLS10R0.5	10	0.5	15.0	42	9.7	100		
4GEOLS10R1		1.5						
4GEOLS10R1.5		1.5						
4GEOLS11R0.5	11	0.5	16.5	—	—			
4GEOLS11R1		1.5						
4GEOLS11R1.5		1.5						
4GEOLS12R0.5	12	0.5	18.0	50	11.7			
4GEOLS12R1		1.0						
4GEOLS12R1.5		1.5						
4GEOLS13R0.5	13	0.5	19.5	—	—	130		
4GEOLS13R1		1.0						
4GEOLS13R1.5		1.5						
4GEOLS16R1	16	1.0	24.0	66	15.5	160		
4GEOLS16R1.5		1.5						
4GEOLS16R2		2.0						
4GEOLS17R1	17	1.0	25.5	—	—	170		
4GEOLS17R1.5		1.5						
4GEOLS17R2		2.0						
4GEOLS20R1	20	1.0	30.0	82	19.5	200	20	
4GEOLS20R1.5		1.5						
4GEOLS20R2		2.0						


外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	3	- 0.014 ~ - 0.028	
3	6	- 0.020 ~ - 0.038	+ 0.02 ~ - 0.01
6	10	- 0.025 ~ - 0.047	
10		- 0.032 ~ - 0.059	

GSXVL6-R-2.5D

GSX 铣刀 VL 多刃圆角型 2.5D
GSX MILL VL Multi-Flutes Radius 2.5D

- 通过采用不等分割、不等导程，实现高速、高质量加工。钢用。

Using unequal spacing of teeth and variable leads make high-speed and high-quality work possible. For Steel.



LIST 9110

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL6080-R03-2.5D	6	0.3	15	50	6	
GSXVL6080-R05-2.5D		0.5				
GSXVL6080-R10-2.5D		1.0				
GSXVL6080-R03-2.5D	8	0.3	20	60	8	
GSXVL6080-R05-2.5D		0.5				
GSXVL6080-R10-2.5D		1.0				
GSXVL6100-R03-2.5D	10	0.3	25	70	10	
GSXVL6100-R05-2.5D		0.5				
GSXVL6100-R10-2.5D		1.0				
GSXVL6100-R20-2.5D	12	2.0	30	75	12	
GSXVL6120-R05-2.5D		0.5				
GSXVL6120-R10-2.5D		1.0				
GSXVL6120-R20-2.5D	16	2.0	40	90	16	
GSXVL6120-R30-2.5D		3.0				
GSXVL6160-R10-2.5D		1.0	50	100	20	
GSXVL6160-R20-2.5D	20	2.0				
GSXVL6160-R30-2.5D		3.0				
GSXVL6200-R10-2.5D	20	1.0	50	100	20	
GSXVL6200-R20-2.5D		2.0				
GSXVL6200-R30-2.5D		3.0				


外径公差: +0.015 ~ 0 圆弧半径公差: + 0.02 ~ - 0.01

GSXVL6T-R-2.5D

GSX 铣刀 VL 多刃圆角型 2.5D 耐热合金用
GSX MILL VL Multi-Flutes Radius 2.5D for Ti-SUS

- 通过采用不等分割、不等导程，实现高速、高质量加工。

Using unequal spacing of teeth and variable leads make high-speed and high-quality work possible.

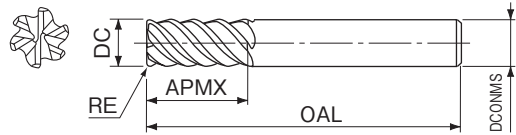

LIST 9108

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSXVL6080T-R03-2.5D	6	0.3	15	50	6	
GSXVL6080T-R05-2.5D		0.5				
GSXVL6080T-R10-2.5D		1.0				
GSXVL6080T-R03-2.5D	8	0.3	20	60	8	
GSXVL6080T-R05-2.5D		0.5				
GSXVL6080T-R10-2.5D		1.0				
GSXVL6100T-R03-2.5D	10	0.3	25	70	10	
GSXVL6100T-R05-2.5D		0.5				
GSXVL6100T-R10-2.5D		1.0				
GSXVL6100T-R20-2.5D	12	2.0	30	75	12	
GSXVL6120T-R05-2.5D		0.5				
GSXVL6120T-R10-2.5D		1.0				
GSXVL6120T-R20-2.5D	16	2.0	40	90	16	
GSXVL6120T-R30-2.5D		3.0				
GSXVL6160T-R10-2.5D		1.0	50	100	20	
GSXVL6160T-R20-2.5D	20	2.0				
GSXVL6160T-R30-2.5D		3.0				
GSXVL6200T-R10-2.5D	20	1.0	50	100	20	
GSXVL6200T-R20-2.5D		2.0				
GSXVL6200T-R30-2.5D		3.0				

圆弧半径公差: + 0.02 ~ - 0.01

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	12	0 ~ - 0.02
12		0 ~ - 0.03

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

GSH-R

GS 铣刀 高硬圆角型

GS MILL Hard Radius

GSRE-R

GS 铣刀 粗铣圆角型




GS MILL Roughing Radius

- 耐磨损性能出色，适合用于高硬度钢的 R 角和仿形加工。

This end mill is suitable for corner R and profile milling of the Hardened Steel.

- 适合用于从普通钢材到不锈钢的 R 角和仿形加工的高效率粗加工。

This end mill is suitable for high efficiency rough milling of corner R and profile milling from Steel to Stainless Steel.



LIST 9434

切削条件 Cutting Condition ●▶D-120

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock								
GSH6060SF-R02	6	0.2	13	50	6	6	●								
GSH6060SF-R05		0.5													
GSH6060SF-R10		1.0													
GSH6080SF-R02	8	0.2	19	60	8			6	●						
GSH6080SF-R05		0.5													
GSH6080SF-R10		1.0													
GSH6100SF-R05	10	0.5	22	70	10					6	●				
GSH6100SF-R10		1.0													
GSH6100SF-R15		1.5													
GSH6100SF-R20	12	2.0	26	75	12							6	●		
GSH6120SF-R05		0.5													
GSH6120SF-R10		1.0													
GSH6120SF-R15	16	1.5	32	90	16	8								●	
GSH6120SF-R20		2.0													
GSH6160SF-R10		1.0													
GSH6160SF-R15	20	1.5	38	100	20			8							●
GSH6160SF-R20		2.0													
GSH8200SF-R10		1.0													
GSH8200SF-R15	20	1.5	38	100	20		8			●					
GSH8200SF-R20		2.0													

LIST 9436

切削条件 Cutting Condition ●▶D-123

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GSRE4060SF-R05	6	0.5	13	50	6	●
GSRE4060SF-R10		1.0				
GSRE4080SF-R05	8	0.5	19	60	8	
GSRE4080SF-R10		1.0				
GSRE4100SF-R10	10	1.0	22	70	10	
GSRE4100SF-R15		1.5				
GSRE4100SF-R20		2.0				
GSRE4120SF-R10	12	1.0	26	75	12	
GSRE4120SF-R15		1.5				
GSRE4120SF-R20		2.0				
GSRE4160SF-R20	16	2.0	32	90	16	
GSRE4160SF-R25		2.5				
GSRE4160SF-R30		3.0				
GSRE4160SF-R40		4.0				
GSRE4200SF-R25	20	2.5	38	100	20	
GSRE4200SF-R30		3.0				
GSRE4200SF-R40		4.0				

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	○	○	○	○	○	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
○	—	—	—	—	—	—



◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	○	○	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

- 适用于从新材到淬火钢的多种材料。通过使用 GSX II 涂层，提高耐热性和耐磨性。

This end mill is suitable for workpiece materials from Unhardened Steel to Hardened Steel. GSX II coating for greater heat and wear resistance.



LIST 9186

切削条件 Cutting Condition ▶▶D-125

订货方式 商品编码



单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈部半角 BHTA	全长 OAL	柄径 DCONMS	库存 Stock
GSXB20020	0.20	0.4	0.6	10°	50	4	●
GSXB20030	0.30	0.6	0.9				
GSXB20050	0.50	1.0	1.5				
GSXB20075	0.75	1.5	2.5	15°	60	6	
GSXB20100	1.00	2.0	3.0				
GSXB20125	1.25	2.5	4.0				
GSXB20150	1.50	3.0	4.5	—	70	8	
GSXB20200	2.00	4.0	6.0				
GSXB20250	2.50	5.0	7.5				
GSXB20300	3.00	6.0	9.0	—	80	10	
GSXB20350	3.50	7.0	11.0				
GSXB20400	4.00	8.0	12.0				
GSXB20500	5.00	10.0	15.0	—	100	10	
GSXB20600	6.00	12.0	18.0				
GSXB20700	7.00	14.0	21.0				
GSXB20800	8.00	16.0	24.0	—	110	12	
GSXB20900	9.00	18.0	27.0				
GSXB21000	10.00	20.0	30.0				

球头半径 RE (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	R2.5	+0.006 ~ -0.014	+0.003 ~ -0.007
R2.5	R6	0 ~ -0.02	± 0.01
R6		0 ~ -0.03	

- 适用于从新材到淬火钢的多种材料。适用于模具的刻模加工。

This end mill is suitable for workpiece materials from unhardened steel to hardened material, and is used in profile milling.



LIST 9386

切削条件 Cutting Condition ▶▶D-125

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈部半角 BHTA	全长 OAL	柄径 DCONMS	库存 Stock
2GSR0.5	0.50	1.0	1.5	10°	50	4	●
2GSR0.75	0.75	1.5	2.5				
2GSR1	1.00	2.0	3.0				
2GSR1.25	1.25	2.5	4.0	15°	60	6	
2GSR1.5	1.50	3.0	4.5				
2GSR2	2.00	4.0	6.0				
2GSR2.5	2.50	5.0	7.5	—	70	8	
2GSR3	3.00	6.0	9.0				
2GSR4	4.00	8.0	12.0				
2GSR5	5.00	10.0	15.0	—	100	10	
2GSR6	6.00	12.0	21.0				

公差 Tolerance (mm)	
外径 DC	RE
0 ~ -0.030	± 0.01

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
—	◎	○	○	—	—



◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
◎	◎	◎	◎	◎	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
—	◎	○	○	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 适用于从模具钢到高硬度钢的多种材料。
- 适合于模具的精加工。

This end mill is suitable for workpiece materials from Mold Steel to Hardened Steel.
Ideal for finishing molds.

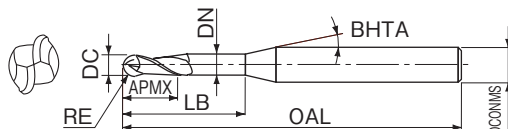

LIST 9340

切削条件 Cutting Condition ● D-126

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈长 LB	颈部半角 BHTA	全长 OAL	柄径 DCONMS	库存 Stock
2GEOR0.5	0.50	1.0	1.5	3	10°	50	4	
2GEOR0.75	0.75	1.5	2.5	4				
2GEOR1	1.00	2.0	3.0	5		60		
2GEOR1.25	1.25	2.5	4.0	6				
2GEOR1.5	1.50	3.0	4.5	8	15°	80	6	
2GEOR2	2.00	4.0	6.0	12		90		
2GEOR2.5	2.50	5.0	7.5	14				
2GEOR3	3.00	6.0	9.0	—	—	100	8	
2GEOR3.5	3.50	7.0	11.0	20	20°			
2GEOR4	4.00	8.0	12.0	—	—			
2GEOR4.5	4.50	9.0	14.0	25	20°	120	10	
2GEOR5	5.00	10.0	15.0	—	—			
2GEOR5.5	5.50	11.0	17.0	30	20°			
2GEOR6	6.00	12.0	18.0	—	—		12	
2GEOR6.5	6.50	13.0	20.0	35	20°			
2GEOR7	7.00	14.0	21.0	38	—	160	16	
2GEOR7.5	7.50	15.0	23.0	40	20°			
2GEOR8	8.00	16.0	24.0	—	—			
2GEOR9	9.00	18.0	27.0	50	20°			
2GEOR10	10.00	20.0	30.0	—	—	180	20	
2GEOR12.5	12.50	25.0	38.0	—	—		25	
2GEOR15	15.00	30.0	45.0	80	20°	200	32	


球头半径 RE (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	8	0 ~ -0.03	± 0.01
8		0 ~ -0.04	

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
◎	◎	◎	◎	◎	◎	○
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 适用于从新材到淬火钢的多种材料。
- 适用于模具的刻模加工。

This end mill is suitable for workpiece materials from Unhardened Steel to Hardened Steel.
Suitable for die milling.



新商品

LIST 9278

订货方式 商品编码

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2PLXSR0.2	0.20	0.4	0.8	45	4	
2PLXSR0.25	0.25	0.5	1.0			
2PLXSR0.3	0.30	0.6	1.2	50		
2PLXSR0.35	0.35	0.7				
2PLXSR0.4	0.40	0.8	1.6		55	
2PLXSR0.45	0.45	0.9				
2PLXSR0.5	0.50	1.0	2.5			
2PLXSR0.55	0.55	1.1				
2PLXSR0.6	0.60	1.2	3.0		60	
2PLXSR0.65	0.65	1.3				
2PLXSR0.7	0.70	1.4	3.5	55		
2PLXSR0.75	0.75	1.5				
2PLXSR0.8	0.80	1.6	4.0		70	
2PLXSR0.85	0.85	1.7				
2PLXSR0.9	0.90	1.8	4.5			
2PLXSR0.95	0.95	1.9				
2PLXSR1	1.00	2.0	5.0		80	
2PLXSR1.05	1.05	2.1				
2PLXSR1.1	1.10	2.2	6.0	60		
2PLXSR1.15	1.15	2.3				
2PLXSR1.2	1.20	2.4			8.0	
2PLXSR1.25	1.25	2.5				
2PLXSR1.3	1.30	2.6				
2PLXSR1.35	1.35	2.7				
2PLXSR1.4	1.40	2.8			10.0	
2PLXSR1.45	1.45	2.9				
2PLXSR1.5	1.50	3.0				
2PLXSR1.55	1.55	3.1				
2PLXSR1.6	1.60	3.2			12.0	
2PLXSR1.65	1.65	3.3				
2PLXSR1.7	1.70	3.4				
2PLXSR1.75	1.75	3.5				
2PLXSR1.8	1.80	3.6			14.0	
2PLXSR1.85	1.85	3.7				
2PLXSR1.9	1.90	3.8				
2PLXSR1.95	1.95	3.9				
2PLXSR2	2.00	4.0			100	
2PLXSR2.05	2.05	4.1				
2PLXSR2.1	2.10	4.2				
2PLXSR2.15	2.15	4.3				
2PLXSR2.2	2.20	4.4			90	
2PLXSR2.25	2.25	4.5				
2PLXSR2.3	2.30	4.6				
2PLXSR2.35	2.35	4.7				
2PLXSR2.4	2.40	4.8			100	
2PLXSR2.45	2.45	4.9				
2PLXSR2.5	2.50	5.0				
2PLXSR2.55	2.55	5.1				
2PLXSR2.6	2.60	5.2			100	
2PLXSR2.65	2.65	5.3				
2PLXSR2.7	2.70	5.4				
2PLXSR2.75	2.75	5.5				
2PLXSR2.8	2.80	5.6			100	
2PLXSR2.85	2.85	5.7				
2PLXSR2.9	2.90	5.8				
2PLXSR2.95	2.95	5.9				
2PLXSR3	3.00	6.0			100	
2PLXSR3.05	3.05	6.1				
2PLXSR3.1	3.10	6.2				
2PLXSR3.15	3.15	6.3				
2PLXSR3.2	3.20	6.4			100	
2PLXSR3.25	3.25	6.5				
2PLXSR3.3	3.30	6.6				
2PLXSR3.35	3.35	6.7				
2PLXSR3.4	3.40	6.8			100	
2PLXSR3.45	3.45	6.9				

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2PLXSR3.5	3.50	7.0	14.0		6	
2PLXSR3.55	3.55	7.1			8	
2PLXSR3.6	3.60	7.2				
2PLXSR3.65	3.65	7.3				
2PLXSR3.7	3.70	7.4			100	
2PLXSR3.75	3.75	7.5				
2PLXSR3.8	3.80	7.6				
2PLXSR3.85	3.85	7.7				
2PLXSR3.9	3.90	7.8			18.0	
2PLXSR3.95	3.95	7.9				
2PLXSR4	4.00	8.0				
2PLXSR4.05	4.05	8.1				
2PLXSR4.1	4.10	8.2			110	
2PLXSR4.15	4.15	8.3				
2PLXSR4.2	4.20	8.4				
2PLXSR4.25	4.25	8.5				
2PLXSR4.3	4.30	8.6			20.0	
2PLXSR4.35	4.35	8.7				
2PLXSR4.4	4.40	8.8				
2PLXSR4.45	4.45	8.9				
2PLXSR4.5	4.50	9.0			10	
2PLXSR4.55	4.55	9.1				
2PLXSR4.6	4.60	9.2				
2PLXSR4.65	4.65	9.3				
2PLXSR4.7	4.70	9.4			22.0	
2PLXSR4.75	4.75	9.5				
2PLXSR4.8	4.80	9.6				
2PLXSR4.85	4.85	9.7				
2PLXSR4.9	4.90	9.8			120	
2PLXSR4.95	4.95	9.9				
2PLXSR5	5.00	10.0				
2PLXSR5.25	5.25	10.5				
2PLXSR5.5	5.50	11.0			24.0	
2PLXSR5.75	5.75	11.5				
2PLXSR6	6.00	12.0				
2PLXSR6.25	6.25	12.5				
2PLXSR6.5	6.50	13.0			26.0	
2PLXSR6.75	6.75	13.5				
2PLXSR7	7.00	14.0				
2PLXSR7.25	7.25	14.5				
2PLXSR7.5	7.50	15.0			30.0	
2PLXSR7.75	7.75	15.5				
2PLXSR8	8.00	16.0				
2PLXSR8.25	8.25	16.5				
2PLXSR8.5	8.50	17.0			32.0	
2PLXSR8.75	8.75	17.5				
2PLXSR9	9.00	18.0				
2PLXSR9.25	9.25	18.5				
2PLXSR9.5	9.50	19.0			40.0	
2PLXSR9.75	9.75	19.5				
2PLXSR10	10.00	20.0				
2PLXSR10.5	10.50	21.0				
2PLXSR11	11.00	22.0			45.0	
2PLXSR11.5	11.50	23.0				
2PLXSR12	12.00	24.0				
2PLXSR12.5	12.50	25.0				
2PLXSR13	13.00	26.0			50.0	
2PLXSR13.5	13.50	27.0				
2PLXSR14	14.00	28.0				
2PLXSR14.5	14.50	29.0				
2PLXSR15	15.00	30.0			60.0	

球头半径 RE (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	3	-0.004 ~ -0.022	±0.01
3	5	-0.005 ~ -0.027	
5	9	-0.006 ~ -0.033	
9		-0.007 ~ -0.040	

※涂层从 X's 涂层变更为 GSX 涂层生产。
※ Manufactured by changing from X's coating to GSX coating.

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



●泛用硬质合金球头立铣刀。

This is general carbide ball end mill for profile milling.

●硬质合金整体型小直径球头立铣刀。

●适用于精密模具、精密零部件的 R 加工和微铣削加工。

This is miniature carbide end mill for precision molds or precision parts, and is used in corner radius milling or pick feed milling.



LIST 9458

切削条件 Cutting Condition ●D-127

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2CER1.5	1.5	3	8	60	6	●
2CER2	2.0	4		70		
2CER2.5	2.5	5	10	80		
2CER3	3.0	6	12	90		
2CER4	4.0	8	14	100	8	
2CER5	5.0	10	18		10	
2CER6	6.0	12	22	110	12	
2CER7	7.0	14	26	120	16	
2CER8	8.0	16	30	140		
2CER10	10.0	20	38	160	20	

球头半径 RE (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	1.5	-0.005 ~ -0.028	+0.02 ~ -0.01
1.5	3	-0.015 ~ -0.038	
3	9	-0.020 ~ -0.047	
9		-0.020 ~ -0.053	

柄径 DCONMS (mm)	公差 Tolerance (mm)
4 ~ 16	-0.003 ~ -0.010
20	-0.003 ~ -0.013

LIST 9292

切削条件 Cutting Condition ●D-128

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2MNER0.05	0.05	0.1	0.2	40	3	
2MNER0.1	0.10	0.2	0.4			
2MNER0.15	0.15	0.3	1.0			
2MNER0.2	0.20	0.4				
2MNER0.25	0.25	0.5				
2MNER0.3	0.30	0.6	2.0			
2MNER0.35	0.35	0.7				
2MNER0.4	0.40	0.8				
2MNER0.45	0.45	0.9	2.5			
2MNER0.5	0.50	1.0				
2MNER0.55	0.55	1.1			3.0	
2MNER0.6	0.60	1.2				
2MNER0.65	0.65	1.3				
2MNER0.7	0.70	1.4				
2MNER0.75	0.75	1.5	5.0			
2MNER0.8	0.80	1.6				
2MNER0.85	0.85	1.7				
2MNER0.9	0.90	1.8				
2MNER0.95	0.95	1.9				
2MNER1	1.00	2.0				

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
○	○	○	○	○	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
○	○	○	○	○	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


2GEOLSR

X's 铣刀 GEO 长柄 球型

X's-mill Geo Ball Long Shank

●长柄型。适合用于深位置的仿形加工。

This end mill having long shank is used in deep profile milling.

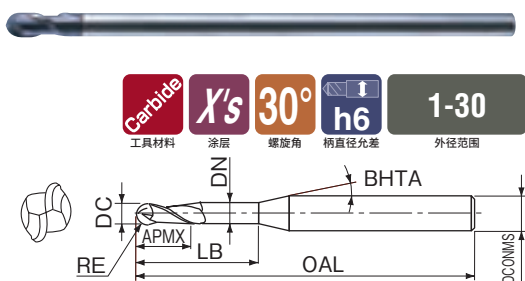

LIST 9342

切削条件 Cutting Condition ▶▶D-126

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈长 LB	颈部半角 BHTA	全长 OAL	柄径 DCONMS	库存 Stock
2GEOLSR0.5	0.5	1	1.5	6	10°	80	4	
2GEOLSR1	1.0	2	3.0	10		90		
2GEOLSR1.5	1.5	3	4.5	12	15°	120	6	
2GEOLSR2	2.0	4	6.0	15		140		
2GEOLSR2.5	2.5	5	7.5	20				
2GEOLSR3	3.0	6	9.0	—		160		
2GEOLSR3.5	3.5	7	11.0	25	20°		8	
2GEOLSR4	4.0	8	12.0			180		
2GEOLSR5	5.0	10	15.0	—		200	10	
2GEOLSR6	6.0	12	18.0				12	
2GEOLSR7	7.0	14	21.0	50				
2GEOLSR8	8.0	16	24.0	—			16	
2GEOLSR9	9.0	18	27.0	65	20°			
2GEOLSR10	10.0	20	30.0	—		230	20	
2GEOLSR12.5	12.5	25	38.0	—			25	
2GEOLSR15	15.0	30	45.0	100	20°		32	

注：外径 DC < 颈径 D₁ (颈径 = 外径 + 约 0.05mm)

球头半径 RE (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
8	8	
8	8	0 ~ -0.03
8	8	0 ~ -0.04

2MMR


模具用 球型

Mold Meister Ball

●适合用于精密模具的少量研磨加工。

●R 精度 ±3μm, R 精度范围 180°

This end mill is the best in manual polish less milling of precise die and mold. Ball tolerance ±3 μm. Ball accuracy range 180°.

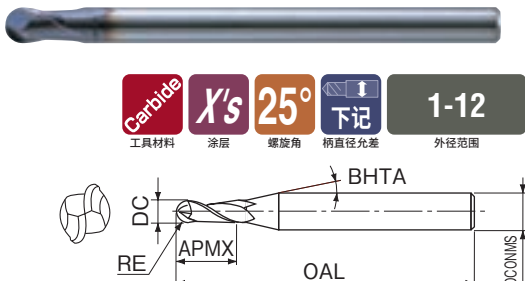

LIST 9408

切削条件 Cutting Condition ▶▶D-126

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈部半角 BHTA	全长 OAL	柄径 DCONMS	库存 Stock
2MMR0.5	0.50	1.0	1.5	10°	50	4	
2MMR0.75	0.75	1.5	2.5				
2MMR1	1.00	2.0	3.0		60		
2MMR1.25	1.25	2.5	4.0	15°	80	6	
2MMR1.5	1.50	3.0	4.5				
2MMR2	2.00	4.0	6.0		90		
2MMR2.5	2.50	5.0	7.5				
2MMR3	3.00	6.0	9.0		100	8	
2MMR4	4.00	8.0	12.0				
2MMR5	5.00	10.0	15.0		120	10	
2MMR6	6.00	12.0	18.0			12	

允差 Tolerance (mm)	
外径 DC	球头半径 RE
± 0.006	± 0.003

R 精度 ±3μm
Ball tolerance

R 精度范围 180°
Ball accuracy range

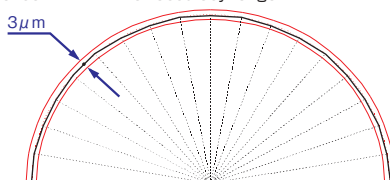

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
◎	◎	◎	◎	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
—	◎	○	○	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
◎	◎	◎	◎	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
—	◎	○	○	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●对模具等的曲面可实现高效率、高精度的曲面加工。

High efficiency and highly precise processing of profile milling on dies are available with using newly developed CAD/CAM system.




●勺 (S) 型

LIST 9358

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	规格型号 Type	外径 DC	A 半径 A Radius	B 半径 B Radius	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
OVM6 × 1	6 × 1	6	1.0	3	7.0	100	6	●
OVM10 × 1.5	10 × 1.5	10	1.5	5	11.5	120	10	
OVM12 × 1.5	12 × 1.5	12		6	13.5		12	
OVM12 × 3	12 × 3		16		3.0	15.0	160	
OVM16 × 1.5	16 × 1.5	20		1.5		8		
OVM20 × 1.5	20 × 1.5		10		21.5			



●蛋 (E) 型


LIST 9358

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	规格型号 Type	外径 DC	A 半径 A Radius	B 半径 B Radius	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
OVM12 × 12	12 × 12	12	12	6	24	120	12	●
OVM12 × 18	12 × 18		18		30			
OVM12 × 24	12 × 24		24		36			
OVM16 × 24	16 × 24	16	32	8	40	160	16	
OVM16 × 32	16 × 32				48			

外径公差 : 0 ~ 0.02mm
Tolerance of Mill Dia.




勺 (S) 型



蛋 (E) 型

●适用于高硬度材模具的高速精加工。

Suitable for high efficiency and high precision finishing of
Hardened Steel Mold.



新商品

LIST 9422

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈长 LB	颈部半角 BHTA	全长 OAL	柄径 DCONMS	库存 Stock
GSBH20020SF	0.20	0.4	0.4	0.6	10°	50	4	
GSBH20030SF	0.30	0.6	0.6	0.9				
GSBH20050SF	0.50	1.0	1.0	1.5				
GSBH20075SF	0.75	1.5	1.5	2.3				
GSBH20100SF	1.00	2.0	2.0	3.0	15°	60	6	
GSBH20125SF	1.25	2.5	2.5	3.8				
GSBH20150SF	1.50	3.0	3.0	4.5				
GSBH20200SF	2.00	4.0	4.0	6.0		70		
GSBH20250SF	2.50	5.0	5.0	7.5		80		
GSBH20300SF	3.00	6.0	6.0	—	—	90	8	
GSBH20400SF	4.00	8.0	8.0			100	10	
GSBH20500SF	5.00	10.0	10.0			110	12	
GSBH20600SF	6.00	12.0	12.0					

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引




无缝隙的一次走刀研磨加工
“One-Pass” grinding

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	○	◎	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
◎	—	—	—	—	—	—

◎:优选 Excellent ○:适用 Good X:不适用 Not Used —:不推荐 Not recommended

- CBN 球头立铣刀。
- 适用于高硬度材模具的高速精加工。

Suitable for high efficiency and high precision finishing of
Hardened Steel Mold.



LIST 9426

订货方式 商品编码

● 4mm 柄系列

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈长 LB	全长 OAL	柄径 DCONMS	库存 Stock
BNBP20200124	0.20	0.4	0.3	1.2	50	4	●
BNBP20300154	0.30	0.6	0.4	1.5			
BNBP20500254	0.50	1.0	0.6	2.5			
BNBP20750404	0.75	1.5	0.9	4.0			
BNBP21000554	1.00	2.0	1.4	5.5			

● 6mm 柄系列

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈长 LB	全长 OAL	柄径 DCONMS	库存 Stock
BNBP20200126	0.20	0.4	0.3	1.2	50	6	●
BNBP20300156	0.30	0.6	0.4	1.5			
BNBP20500256	0.50	1.0	0.6	2.5			
BNBP20750406	0.75	1.5	0.9	4.0			
BNBP21000556	1.00	2.0	1.4	5.5			

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	○	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
◎	—	—	—	—	—	—



◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

基准切削条件 Standard Cutting Condition

被削材 Work Material	STAVAX, NAK80, SKD61 40 ~ 52HRC				SKD11 52 ~ 62HRC				SKH 60 ~ 70HRC				
球头半径 Ball radius (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/tooth)	切削量 D.O.C.		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/tooth)	切削量 D.O.C.		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/tooth)	切削量 D.O.C.		
			a _p mm	P _f mm			a _p mm	P _f mm			a _p mm	P _f mm	
RE0.2	20,000 ~ 50,000	0.02	0.03	0.03	20,000 ~ 50,000	0.02	0.01	0.02	20,000 ~ 50,000	0.015	0.01	0.02	
RE0.3	20,000 ~ 50,000	0.02	0.03	0.03	20,000 ~ 50,000	0.02	0.01	0.02	20,000 ~ 50,000	0.015	0.01	0.02	
RE0.5	20,000 ~ 50,000	0.03	0.05	0.05	20,000 ~ 50,000	0.03	0.03	0.04	20,000 ~ 50,000	0.020	0.02	0.03	
RE0.75	20,000 ~ 50,000	0.04	0.08	0.10	20,000 ~ 50,000	0.04	0.05	0.05	20,000 ~ 50,000	0.030	0.02	0.05	
RE1.0	20,000 ~ 50,000	0.05	0.10	0.10	17,000 ~ 50,000	0.05	0.05	0.05	17,000 ~ 50,000	0.030	0.03	0.05	

- 1) 为了进行稳定的切削加工, 请使用刚性高的机械。
- 2) 推荐使用气吹、油雾。
- 3) 使用时, 工具的突出量尽量缩短。


- 1) For stable machining, a more rigid machine is recommended.
- 2) Air blow or oil mist coolant is recommended.
- 3) Shorten overhang as much as possible.

NBNES1/NBNESL1

CBN 螺旋精铣刀 1 刃型 / 长刃 1 刃型

CBN Helical Finish Master 1 Flute/1 Flute Long

- CBN 1 刃型立铣刀。
 - 采用螺旋刃，适用于高硬度钢的高精度精加工。
- This is suitable for Hardened Steel in high accuracy finish milling.

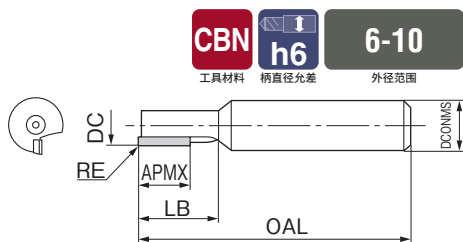

● NBNES1

订货方式 商品编码

单位 (Unit) : mm


商品编码 Code	外径 DC	R 角 RE	刃长 APMX	颈长 LB	全长 OAL	柄径 DCONMS	库存 Stock
NBNES1060-R02	6	0.2	8	12	60	10	□
NBNES1060-R05		0.5					
NBNES1070-R02	7	0.2	10	14			
NBNES1070-R05		0.5					
NBNES1080-R02	8	0.2	12	16	70		
NBNES1080-R05		0.5					
NBNES1090-R02	9	0.2	14	18			□
NBNES1100-R02	10		16	21	75	12	

● NBNESL1

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	R 角 RE	刃长 APMX	颈长 LB	全长 OAL	柄径 DCONMS	库存 Stock
NBNESL1060-R02	6	0.2	12	16	60	10	□
NBNESL1070-R02	7		14	18			
NBNESL1080-R02	8		17	21	70		
NBNESL1090-R02	9		19	23			
NBNESL1100-R02	10		21	26	75	12	




NBNES2/NBNESL2

CBN 螺旋精铣刀 2 刃型 / 长刃 2 刃型

CBN Helical Finish Master 2 Flutes/2 Flutes Long

- CBN 2 刃型立铣刀。
 - 采用螺旋刃，适用于高硬度钢的高精度精加工。
- This is suitable for Hardened Steel in high accuracy finish milling.

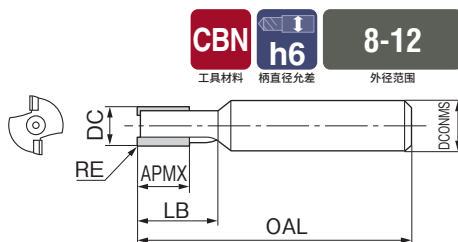

● NBNES2

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	R 角 RE	刃长 APMX	颈长 LB	全长 OAL	柄径 DCONMS	库存 Stock
NBNES2080-R02	8	0.2	12	16	70	10	□
NBNES2080-R05		0.5					
NBNES2090-R02	9	0.2	14	18			
NBNES2090-R05		0.5					
NBNES2100-R02	10	0.2	16	21	75	12	
NBNES2100-R03		0.3					
NBNES2100-R05		0.5					□
NBNES2120-R05	12		21	26	90		
NBNES2120-R10		1.0					

● NBNESL2

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	外径 DC	R 角 RE	刃长 APMX	颈长 LB	全长 OAL	柄径 DCONMS	库存 Stock
NBNESL2080-R02	8	0.2	17	21	70	10	□
NBNESL2090-R02	9		19	23			
NBNESL2100-R02	10		21	26	75	12	

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
◎	—	—	—	—	—	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

基准切削条件 Standard Cutting Condition



被削材硬度		50 ~ 57HRC			58 ~ 65HRC		
切削条件		切削速度 100 ~ 170m/min			切削速度 80 ~ 150m/min		
		转速 (min ⁻¹)	进给速度 (mm/min)	切削量 (ae) (mm)	转速 (min ⁻¹)	进给速度 (mm/min)	切削量 (ae) (mm)
立铣刀直径 (mm)	φ 6 ~ 8	4,000 ~ 9,000	240 ~ 540	~ 0.1	3,200 ~ 8,000	150 ~ 370	~ 0.08
	φ 10 ~ 12	2,700 ~ 5,400	180 ~ 360	~ 0.15	2,100 ~ 4,800	120 ~ 370	~ 0.12

- 请使用干式切削 (气吹)。
- 推荐采用顺铣。
- 请尽可能缩短工具的突出量, 并使用刚性高的设备。

切削刃为 CBN 烧结体。凭借 1 刃型或 2 刃型的螺旋刃, 可实现研磨加工级的精度。
螺旋角 NBNES1、NBNES2 : 12° / NBNESL1、NBNESL2 : 7° 外径公差 Tolerance of Mill Dia. : 0 ~ -0.03mm

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

- 铝材、铜合金专用的立铣刀。
- 可进行铝的干式加工。

This end mill is for Aluminum and Copper Alloy.

It's possible to dry process of Aluminum.



LIST 9330

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	槽刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock			
2DLCM1	1.0	3	40	4	●			
2DLCM1.1	1.1				4	●		
2DLCM1.2	1.2						□	
2DLCM1.3	1.3							
2DLCM1.4	1.4	5			□			
2DLCM1.5	1.5					●		
2DLCM1.6	1.6							
2DLCM1.7	1.7	6			□			
2DLCM1.8	1.8					●		
2DLCM1.9	1.9							
2DLCM2	2.0	8			□			
2DLCM2.1	2.1					●		
2DLCM2.2	2.2							
2DLCM2.3	2.3	10			45		□	
2DLCM2.4	2.4					●		
2DLCM2.5	2.5							
2DLCM2.6	2.6	11	6	□				
2DLCM2.7	2.7				●			
2DLCM2.8	2.8							
2DLCM2.9	2.9	13	50	□				
2DLCM3	3.0				10	45	●	
2DLCM3.1	3.1							□
2DLCM3.2	3.2							
2DLCM3.3	3.3	11	6	□				
2DLCM3.4	3.4				●			
2DLCM3.5	3.5							
2DLCM3.6	3.6	13	50	□				
2DLCM3.7	3.7				●			
2DLCM3.8	3.8							
2DLCM3.9	3.9	11	6	□				
2DLCM4	4.0				13	50	●	
2DLCM4.1	4.1							□
2DLCM4.2	4.2							
2DLCM4.3	4.3	16	60	8	□			
2DLCM4.4	4.4					●		
2DLCM4.5	4.5							
2DLCM4.6	4.6	13	50	□				
2DLCM4.7	4.7				●			
2DLCM4.8	4.8							
2DLCM4.9	4.9	16	60	8		□		
2DLCM5	5.0				13		50	●
2DLCM5.1	5.1							
2DLCM5.2	5.2							
2DLCM5.3	5.3	16	60	8	□			
2DLCM5.4	5.4					●		
2DLCM5.5	5.5							
2DLCM5.6	5.6	13	50	□				
2DLCM5.7	5.7				●			
2DLCM5.8	5.8							
2DLCM5.9	5.9	16	60	8		□		
2DLCM6	6.0				13		50	●
2DLCM6.1	6.1							
2DLCM6.2	6.2							
2DLCM6.3	6.3	16	60	8	□			
2DLCM6.4	6.4					●		
2DLCM6.5	6.5							
2DLCM6.6	6.6	13	50	□				
2DLCM6.7	6.7				●			
2DLCM6.8	6.8							
2DLCM6.9	6.9	16	60	8		□		
2DLCM7	7.0				13		50	●
2DLCM7.1	7.1							
2DLCM7.2	7.2							
2DLCM7.3	7.3	16	60	8	□			

商品编码 Code	外径 DC	槽刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock		
2DLCM7.4	7.4	16	60	8	□		
2DLCM7.5	7.5						
2DLCM7.6	7.6						
2DLCM7.7	7.7	19			70	10	●
2DLCM7.8	7.8						
2DLCM7.9	7.9						
2DLCM8	8.0						
2DLCM8.1	8.1						
2DLCM8.2	8.2						
2DLCM8.3	8.3						
2DLCM8.4	8.4						
2DLCM8.5	8.5						
2DLCM8.6	8.6		22	75			12
2DLCM8.7	8.7						
2DLCM8.8	8.8						
2DLCM8.9	8.9						
2DLCM9	9.0						
2DLCM9.1	9.1						
2DLCM9.2	9.2						
2DLCM9.3	9.3						
2DLCM9.4	9.4						
2DLCM9.5	9.5						
2DLCM9.6	9.6	26	90	16	●		
2DLCM9.7	9.7						
2DLCM9.8	9.8						
2DLCM9.9	9.9						
2DLCM10	10.0						
2DLCM10.1	10.1						
2DLCM10.2	10.2						
2DLCM10.3	10.3						
2DLCM10.4	10.4						
2DLCM10.5	10.5						
2DLCM10.6	10.6	32	100	20	●		
2DLCM10.7	10.7						
2DLCM10.8	10.8						
2DLCM10.9	10.9						
2DLCM11	11.0						
2DLCM11.1	11.1						
2DLCM11.2	11.2						
2DLCM11.3	11.3						
2DLCM11.4	11.4						
2DLCM11.5	11.5						
2DLCM11.6	11.6	38			●		
2DLCM11.7	11.7						
2DLCM11.8	11.8						
2DLCM11.9	11.9				●		
2DLCM12	12.0						
2DLCM16	16.0						
2DLCM20	20.0						

外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	3	6
		-0.014 ~ -0.028	-0.020 ~ -0.038
3	6	-0.020 ~ -0.038	-0.025 ~ -0.047
6	10	-0.025 ~ -0.047	-0.032 ~ -0.059
10		-0.032 ~ -0.059	


2DLCSC

DLC 铣刀 锋利型 2 刃型

DLC-mill Sharp Corner

- 铝材、铜合金专用的立铣刀。
- 采用刀尖锋利型。

This end mill having sharp edge corner is suitable for excellent cutting surface of Aluminum and Copper Alloy.



LIST 9378

订货方式 商品编码

切削条件 Cutting Condition ▶▶D-130

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2DLCSC1	1.0	3	40	4	●
2DLCSC1.5	1.5	4			
2DLCSC2	2.0	6			
2DLCSC2.5	2.5	8	45	6	
2DLCSC3	3.0				
2DLCSC3.5	3.5	10			
2DLCSC4	4.0	11	50		
2DLCSC4.5	4.5				
2DLCSC5	5.0	13			
2DLCSC6	6.0	16	60	8	
2DLCSC7	7.0	19			
2DLCSC8	8.0	22	70	10	
2DLCSC9	9.0	26			
2DLCSC10	10.0	32	75	12	
2DLCSC11	11.0	38			
2DLCSC12	12.0	100	90	16	
2DLCSC16	16.0	32	100	20	
2DLCSC20	20.0	38			

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.014 ~ -0.028
3	6	-0.020 ~ -0.038
6	10	-0.025 ~ -0.047
10		-0.032 ~ -0.059


2CEAL

铝用 铣刀

ANCHOR V for Aluminum

- 铝用硬质合金立铣刀。

This carbide end mills is designed for grooving of Aluminum.



LIST 9320

订货方式 商品编码

切削条件 Cutting Condition ▶▶D-131

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2CEAL2	2	6	50	4	●
2CEAL3	3	8		6	
2CEAL4	4	11			
2CEAL5	5	13			
2CEAL6	6	16	63		
2CEAL7	7	19			
2CEAL8	8	22			
2CEAL9	9	26			
2CEAL10	10	32	70	10	
2CEAL11	11	38			
2CEAL12	12	45			
2CEAL16	16	50	75	12	
2CEAL20	20	60	89	16	
2CEAL25	25	75	100	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.005 ~ -0.028
3	6	-0.015 ~ -0.038
6	18	-0.020 ~ -0.047
18		-0.020 ~ -0.053

柄径 DCONMS (mm)		公差 Tolerance (mm)
4 ~ 16	20	
-0.003 ~ -0.010	-0.003 ~ -0.013	

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
—	—	—	—	◎	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
—	—	—	—	◎	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

SL2DLCSC

DLC 铣刀 长颈锋利型 2 刃型

DLC-mill Long Sharp Corner


DLCSLTLS

DLC 铣刀 开槽 长柄型

DLC-mill SLOT Long Shank

- 适合深槽和深位置的槽加工及大面积的侧面加工的铝用立铣刀。

This end mill having long flute is suitable for used in deep grooving and long side milling of Aluminum.

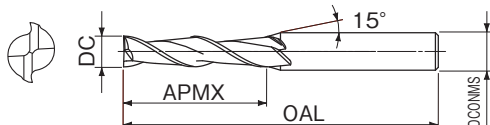

LIST 9380

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
SL2DLCSC3	3.0	12	50	6	●
SL2DLCSC3.5	3.5	15			
SL2DLCSC4	4.0	17			
SL2DLCSC4.5	4.5	20	60	8	
SL2DLCSC5	5.0				
SL2DLCSC6	6.0	25	70	10	
SL2DLCSC7	7.0	30	80		
SL2DLCSC8	8.0	34	90	12	
SL2DLCSC9	9.0				
SL2DLCSC10	10.0	50	115	16	
SL2DLCSC11	11.0	56	125	20	
SL2DLCSC12	12.0				
SL2DLCSC16	16.0				
SL2DLCSC20	20.0				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.014 ~ -0.028
3	6	-0.020 ~ -0.038
6	10	-0.025 ~ -0.047
10		-0.032 ~ -0.059

- 从铝合金的孔加工到槽切削，一般都能实现连续高效率的加工。适用于深壁加工。

This end mill is available for grooving continuously into slotting of Aluminum Alloy, and is suitable for milling in deep side face.



LIST 9390

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
DLCSLTLS2	2	3.0	8	1.9	50	4	●
DLCSLTLS3	3	4.5	12	2.9	60	6	
DLCSLTLS4	4	6.0	16	3.8			
DLCSLTLS5	5	7.5	20	4.8			
DLCSLTLS6	6	9.0	24	5.8	80	8	
DLCSLTLS7	7	10.5	—	—			
DLCSLTLS8	8	12.0	34	7.7	90	10	
DLCSLTLS9	9	13.5	—	—			
DLCSLTLS10	10	15.0	42	9.7	100	12	
DLCSLTLS11	11	16.5	—	—	120		
DLCSLTLS12	12	18.0	50	11.7	130	16	
DLCSLTLS13	13	19.5	—	—			
DLCSLTLS16	16	24.0	66	15.5	160	20	
DLCSLTLS17	17	25.5	—	—	170		
DLCSLTLS20	20	30.0	82	19.5	200		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.014 ~ -0.028
3	6	-0.020 ~ -0.038
6	10	-0.025 ~ -0.047
10		-0.032 ~ -0.059

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	—	◎	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	—	◎	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

DLCVLSLT3-2.5D

DLC 铣刀 VL 开槽型 2.5D
DLC MILL VL SLOT 2.5D

切削条件 Cutting Condition ▶ D-132



工具材料

涂层

螺旋角


耐崩型

柄直径公差

外径范围

●可抑制颤动、实现高效率加工的铝合金用立铣刀。

End mill for Aluminum Alloy suppresses chattering and is very efficient.

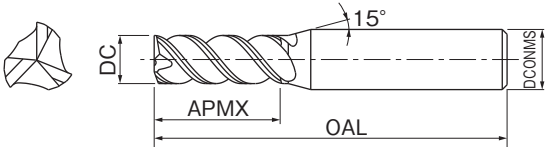

订货方式 商品编码

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVLSLT3030-2.5D	3.0	7.50	45	6	□
DLCVLSLT3031-2.5D	3.1	7.75			
DLCVLSLT3032-2.5D	3.2	8.00			
DLCVLSLT3033-2.5D	3.3	8.25			
DLCVLSLT3034-2.5D	3.4	8.50			
DLCVLSLT3035-2.5D	3.5	8.75			
DLCVLSLT3036-2.5D	3.6	9.00			
DLCVLSLT3037-2.5D	3.7	9.25			
DLCVLSLT3038-2.5D	3.8	9.50			
DLCVLSLT3039-2.5D	3.9	9.75			
DLCVLSLT3040-2.5D	4.0	10.00	50		
DLCVLSLT3041-2.5D	4.1	10.25			
DLCVLSLT3042-2.5D	4.2	10.50			
DLCVLSLT3043-2.5D	4.3	10.75			
DLCVLSLT3044-2.5D	4.4	11.00			
DLCVLSLT3045-2.5D	4.5	11.25			
DLCVLSLT3046-2.5D	4.6	11.50			
DLCVLSLT3047-2.5D	4.7	11.75			
DLCVLSLT3048-2.5D	4.8	12.00			
DLCVLSLT3049-2.5D	4.9	12.25			
DLCVLSLT3050-2.5D	5.0	12.50	60		
DLCVLSLT3051-2.5D	5.1	12.75			
DLCVLSLT3052-2.5D	5.2	13.00			
DLCVLSLT3053-2.5D	5.3	13.25			
DLCVLSLT3054-2.5D	5.4	13.50			
DLCVLSLT3055-2.5D	5.5	13.75			
DLCVLSLT3056-2.5D	5.6	14.00			
DLCVLSLT3057-2.5D	5.7	14.25			
DLCVLSLT3058-2.5D	5.8	14.50			
DLCVLSLT3059-2.5D	5.9	14.75			
DLCVLSLT3060-2.5D	6.0	15.00	70		
DLCVLSLT3061-2.5D	6.1	15.25			
DLCVLSLT3062-2.5D	6.2	15.50			
DLCVLSLT3063-2.5D	6.3	15.75			
DLCVLSLT3064-2.5D	6.4	16.00			
DLCVLSLT3065-2.5D	6.5	16.25			
DLCVLSLT3066-2.5D	6.6	16.50			
DLCVLSLT3067-2.5D	6.7	16.75			
DLCVLSLT3068-2.5D	6.8	17.00			
DLCVLSLT3069-2.5D	6.9	17.25			
DLCVLSLT3070-2.5D	7.0	17.50	80		
DLCVLSLT3071-2.5D	7.1	17.75			
DLCVLSLT3072-2.5D	7.2	18.00			
DLCVLSLT3073-2.5D	7.3	18.25			
DLCVLSLT3074-2.5D	7.4	18.50			
DLCVLSLT3075-2.5D	7.5	18.75			
DLCVLSLT3076-2.5D	7.6	19.00			
DLCVLSLT3077-2.5D	7.7	19.25			
DLCVLSLT3078-2.5D	7.8	19.50			
DLCVLSLT3079-2.5D	7.9	19.75			
DLCVLSLT3080-2.5D	8.0	20.00	90		
DLCVLSLT3081-2.5D	8.1	20.25			
DLCVLSLT3082-2.5D	8.2	20.50			
DLCVLSLT3083-2.5D	8.3	20.75			
DLCVLSLT3084-2.5D	8.4	21.00			
DLCVLSLT3085-2.5D	8.5	21.25			
DLCVLSLT3086-2.5D	8.6	21.50			
DLCVLSLT3087-2.5D	8.7	21.75			
DLCVLSLT3088-2.5D	8.8	22.00			
DLCVLSLT3089-2.5D	8.9	22.25			

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVLSLT3090-2.5D	9.0	22.50	70	10	□
DLCVLSLT3091-2.5D	9.1	22.75			
DLCVLSLT3092-2.5D	9.2	23.00			
DLCVLSLT3093-2.5D	9.3	23.25			
DLCVLSLT3094-2.5D	9.4	23.50			
DLCVLSLT3095-2.5D	9.5	23.75			
DLCVLSLT3096-2.5D	9.6	24.00			
DLCVLSLT3097-2.5D	9.7	24.25			
DLCVLSLT3098-2.5D	9.8	24.50			
DLCVLSLT3099-2.5D	9.9	24.75			
DLCVLSLT3100-2.5D	10.0	25.00	75	12	
DLCVLSLT3105-2.5D	10.5	26.25			
DLCVLSLT3110-2.5D	11.0	27.50			
DLCVLSLT3115-2.5D	11.5	28.75			
DLCVLSLT3120-2.5D	12.0	30.00			
DLCVLSLT3125-2.5D	12.5	31.25			
DLCVLSLT3130-2.5D	13.0	32.50			
DLCVLSLT3135-2.5D	13.5	33.75			
DLCVLSLT3140-2.5D	14.0	35.00			
DLCVLSLT3145-2.5D	14.5	36.25			
DLCVLSLT3150-2.5D	15.0	37.50	90	16	
DLCVLSLT3155-2.5D	15.5	38.75			
DLCVLSLT3160-2.5D	16.0	40.00			

外径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ -0.015
3	12	0 ~ -0.02
12		0 ~ -0.03

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

DLCVLSLTLS3-1.5D

DLC 铣刀 VL 开槽 长柄型 1.5D
DLC MILL VL SLOT Long Shank 1.5D

- 从铝合金的孔加工到槽切削，一般都能实现连续高效率的加工。适用于深壁加工。

This end mill is available for grooving continuously into slotting of Aluminum Alloy, and is suitable for milling in deep side face.



订货方式 商品编码 单位 (Unit) : mm 切削条件 Cutting Condition ▶▶D-133


商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
DLCVLSLTLS3030-1.5D	3.0	4.50	15.0	2.9	60	6	□
DLCVLSLTLS3035-1.5D	3.5	5.25	17.5	3.4			
DLCVLSLTLS3040-1.5D	4.0	6.00	20.0	3.8			
DLCVLSLTLS3045-1.5D	4.5	6.75	22.5	4.3			
DLCVLSLTLS3050-1.5D	5.0	7.50	25.0	4.8	80	8	
DLCVLSLTLS3055-1.5D	5.5	8.25	27.5	5.3			
DLCVLSLTLS3060-1.5D	6.0	9.00	30.0	5.8			
DLCVLSLTLS3065-1.5D	6.5	9.75	—	—			
DLCVLSLTLS3070-1.5D	7.0	10.50	—	—	90	8	
DLCVLSLTLS3075-1.5D	7.5	11.25	—	—			
DLCVLSLTLS3080-1.5D	8.0	12.00	40.0	7.7			
DLCVLSLTLS3085-1.5D	8.5	12.75	—	—			
DLCVLSLTLS3090-1.5D	9.0	13.50	—	—	100	10	
DLCVLSLTLS3095-1.5D	9.5	14.25	—	—			
DLCVLSLTLS3100-1.5D	10.0	15.00	50.0	9.7			
DLCVLSLTLS3105-1.5D	10.5	15.75	—	—			
DLCVLSLTLS3110-1.5D	11.0	16.50	—	—	110	10	
DLCVLSLTLS3115-1.5D	11.5	17.25	—	—			
DLCVLSLTLS3120-1.5D	12.0	18.00	60.0	11.7			
DLCVLSLTLS3130-1.5D	13.0	19.50	—	—			
DLCVLSLTLS3140-1.5D	14.0	21.00	70.0	13.7	120	12	
DLCVLSLTLS3150-1.5D	15.0	22.50	—	—			
DLCVLSLTLS3160-1.5D	16.0	24.00	80.0	15.5			
DLCVLSLTLS3170-1.5D	17.0	25.50	—	—			

DLCVL4-2.5D

DLC 铣刀 VL 型 2.5D
DLC MILL VL 2.5D

- 通过采用不等分割、不等导程以及锋利的刀尖形状抑制了颤动，适用于铝合金的加工。

Suitable for difficult materials such as Aluminum Alloy it has unequal tooth spacing and variable leads and a cutting edge shape with good bite to suppress chattering.



订货方式 商品编码 单位 (Unit) : mm 切削条件 Cutting Condition ▶▶D-136

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVL4030-2.5D	3	7.5	45	6	□
DLCVL4040-2.5D	4	10.0			
DLCVL4050-2.5D	5	12.5	50		
DLCVL4060-2.5D	6	15.0			
DLCVL4070-2.5D	7	17.5	60		
DLCVL4080-2.5D	8	20.0			
DLCVL4090-2.5D	9	22.5	70		
DLCVL4100-2.5D	10	25.0			
DLCVL4110-2.5D	11	27.5	75		
DLCVL4120-2.5D	12	30.0			
DLCVL4130-2.5D	13	32.5	90		
DLCVL4150-2.5D	15	37.5			
DLCVL4160-2.5D	16	40.0	100		
DLCVL4180-2.5D	18	45.0			
DLCVL4200-2.5D	20	50.0			


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	± 0.008
3	12	± 0.010
12		± 0.015

DLCVL4-4D

DLC 铣刀 VL 型 4D

DLC MILL VL 4D

●可抑制颤动、实现高效率加工的长刃型立铣刀。
Suppress chatter, do high-performance work with long cutting length.

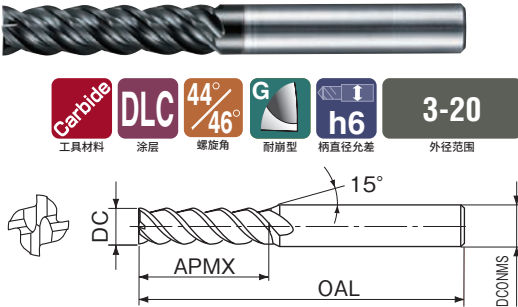

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVL4030-4D	3	12	50	6	□
DLCVL4040-4D	4	16	60	6	
DLCVL4050-4D	5	20	70	6	
DLCVL4060-4D	6	24	80	8	
DLCVL4070-4D	7	28	90	10	
DLCVL4080-4D	8	32	100	12	
DLCVL4090-4D	9	36	110	16	
DLCVL4100-4D	10	40	120	20	
DLCVL4110-4D	11	44	130	20	
DLCVL4120-4D	12	48	140	20	
DLCVL4130-4D	13	52			
DLCVL4150-4D	15	60			
DLCVL4160-4D	16	64			
DLCVL4180-4D	18	72			
DLCVL4200-4D	20	80			


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	± 0.008
3	12	± 0.010
12		± 0.015

DLCVL4-5D

DLC 铣刀 VL 型 5D

DLC MILL VL 5D

●可抑制颤动、实现高效率加工的长刃型立铣刀。
Suppress chatter, do high-performance work with long cutting length.

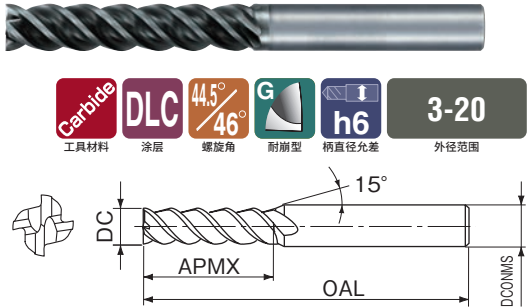

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVL4030-5D	3	15	60	6	□
DLCVL4040-5D	4	20	70	6	
DLCVL4050-5D	5	25	80	8	
DLCVL4060-5D	6	30	90	10	
DLCVL4070-5D	7	35	100	12	
DLCVL4080-5D	8	40	110	16	
DLCVL4090-5D	9	45	120	20	
DLCVL4100-5D	10	50	130	20	
DLCVL4110-5D	11	55	140	20	
DLCVL4120-5D	12	60	150	20	
DLCVL4130-5D	13	65			
DLCVL4150-5D	15	75			
DLCVL4160-5D	16	80			
DLCVL4180-5D	18	90			
DLCVL4200-5D	20	100			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


DLCVLLS4-1.5D

DLC 铣刀 VL 长柄型 1.5D

DLC MILL VL Long Shank 1.5D

- 在垂直面或深壁加工中也可抑制振刀，实现高效率、高质量加工。铝合金用。

High performance and quality drilling are possible by suppressing chatter while working on vertical faces or shaping. For Aluminum Alloy.



切削条件 Cutting Condition ▶▶D-137

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
DLCVLLS4030-1.5D	3	4.5	15	2.9	60	6	□
DLCVLLS4040-1.5D	4	6.0	20	3.8			
DLCVLLS4050-1.5D	5	7.5	25	4.8			
DLCVLLS4060-1.5D	6	9.0	30	5.8			
DLCVLLS4070-1.5D	7	10.5	—	—	80	8	
DLCVLLS4080-1.5D	8	12.0	40	7.7			
DLCVLLS4090-1.5D	9	13.5	—	—	90	10	
DLCVLLS4100-1.5D	10	15.0	50	9.7	100		
DLCVLLS4110-1.5D	11	16.5	—	—	110	12	
DLCVLLS4120-1.5D	12	18.0	60	11.7			
DLCVLLS4130-1.5D	13	19.5	—	—	120	16	
DLCVLLS4160-1.5D	16	24.0	80	15.5	140		
DLCVLLS4170-1.5D	17	25.5	—	—	150	20	
DLCVLLS4200-1.5D	20	30.0	100	19.5	160		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	±0.008
3	12	±0.010
12		±0.015


DLCVL6-2.5D

DLC 铣刀 VL 多刃型 2.5D

DLC MILL VL Multi-Flutes 2.5D

- 通过采用不等分割、不等导程，实现高速、高质量加工。铝合金用。

Using unequal spacing of teeth and variable leads make high-speed and high-quality work possible. For Aluminum Alloy.

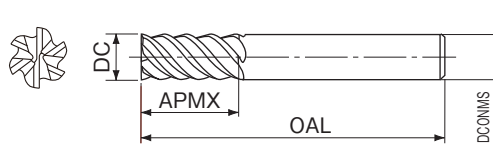

切削条件 Cutting Condition ▶▶D-137

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVL6060-2.5D	6	15	50	6	□
DLCVL6080-2.5D	8	20	60	8	
DLCVL6100-2.5D	10	25	70	10	
DLCVL6120-2.5D	12	30	75	12	
DLCVL6160-2.5D	16	40	90	16	
DLCVL6200-2.5D	20	50	100	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	12	±0.010
12		±0.015

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具



技术资料
索引

2DLCM-R

DLC 铣刀 圆角型
DLC-mill Radius

- 铝材、铜合金用的立铣刀。
- 可进行槽的 R 角部加工。

This end mill is suitable for used for corner radius milling or copying of Aluminum.



LIST 9302

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock			
2DLCM2R0.2	2	0.2	6	40	4	●			
2DLCM3R0.2	3	0.2	8	45	6				
2DLCM3R0.5		0.5							
2DLCM4R0.2	4	0.2	11						
2DLCM4R0.5		0.5							
2DLCM5R0.2	5	0.2		13	50				
2DLCM5R0.5		0.5							
2DLCM6R0.3	6	0.3	16				60	8	
2DLCM6R0.5		0.5							
2DLCM6R1	7	1.0		19					
2DLCM7R0.3		0.3							
2DLCM7R0.5	8	0.5	22		70		10		
2DLCM7R1		1.0							
2DLCM8R0.3	9	0.3		26				75	12
2DLCM8R0.5		0.5							
2DLCM8R1	10	1.0	30		80		16		
2DLCM10R0.3		0.3							
2DLCM10R0.5	11	0.5		34				85	20
2DLCM10R1		1.0							
2DLCM12R0.5	12	0.5	38		90		25		
2DLCM12R1		1.0							
2DLCM12R2	13	2.0		42				95	30
2DLCM16R0.5		0.5							
2DLCM16R1	16	1.0	46		100		35		
2DLCM16R2		2.0							
2DLCM16R3	17	3.0		50				105	40
2DLCM20R0.5		0.5							
2DLCM20R1	20	1.0	54		110		45		
2DLCM20R2		2.0							
2DLCM20R3	21	3.0		58				115	50
2DLCM25R0.5		0.5							



外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	圆弧半径 RE	公差 Tolerance (mm)
	3	0.2	+0.015 ~ 0
3	6	0.3	+0.020 ~ 0
6	10	0.5	+0.030 ~ 0
10		1.0	+0.050 ~ 0
		2.0	
		3.0	

DLCVLSLT3-R-2.5D

DLC 铣刀 VL 开槽 圆角型 2.5D
DLC MILL VL SLOT Radius 2.5D

- 可抑制颤动，从孔加工到槽切削，都能实现连续高效率的加工。铝合金用。

This end mill suppresses chatter vibration. It is available for grooving continuously into slotting. For Aluminum Alloy.

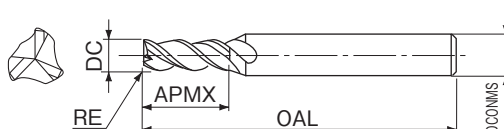

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVLSLT3030-R02-2.5D	3	0.2	7.5	45	6	□
DLCVLSLT3030-R05-2.5D		0.5				
DLCVLSLT3040-R02-2.5D	4	0.2	10.0			
DLCVLSLT3040-R05-2.5D		0.5				
DLCVLSLT3050-R02-2.5D	5	0.2	12.5	50		
DLCVLSLT3050-R05-2.5D		0.5				
DLCVLSLT3060-R03-2.5D	6	0.3	15.0			
DLCVLSLT3060-R05-2.5D		0.5				
DLCVLSLT3060-R10-2.5D		1.0				
DLCVLSLT3070-R03-2.5D	7	0.3	17.5	60		
DLCVLSLT3070-R05-2.5D		0.5				
DLCVLSLT3070-R10-2.5D		1.0				
DLCVLSLT3080-R03-2.5D	8	0.3	20.0			
DLCVLSLT3080-R05-2.5D		0.5				
DLCVLSLT3080-R10-2.5D		1.0				
DLCVLSLT3090-R03-2.5D	9	0.3	22.5	70	10	
DLCVLSLT3090-R05-2.5D		0.5				
DLCVLSLT3090-R10-2.5D		1.0				
DLCVLSLT3100-R03-2.5D	10	0.3	25.0			
DLCVLSLT3100-R05-2.5D		0.5				
DLCVLSLT3100-R10-2.5D		1.0				
DLCVLSLT3100-R20-2.5D		2.0				
DLCVLSLT3120-R05-2.5D	12	0.5	30.0			
DLCVLSLT3120-R10-2.5D		1.0				
DLCVLSLT3120-R20-2.5D		2.0				
DLCVLSLT3120-R30-2.5D		3.0				
DLCVLSLT3160-R10-2.5D	16	1.0	40.0	90	16	
DLCVLSLT3160-R20-2.5D		2.0				
DLCVLSLT3160-R30-2.5D		3.0				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



DLCVL4-R-2.5D

DLC 铣刀 VL 圆角型 2.5D

DLC MILL VL Radius 2.5D

- 可抑制颤动、实现高效率加工的铝合金用立铣刀。

End mill for Aluminum Alloy suppresses chattering and is very efficient.



切削条件 Cutting Condition ▶▶D-136

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVL4060-R03-2.5D	6	0.3	15	50	6	□
DLCVL4060-R05-2.5D		0.5				
DLCVL4060-R10-2.5D		1.0				
DLCVL4080-R03-2.5D	8	0.3	20	60	8	
DLCVL4080-R05-2.5D		0.5				
DLCVL4080-R10-2.5D		1.0				
DLCVL4100-R03-2.5D	10	0.3	25	70	10	
DLCVL4100-R05-2.5D		0.5				
DLCVL4100-R10-2.5D		1.0				
DLCVL4100-R20-2.5D	12	2.0	30	75	12	
DLCVL4120-R05-2.5D		0.5				
DLCVL4120-R10-2.5D		1.0				
DLCVL4120-R20-2.5D	16	2.0	40	90	16	
DLCVL4120-R30-2.5D		3.0				
DLCVL4160-R10-2.5D		1.0				
DLCVL4160-R20-2.5D	20	2.0	50	100	20	
DLCVL4160-R30-2.5D		3.0				
DLCVL4200-R10-2.5D		1.0				
DLCVL4200-R20-2.5D	20	2.0	80	140	20	
DLCVL4200-R30-2.5D		3.0				

外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	12	± 0.010	+ 0.02 ~
12		± 0.015	- 0.01



DLCVL4-R-4D

DLC 铣刀 VL 圆角型 4D

DLC MILL VL Radius 4D

- 可抑制颤动、实现高效率加工的铝合金用长刃型立铣刀。

Long cutting length end mill for Aluminum Alloy suppresses chattering and is very efficient.

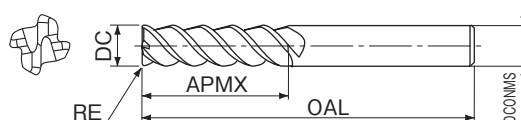

切削条件 Cutting Condition ▶▶D-136

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DLCVL4060-R03-4D	6	0.3	24	60	6	□
DLCVL4060-R05-4D		0.5				
DLCVL4060-R10-4D		1.0				
DLCVL4080-R03-4D	8	0.3	32	80	8	
DLCVL4080-R05-4D		0.5				
DLCVL4080-R10-4D		1.0				
DLCVL4100-R03-4D	10	0.3	40	90	10	
DLCVL4100-R05-4D		0.5				
DLCVL4100-R10-4D		1.0				
DLCVL4100-R20-4D	12	2.0	48	100	12	
DLCVL4120-R05-4D		0.5				
DLCVL4120-R10-4D		1.0				
DLCVL4120-R20-4D	16	2.0	64	120	16	
DLCVL4120-R30-4D		3.0				
DLCVL4160-R10-4D		1.0				
DLCVL4160-R20-4D	20	2.0	80	140	20	
DLCVL4160-R30-4D		3.0				
DLCVL4200-R10-4D		1.0				
DLCVL4200-R20-4D	20	2.0	80	140	20	
DLCVL4200-R30-4D		3.0				

外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
	12	± 0.010	+ 0.02 ~
12		± 0.015	- 0.01

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具



技术资料
索引

DLCVLS4-R-1.5D

DLC 铣刀 VL 长柄 圆角型 1.5D
DLC MILL VL Long Shank Radius 1.5D

- 在垂直面或深壁加工中也可抑制振刀，实现高效率、高质量加工。铝合金用。

High performance and quality drilling are possible by suppressing chatter while working on vertical faces or shaping. For Aluminum Alloy.

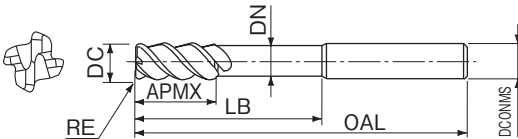

切削条件 Cutting Condition ▶▶D-137

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	库存 Stock
DLCVLS4030-R02-1.5D	3	0.2	4.5	15	2.9	60	6	
DLCVLS4030-R05-1.5D		0.5						
DLCVLS4040-R02-1.5D	4	0.2	6.0	20	3.8			
DLCVLS4040-R05-1.5D		0.5						
DLCVLS4050-R02-1.5D	5	0.2	7.5	25	4.8			
DLCVLS4050-R05-1.5D		0.5						
DLCVLS4060-R03-1.5D	6	0.3	9.0	30	5.8			
DLCVLS4060-R05-1.5D		0.5						
DLCVLS4060-R10-1.5D	6	1.0	10.5	—	—	80	8	
DLCVLS4070-R03-1.5D		0.3						
DLCVLS4070-R05-1.5D	7	0.5						
DLCVLS4070-R10-1.5D		1.0						
DLCVLS4080-R03-1.5D	8	0.3						
DLCVLS4080-R05-1.5D		0.5						
DLCVLS4080-R10-1.5D	8	1.0						
DLCVLS4090-R03-1.5D		0.3						
DLCVLS4090-R05-1.5D	9	0.5	13.5	—	—	90		
DLCVLS4090-R10-1.5D		1.0						
DLCVLS4100-R03-1.5D	10	0.3						
DLCVLS4100-R05-1.5D		0.5						
DLCVLS4100-R10-1.5D	10	1.0						
DLCVLS4100-R20-1.5D		2.0						
DLCVLS4110-R03-1.5D	11	0.3	16.5	—	—	110		
DLCVLS4110-R05-1.5D		0.5						
DLCVLS4110-R10-1.5D	11	1.0						
DLCVLS4110-R20-1.5D		2.0						
DLCVLS4120-R05-1.5D	12	0.5						
DLCVLS4120-R10-1.5D		1.0						
DLCVLS4120-R20-1.5D	12	2.0						
DLCVLS4120-R30-1.5D		3.0						
DLCVLS4130-R05-1.5D	13	0.5	19.5	—	—	120	12	
DLCVLS4130-R10-1.5D		1.0						
DLCVLS4130-R20-1.5D	13	2.0						
DLCVLS4130-R30-1.5D		3.0						
DLCVLS4160-R10-1.5D	16	1.0						
DLCVLS4160-R20-1.5D		2.0						
DLCVLS4160-R30-1.5D	16	3.0						
DLCVLS4170-R10-1.5D		17	1.0					
DLCVLS4170-R20-1.5D	2.0							
DLCVLS4170-R30-1.5D	17	3.0						
DLCVLS4200-R10-1.5D		20	1.0					
DLCVLS4200-R20-1.5D	2.0							
DLCVLS4200-R30-1.5D	20	3.0						

●铝材、铜合金用的立铣刀。


●适用于曲面加工。

This end mill is for Aluminum and Copper Alloy.
Suitable for curved surface milling.



●适用于铝合金、高硅铝合金的加工，具有长寿命的特点。

This is the best end mill for Aluminum Alloy and High-Silicon Aluminum Alloy.

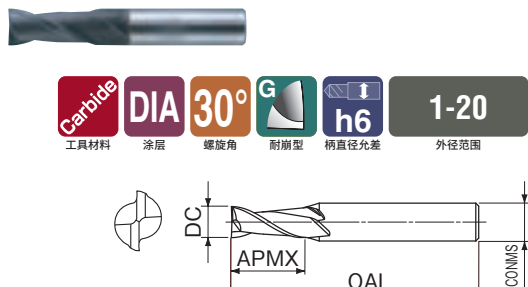

LIST 9360

切削条件 Cutting Condition ●D-138

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈长 LB	颈部半径 BHTA	全长 OAL	柄径 DCONMS	库存 Stock	
2DLCR0.5	0.50	1.0	1.5	3	10°	50	4	●	
2DLCR0.75	0.75	1.5	2.5	4		15°	60		6
2DLCR1	1.00	2.0	3.0	5			80		
2DLCR1.25	1.25	2.5	4.0	6	90				
2DLCR1.5	1.50	3.0	4.5	8			100		8
2DLCR2	2.00	4.0	6.0	12	120				
2DLCR2.5	2.50	5.0	7.5	14		160			
2DLCR3	3.00	6.0	9.0	—	180		20		
2DLCR3.5	3.50	7.0	11.0	20		20°			
2DLCR4	4.00	8.0	12.0	—	—	□			
2DLCR4.5	4.50	9.0	14.0	25	20°				
2DLCR5	5.00	10.0	15.0	—	—				
2DLCR5.5	5.50	11.0	17.0	30	20°				
2DLCR6	6.00	12.0	18.0	—	—				
2DLCR6.5	6.50	13.0	20.0	35	20°				
2DLCR7	7.00	14.0	21.0	38	—				
2DLCR7.5	7.50	15.0	23.0	40	20°				
2DLCR8	8.00	16.0	24.0	—	—				
2DLCR9	9.00	18.0	27.0	50	20°				
2DLCR10	10.00	20.0	30.0	—	—				

注：外径 DC < 颈径 DN (颈径 = 外径 + 约 0.05mm)

球头半径 RE (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	外径 DC	RE
8	8	0 ~ -0.03	± 0.01
		0 ~ -0.04	

切削条件 Cutting Condition ●D-138

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2DSE1	1.0	3	40	4	□
2DSE1.5	1.5	4			
2DSE2	2.0	6			
2DSE2.5	2.5	8	45	6	
2DSE3	3.0				
2DSE3.5	3.5	10			
2DSE4	4.0	11	50		
2DSE4.5	4.5				
2DSE5	5.0				
2DSE5.5	5.5	13	60		
2DSE6	6.0				
2DSE6.5	6.5				
2DSE7	7.0	16	70	8	
2DSE7.5	7.5				
2DSE8	8.0	19	70	10	
2DSE8.5	8.5				
2DSE9	9.0				
2DSE9.5	9.5				
2DSE10	10.0	22	75	12	
2DSE11	11.0				
2DSE12	12.0	26			
2DSE13	13.0				
2DSE14	14.0				
2DSE15	15.0	32	100	20	
2DSE16	16.0				
2DSE17	17.0				
2DSE18	18.0	38	100	20	
2DSE19	19.0				
2DSE20	20.0				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	-0.014 ~ -0.034
3	6	-0.020 ~ -0.040
6	10	-0.025 ~ -0.047
10	—	-0.032 ~ -0.059

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	—	◎	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
×	×	×	×	×	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	×	×	×	◎	○	◎

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


2DCE

金刚石涂层 铣刀 2 刃型

Diamond Coating End Mills Two Flutes

- 适用于石墨（电极）加工，相比硬质合金无处理品，具有 10 倍以上的长寿命。

This is the best end mill for graphite (electrode). The life is over 10 times of conventional carbide end mill.

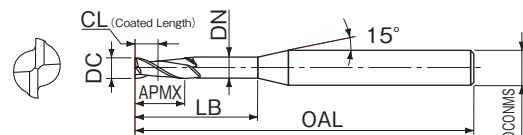

切削条件 Cutting Condition ▶ D-139

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	全长 OAL	涂层长 CL	柄径 DCONMS	库存 Stock		
2DCE0.5	0.5	1	2	40	1.0	3	□		
2DCE0.6	0.6	2	3		2.0				
2DCE0.7	0.7		4		2.5				
2DCE0.8	0.8		5						
2DCE0.9	0.9		6						
2DCE1	1.0		3	8	75	3.0		4	
2DCE1.5	1.5	4	10	4.0					
2DCE2	2.0	6	16	100	6.0	6			
2DCE2.5	2.5	8	20		8.0				
2DCE3	3.0		30		10.0				
2DCE3.5	3.5		10		35			11.0	
2DCE4	4.0	20	40		125			13.0	8
2DCE5	5.0	25	50	16.0					
2DCE6	6.0	30	60	140		19.0			
2DCE7	7.0	35	70		150	22.0		10	
2DCE8	8.0	40	80			12.0			
2DCE9	9.0	45							
2DCE10	10.0	50							
2DCE11	11.0								
2DCE12	12.0		55						

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3.5	0 ~ 0.020
	3.5	0 ~ 0.022
	6.0	0 ~ 0.025
	10.0	0 ~ 0.030



DCECFF

金刚石涂层 纤维 铣刀

Crystal Diamond Coat Fiber Mill

- 适用于 CFRP 材的侧面加工。

Excellent for milling the sides of CFRP material.

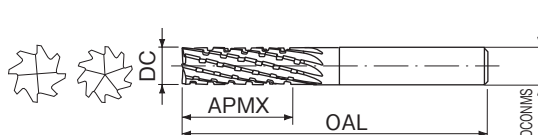

切削条件 Cutting Condition ▶ D-139

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
DCECFF0300	3	10	50	4	6	□
DCECFF0400	4	15		6	8	
DCECFF0500	5	18				
DCECFF0600	6	25		8		
DCECFF0700	7					
DCECFF0800	8					
DCECFF1000	10	30	80	10	10	
DCECFF1200	12	35	90	12		
DCECFF1600	16		100	16	14	
DCECFF1800	18	40	105			
DCECFF2000	20	45	110	20	16	

公差 Tolerance (mm)
0 ~ 0.05

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
×	×	×	×	×	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	×	×	×	◎	○	◎

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

采用了金刚石涂层处理。
10 ~ 20μm 左右的厚涂层。外径 DC > 柄径 DN

- 适合用于石墨（电极）加工，相比硬质合金无处理品，具有 10 倍以上的长寿命。

This is the best ball end mill for graphite electrodes. The life is over 10 times of conventional carbide end mill.

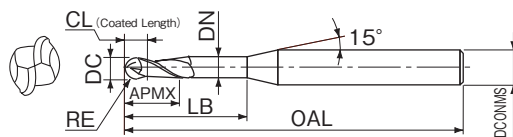

SL 型 SL Type

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DCRESL1	1.0	20	4	100	6	□
DCRESLN1	1.0	40				
DCRESL1.5	1.5	30	6			
DCRESLN1.5	1.5	60				
DCRESL2	2.0	40	8			
DCRESLN2	2.0	60				
DCRESL2.5	2.5	50	10	125		
DCRESLN2.5	2.5	60				
DCRESL3	3.0	60	12	140		
DCRESL3.5	3.5	70	14			
DCRESL4	4.0	80	16	150	8	
DCRESL4.5	4.5		18			
DCRESL5	5.0		20			
DCRESL5.5	5.5		22		10	
DCRESL6	6.0		24			

NL 型 NL Type

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock	
DCRENLO.5	0.50	8	4	75	6	□	
DCRENLO.55	0.55	12	6				
DCRENLO.6	0.60						
DCRENLO.65	0.65						
DCRENLO.7	0.70						
DCRENLO.75	0.75						
DCRENLO.8	0.80			16			8
DCRENLO.85	0.85						
DCRENLO.9	0.90						
DCRENLO.95	0.95						
DCREN1	1.00	20	10		100		
DCREN1.25	1.25	30	15				
DCREN1.5	1.50						
DCREN1.75	1.75	40	20				
DCREN2	2.00	50	25	125	140		
DCREN2.25	2.25						
DCREN2.5	2.50	60	30				
DCREN2.75	2.75						
DCREN3	3.00	70	35				
DCREN3.25	3.25						
DCREN3.5	3.50	80	40	150			
DCREN3.75	3.75						
DCREN4	4.00	80	45		8		
DCREN4.25	4.25						
DCREN4.5	4.50		50				
DCREN4.75	4.75						
DCREN5	5.00						
DCREN5.25	5.25						
DCREN5.5	5.50	55	10				
DCREN5.75	5.75		8				
DCREN6	6.00		12				

NX 型 NX Type

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DCRENX1	1.0	20	10	125	6	□
DCRENXN1	1.0	40				
DCRENX1.5	1.5	30	15			
DCRENXN1.5	1.5	60				
DCRENX2	2.0	40	20	150		
DCRENXN2	2.0	80				
DCRENX2.5	2.5	50	25			
DCRENXN2.5	2.5	85				
DCRENX3	3.0	60	30	175		
DCRENXN3	3.0	70	35			
DCRENX3.5	3.5	70	35		8	
DCRENXN3.5	3.5	80	40			
DCRENX4	4.0	80	40	200		
DCRENXN4	4.0	90	45			
DCRENX4.5	4.5	90	45			
DCRENXN4.5	4.5	100	50			
DCRENX5	5.0	100	50			
DCRENXN5	5.0					
DCRENX5.5	5.5	110	55			
DCRENXN5.5	5.5					
DCRENX6	6.0	110	55	12		

SL 型、NX 型、NL 型共通

公差 Tolerance (mm)	
外径 DC	RE
+ 0.015 ~ - 0.01	+ 0.02 ~ - 0.01

球头半径 RE (mm)		涂层长 CL (以上)
超过 Above	以下 Up to	
	1	2
1	2	3
2	3	4
3	4	5
4	5	6
5	6	7

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
×	×	×	×	×	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	×	×	×	◎	○	◎

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

●标准型 Regular Type

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
DCRER0.5	0.50	10	3.0	60	4	□
DCRER0.55	0.55					
DCRER0.6	0.60					
DCRER0.65	0.65					
DCRER0.7	0.70	15	4.5	70		
DCRER0.75	0.75					
DCRER0.8	0.80					
DCRER0.85	0.85					
DCRER0.9	0.90	20	6.0	80		
DCRER0.95	0.95					
DCRER1	1.00					
DCRER1.25	1.25					
DCRER1.5	1.50	30	9.0	100		
DCRER1.75	1.75					
DCRER2	2.00					
DCRER2.25	2.25					
DCRER2.5	2.50	40	12.0	110		
DCRER2.75	2.75					
DCRER3	3.00					
DCRER3.5	3.50					
DCRER4	4.00	50	15.0	120		
DCRER4.5	4.50					
DCRER5	5.00					
DCRER5.5	5.50					
DCRER6	6.00	60	18.0	130		
DCRER6.5	6.50					
DCRER7	7.00					
DCRER7.5	7.50					
DCRER8	8.00	70	21.0	140		
DCRER8.5	8.50					
DCRER9	9.00					
DCRER9.5	9.50					
DCRER10	10.00	80	24.0	150		
DCRER10.5	10.50					
DCRER11	11.00					
DCRER11.5	11.50					
DCRER12	12.00	90	27.0	160		
DCRER12.5	12.50					
DCRER13	13.00					
DCRER13.5	13.50					
DCRER14	14.00	100	30.0	170		
DCRER14.5	14.50					
DCRER15	15.00					
DCRER15.5	15.50					
DCRER16	16.00	110	33.0	180		
DCRER16.5	16.50					
DCRER17	17.00					
DCRER17.5	17.50					
DCRER18	18.00	120	36.0	190		
DCRER18.5	18.50					
DCRER19	19.00					
DCRER19.5	19.50					
DCRER20	20.00	130	39.0	200		
DCRER20.5	20.50					
DCRER21	21.00					
DCRER21.5	21.50					
DCRER22	22.00	140	42.0	210		
DCRER22.5	22.50					
DCRER23	23.00					
DCRER23.5	23.50					
DCRER24	24.00	150	45.0	220		
DCRER24.5	24.50					
DCRER25	25.00					
DCRER25.5	25.50					
DCRER26	26.00	160	48.0	230		
DCRER26.5	26.50					
DCRER27	27.00					
DCRER27.5	27.50					
DCRER28	28.00	170	51.0	240		
DCRER28.5	28.50					
DCRER29	29.00					
DCRER29.5	29.50					
DCRER30	30.00	180	54.0	250		
DCRER30.5	30.50					
DCRER31	31.00					
DCRER31.5	31.50					
DCRER32	32.00	190	57.0	260		
DCRER32.5	32.50					
DCRER33	33.00					
DCRER33.5	33.50					
DCRER34	34.00	200	60.0	270		
DCRER34.5	34.50					
DCRER35	35.00					
DCRER35.5	35.50					
DCRER36	36.00	210	63.0	280		
DCRER36.5	36.50					
DCRER37	37.00					
DCRER37.5	37.50					
DCRER38	38.00	220	66.0	290		
DCRER38.5	38.50					
DCRER39	39.00					
DCRER39.5	39.50					
DCRER40	40.00	230	69.0	300		
DCRER40.5	40.50					
DCRER41	41.00					
DCRER41.5	41.50					
DCRER42	42.00	240	72.0	310		
DCRER42.5	42.50					
DCRER43	43.00					
DCRER43.5	43.50					
DCRER44	44.00	250	75.0	320		
DCRER44.5	44.50					
DCRER45	45.00					
DCRER45.5	45.50					
DCRER46	46.00	260	78.0	330		
DCRER46.5	46.50					
DCRER47	47.00					
DCRER47.5	47.50					
DCRER48	48.00	270	81.0	340		
DCRER48.5	48.50					
DCRER49	49.00					
DCRER49.5	49.50					
DCRER50	50.00	280	84.0	350		
DCRER50.5	50.50					
DCRER51	51.00					
DCRER51.5	51.50					
DCRER52	52.00	290	87.0	360		
DCRER52.5	52.50					
DCRER53	53.00					
DCRER53.5	53.50					
DCRER54	54.00	300	90.0	370		
DCRER54.5	54.50					
DCRER55	55.00					
DCRER55.5	55.50					
DCRER56	56.00	310	93.0	380		
DCRER56.5	56.50					
DCRER57	57.00					
DCRER57.5	57.50					
DCRER58	58.00	320	96.0	390		
DCRER58.5	58.50					
DCRER59	59.00					
DCRER59.5	59.50					
DCRER60	60.00	330	99.0	400		
DCRER60.5	60.50					
DCRER61	61.00					
DCRER61.5	61.50					
DCRER62	62.00	340	102.0	410		
DCRER62.5	62.50					
DCRER63	63.00					
DCRER63.5	63.50					
DCRER64	64.00	350	105.0	420		
DCRER64.5	64.50					
DCRER65	65.00					
DCRER65.5	65.50					
DCRER66	66.00	360	108.0	430		
DCRER66.5	66.50					
DCRER67	67.00					
DCRER67.5	67.50					
DCRER68	68.00	370	111.0	440		
DCRER68.5	68.50					
DCRER69	69.00					
DCRER69.5	69.50					
DCRER70	70.00	380	114.0	450		
DCRER70.5	70.50					
DCRER71	71.00					
DCRER71.5	71.50					
DCRER72	72.00	390	117.0	460		


CU4

铜加工用 4 刃 铣刀

Four Flutes End Mills for Copper

●适用于铜电极加工。

This end mill is the best for the copper electrode milling.



切削条件 Cutting Condition ●●D-155

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
CU4010	1	2.5	40	4	□
CU4020	2	5.0			
CU4030	3	7.5	45		
CU4040	4	11.0			
CU4050	5	13.0	50		
CU4060	6				
CU4080	8	19.0	60	8	
CU4100	10	22.0	70	10	
CU4120	12	26.0	75	12	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	0 ~ -0.015
3		0 ~ -0.030



CUB2

铜加工用 球头 铣刀

Ball End Mills for Copper

●适用于铜电极加工。

This end mill is the best for the copper electrode milling.



切削条件 Cutting Condition ●●D-155

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	颈部半角 BHTA	全长 OAL	柄径 DCONMS	库存 Stock
CUB20050	0.50	1.0	1.5	10°	50	4	□
CUB20075	0.75	1.5	2.5				
CUB20100	1.00	2.0	3.0				
CUB20125	1.25	2.5	4.0	15°	60	6	
CUB20150	1.50	3.0	4.5				
CUB20200	2.00	4.0	6.0		70		
CUB20250	2.50	5.0	7.5		80		
CUB20300	3.00	6.0	9.0	—	90	8	
CUB20400	4.00	8.0	12.0		100	10	
CUB20500	5.00	10.0	15.0		110	12	
CUB20600	6.00	12.0	21.0				

公差 Tolerance (mm)	
外径 DC	球头半径 RE
0 -0.03	+0.003 ~ -0.007

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	—	○	◎	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	—	○	◎	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 适用于模具的微铣削加工。
- 具有多种尺寸规格，可以进行多种铣削。
 - This end mill is the best in micro milling of die and Mold Steel.
 - It can support every milling by abundant size arrangements.

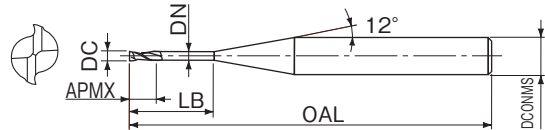

新商品

LIST 9414

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	颈长 LB	柄径 DCONMS	刃长 APMX	全长 OAL	颈径 DN	干涉角	工件倾斜角对应的实际有效长度				库存 Stock	
								0.5°	1°	2°	3°		
GSN200200054	0.2	0.5	4	0.3	45	0.18	11.38	0.52	0.54	0.60	0.66		
GSN200200104		1.0					10.82	1.04	1.09	1.20	1.33		
GSN200200154		1.5					10.32	1.56	1.63	1.79	1.99		
GSN200300104	0.3	1.0		0.4		0.28	10.79	1.04	1.09	1.20	1.33		
GSN200300204		2.0					9.81	2.09	2.18	2.39	2.65		
GSN200300304		3.0					8.98	3.13	3.27	3.59	3.98		
GSN200300604	0.4	6.0		0.6		0.37	7.17	6.26	6.54	7.18	7.96		
GSN200300904		9.0					5.97	9.39	9.81	10.77	11.95		
GSN200400204		2.0					9.76	2.09	2.18	2.39	2.65		
GSN200400304	0.4	3.0		0.6		0.37	8.92	3.13	3.27	3.59	3.98		
GSN200400404		4.0					8.21	4.17	4.36	4.79	5.31		
GSN200400804		8.0					6.24	8.34	8.72	9.57	10.62		
GSN200401204	0.5	12.0		0.7		0.47	5.03	12.51	13.07	14.36	15.93		
GSN200500204		2.0					9.70	2.09	2.18	2.39	2.65		
GSN200500404		4.0					8.14	4.17	4.36	4.79	5.31		
GSN200500604	0.5	6.0		0.7		0.47	7.01	6.26	6.54	7.18	7.96		
GSN200500804		8.0					6.15	8.34	8.72	9.57	10.62		
GSN200501004		10.0					5.48	10.43	10.89	11.97	13.27		
GSN200501504	0.6	15.0		0.9		0.57	4.31	15.64	16.34	17.95	19.91		
GSN200600204		2.0					9.65	2.09	2.18	2.39	2.65		
GSN200600404		4.0					8.06	4.17	4.36	4.79	5.31		
GSN200600604	0.6	6.0		0.9		0.57	6.92	6.26	6.54	7.18	7.96		
GSN200600804		8.0					6.07	8.34	8.72	9.57	10.62		
GSN200601004		10.0					5.40	10.43	10.89	11.97	13.27		
GSN200601204	0.7	12.0		1.0		0.67	4.86	12.51	13.07	14.36	15.93		
GSN200601804		18.0					3.74	18.77	19.61	21.54	23.89		
GSN200700204		2.0					9.59	2.09	2.18	2.39	2.65		
GSN200700404	0.7	4.0		1.0		0.67	7.99	4.17	4.36	4.79	5.31		
GSN200700604		6.0					6.84	6.26	6.54	7.18	7.96		
GSN200700804		8.0					5.98	8.34	8.72	9.57	10.62		
GSN200701004	0.8	10.0		1.2		0.77	5.31	10.43	10.89	11.97	13.27		
GSN200800404		4.0					7.90	4.17	4.36	4.79	5.31		
GSN200800604		6.0					6.75	6.26	6.54	7.18	7.96		
GSN200800804	0.8	8.0		1.2		0.77	5.88	8.34	8.72	9.57	10.62		
GSN200801004		10.0					5.22	10.43	10.89	11.97	13.27		
GSN200801204		12.0					4.68	12.51	13.07	14.36	15.93		
GSN200801604	0.9	16.0		1.4		0.87	3.89	16.69	17.43	19.15	21.24		
GSN200802404		24.0					2.91	25.03	26.15	28.72	无干涉		
GSN200900604		6.0					6.65	6.26	6.54	7.18	7.96		
GSN200900804	0.9	8.0		1.4		0.87	5.79	8.34	8.72	9.57	10.62		
GSN200901004		10.0					5.12	10.43	10.89	11.97	13.27		
GSN200901504		15.0					3.98	15.64	16.34	17.95	19.91		
GSN201000404	1.0	4.0		1.5		0.97	7.73	4.17	4.36	4.79	5.31		
GSN201000604		6.0					6.55	6.26	6.54	7.18	7.96		
GSN201000804		8.0					5.69	8.34	8.72	9.57	10.62		
GSN201001004	1.0	10.0		1.5		0.97	5.03	10.43	10.89	11.97	13.27		
GSN201001204		12.0					4.50	12.51	13.07	14.36	15.93		
GSN201001604		16.0					3.72	16.69	17.43	19.15	21.24		
GSN201002004	1.2	20.0		1.8		1.15	3.17	20.86	21.79	23.93	26.54		
GSN201002504		25.0					2.68	26.07	27.24	29.91	无干涉		
GSN201003004		30.0					2.32	31.28	32.68	35.90	无干涉		
GSN201200604	1.2	6.0		1.8		1.15	6.35	6.26	6.54	7.18	7.96		
GSN201200804		8.0					5.48	8.34	8.72	9.57	10.62		
GSN201201004		10.0					4.82	10.43	10.89	11.97	13.27		
GSN201201204	1.5	12.0		2.3		1.45	4.31	12.51	13.07	14.36	15.93		
GSN201201604		16.0					3.55	16.69	17.43	19.15	21.24		
GSN201202004		20.0					3.01	20.86	21.79	23.93	26.54		
GSN201500604	1.5	6.0		2.3		1.45	6.01	6.26	6.54	7.18	7.96		
GSN201500804		8.0					5.15	8.34	8.72	9.57	10.62		
GSN201501004		10.0					4.50	10.43	10.89	11.97	13.27		
GSN201501204		12.0					4.00	12.51	13.07	14.36	15.93		

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速立铣刀


切削工具

套装商品
其它

精密工具

技术资料
索引

新商品



一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	○	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	○	○	○	—	—	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

← 上一页 Previous Page

单位 (Unit): mm


商品编码 Code	外径 DC	颈长 LB	柄径 DCONMS	刃长 APMX	全长 OAL	颈径 DN	干涉角	工件倾斜角对应的实际有效长度				库存 Stock								
								0.5°	1°	2°	3°									
GSN201501404	1.5	14.0	4	2.3	60	1.45	3.60	14.60	15.25	16.75	18.58	无干涉								
GSN201501604		16.0					3.27	16.69	17.43	19.15	21.24									
GSN201501804		18.0					3.00	18.77	19.61	21.54	23.89									
GSN201502004		20.0					2.77	20.86	21.79	23.93										
GSN201502504		25.0			70		2.32	26.07	27.24	29.91										
GSN201503004		30.0					2.00	31.28	32.68	35.90										
GSN201503804		38.0			80		1.63	39.63	41.40											
GSN201504504		45.0					1.41	46.93	49.03	无干涉										
GSN202000604	2.0	6.0	4	3.0	50	1.95	5.34	6.26	6.54	7.18	7.96	无干涉								
GSN202000804		8.0					4.50	8.34	8.72	9.57	10.62									
GSN202001004		10.0					3.89	10.43	10.89	11.97	13.27									
GSN202001204		12.0					3.43	12.51	13.07	14.36	15.93									
GSN202001404		14.0			60		3.06	14.60	15.25	16.75	18.58									
GSN202001604		16.0					2.77	16.69	17.43	19.15										
GSN202001804		18.0					2.52	18.77	19.61	21.54										
GSN202002004		20.0					2.32	20.86	21.79	23.93										
GSN202002504		25.0			70		1.93	26.07	27.24											
GSN202003004		30.0					1.65	31.28	32.68											
GSN202003504		35.0			80		1.44	36.50	38.13											
GSN202004004		40.0					1.28	41.71	43.58											
GSN202005004		50.0			100		1.05	52.14	54.47											
GSN202006004		60.0			110		0.89	62.57	无干涉											
GSN202500804	2.5	8.0	3.7	50	2.45	3.72	8.34	8.72	9.57	10.62	无干涉									
GSN202501204		12.0				2.77	12.51	13.07	14.36	15.93										
GSN202501604		16.0				2.20	16.69	17.43	19.15											
GSN202502004		20.0				1.83	20.86	21.79												
GSN202502504		25.0				70		1.51	26.07	27.24										
GSN202503004		30.0						1.28	31.28	32.68										
GSN202504004		40.0						0.99	41.71											
GSN202505004		50.0				100	0.80	52.14	无干涉											
GSN203000806	3.0	8.0	6	4.5	2.90	5.69	8.34	8.72	9.57	10.62	无干涉									
GSN203001206		12.0				4.50	12.51	13.07	14.36	15.93										
GSN203001606		16.0				3.72	16.69	17.43	19.15	21.24										
GSN203002006		20.0				3.17	20.86	21.79	23.93	26.54										
GSN203002506		25.0				70		2.68	26.07	27.24		29.91								
GSN203003006		30.0						2.32	31.28	32.68		35.90								
GSN203004006		40.0						1.83	41.71	43.58										
GSN203005006		50.0				100	1.51	52.14	54.47	无干涉										
GSN204001206	4.0	12.0	6	6.0	3.90	3.43	12.51	13.07	14.36	15.93	无干涉									
GSN204001606		16.0				2.77	16.69	17.43	19.15											
GSN204002006		20.0				2.32	20.86	21.79	23.93											
GSN204002506		25.0				1.93	26.07	27.24												
GSN204003006		30.0				70		1.65	31.28	32.68										
GSN204003506		35.0						1.44	36.50	38.13										
GSN204004006		40.0						1.28	41.71	43.58										
GSN204004506		45.0				90		1.15	46.93	49.03										
GSN204005006	5.0	50.0	6	7.5	4.90	1.05	52.14	54.47			无干涉									
GSN204006006		60.0				0.89	62.57	无干涉												
GSN205001606		16.0				60		1.56	16.69	17.43										
GSN205002506		25.0						1.05	26.07	27.24										
GSN205003506		35.0				70		0.77	36.50											
GSN205005006		50.0						0.55	52.14											
GSN205006006		60.0						0.46	62.57											
GSN206002006	6.0	20.0		9.0	80	5.90	无干涉					无干涉								
GSN206003006		30.0			90															
GSN206004006		40.0																		
GSN206005006		50.0																		
GSN206006006		60.0			120															
GSN206006006		60.0																		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	0.4	0 ~ 0.010
0.4	2.9	0 ~ 0.015
2.9		0 ~ 0.020

柄直径公差 Tolerance of Shank Dia. : 0 ~ 0.005mm

- 适用于模具的微铣削加工。
- 具有多种尺寸规格，可以进行多种铣削。

- This end mill is the best in micro milling of die and Mold Steel.
- It can support every milling by abundant size arrangements.

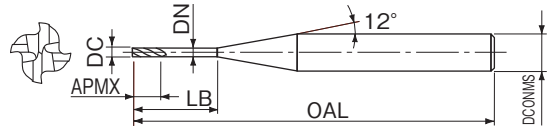

新商品

LIST 9416

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	颈长 LB	柄径 DCONMS	刃长 APMX	全长 OAL	颈径 DN	干涉角	工件倾斜角对应的实际有效长度				库存 Stock
								0.5°	1°	2°	3°	
GSN401000404	1.0	4	4	1.5	50	0.97	7.73	4.17	4.36	4.79	5.31	
GSN401000604		6					6.55	6.26	6.54	7.18	7.96	
GSN401000804		8					5.69	8.34	8.72	9.57	10.62	
GSN401001004		10					5.03	10.43	10.89	11.97	13.27	
GSN401001204		12					4.50	12.51	13.07	14.36	15.93	
GSN401001604		16					3.72	16.69	17.43	19.15	21.24	
GSN401200604	1.2	6		1.8	50	1.15	6.35	6.26	6.54	7.18	7.96	
GSN401200804		8					5.48	8.34	8.72	9.57	10.62	
GSN401201004		10					4.82	10.43	10.89	11.97	13.27	
GSN401201204		12					4.31	12.51	13.07	14.36	15.93	
GSN401201604		16					3.55	16.69	17.43	19.15	21.24	
GSN401500604		1.5					6	2.3	50	1.45	6.01	
GSN401500804	8		5.15	8.34	8.72	9.57	10.62					
GSN401501004	10		4.50	10.43	10.89	11.97	13.27					
GSN401501204	12		4.00	12.51	13.07	14.36	15.93					
GSN401501404	14		3.60	14.60	15.25	16.75	18.58					
GSN401501604	16		3.27	16.69	17.43	19.15	21.24					
GSN401501804	18		3.00	18.77	19.61	21.54	23.89					
GSN401502004	20		2.77	20.86	21.79	23.93	无干涉					
GSN402000604	2.0	6	3.0	50	1.95	5.34	6.26	6.54	7.18	7.96		
GSN402000804		8				4.50	8.34	8.72	9.57	10.62		
GSN402001004		10				3.89	10.43	10.89	11.97	13.27		
GSN402001204		12				3.43	12.51	13.07	14.36	15.93		
GSN402001404		14				3.06	14.60	15.25	16.75	18.58		
GSN402001604		16				2.77	16.69	17.43	19.15	无干涉		
GSN402001804		18		2.52		18.77	19.61	21.54				
GSN402002004		20		2.32		20.86	21.79	23.93				
GSN402002504		25		1.93		26.07	27.24	无干涉				
GSN402003004		30		1.65		31.28	32.68					
GSN402500804	2.5	8	3.7	50	2.45	3.72	8.34	8.72	9.57	无干涉		
GSN402501204		12				2.77	12.51	13.07	14.36			
GSN402501604		16				2.20	16.69	17.43	19.15			
GSN402502004		20				1.83	20.86	21.79	无干涉			
GSN402502504		25		1.51		26.07	27.24					
GSN403000806	3.0	8	4.5	50	2.90	5.69	8.34	8.72	9.57	10.62		
GSN403001206		12				4.50	12.51	13.07	14.36	15.93		
GSN403001606		16				3.72	16.69	17.43	19.15	21.24		
GSN403002006		20				3.17	20.86	21.79	23.93	26.54		
GSN403002506		25		2.68		26.07	27.24	29.91				
GSN403003006		30		2.32		31.28	32.68	35.90				
GSN404001206	4.0	12	6.0	50	3.90	3.43	12.51	13.07	14.36			
GSN404001606		16		2.77		16.69	17.43	19.15				
GSN404002006		20		2.32		20.86	21.79	23.93				
GSN404002506		25		1.93		26.07	27.24	无干涉				
GSN404003006		30		1.65		31.28	32.68					
GSN404003506		35		1.44		36.50	38.13					
GSN404004006		40		1.28		41.71	43.58					
GSN404004506		45		1.15		46.93	49.03					
GSN404005006		50		1.05		52.14	54.47					
GSN405001606	5.0	16	7.5	60	4.90	1.56	16.69	17.43	无干涉			
GSN405002506		70		1.05		26.07	27.24					
GSN405003506		80		0.77		36.50						
GSN405005006		110		0.55		52.14						
GSN406002006	6.0	20	9.0	80	5.90	-	无干涉	无干涉				
GSN406003006		90										
GSN406004006		100										
GSN406005006		110										
GSN408003008	8.0	30	8	12.0	100	7.80	-	无干涉	无干涉			
GSN408005008		50										
GSN408006008		60										
GSN4100040010	10.0	40	10	15.0	110	9.80	-	无干涉	无干涉			
GSN4100060010		60										
GSN4100080010		80										
GSN4100080010					150							

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀


切削工具

套装商品
其它

精密工具

技术资料
索引

- 适用于模具的微铣削加工。
- 具有多种尺寸规格，可以进行多种铣削。
 - This end mill is the best in micro milling of die and Mold Steel.
 - It can support every milling by abundant size arrangements.

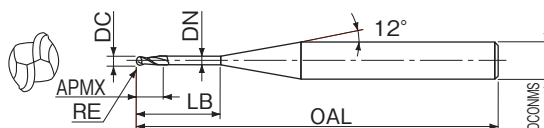


LIST 9428

订货方式 商品编码

● 4mm 柄系列

单位 (Unit) : mm


商品编码 Code	球头半径 RE	颈长 LB	柄径 DCONMS	外径 DC	刃长 APMX	全长 OAL	颈径 DN	干涉角	工件倾斜角对应的实际有效长度				库存 Stock
									0.5°	1°	2°	3°	
GSBNH200100054	0.10	0.5	4	0.2	0.2	45	0.18	11.49	0.52	0.54	0.58	0.63	
GSBNH200100104		1.0						10.92	1.04	1.08	1.18	1.30	
GSBNH200100154		1.5						10.40	1.56	1.63	1.78	1.96	
GSBNH200100204		2.0						9.93	2.08	2.17	2.37	2.62	
GSBNH200100254		2.5						9.51	2.60	2.71	2.97	3.29	
GSBNH200100304		3.0						9.11	3.12	3.26	3.57	3.95	
GSBNH200150104	0.15	1.0		0.3	0.3		0.28	10.94	1.04	1.08	1.17	1.28	
GSBNH200150154		1.5						10.41	1.56	1.62	1.77	1.94	
GSBNH200150204		2.0						9.93	2.08	2.17	2.36	2.61	
GSBNH200150254		2.5						9.49	2.60	2.71	2.96	3.27	
GSBNH200150304		3.0						9.09	3.12	3.26	3.56	3.93	
GSBNH200200104		1.0						0.4	0.4	0.37	10.97	1.03	
GSBNH200200154	1.5	10.42		1.56	1.62		1.76				1.93		
GSBNH200200204	2.0	9.93		2.08	2.16		2.35				2.59		
GSBNH200200254	2.5	9.48		2.60	2.71		2.95				3.25		
GSBNH200200304	3.0	9.06		3.12	3.25		3.55				3.92		
GSBNH200200404	4.0	8.34		4.16	4.34		4.75				5.25		
GSBNH200200504	0.25	5.0		0.5	0.5		0.47	7.72	5.21	5.43	5.94	6.57	
GSBNH200250154		1.5						10.43	1.55	1.61	1.75	1.91	
GSBNH200250204		2.0						9.92	2.07	2.16	2.34	2.57	
GSBNH200250304		3.0						9.04	3.12	3.25	3.54	3.90	
GSBNH200250404		4.0						8.30	4.16	4.34	4.74	5.23	
GSBNH200250504		5.0						7.67	5.20	5.43	5.93	6.56	
GSBNH200250604	0.30	6.0		0.6	0.6		0.56	7.13	6.25	6.51	7.13	7.88	
GSBNH200250804		8.0						6.24	8.33	8.69	9.52	10.54	
GSBNH200300204		2.0						9.92	2.07	2.15	2.34	2.56	
GSBNH200300304		3.0						9.01	3.12	3.24	3.53	3.89	
GSBNH200300404		4.0						8.25	4.16	4.33	4.73	5.21	
GSBNH200300504		5.0						7.61	5.20	5.42	5.92	6.54	
GSBNH200300604	0.40	6.0		0.8	1.4		0.76	7.07	6.24	6.51	7.12	7.87	
GSBNH200300704		7.0						6.59	7.29	7.60	8.32	9.20	
GSBNH200300804		8.0						6.17	8.33	8.69	9.51	10.52	
GSBNH200301004		10.0						5.48	10.42	10.87	11.91	13.18	
GSBNH200400204		2.0						1.0	1.5	0.96	9.91	2.07	
GSBNH200400304	3.0	8.95		3.11	3.23		3.51				3.85		
GSBNH200400404	4.0	8.16		4.15	4.32		4.71				5.18		
GSBNH200400504	5.0	7.50		5.20	5.41		5.91				6.51		
GSBNH200400604	6.0	6.94		6.24	6.50		7.10				7.84		
GSBNH200400704	7.0	6.45		7.28	7.59		8.30				9.16		
GSBNH200400804	0.50	8.0		1.0	1.5		0.96	6.03	8.33	8.68	9.50	10.49	
GSBNH200401004		10.0						5.33	10.41	10.86	11.89	13.14	
GSBNH200500304		3.0						8.88	3.11	3.22	3.49	3.82	
GSBNH200500404		4.0						8.06	4.15	4.31	4.69	5.15	
GSBNH200500504		5.0						7.37	5.19	5.40	5.89	6.48	
GSBNH200500604		6.0						6.80	6.24	6.49	7.08	7.80	
GSBNH200500704	0.60	7.0		1.2	1.6		1.15	6.30	7.28	7.58	8.28	9.13	
GSBNH200500804		8.0						5.87	8.32	8.67	9.48	10.46	
GSBNH200500904		9.0						5.50	9.36	9.76	10.67	11.79	
GSBNH200501004		10.0						5.17	10.41	10.85	11.87	13.11	
GSBNH200501204		12.0						4.62	12.49	13.03	14.26	15.77	
GSBNH200501404		14.0				4.17		14.58	15.21	16.66	18.42		
GSBNH200501604	0.60	16.0		1.2	1.6	1.15	3.80	16.66	17.39	19.05	21.08		
GSBNH200501804		18.0					3.49	18.75	19.57	21.44	23.73		
GSBNH200502004		20.0					3.23	20.83	21.74	23.84	26.39		
GSBNH200502204		22.0					3.01	22.92	23.92	26.23	29.04		
GSBNH200600604		6.0					6.64	6.23	6.48	7.06	7.77		
GSBNH200600804		8.0					5.70	8.32	8.66	9.46	10.43		
GSBNH200601004	0.60	10.0		1.2	1.6	45	1.15	5.00	10.40	10.84	11.85	13.08	
GSBNH200601204		12.0						4.44	12.49	13.02	14.24	15.74	
GSBNH200601604		16.0						3.64	16.66	17.38	19.03	21.04	




单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	柄径 DCONMS	外径 DC	刃长 APMX	全长 OAL	颈径 DN	干涉角	工件倾斜角对应的实际有效长度				库存 Stock
									0.5°	1°	2°	3°	
GSBNH200700804	0.70	8.0	4	1.4	1.7	45	1.35	5.52	8.31	8.65	9.44	10.39	●
GSBNH200701204		12.0				50		4.26	12.48	13.01	14.22	15.70	
GSBNH200701604		16.0				50		3.47	16.66	17.37	19.01	21.01	
GSBNH200750804	0.75	8.0		1.5	1.8	45	1.45	5.42	8.31	8.65	9.43	10.38	
GSBNH200751004		10.0				47.1		10.40	10.83	11.82	13.03	13.03	
GSBNH200751204		12.0				41.7		12.48	13.01	14.21	15.69	15.69	
GSBNH200751404		14.0				37.3	1.45	14.57	15.19	16.61	18.34	18.34	
GSBNH200751604		16.0				33.8		16.65	17.36	19.00	21.00	21.00	
GSBNH200751804		18.0				30.9		18.74	19.54	21.39	23.65	23.65	
GSBNH200752004		20.0				28.5	1.55	20.82	21.72	23.79	无干涉	无干涉	
GSBNH200800804	0.80	8.0		1.6	1.6	45		5.32	8.31	8.64	9.42	10.36	
GSBNH200801204		12.0				50		4.07	12.48	13.00	14.20	15.67	
GSBNH200801604		16.0				50		3.29	16.65	17.36	18.99	20.98	
GSBNH200802004	0.90	20.0				55		2.76	20.82	21.72	23.78	无干涉	
GSBNH200900804		8.0		1.8	1.9	45	1.75	5.10	8.30	8.64	9.40	10.33	
GSBNH200901204		12.0				50		3.86	12.48	12.99	14.19	15.64	
GSBNH200901604		16.0				50		3.10	16.65	17.35	18.97	20.95	
GSBNH200902004	1.00	20.0		2.0	2.0	55	1.95	2.59	20.82	21.71	23.76	无干涉	
GSBNH201000404		4.0				45		7.33	4.13	4.27	4.59	4.99	
GSBNH201000604		6.0				45		5.85	6.21	6.45	6.99	7.64	
GSBNH201000804		8.0				45		4.87	8.30	8.63	9.38	10.30	
GSBNH201001004		10.0				45		4.16	10.39	10.81	11.77	12.95	
GSBNH201001204		12.0				45		3.64	12.47	12.98	14.17	15.61	
GSBNH201001404		14.0				45		3.23	14.56	15.16	16.56	18.26	
GSBNH201001604		16.0				50		2.90	16.64	17.34	18.95	21.00	
GSBNH201001804		18.0				55		2.64	18.73	19.52	21.35	23.74	
GSBNH201002004		20.0				60		2.41	20.81	21.70	23.74	26.13	
GSBNH201002204		22.0				65		2.23	22.90	23.88	26.13	26.13	
GSBNH201002504		25.0				70		1.99	26.03	27.15	无干涉	无干涉	
GSBNH201003004		30.0				70		1.70	31.24	32.60	无干涉	无干涉	

允差 Tolerance (mm)	
外径 DC	球头半径 RE
+ 0.006	+ 0.003
- 0.014	- 0.007



带倒锥的切削刃
与加工物的接触长度短
Long neck ball has short cutting length.



带倒锥，可减小切削阻力，加工面粗糙度良好
Back taper of outside cutting edge reduces cutting force, and good machined surface roughness.

新品

← 上一页 Previous Page

● 6mm 柄系列

单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	柄径 DCONMS	外径 DC	刃长 APMX	全长 OAL	颈径 DN	干涉角	工件倾斜角对应的实际有效长度				库存 Stock	
									0.5°	1°	2°	3°		
GSBNH200100056	0.10	0.5	6	0.2	0.2	50	0.18	11.66	0.52	0.54	0.58	0.63		
GSBNH200100106		1.0						11.27	1.04	1.08	1.18	1.30		
GSBNH200100156		1.5						10.90	1.56	1.63	1.78	1.96		
GSBNH200100206		2.0						10.56	2.08	2.17	2.37	2.62		
GSBNH200150106	0.15	1.0		0.3	0.3		0.28	11.29	1.04	1.08	1.17	1.28		
GSBNH200150156		1.5						10.92	1.56	1.62	1.77	1.94		
GSBNH200150206		2.0						10.57	2.08	2.17	2.36	2.61		
GSBNH200200106		1.0						11.32	1.03	1.07	1.16	1.26		
GSBNH200200156	0.20	1.5		0.4	0.4		0.37	10.94	1.56	1.62	1.76	1.93		
GSBNH200200206		2.0						10.58	2.08	2.16	2.35	2.59		
GSBNH200200256		2.5						10.25	2.60	2.71	2.95	3.25		
GSBNH200200306		3.0						9.93	3.12	3.25	3.55	3.92		
GSBNH200250156	0.25	1.5		0.5	0.5		0.47	10.95	1.55	1.61	1.75	1.91		
GSBNH200250206		2.0						10.59	2.07	2.16	2.34	2.57		
GSBNH200250306		3.0						9.93	3.12	3.25	3.54	3.90		
GSBNH200250406		4.0						9.35	4.16	4.34	4.74	5.23		
GSBNH200250506	0.30	5.0		0.6	0.6		0.56	8.83	5.20	5.43	5.93	6.56		
GSBNH200250606		6.0						8.36	6.25	6.51	7.13	7.88		
GSBNH200250806		8.0						7.57	8.33	8.69	9.52	10.54		
GSBNH200300206		2.0						10.60	2.07	2.15	2.34	2.56		
GSBNH200300306	0.30	3.0		0.6	0.6		0.56	9.93	3.12	3.24	3.53	3.89		
GSBNH200300406		4.0						9.33	4.16	4.33	4.73	5.21		
GSBNH200300506		5.0						8.81	5.20	5.42	5.92	6.54		
GSBNH200300606		6.0						8.34	6.24	6.51	7.12	7.87		
GSBNH200300806	0.40	8.0		0.8	1.4		0.76	7.53	8.33	8.69	9.51	10.52		
GSBNH200301006		10.0						6.87	10.42	10.87	11.91	13.18		
GSBNH200400206		2.0						10.62	2.07	2.14	2.32	2.53		
GSBNH200400306		3.0						9.92	3.11	3.23	3.51	3.85		
GSBNH200400406	0.40	4.0		0.8	1.4		0.76	9.31	4.15	4.32	4.71	5.18		
GSBNH200400506		5.0						8.77	5.20	5.41	5.91	6.51		
GSBNH200400606		6.0						8.28	6.24	6.50	7.10	7.84		
GSBNH200400806		8.0						7.46	8.33	8.68	9.50	10.49		
GSBNH200401006	0.50	10.0		1.0	1.5		0.96	6.78	10.41	10.86	11.89	13.14		
GSBNH200500306		3.0						9.91	3.11	3.22	3.49	3.82		
GSBNH200500406		4.0						9.28	4.15	4.31	4.69	5.15		
GSBNH200500506		5.0						8.72	5.19	5.40	5.89	6.48		
GSBNH200500606	0.50	6.0		1.0	1.5		0.96	8.22	6.24	6.49	7.08	7.80		
GSBNH200500806		8.0						7.38	8.32	8.67	9.48	10.46		
GSBNH200501006		10.0						6.70	10.41	10.85	11.87	13.11		
GSBNH200501206		12.0						6.13	12.49	13.03	14.26	15.77		
GSBNH200501406	0.60	14.0		1.2	1.6		1.15	5.65	14.58	15.21	16.66	18.42		
GSBNH200501606		16.0						5.24	16.66	17.39	19.05	21.08		
GSBNH200501806		18.0						4.88	18.75	19.57	21.44	23.73		
GSBNH200502006		20.0						4.57	20.83	21.74	23.84	26.39		
GSBNH200502206	0.60	22.0		1.2	1.6		1.15	4.30	22.92	23.92	26.23	29.04		
GSBNH200600606		6.0						8.16	6.23	6.48	7.06	7.77		
GSBNH200600806		8.0						7.30	8.32	8.66	9.46	10.43		
GSBNH200601006		10.0						6.61	10.40	10.84	11.85	13.08		
GSBNH200601206	0.75	12.0		1.5	1.8		1.45	6.03	12.49	13.02	14.24	15.74		
GSBNH200601606		16.0						5.13	16.66	17.38	19.03	21.04		
GSBNH200750806		8.0						7.17	8.31	8.65	9.43	10.38		
GSBNH200751006		10.0						6.46	10.40	10.83	11.82	13.03		
GSBNH200751206	0.75	12.0		1.5	1.8		1.45	5.87	12.48	13.01	14.21	15.69		
GSBNH200751606		16.0						4.97	16.65	17.36	19.00	21.00		
GSBNH200752006		20.0						4.31	20.82	21.72	23.79	26.31		
GSBNH201000406		1.00						4.0	2.0	2.0	50	1.95		9.10
GSBNH201000606	6.0			7.87	6.21		6.45	6.99						7.64
GSBNH201000806	8.0			6.92	8.30		8.63	9.38						10.30

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm


商品编码 Code	球头半径 RE	颈长 LB	柄径 DCONMS	外径 DC	刃长 APMX	全长 OAL	颈径 DN	干涉角	工件倾斜角对应的实际有效长度				库存 Stock	
									0.5°	1°	2°	3°		
GSBNH201001006	1.00	10.0	6	2.0	2.0	50	1.95	6.18	10.39	10.81	11.77	12.95	●	
GSBNH201001206		12.0				60		5.58	12.47	12.98	14.17	15.61		
GSBNH201001406		14.0						5.09	14.56	15.16	16.56	18.26		
GSBNH201001606		16.0						4.68	16.64	17.34	18.95	20.92		
GSBNH201001806		18.0						4.32	18.73	19.52	21.35	23.57		
GSBNH201002006		20.0						4.02	20.81	21.70	23.74	26.23		
GSBNH201002206		22.0				65		3.76	22.90	23.88	26.13	28.88		
GSBNH201002506		25.0						3.42	26.03	27.15	29.72	32.86		
GSBNH201003006		30.0				70		2.98	31.24	32.60	35.70	无干涉		
GSBNH201003506		35.0				80		2.64	36.46	38.04	41.69			
GSBNH201500806	1.50	8.0		3.0	2.5	60	2.90	6.28	8.28	8.58	9.28	10.14		
GSBNH201501006		10.0						5.48	10.36	10.76	11.68	12.79		
GSBNH201501206		12.0						4.87	12.45	12.94	14.07	15.45		
GSBNH201501606		16.0						3.97	16.62	17.30	18.86	20.76		
GSBNH201502006		20.0				65		3.35	20.79	21.66	23.64	26.07		
GSBNH201502506		25.0						2.81	26.01	27.10	29.62	无干涉		
GSBNH201503006		30.0				70		2.41	31.22	32.55	35.61			
GSBNH201503506		35.0				80		2.12	36.43	38.00	41.59	无干涉		
GSBNH202001006	2.00	10.0		4.0	3.0	65	3.90	4.47	10.34	10.72	11.58	12.64		
GSBNH202001206		12.0						3.87	12.43	12.90	13.97	15.29		
GSBNH202001606		16.0						3.05	16.60	17.25	18.76	20.60		
GSBNH202002006		20.0						2.52	20.77	21.61	23.55			
GSBNH202002506		25.0				70		2.06	25.99	27.06	29.53			
GSBNH202003006		30.0						1.75	31.20	32.51	无干涉			
GSBNH202003506		35.0				80		1.52	36.41	37.95				
GSBNH202004006		40.0				85		1.34	41.63	43.40				
GSBNH202004506		45.0				90		1.20	46.84	48.85				
GSBNH202005006		50.0				100		1.09	52.06	54.30				
GSBNH202502006	2.50	20.0		5.0	3.5	70	4.90	1.44	20.75	21.57	无干涉	无干涉		
GSBNH202502506		25.0						1.15	25.96	27.01				
GSBNH202503006		30.0				80		0.96	31.18					
GSBNH202503506		35.0						0.82	36.39					
GSBNH203003006	3.00	30.0		6.0	6.0	120	5.75	-	无干涉	无干涉				
GSBNH203005006		50.0												

允差 Tolerance (mm)	
外径 DC	球头半径 RE
+ 0.006	+ 0.003
- 0.014	- 0.007

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	◎	◎	◎
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
○	◎	○	○	—	—	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

- 适合用于铜电极的微铣削加工。也适用于铝。
- 具有多种尺寸规格，可以进行多种铣削。
 - This end mill is the best in micro milling of copper electrode. Suitable for milling Aluminum.
 - It can support every milling by abundant size arrangements.

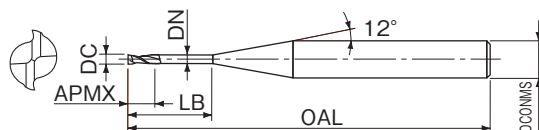

LIST 9410


订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	颈长 LB	刃长 APMX	全长 OAL	柄径 DCONMS	干涉角	工件倾斜角对应的实际有效长度				库存 Stock				
							0.5°	1°	2°	3°					
CURIB0.3 × 1	0.3	1	0.40	45	4	10.79	1.04	1.09	1.20	1.33	□				
CURIB0.3 × 2		2				9.81	2.09	2.18	2.39	2.65					
CURIB0.3 × 3		3				8.98	3.13	3.27	3.59	3.98					
CURIB0.3 × 6		6				7.17	6.26	6.54	7.18	7.96					
CURIB0.3 × 9		9				5.97	9.39	9.81	10.77	11.95					
CURIB0.4 × 2	0.4	2	0.60			9.76	2.09	2.18	2.39	2.65	●				
CURIB0.4 × 3		3				8.92	3.13	3.27	3.59	3.98	□				
CURIB0.4 × 4		4				8.21	4.17	4.36	4.79	5.31	●				
CURIB0.4 × 8		8				6.24	8.34	8.72	9.57	10.62	□				
CURIB0.4 × 12		12				5.03	12.51	13.07	14.36	15.93	●				
CURIB0.5 × 2	0.5	2	0.70	50		9.70	2.09	2.18	2.39	2.65					
CURIB0.5 × 4		4				8.14	4.17	4.36	4.79	5.31					
CURIB0.5 × 6		6				7.01	6.26	6.54	7.18	7.96					
CURIB0.5 × 8		8				6.15	8.34	8.72	9.57	10.62					
CURIB0.5 × 10		10				5.48	10.43	10.89	11.97	13.27					
CURIB0.5 × 15	0.6	15	0.90			45		4.31	15.64	16.34	17.95	19.91	□		
CURIB0.6 × 2		2		9.65				2.09	2.18	2.39	2.65				
CURIB0.6 × 4		4		8.06				4.17	4.36	4.79	5.31	●			
CURIB0.6 × 6		6		6.92				6.26	6.54	7.18	7.96				
CURIB0.6 × 8		8		6.07		8.34	8.72	9.57	10.62						
CURIB0.6 × 10	0.7	10	1.00	50		5.40	10.43	10.89	11.97	13.27	□				
CURIB0.6 × 12		12				4.86	12.51	13.07	14.36	15.93					
CURIB0.6 × 18		18				3.74	18.77	19.61	21.54	23.89					
CURIB0.7 × 2		0.7		2		1.00	45		9.59	2.09		2.18	2.39	2.65	●
CURIB0.7 × 4				4					7.99	4.17		4.36	4.79	5.31	
CURIB0.7 × 6	6		6.84	6.26			6.54	7.18	7.96						
CURIB0.7 × 8	8		5.98	8.34			8.72	9.57	10.62						
CURIB0.7 × 10	10		5.31	10.43			10.89	11.97	13.27	□					
CURIB0.8 × 4	0.8	4	1.20	45		7.90	4.17	4.36	4.79	5.31	●				
CURIB0.8 × 6		6				6.75	6.26	6.54	7.18	7.96					
CURIB0.8 × 8		8				5.88	8.34	8.72	9.57	10.62					
CURIB0.8 × 10		10		50		5.22	10.43	10.89	11.97	13.27					
CURIB0.8 × 12		12				4.68	12.51	13.07	14.36	15.93					
CURIB0.8 × 16	16	3.89				16.69	17.43	19.15	21.24	□					
CURIB0.8 × 24	24	2.91				25.03	26.15	28.72	无干涉						
CURIB0.9 × 6	0.9	6	1.35	45		6.65	6.26	6.54	7.18		7.96	□			
CURIB0.9 × 8		8				5.79	8.34	8.72	9.57		10.62				
CURIB0.9 × 10		10				5.12	10.43	10.89	11.97		13.27				
CURIB0.9 × 15		15		60		3.98	15.64	16.34	17.95		19.91				
CURIB1 × 4		4				7.73	4.17	4.36	4.79	5.31					
CURIB1 × 6	1.0	6	1.50	50		6.55	6.26	6.54	7.18	7.96	●				
CURIB1 × 8		8				5.69	8.34	8.72	9.57	10.62					
CURIB1 × 10		10				5.03	10.43	10.89	11.97	13.27					
CURIB1 × 12		12				4.50	12.51	13.07	14.36	15.93					
CURIB1 × 16		16				3.72	16.69	17.43	19.15	21.24					
CURIB1 × 20	1.2	20		60		3.17	20.86	21.79	23.93	26.54	□				
CURIB1 × 25		25				2.68	26.07	27.24	29.91	无干涉					
CURIB1 × 30		30				2.32	31.28	32.68	35.90						
CURIB1.2 × 6	1.2	6		2.10		50		6.35	6.26	6.54	7.18	7.96	●		
CURIB1.2 × 8		8	5.48					8.34	8.72	9.57	10.62				
CURIB1.2 × 10		10	4.82					10.43	10.89	11.97	13.27				
CURIB1.2 × 12		12	4.31					12.51	13.07	14.36	15.93				
CURIB1.2 × 16		1.4	16			60		3.55	16.69	17.43	19.15	21.24		●	
CURIB1.2 × 20	20		3.01					20.86	21.79	23.93	26.54				
CURIB1.4 × 6	6		6.12					6.26	6.54	7.18	7.96				
CURIB1.4 × 8	1.4	8	2.10			50		5.26	8.34	8.72	9.57	10.62	□		
CURIB1.4 × 10		10						4.61	10.43	10.89	11.97	13.27			
CURIB1.4 × 12		12		4.10				12.51	13.07	14.36	15.93				
CURIB1.4 × 14		14		3.70				14.60	15.25	16.75	18.58				
CURIB1.4 × 16		16		3.36				16.69	17.43	19.15	21.24				
CURIB1.4 × 16		16		3.36				16.69	17.43	19.15	21.24				

单位 (Unit) : mm

商品编码 Code	外径 DC	颈长 LB	刃长 APMX	全长 OAL	柄径 DCONMS	干涉角	工件倾斜角对应的实际有效长度				库存 Stock			
							0.5°	1°	2°	3°				
CURIB1.5 × 6	1.5	6	2.30	50	4	6.01	6.26	6.54	7.18	7.96	●			
CURIB1.5 × 8		8				5.15	8.34	8.72	9.57	10.62	□			
CURIB1.5 × 10		10				4.50	10.43	10.89	11.97	13.27	●			
CURIB1.5 × 12		12				4.00	12.51	13.07	14.36	15.93	□			
CURIB1.5 × 14		14		60		3.60	14.60	15.25	16.75	18.58	●			
CURIB1.5 × 16		16				3.27	16.69	17.43	19.15	21.24	□			
CURIB1.5 × 18		18				3.00	18.77	19.61	21.54	23.89	□			
CURIB1.5 × 20		20				2.77	20.86	21.79	23.93	无干涉	●			
CURIB1.5 × 25		25		70		2.32	26.07	27.24	29.91		无干涉	□		
CURIB1.5 × 30		30				2.00	31.28	32.68	35.90					
CURIB1.5 × 38	38	80		1.63		39.63	41.40	无干涉	无干涉				无干涉	
CURIB1.5 × 45	45			1.41		46.93	49.03							
CURIB1.6 × 6	6	50		5.88		6.26	6.54			7.18	7.96	无干涉		无干涉
CURIB1.6 × 8	8			5.03		8.34	8.72			9.57	10.62			
CURIB1.6 × 10	10			4.39		10.43	10.89	11.97	13.27					
CURIB1.6 × 12	12			3.89		12.51	13.07	14.36	15.93					
CURIB1.6 × 14	14	60		3.50		14.60	15.25	16.75	18.58	无干涉	无干涉			
CURIB1.6 × 16	16			3.17		16.69	17.43	19.15	21.24					
CURIB1.6 × 18	18			2.91		18.77	19.61	21.54						
CURIB1.6 × 20	20			2.68		20.86	21.79	23.93						
CURIB1.7 × 6	1.7	6	2.60	50		5.76	6.26	6.54	7.18	7.96	□			
CURIB1.7 × 8		8				4.90	8.34	8.72	9.57	10.62				
CURIB1.7 × 10		10				4.27	10.43	10.89	11.97	13.27				
CURIB1.7 × 12		12				3.78	12.51	13.07	14.36	15.93				
CURIB1.7 × 14		14		60		3.39	14.60	15.25	16.75	18.58				
CURIB1.7 × 16		16				3.07	16.69	17.43	19.15	21.24				
CURIB1.7 × 18		18				2.81	18.77	19.61	21.54	无干涉				
CURIB1.7 × 20		20				2.59	20.86	21.79	23.93					
CURIB1.8 × 6	1.8	6	2.70	50		5.62	6.26	6.54	7.18	7.96	□			
CURIB1.8 × 8		8				4.77	8.34	8.72	9.57	10.62				
CURIB1.8 × 10		10				4.15	10.43	10.89	11.97	13.27				
CURIB1.8 × 12		12				3.66	12.51	13.07	14.36	15.93				
CURIB1.8 × 14		14		60		3.28	14.60	15.25	16.75	18.58				
CURIB1.8 × 16		16				2.97	16.69	17.43	19.15	无干涉				
CURIB1.8 × 18		18				2.72	18.77	19.61	21.54					
CURIB1.8 × 20		20				2.50	20.86	21.79	23.93					
CURIB1.9 × 6	1.9	6	2.80	50		5.48	6.26	6.54	7.18		7.96	□		
CURIB1.9 × 8		8				4.64	8.34	8.72	9.57	10.62				
CURIB1.9 × 10		10				4.02	10.43	10.89	11.97	13.27				
CURIB1.9 × 12		12				3.55	12.51	13.07	14.36	15.93				
CURIB1.9 × 14		14		60		3.17	14.60	15.25	16.75	18.58				
CURIB1.9 × 16		16				2.87	16.69	17.43	19.15	无干涉				
CURIB1.9 × 18		18				2.62	18.77	19.61	21.54					
CURIB1.9 × 20		20				2.41	20.86	21.79	23.93					
CURIB2 × 6	2.0	6	3.00	50		5.34	6.26	6.54	7.18		7.96	□		
CURIB2 × 8		8				4.50	8.34	8.72	9.57	10.62				
CURIB2 × 10		10				3.89	10.43	10.89	11.97	13.27				
CURIB2 × 12		12				3.43	12.51	13.07	14.36	15.93				
CURIB2 × 14		14		60		3.06	14.60	15.25	16.75	18.58				
CURIB2 × 16		16				2.77	16.69	17.43	19.15					
CURIB2 × 18		18				2.52	18.77	19.61	21.54					
CURIB2 × 20		20				2.32	20.86	21.79	23.93					
CURIB2 × 25		25		70		1.93	26.07	27.24	无干涉	无干涉				
CURIB2 × 30		30				1.65	31.28	32.68						
CURIB2 × 35		35		80		1.44	36.50	38.13			无干涉			
CURIB2 × 40		40				1.28	41.71	43.58						
CURIB2 × 50		50		100		1.05	52.14	54.47						
CURIB2 × 60		60				0.89	62.57	无干涉						
CURIB2.5 × 8	2.5	8	3.70	50		3.72	8.34	8.72	9.57	10.62	□			
CURIB2.5 × 10		10				3.17	10.43	10.89	11.97	13.27				



← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	外径 DC	颈长 LB	刃长 APMX	全长 OAL	柄径 DCONMS	干涉角	工件倾斜角对应的实际有效长度				库存 Stock		
							0.5°	1°	2°	3°			
CURIB2.5 × 12	2.5	12	3.70	50	4	2.77	12.51	13.07	14.36	无干涉	□		
CURIB2.5 × 14		14		60		2.45	14.60	15.25	16.75				
CURIB2.5 × 16		16				2.20	16.69	17.43	19.15				
CURIB2.5 × 18		18				2.00	18.77	19.61	21.54				
CURIB2.5 × 20		20		70		1.83	20.86	21.79	无干涉				
CURIB2.5 × 25		25				1.51	26.07	27.24					
CURIB2.5 × 30		30				1.28	31.28	32.68					
CURIB2.5 × 40		40		90		0.99	41.71	无干涉					
CURIB2.5 × 50	50	100	0.80	52.14									
CURIB3 × 8	3.0	8	4.50	50	6	5.69	8.34	8.72	9.57	10.62	●		
CURIB3 × 10		10				5.03	10.43	10.89	11.97	13.27			
CURIB3 × 12		12				4.50	12.51	13.07	14.36	15.93			
CURIB3 × 14		14				4.07	14.60	15.25	16.75	18.58			
CURIB3 × 16		16		60		3.72	16.69	17.43	19.15	21.24	□		
CURIB3 × 18		18				3.43	18.77	19.61	21.54	23.89			
CURIB3 × 20		20				3.17	20.86	21.79	23.93	26.54			
CURIB3 × 25		25		70		2.68	26.07	27.24	29.91	无干涉			
CURIB3 × 30		30				2.32	31.28	32.68	35.90				
CURIB3 × 40		40		90		1.83	41.71	43.58	无干涉	□			
CURIB3 × 50		50		100		1.51	52.14	54.47					
CURIB4 × 12	4.0	12	6.00	50	6	3.43	12.51	13.07	14.36	15.93	●		
CURIB4 × 16		16		60		2.77	16.69	17.43	19.15				
CURIB4 × 20		20				2.32	20.86	21.79	23.93				
CURIB4 × 25		25		70		1.93	26.07	27.24	无干涉				
CURIB4 × 30		30				1.65	31.28	32.68					
CURIB4 × 35		35		80		1.44	36.50	38.13					
CURIB4 × 40		40		90		1.28	41.71	43.58					
CURIB4 × 45		45				1.15	46.93	49.03					
CURIB4 × 50		50		100		1.05	52.14	54.47					
CURIB4 × 60		60		110		0.89	62.57	无干涉					
CURIB5 × 16	5.0	16	7.50	60	6	1.56	16.69	17.43		无干涉	无干涉	□	
CURIB5 × 25		25		70		1.05	26.07	27.24					
CURIB5 × 35		35		80		0.77	36.50	无干涉					
CURIB5 × 50		50		110		0.55	52.14						
CURIB5 × 60		60		120		0.46	无干涉						
CURIB6 × 20	6.0	20	9.00	80		-			无干涉				无干涉
CURIB6 × 30		30		90									
CURIB6 × 40		40		100									
CURIB6 × 50		50		110									
CURIB6 × 60		60		120									

颈部的退刀量


外径 DC (mm)	DC - DN (mm)
DC ≤ 0.3	0.02
0.3 < DC ≤ 1.0	0.03
1.0 < DC ≤ 2.5	0.05
2.5 < DC	0.10

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	—	◎	◎	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 适用于铜电极的微铣削加工
- 具有多种尺寸规格，可以进行多种铣削。

- This end mill is the best in micro milling of copper electrode.
- It can support every milling by abundant size arrangements.



新商品

LIST 9412

订货方式 商品编码

● 4mm 柄系列

单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	干涉角	工件倾斜角对应的实际有效长度				库存 Stock
								0.5°	1°	2°	3°	
CURIBRO.1 × 0.5	0.10	0.5	0.2	0.20	45	4	11.49	0.52	0.54	0.58	0.63	●
CURIBRO.1 × 1		1.0					10.92	1.04	1.08	1.18	1.30	
CURIBRO.1 × 1.5		1.5					10.40	1.56	1.63	1.78	1.96	
CURIBRO.1 × 2		2.0					9.93	2.08	2.17	2.37	2.62	
CURIBRO.2 × 1	0.20	1.0	0.4	0.40			10.97	1.03	1.07	1.16	1.26	□
CURIBRO.2 × 1.5		1.5					10.42	1.56	1.62	1.76	1.93	
CURIBRO.2 × 2		2.0					9.93	2.08	2.16	2.35	2.59	
CURIBRO.2 × 2.5		2.5					9.48	2.60	2.71	2.95	3.25	
CURIBRO.2 × 3	0.25	3.0	0.5	0.50			9.06	3.12	3.25	3.55	3.92	●
CURIBRO.2 × 4		4.0					8.34	4.16	4.34	4.75	5.25	
CURIBRO.2 × 5		5.0					7.72	5.21	5.43	5.94	6.57	
CURIBRO.25 × 2		2.0					9.92	2.07	2.16	2.34	2.57	
CURIBRO.25 × 4	0.30	4.0	0.6	0.60			8.30	4.16	4.34	4.74	5.23	□
CURIBRO.25 × 5		5.0					7.67	5.20	5.43	5.93	6.56	
CURIBRO.25 × 6		6.0					7.13	6.25	6.51	7.13	7.88	
CURIBRO.25 × 8		8.0					6.24	8.33	8.69	9.52	10.54	
CURIBRO.3 × 2	0.30	2.0	0.6	0.60			9.92	2.07	2.15	2.34	2.56	●
CURIBRO.3 × 3		3.0					9.01	3.12	3.24	3.53	3.89	
CURIBRO.3 × 4		4.0					8.25	4.16	4.33	4.73	5.21	
CURIBRO.3 × 5		5.0					7.61	5.20	5.42	5.92	6.54	
CURIBRO.3 × 6	0.40	6.0	0.8	1.40			7.07	6.24	6.51	7.12	7.87	●
CURIBRO.3 × 7		7.0					6.59	7.29	7.60	8.32	9.20	
CURIBRO.3 × 8		8.0					6.17	8.33	8.69	9.51	10.52	
CURIBRO.4 × 2		2.0					9.91	2.07	2.14	2.32	2.53	
CURIBRO.4 × 3	3.0	8.95	3.11	3.23			3.51	3.85				
CURIBRO.4 × 4	4.0	8.16	4.15	4.32			4.71	5.18				
CURIBRO.4 × 5	5.0	7.50	5.20	5.41			5.91	6.51				
CURIBRO.4 × 6	0.40	6.0	0.8	1.40			6.94	6.24	6.50	7.10	7.84	□
CURIBRO.4 × 7		7.0					6.45	7.28	7.59	8.30	9.16	
CURIBRO.4 × 8		8.0					6.03	8.33	8.68	9.50	10.49	
CURIBRO.4 × 10		10.0					5.33	10.41	10.86	11.89	13.14	
CURIBRO.5 × 3	0.50	3.0	1.0	1.50			8.88	3.11	3.22	3.49	3.82	●
CURIBRO.5 × 4		4.0					8.06	4.15	4.31	4.69	5.15	
CURIBRO.5 × 5		5.0					7.37	5.19	5.40	5.89	6.48	
CURIBRO.5 × 6		6.0					6.80	6.24	6.49	7.08	7.80	
CURIBRO.5 × 7	0.50	7.0	1.0	1.50			6.30	7.28	7.58	8.28	9.13	□
CURIBRO.5 × 8		8.0					5.87	8.32	8.67	9.48	10.46	
CURIBRO.5 × 9		9.0					5.50	9.36	9.76	10.67	11.79	
CURIBRO.5 × 10		10.0					5.17	10.41	10.85	11.87	13.11	
CURIBRO.5 × 12	0.50	12.0	1.0	1.50			4.62	12.49	13.03	14.26	15.77	●
CURIBRO.5 × 14		14.0					4.17	14.58	15.21	16.66	18.42	
CURIBRO.5 × 16		16.0					3.80	16.66	17.39	19.05	21.08	
CURIBRO.5 × 18		18.0					3.49	18.75	19.57	21.44	23.73	
CURIBRO.5 × 20	0.50	20.0	1.0	1.50			3.23	20.83	21.74	23.84	26.39	□
CURIBRO.5 × 22		22.0					3.01	22.92	23.92	26.23	29.04	
CURIBRO.6 × 6		6.0					6.64	6.23	6.48	7.06	7.77	
CURIBRO.6 × 8		8.0					5.70	8.32	8.66	9.46	10.43	
CURIBRO.6 × 10	0.60	10.0	1.2	1.60			5.00	10.40	10.84	11.85	13.08	□
CURIBRO.6 × 12		12.0					4.44	12.49	13.02	14.24	15.74	
CURIBRO.7 × 8		8.0					5.52	8.31	8.65	9.44	10.39	
CURIBRO.7 × 12		12.0					4.26	12.48	13.01	14.22	15.70	
CURIBRO.7 × 16	0.70	16.0	1.4	1.70			3.47	16.66	17.37	19.01	21.01	●
CURIBRO.75 × 8		8.0					5.42	8.31	8.65	9.43	10.38	
CURIBRO.75 × 10		10.0					4.71	10.40	10.83	11.82	13.03	
CURIBRO.75 × 12		12.0					4.17	12.48	13.01	14.21	15.69	
CURIBRO.75 × 14	0.75	14.0	1.5	1.75			3.73	14.57	15.19	16.61	18.34	●
CURIBRO.75 × 16		16.0					3.38	16.65	17.36	19.00	21.00	
CURIBRO.75 × 18		18.0					3.09	18.74	19.54	21.39	23.65	
CURIBRO.75 × 20		20.0					2.85	20.82	21.72	23.79	无干涉	
CURIBRO.8 × 8	0.80	8.0	1.6	1.80	45		5.32	8.31	8.64	9.42	10.36	

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀


高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



新品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	—	—	—	—	—
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
—	—	—	—	⊙	⊙	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	干涉角	工件倾斜角对应的实际有效长度				库存 Stock	
								0.5°	1°	2°	3°		
CURIBR0.8 × 12	0.80	12.0	1.6	1.80	45	4	4.07	12.48	13.00	14.20	15.67	□	
CURIBR0.8 × 16		16.0			50		3.29	16.65	17.36	18.99	20.98		
CURIBR0.8 × 20		20.0			55		2.76	20.82	21.72	23.78	无干涉		
CURIBR0.9 × 8	0.90	8.0	1.8	1.90	45		5.10	8.30	8.64	9.40	10.33	□	
CURIBR0.9 × 12		12.0			45		3.86	12.48	12.99	14.19	15.64		
CURIBR0.9 × 16		16.0			50		3.10	16.65	17.35	18.97	20.95		
CURIBR0.9 × 20		20.0			55		2.59	20.82	21.71	23.76	无干涉		
CURIBR1 × 4	1.00	4.0	2.0	2.00	45		7.33	4.13	4.27	4.59	4.99	●	
CURIBR1 × 6		6.0					5.85	6.21	6.45	6.99	7.64		
CURIBR1 × 8		8.0					4.87	8.30	8.63	9.38	10.30		
CURIBR1 × 10		10.0					4.16	10.39	10.81	11.77	12.95		
CURIBR1 × 12		12.0					3.64	12.47	12.98	14.17	15.61		
CURIBR1 × 14		14.0			50		3.23	14.56	15.16	16.56	18.26	□	
CURIBR1 × 16		16.0					2.90	16.64	17.34	18.95	无干涉		
CURIBR1 × 18		18.0					2.64	18.73	19.52	21.35			
CURIBR1 × 20		20.0					2.41	20.81	21.70	23.74			
CURIBR1 × 22		22.0					2.23	22.90	23.88	26.13			无干涉
CURIBR1 × 25		25.0			65		1.99	26.03	27.15	□			
CURIBR1 × 30		30.0			70		1.70	31.24	32.60				

订货方式 商品编码

● 6mm 柄系列

单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	干涉角	工件倾斜角对应的实际有效长度				库存 Stock
								0.5°	1°	2°	3°	
CURIBR0.1 × 0.5 × 6	0.10	0.5	0.2	0.20	50	6	11.66	0.52	0.54	0.58	0.63	●
CURIBR0.1 × 1 × 6		1.0					11.27	1.04	1.08	1.18	1.30	
CURIBR0.1 × 1.5 × 6		1.5					10.90	1.56	1.63	1.78	1.96	
CURIBR0.1 × 2 × 6		2.0					10.56	2.08	2.17	2.37	2.62	
CURIBR0.2 × 1 × 6	0.20	1.0	0.4	0.40			11.32	1.03	1.07	1.16	1.26	□
CURIBR0.2 × 1.5 × 6		1.5					10.94	1.56	1.62	1.76	1.93	
CURIBR0.2 × 2 × 6		2.0					10.58	2.08	2.16	2.35	2.59	
CURIBR0.2 × 2.5 × 6		2.5					10.25	2.60	2.71	2.95	3.25	
CURIBR0.2 × 3 × 6	0.25	3.0	0.5	0.50			9.93	3.12	3.25	3.55	3.92	●
CURIBR0.2 × 4 × 6		4.0					9.36	4.16	4.34	4.75	5.25	
CURIBR0.2 × 5 × 6		5.0					8.85	5.21	5.43	5.94	6.57	
CURIBR0.25 × 1.5 × 6		1.5					10.95	1.55	1.61	1.75	1.91	
CURIBR0.25 × 2 × 6	0.30	2.0	0.6	0.60			10.59	2.07	2.16	2.34	2.57	□
CURIBR0.25 × 4 × 6		4.0					9.35	4.16	4.34	4.74	5.23	
CURIBR0.25 × 5 × 6		5.0					8.83	5.20	5.43	5.93	6.56	
CURIBR0.25 × 6 × 6		6.0					8.36	6.25	6.51	7.13	7.88	
CURIBR0.25 × 8 × 6	0.30	8.0	0.8	1.40			7.57	8.33	8.69	9.52	10.54	●
CURIBR0.3 × 2 × 6		2.0					10.60	2.07	2.15	2.34	2.56	
CURIBR0.3 × 3 × 6		3.0					9.93	3.12	3.24	3.53	3.89	
CURIBR0.3 × 4 × 6		4.0					9.33	4.16	4.33	4.73	5.21	
CURIBR0.3 × 5 × 6	0.40	5.0	1.0	1.40			8.81	5.20	5.42	5.92	6.54	□
CURIBR0.3 × 6 × 6		6.0					8.34	6.24	6.51	7.12	7.87	
CURIBR0.3 × 8 × 6		8.0					7.53	8.33	8.69	9.51	10.52	
CURIBR0.3 × 10 × 6		10.0					6.87	10.42	10.87	11.91	13.18	
CURIBR0.4 × 2 × 6	0.40	2.0	0.8	1.40			10.62	2.07	2.14	2.32	2.53	□
CURIBR0.4 × 3 × 6		3.0					9.92	3.11	3.23	3.51	3.85	
CURIBR0.4 × 4 × 6		4.0					9.31	4.15	4.32	4.71	5.18	
CURIBR0.4 × 5 × 6		5.0					8.77	5.20	5.41	5.91	6.51	
CURIBR0.4 × 6 × 6		6.0					8.28	6.24	6.50	7.10	7.84	
CURIBR0.4 × 7 × 6		7.0					7.85	7.28	7.59	8.30	9.16	
CURIBR0.4 × 8 × 6		8.0					7.46	8.33	8.68	9.50	10.49	
CURIBR0.4 × 10 × 6		10.0					6.78	10.41	10.86	11.89	13.14	

单位 (Unit) : mm

商品编码 Code	球头半径 RE	颈长 LB	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	干涉角	工件倾斜角对应的实际有效长度				库存 Stock			
								0.5°	1°	2°	3°				
CURIBR0.5 × 3 × 6	0.50	3.0	1.0	1.50	50		9.91	3.11	3.22	3.49	3.82	●			
CURIBR0.5 × 4 × 6		4.0					9.28	4.15	4.31	4.69	5.15				
CURIBR0.5 × 5 × 6		5.0					8.72	5.19	5.40	5.89	6.48				
CURIBR0.5 × 6 × 6		6.0					8.22	6.24	6.49	7.08	7.80				
CURIBR0.5 × 7 × 6		7.0					7.78	7.28	7.58	8.28	9.13	□			
CURIBR0.5 × 8 × 6		8.0					7.38	8.32	8.67	9.48	10.46	●			
CURIBR0.5 × 9 × 6		9.0					7.02	9.36	9.76	10.67	11.79	□			
CURIBR0.5 × 10 × 6		10.0					6.70	10.41	10.85	11.87	13.11	●			
CURIBR0.5 × 12 × 6		12.0					6.13	12.49	13.03	14.26	15.77				
CURIBR0.5 × 14 × 6		14.0					5.65	14.58	15.21	16.66	18.42				
CURIBR0.5 × 16 × 6		16.0					5.24	16.66	17.39	19.05	21.08				
CURIBR0.5 × 18 × 6		18.0					4.88	18.75	19.57	21.44	23.73				
CURIBR0.5 × 20 × 6	20.0	4.57	20.83	21.74	23.84	26.39									
CURIBR0.5 × 22 × 6	22.0	4.30	22.92	23.92	26.23	29.04									
CURIBR0.6 × 6 × 6	0.60	6.0	1.2	1.60	50	8.16	6.23	6.48	7.06	7.77	□				
CURIBR0.6 × 8 × 6		8.0				7.30	8.32	8.66	9.46	10.43					
CURIBR0.6 × 10 × 6		10.0				6.61	10.40	10.84	11.85	13.08					
CURIBR0.6 × 12 × 6		12.0				6.03	12.49	13.02	14.24	15.74					
CURIBR0.6 × 16 × 6	0.60	16.0	1.2	1.60	60	5.13	16.66	17.38	19.03	21.04					
CURIBR0.75 × 8 × 6		0.75			8.0	1.5	1.80	50	7.17	8.31		8.65	9.43	10.38	●
CURIBR0.75 × 10 × 6					10.0				6.46	10.40		10.83	11.82	13.03	□
CURIBR0.75 × 12 × 6					12.0				5.87	12.48		13.01	14.21	15.69	●
CURIBR0.75 × 14 × 6	0.75		14.0	1.5	1.80				60	5.38	14.57	15.19	16.61	18.34	□
CURIBR0.75 × 16 × 6		16.0	4.97			16.65	17.36	19.00		21.00					
CURIBR0.75 × 18 × 6		18.0	4.62			18.74	19.54	21.39		23.65					
CURIBR0.75 × 20 × 6		20.0	4.31			20.82	21.72	23.79		26.31					
CURIBR1 × 4 × 6	1.00	4.0	2.0	2.00	50	6	9.10	4.13	4.27	4.59	4.99	●			
CURIBR1 × 6 × 6		6.0					7.87	6.21	6.45	6.99	7.64				
CURIBR1 × 8 × 6		8.0					6.92	8.30	8.63	9.38	10.30				
CURIBR1 × 10 × 6		10.0					6.18	10.39	10.81	11.77	12.95				
CURIBR1 × 12 × 6		12.0					5.58	12.47	12.98	14.17	15.61	●			
CURIBR1 × 14 × 6		14.0					5.09	14.56	15.16	16.56	18.26				
CURIBR1 × 16 × 6		16.0					4.68	16.64	17.34	18.95	20.92				
CURIBR1 × 18 × 6		18.0					4.32	18.73	19.52	21.35	23.57		□		
CURIBR1 × 20 × 6		20.0					4.02	20.81	21.70	23.74	26.23	●			
CURIBR1 × 22 × 6		22.0					3.76	22.90	23.88	26.13	28.88	□			
CURIBR1 × 25 × 6		25.0					3.42	26.03	27.15	29.72	32.86				
CURIBR1 × 30 × 6		30.0					2.98	31.24	32.60	35.70	无干涉				
CURIBR1 × 35 × 6	35.0	2.64	36.46	38.04	41.69										
CURIBR1.5 × 8	1.50	8.0	3.0	2.50	60	6.28	8.28	8.58	9.28	10.14	●				
CURIBR1.5 × 10		10.0				5.48	10.36	10.76	11.68	12.79					
CURIBR1.5 × 15		15.0				4.16	15.58	16.21	17.66	19.43					
CURIBR1.5 × 20		20.0				3.35	20.79	21.66	23.64	26.07					
CURIBR1.5 × 25		25.0			2.81	26.01	27.10	29.62	无干涉						
CURIBR1.5 × 30		30.0			2.41	31.22	32.55	35.61							
CURIBR1.5 × 35		35.0			2.12	36.43	38.00	41.59							
CURIBR2 × 10		10.0			4.47	10.34	10.72	11.58		12.64	●				
CURIBR2 × 15	15.0	3.22	15.56	16.16	17.56	19.27									
CURIBR2 × 20	20.0	2.52	20.77	21.61	23.55	无干涉									
CURIBR2 × 25	25.0	2.06	25.99	27.06	29.53										
CURIBR2 × 30	30.0	1.75	31.20	32.51	无干涉										
CURIBR2 × 35	35.0	1.52	36.41	37.95											
CURIBR2 × 40	40.0	1.34	41.63	43.40											
CURIBR2 × 45	45.0	1.20	46.84	48.85											
CURIBR2 × 50	2.00	50.0	4.0	3.00	100	1.09	52.06	54.30	无干涉						
CURIBR2.5 × 20		20.0			1.44	20.75	21.57	无干涉							
CURIBR2.5 × 25		25.0			1.15	25.96	27.01								
CURIBR2.5 × 30		30.0			0.96	31.18									
CURIBR2.5 × 35	2.50	35.0	5.0	3.50	80	0.82	36.39		无干涉						
CURIBR3 × 30		30.0			6.0	6.00	120	-		无干涉					
CURIBR3 × 50		50.0													

允差 Tolerance (mm)	
外径 DC	球头半径 RE
+0.006	+0.003
-0.014	-0.007

颈部的退刀量

外径 DC (mm)	DC - DN (mm)
DC ≤ 0.3	0.02
0.3 < DC ≤ 1.0	0.03
1.0 < DC ≤ 2.5	0.05
2.5 < DC	0.10

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具



套装商品
其它

精密工具

技术资料
索引

●带有内冷却孔，适合用于从普通钢到铝的高效率角切削加工。

This end mill having air hole is suitable for high efficiency side milling from carbon Steel to Aluminum.

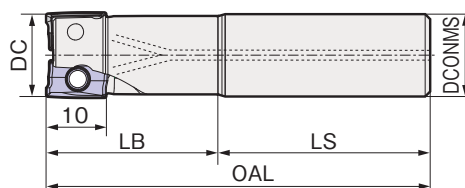

●钻杆 Holder

LIST 9438

订货方式 商品编码

●标准型 Standard type

单位 (Unit) : mm

商品编码 Code	外径 DC	尺寸 Dimension(mm)				刃数 CEDC	库存 Stock	
		DCONMS	LB	LS	OAL			
NWEX2014E	14	16	25	55	80	1	●	
NWEX2016E	16			75	100	2		
NWEX2018E	18							
NWEX2020E	20	20	30	80	110	3		
NWEX2022E	22							
NWEX2025E	25							
NWEX2028E	28	25	35	85	120	4		
NWEX2030E	30							
NWEX2032E	32							
NWEX2040E	40	32	40	90	130	5		
NWEX2050E	50		30	120	150	6		
NWEX2063E	63					7		
						8		

●长刀型 Long type

NWEX2014EL	14	16	25	95	120	1	●	
NWEX2016EL	16			120	145	2		
NWEX2018EL	18							
NWEX2020EL	20	20	40	110	150			
NWEX2022EL	22		30	120				
NWEX2025EL	25		50					
NWEX2028EL	28	25	30	140	170			
NWEX2030EL	30							
NWEX2032EL	32							
NWEX2040EL	40	32	30	150	180			

●刀片 Inserts

请参照 D-89。 See page D-89.

●配件 Parts


请参照 D-92。 See page D-92.

系列一览 Product range

	型 号 Model	内 容 Type	外径(mm)						形 状
			φ14	φ25	φ40	φ63	φ80	φ125	
带柄型	NWEX 2000E	标准型 Standard type	14					63	
	NWEX 2000EL	长刀型 Long type	14		40				
	NWEX 3000E	标准型 Standard type		25				63	
	NWEX 3000ES	短刃型 Short type			50			63	
	NWEX 3000EL	长刃型 Long type		25			40		
	NWEX 3000E-C	刻模型 Coarse pitch type			40			63	
	NWEX 3000ES-C	短刃刻模型 Short & Coarse pitch type				50		63	
带套型	NWEX 2000F	标准型 Standard type			40			63	
	NWEX 3000F	标准型 Standard type			40			63	
	NWEX 3000R	标准型 Standard type					80	125	
	NWEXF 3000R	多刃型 Fine pitch type					80	125	

●带有内冷却孔，适合用于从普通钢到铝的高效率角切削加工。

This end mill having air hole is suitable for high efficiency side milling from carbon Steel to Aluminum.

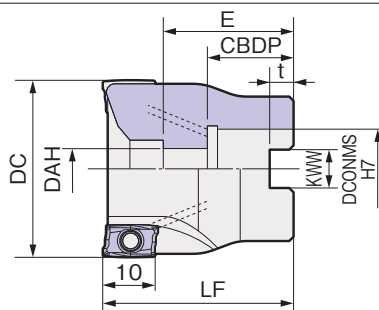

单位 (Unit) : mm

●钻杆 Holder

LIST 9438

订货方式 商品编码

●标准型 Standard type

商品编码 Code	外径 DC	尺寸 Dimension(mm)							刃数 CEDC	库存 Stock
		DCONMS	DAH	KWW	t	LF	CBDP	E		
NWEX2040F	40	16	9	8.4	5.6	40	18	28	6	●
NWEX2050F	50	22	11	10.4	6.3		20	26	7	
NWEX2063F	63								8	

●刀片 Inserts

LIST 9438

订货方式 刀片型号 材料



单位 (Unit) : mm

刀片型号 Code	材料						尺寸 RE
	NCP100	NCP200	NCP300	NCK200	NCK300	NOL100	
NAXMT123504 PEER-G	●	●	●	●	●	—	0.4
NAXMT123508 PEER-G	●	●	●	●	●	—	0.8
NAXMT123512 PEER-G	●	●	●	●	●	—	1.2
NAXMT123504 PEER-H	●	●	●	●	●	—	0.4
NAXMT123508 PEER-H	●	●	●	●	●	—	0.8
NAXMT123512 PEER-H	●	●	●	●	●	—	1.2
NAXET123502 PEFR-S	—	—	—	—	—	●	0.2
NAXET123504 PEFR-S	—	—	—	—	—	●	0.4
NAXET123508 PEFR-S	—	—	—	—	—	●	0.8

螺纹直径末尾编码 G: 泛用型、H: 高强度型、S: 铝用


刀片材料和断屑槽详情

D-92

●配件 Parts

请参照 D-92。 See page D-92.

可进行多种加工!

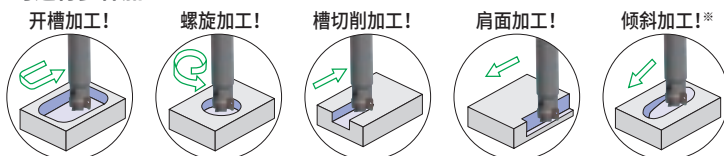

工具直径	倾斜角度	
	2000 型	3000 型
φ 14	5°	—
φ 16	4°	—
φ 20	4°	—
φ 25	2°	5°
φ 32	1° 30'	3°
φ 40	1°	2°
φ 50	0° 30'	1°
φ 63	0° 30'	0° 30'
φ 80	—	0° 30'
φ 100 ~	—	不适用

※根据工具直径，可加工角度如表所示。

NWEX3000E/ES/EL/E-C/ES-C


WAVY 铣刀 NWEX3000E/ES/EL/E-C/ES-C 型
WAVY MILL NWEX3000E/ES/EL/E-C/ES-C

25-63

外径范围

- 带有内冷却孔，适用于从普通钢到铝的高效率角切削加工。

This end mill having air hole is suitable for high efficiency side milling from Steel to Aluminum.

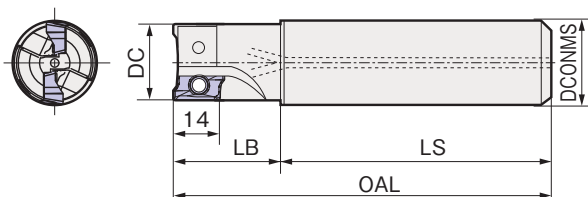

● 钻杆 Holder

LIST 9438

订货方式 商品编码

切削条件 Cutting Condition ● D-156

● 标准型 Standard type

单位 (Unit) : mm

商品编码 Code	外径 DC	尺寸 Dimension(mm)				刃数 CEDC	库存 Stock
		DCONMS	LB	LS	OAL		
NWEX3025E-20	25	20	35	85	120	2	●
NWEX3025E							
NWEX3028E	28	25	40	90	130	3	
NWEX3030E	30						
NWEX3032E-25	32						
NWEX3032E		32					
NWEX3035E	35		5				
NWEX3040E	40		6				
NWEX3050E	50						
NWEX3063E	63						

● 短刃型 Short type

NWEX3050ES	50	32	25	110	135	5	●
NWEX3050ES-42		42					
NWEX3063ES	63	32				6	
NWEX3063ES-42		42					

● 长刃型 Long type

NWEX3025EL	25	25	50	120	170	2	●					
NWEX3028EL	28		60		180							
NWEX3030EL	30											
NWEX3032EL	32	32	60	140	220							
NWEX3035EL	35		80									
NWEX3040EL	40											

● 刻模型 Coarse pitch type

NWEX3040E-C	40	32	50	120	170	3	●
NWEX3050E-C	50					4	
NWEX3063E-C	63						

● 短刃刻模型 Short & Coarse pitch type


NWEX3050ES-C	50	32	25	110	135	3	●
NWEX3050ES-C-42		42					
NWEX3063ES-C	63	32				4	
NWEX3063ES-C-42		42					

● 刀片 Inserts

请参照 D-91。 See page D-91.

● 配件 Parts


请参照 D-92。 See page D-92.

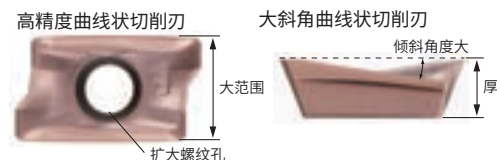

刀尖得到强化的低阻力刀片
Tough, sharp cutting edge geometry

●带有内冷却孔，适合用于从普通钢到铝的高效率角切削加工。

This end mill having air hole is suitable for high efficiency side milling from Steel to Aluminum.

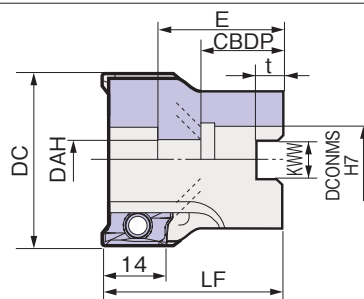

单位 (Unit) : mm

●钻杆 Holder

LIST 9438

订货方式 商品编码

●标准型 Standard type

商品编码 Code	外径 DC	尺寸 Dimension(mm)							刃数 CEDC	库存 Stock
		DCONMS	DAH	KWW	t	LF	CBDP	E		
NWEX3040F	40	16.00	9	8.4	5.6	40	18.0	28.0	4	●
NWEX3050F	50	22.00	11	10.4	6.3		20.0	26.0	5	
NWEX3063F	63								6	
NWEX3080R	80	25.40	13	9.5	6.0	50	25.0	31.0	4	
NWEX3100R	100	31.75	17	12.7	8.0	63	32.5	39.5	5	
NWEX3125R	125	38.10	30	15.9	10.0		35.5	42.5	6	

●多刃型 Fine pitch type

NWEXF3080R	80	25.40	13	9.5	6.0	50	25.0	31.0	7	●
NWEXF3100R	100	31.75	17	12.7	8.0	63	32.5	39.5	8	
NWEXF3125R	125	38.10	30	15.9	10.0		35.5	42.5	9	

紧固 $\phi 80$ 、 $\phi 100$ 切割刀的心轴时，请使用以下尺寸的内六角螺栓（JISB1176）。


· $\phi 80$ 切割刀：M12×30 ~ 35mm · $\phi 100$ 切割刀：M16×40mm

●刀片 Inserts

LIST 9438

订货方式 刀片型号 材料

单位 (Unit) : mm



刀片型号 Code	材料						尺寸
	NCP100	NCP200	NCP300	NCK200	NCK300	NDL100	RE
NAXMT170508 PEER-L	●	●	●	●	●	—	0.8
NAXMT170504 PEER-G	●	●	●	●	●	—	0.4
NAXMT170508 PEER-G	●	●	●	●	●	—	0.8
NAXMT170512 PEER-G	●	●	●	●	●	—	1.2
NAXMT170516 PEER-G	●	●	●	●	●	—	1.6
NAXMT170520 PEER-G*	●	●	●	●	●	—	2.0
NAXMT170530 PEER-G*	●	●	●	●	●	—	3.0
NAXMT170508 PEER-H	●	●	●	●	●	—	0.8
NAXMT170512 PEER-H	●	●	●	●	●	—	1.2
NAXET170502 PEFR-S	—	—	—	—	—	●	0.2
NAXET170504 PEFR-S	—	—	—	—	—	●	0.4
NAXET170508 PEFR-S	—	—	—	—	—	●	0.8

螺纹直径末尾编码 L: 低阻力型、G: 泛用型、H: 高强度型、S: 铝用
使用带 * 标记的刀片时，必须对刀身进行修正。

刀片材料和断屑槽详情

D-92

* 安装刀片的圆弧角为 RE2.0 RE3.0 时，必须对刀身进行修正。



请对这一刀边进行额外加工。
额外加工的大致标准

刀片的圆弧角 RE2.0 时：CHW1
(NAXMT170520 PEER-G)
刀片的圆弧角 RE3.0 时：CHW1.5
(NAXMT170530 PEER-G)
标准：CHW0.5。

●配件 Parts

请参照 D-92。 See page D-92。

WAVY 铣刀 NWEX 型

WAVY MILL NWEX type

●刀片材料适用领域

Application range.

ISO 分类	P01 (精加工切削)	P10 (轻切削)	P20 (半精加工切削)	P30 (粗加工切削)	P40 (重切削)
P 钢					
M 不锈钢					

ISO 分类	K01 (精加工切削)	K10 (轻切削)	K20 (半精加工切削)	K30 (粗加工切削)
K 铸铁				

钢用材料

Grade for Steel

材 料 Material	用 途 Application
NCP100	一般～高速加工用、湿式加工用 General to high speed and wet cutting
NCP200	普通钢、模具钢的泛用加工用 General grade for Steel
NCP300	断续加工用、不锈钢加工用 Very tough grade for Steel and Stainless Steel

铸铁用材料

Grade for Cast Iron and Ductile Cast Iron

材 料 Material	用 途 Application
NCK200	铸铁、球墨铸铁的泛用加工用 General cutting
NCK300	铸铁、球墨铸铁的泛用～断续加工用 General to heavy cutting

铝用材料

Grade for Aluminum

材 料 Material	用 途 Application
NDL100	铝合金、铜合金加工用 For Aluminum Alloy and Copper Alloy cutting

●断屑槽选择指南

Chip breaker selection guide

普通钢、不锈钢、铸铁用	
	刀尖强度 → 大
铝用	
S 型 (NDL100)	

断屑槽	L 型	G 型	H 型	S 型
被削材	钢、不锈钢、铸铁			铝
特征	低阻力型	泛用型	高强度型	大斜角型
3000 型刀片断面形状				
2000 型刀片断面形状				
用途	轻切削、低刚性加工、毛刺对策	主断屑槽泛用～断续加工	高硬度钢的重切削、强断续加工	铝、有色金属

●配件 Parts

订货方式 商品编码

商品编码 Code	螺丝 Screw	螺丝扳手 Wrench	推荐紧固力矩 N · m	适用钻杆 Applicable Holder
	BFTX0305IP	TRDR08IP	2.0	NWEX2014E(EL) ~ NWEX2018E(EL)
	BFTX0306IP			NWEX2020E(EL) ~ NWEX2063E NWEX2040F ~ NWEX2063F
	BFTX0407IP	TRDR15IP	3.0	NWEX3025E(EL) ~ NWEX3030EL
	BFTX0409IP			NWEX3032E(EL) ~ 3063E(ES) NWEX3030F 型 / NWEX3000R 型 / NWEXF3000R 型

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 适合用于肩部加工、槽加工、开槽加工、钻头加工的高效率加工。

This end mill is suitable for shoulder milling, grooving, contouring, drilling.

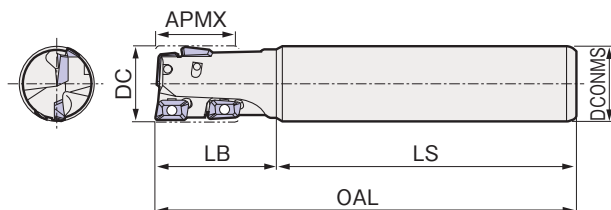

●钻杆 Holder

LIST 9336

订货方式 商品编码

●标准型 Standard type

单位 (Unit) : mm

商品编码 Code	外径 DC	尺寸 Dimension(mm)					总刃数 No. of Teeth	有效刃数 Effective Teeth	库存 Stock	适用刀片 Applicable Insert
		DCONMS	APMX	LB	LS	OAL				
XSWMM2020E	20	20	17	35	95	130	3	1	●	APMT · APET1035
XSWMM2025E	25	25	26	40	100	140	4			

●长柄型 Long shank type

XSWMM2020EL	20	20	17	60	125	185	3	1	●	APMT · APET1035
XSWMM2025EL	25	25	26	75	145	220	4			


●刀片 Inserts

LIST 9326 (APMT), LIST 9356 (APET)

订货方式 刀片型号 材料



单位 (Unit) : mm



刀片型号 Code	材料 Material		尺寸 Dimension(mm)		库存 Stock
			圆弧半径 RE	①	
APMT 103504PDERN	XSZ350	XSZ310	0.4	± 0.08	●
APMT 103504PDERHN	XSZ350	XSZ310	0.4	± 0.08	●
APET 103504PDFRSN	DLC100		0.4	± 0.05	●

末尾第2位为H的是刀尖强化型刀片。
推荐使用刀尖强化型。


PDERHN: Stronger cutting edge.
Recommend PDERHN type inserts.

材料	适用
XSZ350	钢用
XSZ310	铸铁用
DLC100	铝用

●配件 Parts

订货方式 商品编码

商品编码 Code	螺丝 Screw	螺丝扳手 Wrench	推荐紧固力矩 N · m	适用钻杆 Applicable Holder
BFTX02506N	TRD08		2.0	所有尺寸 All sizes

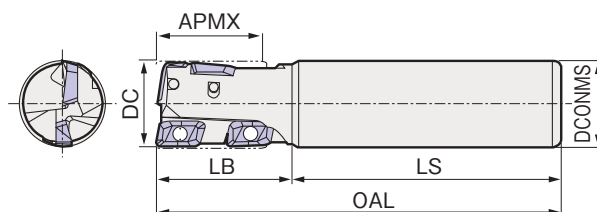

● 钻杆 Holder

LIST 9336

订货方式 商品编码

● 标准型 Standard type

单位 (Unit) : mm

商品编码 Code	外径 DC	尺寸 Dimension(mm)					总刃数 No. of Teeth	有效刃数 Effective Teeth	库存 Stock	适用刀片 Applicable Insert
		DCONMS	APMX	LB	LS	OAL				
XSWMM3032E	32	32	39	50	100	150	4	1	●	APMT · APET1605
XSWMM3040E	40			55	105	160				

● 长柄型 Long shank type

XSWMM3032EL	32	32	39	90	140	230	4	1	●	APMT · APET1605
XSWMM3040EL	40			55	185	240				


● 刀片 Inserts

LIST 9326 (APMT) , LIST 9356 (APET)

订货方式 刀片型号 材料



单位 (Unit) : mm



刀片型号 Code	材料 Material		尺寸 Dimension(mm)		库存 Stock
			圆弧半径 RE	①	
APMT 160508PDERN	XSZ350	XSZ310	0.8	± 0.08	●
APMT 160508PDERHN	XSZ350	XSZ310	0.8	± 0.08	●
APMT 160512PDERN	XSZ350	XSZ310	1.2	± 0.08	●
APMT 160512PDERHN	XSZ350	XSZ310	1.2	± 0.08	●
APMT 160516PDERN	XSZ350	XSZ310	1.6	± 0.08	●
APMT 160516PDERHN	XSZ350	XSZ310	1.6	± 0.08	●
APMT 160520PDERHN	XSZ350	XSZ310	2.0	± 0.08	●
APMT 160530PDERHN	XSZ350	XSZ310	3.0	± 0.08	●
APMT 160540PDERHN	XSZ350	XSZ310	4.0	± 0.08	●
APMT 160550PDERHN	XSZ350	XSZ310	5.0	± 0.08	●
APMT 160560PDERHN	XSZ350	XSZ310	6.0	± 0.08	●
APET 160504PDFRSN	DLC100		0.4	± 0.05	●
APET 160508PDFRSN	DLC100		0.8	± 0.05	●

末尾第 2 位为 H 的是刀尖强化型刀片。

使用圆弧半径 2.0 以上的刀片时, 必须修正钻杆。

推荐使用刀尖强化型。

PDERHN : Stronger cutting edge.

When using insert of R2.0 and over, the holder must be modified.

Recommend PDERHN type inserts.

材料	适用
XSZ350	钢屑
XSZ310	铸铁屑
DLC100	铝屑

● 配件 Parts

订货方式 商品编码

商品编码 Code	螺丝 Screw	螺丝扳手 Wrench	推荐紧固力矩 N · m	适用钻杆 Applicable Holder
				
BFTX03584		TRD15	3.0	所有尺寸 All sizes

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适用于模具钢等多种材料的高速粗加工。

This end mill is adaptable for high speed roughing of a wide variety of work materials.

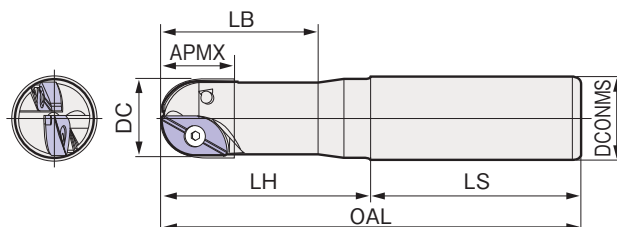

●钻杆 Holder

LIST 9328

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	尺寸 Dimension(mm)							库存 Stock	适用刀片 Applicable Insert
		DC	DCONMS	APMX	LH	LS	LB	OAL		
XSWBMR2200S	10.0	20	25	20	60	80	40	140	●	ZNMT1804100-CN ZNMT2004100-SN
XSWBMR2200M						140		200		
XSWBMR2200L					80	170		250		
XSWBMR2250S	12.5	25	32	23	70	80	50	150		ZNMT2205125-CN ZNMT2305125-SN
XSWBMR2250M					73	147		220		
XSWBMR2250L					100	200		300		
XSWBMR2300S	15.0	30	32	28	80	80	60	160	●	ZNMT2706150-CN ZNMT2806150-SN
XSWBMR2300M					85	155		240		
XSWBMR2300L					120	230		350		

●刀片 Inserts

LIST 9328

订货方式 刀片型号 材料



单位 (Unit) : mm

刀片型号 Code	材料 Material	尺寸 Dimension(mm)					形状 Figure	库存 Stock	适用钻杆 Applicable Holder
		A	B	T	RE				
ZNMT1804100-CN	XSZ350	XSZ310	18.00	9.76	4.76	10.0	Fig. 1	●	XSWBMR2200
ZNMT2004100-SN	XSZ350	XSZ310	20.00	7.50	4.37	10.0	Fig. 2	●	XSWBMR2200
ZNMT2205125-CN	XSZ350	XSZ310	22.50	12.20	5.70	12.5	Fig. 1	●	XSWBMR2250
ZNMT2305125-SN	XSZ350	XSZ310	23.00	9.38	5.56	12.5	Fig. 2	●	XSWBMR2250
ZNMT2706150-CN	XSZ350	XSZ310	27.00	14.64	6.75	15.0	Fig. 1	●	XSWBMR2300
ZNMT2806150-SN	XSZ350	XSZ310	28.00	11.25	6.35	15.0	Fig. 2	●	XSWBMR2300

刀片使用 Fig1 和 Fig2 的组合。
Inserts is used in the combination of Fig. 1 and Fig.2.

材料	适用
XSZ350	钢用
XSZ310	铸铁用

●配件 Parts

订货方式 商品编码

商品编码 Code	螺丝 Screw	螺丝扳手 Wrench	螺丝扳手 Wrench	推荐紧固力矩 N · m	适用钻杆 Applicable Holder
BFTX0307N		TRX10	—	2.0	XSWBMR2200
BFTX0409N		—	TRD15	3.0	XSWBMR2250
BFTX0511N		—	TRD20	5.0	XSWBMR2300

刀杆上未组装刀片。 Inserts are not included with in holder.

1 盒中含 10 个刀片。 Packed quantity: 10Pcs.

刀杆上附带了防烧结剂 SUMI-P. ANTI-SEIZURE LUBRICANT is included in holder.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●适合模具等的曲面精加工。

This end mill is suited for finish profile milling of molds and dies.

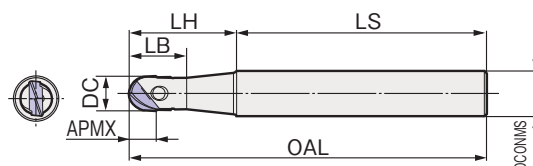

●钻杆 Holder

LIST 9400

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	尺寸 Dimension(mm)							库存 Stock	适用刀片 Applicable Insert
		DC	DCONMS	APMX	LH	LS	LB	OAL		
XSWBMF1160S	8.0	16	20	12.0	50	80	25.5	130	●	ZPGU2061080-N
XSWBMF1160M						130		180		
XSWBMF1160L					70	150		220		
XSWBMF1200S	10.0	20	25	15.0	60	80	32.0	140		ZPGU2471100-N
XSWBMF1200M						140		200		
XSWBMF1200L					80	170		250		
XSWBMF1250S	12.5	25	32	18.5	70	80	36.0	150		ZPGU2876125-N
XSWBMF1250M						73		147		
XSWBMF1250L					100	200		300		
XSWBMF1300S	15.0	30		22.5	80	80	43.0	160		ZPGU3486150-N
XSWBMF1300M						85		155		
XSWBMF1300L					120	230		350		


●刀片 Inserts

LIST 9400

订货方式 刀片型号



单位 (Unit) : mm



刀片型号 Code	材料 Material	尺寸 Dimension(mm)					库存 Stock	适用钻杆 Applicable Holder
		DC	L	APMX	T	RE		
ZPGU2061080-N	XSZ120	16	20.5	12.0	6.1	8.0	●	XSWBMF1160
ZPGU2471100-N	XSZ120	20	24.5	15.0	7.1	10.0	●	XSWBMF1200
ZPGU2876125-N	XSZ120	25	28.5	18.5	7.6	12.5	●	XSWBMF1250
ZPGU3486150-N	XSZ120	30	34.4	22.5	8.6	15.0	●	XSWBMF1300

螺纹尺寸 Code	包装数量
ZPGU2061080-N	10pc
ZPGU2471100-N	
ZPGU2876125-N	5pc
ZPGU3486150-N	

●配件 Parts

订货方式 商品编码

商品编码 Code	螺丝 Screw	螺丝扳手 Wrench	推荐紧固力矩 N · m	适用钻杆 Applicable Holder
				
	BFTG0513F	TRD20		
	BFTG0617F	TRD25		
	BFTG0621F	TRD25		
	BFTG0825F	TRD25		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSX2C-1.5D/2D | GSX 铣刀 2 刃型 1.5D/2D GSX MILL Two Flutes 1.5D/2D

	被削材 Work Material	一般结构用钢 SS		碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
		Structural Steel		Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy	
				150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC					
	外径 Dia. of Mill (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度
		Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)
侧面加工 Side Milling	1	19600	250	19600	250	18300	180	12700	100	9000	60	11000	70	9000	50
	2	11200	340	11200	340	10500	240	7300	130	5300	80	6400	90	5300	70
	4	6400	460	6400	460	6000	320	4200	180	3000	110	3600	120	3000	90
	6	4600	560	4600	560	4300	400	3000	210	2200	130	2700	140	2200	100
	8	3400	560	3400	560	3200	400	2200	210	1600	130	2000	140	1600	100
	10	2800	560	2800	560	2600	400	1800	210	1300	130	1600	140	1300	100
	12	2300	560	2300	560	2200	400	1500	210	1100	130	1300	140	1100	100
	16	1700	450	1700	450	1600	320	1100	180	800	100	1000	110	800	85
	20	1350	380	1350	380	1300	280	900	160	650	90	800	100	650	75
	切削量 Depth of cut	a _p	1.5DC				1.0DC				0.02DC				
槽加工 Grooving	1	19600	200	19600	250	18300	180	12700	100	9000	60	11000	50	4500	20
	2	11200	270	11200	340	10500	240	7300	130	5300	80	6400	65	2650	25
	4	6400	370	6400	460	6000	320	4200	180	3000	110	3600	80	1500	35
	6	4600	450	4600	560	4300	400	3000	210	2200	130	2650	100	1100	40
	8	3400	450	3400	560	3200	400	2200	210	1600	130	2000	100	800	40
	10	2800	450	2800	560	2600	400	1800	210	1300	130	1600	100	650	40
	12	2300	450	2300	560	2200	400	1500	210	1100	130	1300	100	500	40
	16	1700	360	1700	450	1600	320	1100	180	800	100	1000	80	400	35
	20	1350	300	1350	380	1300	280	900	160	650	90	800	70	320	30
	切削量 Depth of cut	a _p	0.2DC		0.5DC		0.2DC		0.05DC		0.2DC		0.2DC		



GSX2C-1.5D/2D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 4) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

D-14 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

2GS 2PLXS GSX2P-2.5D

GS 铣刀 2 刃型 GS MILL Two Flutes

X's 铣刀 2 刃型 X's-mill Two Flutes

GSX 铣刀 2 刃 P 型 2.5D GSX MILL Two Flutes 2.5D P Type

	被削材 Work Material	一般结构用钢 SS Structural Steel		碳钢 铸铁 Carbon Steel Cast Iron		S-C FC- 调质钢 Alloy Steel Heat Treated Steel		合金钢 SCM 调质钢 NAK, HPM Alloy Steel Heat Treated Steel		调质钢 淬硬钢 Heat Treated Steel Hardened Steel		淬硬钢 Hardened Steel		不锈钢 SUS304, SUS316 Stainless Steel		耐热合金 钛合金 Heat Resistant Alloy Titanium Alloy	
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC									
		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
侧面加工 Side Milling	外径 Dia. of Mill (mm)																
	1	16,000	180	16,000	180	15,500	130	10,500	70	7,500	45	9,400	50	7,500	35		
	2	9,500	250	9,500	250	9,000	200	6,200	100	4,500	60	5,400	70	4,500	50		
	4	5,400	330	5,400	330	5,000	250	3,400	120	2,500	75	3,000	90	2,500	65		
	6	4,000	400	4,000	400	3,700	300	2,550	150	1,900	100	2,300	110	1,900	80		
	8	3,000	400	3,000	400	2,800	300	1,900	150	1,400	100	1,700	110	1,400	80		
	10	2,400	400	2,400	400	2,200	300	1,500	150	1,100	100	1,300	110	1,100	80		
	12	2,000	400	2,000	400	1,850	300	1,300	150	950	100	1,100	110	950	80		
	16	1,500	330	1,500	330	1,400	250	950	120	700	75	850	85	700	60		
	20	1,200	280	1,200	280	1,100	220	750	110	550	65	650	75	550	55		
	切削量 Depth of cut	a _p	2.5DC				2.0DC				0.01DC						
		a _e	0.02DC														
槽加工 Grooving	1	16,600	180	16,600	180	15,500	130	10,500	70	7,500	45	9,400	50	7,500	35		
	2	9,500	250	9,500	250	9,000	200	6,200	100	4,500	60	5,400	70	4,500	50		
	4	5,400	330	5,400	330	5,000	250	3,400	120	2,500	75	3,000	90	2,500	65		
	6	4,000	400	4,000	400	3,700	300	2,550	150	1,900	100	2,300	110	1,900	80		
	8	3,000	400	3,000	400	2,800	300	1,900	150	1,400	100	1,700	110	1,400	80		
	10	2,400	400	2,400	400	2,200	300	1,500	150	1,100	100	1,300	110	1,100	80		
	12	2,000	400	2,000	400	1,850	300	1,300	150	950	100	1,100	110	950	80		
	16	1,500	330	1,500	330	1,400	250	950	120	700	75	850	85	700	60		
	20	1,200	280	1,200	280	1,100	220	750	110	550	65	650	75	550	55		
	切削量 Depth of cut	a _p	1.5DC														
		a _e	0.02DC 以下														

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

2GS/2PLXS/GSX2P-2.5D

- 1) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 2) 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。
- 3) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 4) 干式加工时，请进行气吹。
- 5) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 6) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Adjust cutting condition when an unusual vibration, different sound occur by cutting.
- 2) When using low speed machines, use the maximum speed and adjust the feed rate.
- 3) Use highly rigid machining center and holder.
- 4) Use an air blow for dry process.
- 5) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 6) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

D-15, D-16, D-20 ◀ ▶ 尺寸表 Stocked Sized

2CE | 超硬铣刀 2 刃型 ANCHOR V Two Flutes

被削材 Work Material	模具钢 预硬钢		工具钢 预硬钢		碳钢 合金钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		
	Mold Steel Pre-Hardened Steel		Tool Steel Pre-Hardened Steel		Carbon Steel Alloy Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
	35 ~ 45HRC		25 ~ 35HRC		~ 250HB						~ 200HB				
外径 Dia. of Mill (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	
	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	
	2	4000	65	5600	100	8000	160	3200	50	3200	30	8000	350	14300	630
	3	2700	70	3700	110	5300	160	2100	55	2100	40	5300	350	9500	655
	5	1600	70	2200	120	3200	175	1300	60	1300	45	3200	385	5700	655
	6	1300	80	1900	135	2700	195	1100	65	1060	50	2700	390	4800	690
	8	990	80	1400	145	2000	210	800	65	800	50	2000	400	3600	690
	10	800	80	1100	145	1600	210	640	65	640	50	1600	400	2900	695
	12	660	70	930	145	1300	205	530	65	530	50	1300	390	2400	690
	15	530	65	740	135	1100	200	420	55	420	45	1100	395	1900	655
	20	400	55	560	125	800	175	320	50	320	45	800	350	1400	615
	侧面加工	a _p	1.5DC		1.5DC		1.5DC		1.5DC		1.0DC		1.5DC		1.5DC
a _e		0.15DC		0.2DC		0.25DC		0.15DC		0.1DC		0.25DC		0.25DC	
a _n		0.15DC		0.2DC		0.25DC		0.15DC		0.1DC		0.5DC		0.5DC	

侧面加工时
Side Milling



槽加工时
Grooving



DC: 铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

2CE

- 1) 为了进行稳定的加工，请使用高精度的机床、刀杆。
- 2) 采用干式加工（推荐使用气吹）时，请分别将转速和进给速度降低到 70%。
- 3) 加工不锈钢时，请采用湿式加工。
- 4) 对于耐热合金、钛合金，推荐使用非水溶性切削油剂。

- 1) Use precise machine and holder.
- 2) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 3) Use in wet condition in case of Stainless Steel.
- 4) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

D-18 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSX2C-2.5D/3D | GSX 铣刀 2 刃型 2.5D/3D GSX MILL Two Flutes 2.5D/3D

	被削材 Work Material	一般结构用钢 SS		碳钢 铸铁		S-C FC-		合金钢 调质钢		SCM NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
		Structural Steel		Carbon Steel Cast Iron				Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy			
				150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC									
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		
	1	14000	150	14000	150	13000	110	8900	60	6400	38	8000	43	6400	30				
	2	8000	210	8000	210	7700	170	5300	85	3800	50	4600	60	3800	43				
	4	4600	280	4600	280	4300	210	2900	100	2100	65	2600	75	2100	44				
	6	3400	340	3400	340	3100	260	2200	130	1600	85	2000	95	1600	70				
	8	2600	340	2600	340	2400	260	1600	130	1200	85	1400	95	1200	70				
	10	2000	340	2000	340	1900	260	1300	130	940	85	1100	95	940	70				
	12	1700	340	1700	340	1600	260	1100	130	810	85	940	95	810	70				
	16	1300	280	1300	280	1200	210	800	100	600	65	720	75	600	50				
	20	1000	240	1000	240	940	190	640	95	470	55	550	64	470	47				
	切削量 Depth of cut	ap	2.5DC								2.0DC								
	ae	0.02DC								0.01DC									
槽加工 Grooving	1	14000	100	14000	130	13000	95	8900	50	6400	30	8000	26	3200	9				
	2	8100	140	8100	170	7700	120	5300	70	3800	43	4600	34	1900	13				
	4	4600	190	4600	230	4300	160	2900	95	2100	55	2600	43	1050	17				
	6	3400	230	3400	280	3100	205	2200	100	1600	70	1900	50	800	22				
	8	2600	230	2600	280	2400	205	1600	100	1200	70	1400	50	600	22				
	10	2000	230	2000	280	1900	205	1300	100	940	70	1100	50	450	22				
	12	1700	230	1700	280	1600	205	1100	100	770	70	940	50	380	22				
	16	1300	180	1300	230	1200	160	800	95	600	50	730	43	300	17				
	20	1000	150	1000	200	940	145	640	80	480	47	550	34	240	13				
	切削量 Depth of cut	ap	0.1DC				0.2DC				0.05DC				0.1DC				

GSX2C-2.5D/3D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
 - 2) 干式加工时, 请进行气吹。
 - 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
 - 4) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。
- 1) Use highly rigid machining center and holder.
 - 2) Use an air blow for dry process.
 - 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
 - 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

D-19, D-20 尺寸表 Stocked Sized

GSX2C-4D | GSX 铣刀 2 刃型 4D GSX MILL Two Flutes 4D

被削材 Work Material	一般结构用钢 SS		碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		
	Structural Steel		Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		
			150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC						
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
1	9600	90	9600	90	9000	65	6300	35	4400	20	5400	28	4400	18	
2	5500	125	5500	125	5200	85	3600	50	2600	28	3200	35	2600	25	
4	3200	170	3200	170	2900	120	2100	65	1500	42	1800	45	1500	28	
6	2200	210	2200	210	2100	145	1500	75	1100	50	1300	50	1100	35	
8	1700	210	1700	210	1500	145	1100	75	850	50	1000	50	850	35	
10	1400	210	1400	210	1300	145	900	75	630	50	770	50	670	35	
12	1100	210	1100	210	1100	145	770	75	560	50	630	50	560	35	
16	840	170	840	170	770	120	560	65	420	35	490	42	420	32	
20	670	140	670	140	630	105	460	60	320	32	390	35	340	28	
切削量 Depth of cut	ap	3.5DC								3.0DC					
	ae	0.01DC				0.005DC				0.005DC					

侧面加工时
Side Milling

DC: 立铣刀外径
Dia. of Mill

D-21 尺寸表 Stocked Sized

GSX2C-4D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
 - 2) 干式加工时, 请进行气吹。
 - 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
 - 4) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。
- 1) Use highly rigid machining center and holder.
 - 2) Use an air blow for dry process.
 - 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
 - 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

**2MNE
4MNE**

超硬微型铣刀 2 刃型 Carbide Mini-Square End Mills Two Flutes

超硬微型铣刀 4 刃型 Carbide Mini-Square End Mills Four Flutes

被削材 Work Material	合金钢		碳钢		特殊钢		铝合金 铜合金		铸铁		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill	
	Alloy Steel ~ 40HRC		Carbon Steel		Special Steel		Aluminum Alloy Copper Alloy		Cast Iron			
外径 Dia. of Mill (mm)	切削速度 Speed (m/min)	进给 Feed (mm/tooth)	切削速度 Speed (m/min)	进给 Feed (mm/tooth)	切削速度 Speed (m/min)	进给 Feed (mm/tooth)	切削速度 Speed (m/min)	进给 Feed (mm/tooth)	切削速度 Speed (m/min)	进给 Feed (mm/tooth)		
0.1 ~ 0.25	5 ~ 10	0.001 ~ 0.003	6 ~ 12	0.001 ~ 0.005	4 ~ 18	0.001 ~ 0.003	15 ~ 20	0.001 ~ 0.005	8 ~ 15	0.001 ~ 0.005		
0.3 ~ 0.4	6 ~ 12	0.001 ~ 0.005	8 ~ 15	0.001 ~ 0.005	4 ~ 18	0.001 ~ 0.003	20 ~ 30	0.001 ~ 0.005	25 ~ 35	0.002 ~ 0.005		
0.5 ~ 0.6	8 ~ 15	0.001 ~ 0.005	10 ~ 18	0.001 ~ 0.005	5 ~ 10	0.001 ~ 0.003	25 ~ 35	0.003 ~ 0.008	25 ~ 35	0.003 ~ 0.008		
0.7 ~ 0.95	10 ~ 18	0.003 ~ 0.01	15 ~ 25	0.003 ~ 0.01	8 ~ 15	0.003 ~ 0.008	30 ~ 40	0.005 ~ 0.01	30 ~ 40	0.005 ~ 0.01		
1.0 ~ 2.0	10 ~ 20	0.003 ~ 0.01	15 ~ 25	0.005 ~ 0.015	8 ~ 15	0.003 ~ 0.008	70 ~ 80	0.01 ~ 0.02	35 ~ 45	0.01 ~ 0.02		
切削量 Depth of cut	ap	0.4DC (DC<1mm)				1.5DC (DC ≥ 1mm)						
	ae	0.1DC										

2MNE/4MNE

- 1) 为了进行稳定的加工, 请使用高精度的机床、刀杆。
- 2) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 3) 加工不锈钢时, 请采用湿式加工。
- 4) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) Use precise machine and holder.
- 2) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 3) Use in wet condition in case of Stainless Steel.
- 4) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

D-18, D-36 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

GSX3C-1.5D/2D

GSX 铣刀 3 刃型 1.5D/2D GSX MILL Three Flutes 1.5D/2D

	被削材 Work Material	一般结构用钢 SS Structural Steel		碳钢 铸铁	S-C FC-	合金钢 调质钢	SCM NAK, HPM	调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		
				Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel	Heat Resistant Alloy Titanium Alloy			
				150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC						
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
	1	19600	300	19600	300	18300	210	12700	130	9000	80	11000	90	9000	65	
	2	11200	410	11200	410	10500	280	7300	170	5300	100	6400	120	5300	90	
	4	6400	550	6400	550	6000	370	4200	230	3000	140	3600	150	3000	120	
	6	4600	670	4600	670	4300	460	3000	270	2200	170	2700	180	2200	130	
	8	3400	670	3400	670	3200	460	2200	270	1600	170	2000	180	1600	130	
	10	2800	670	2800	670	2600	460	1800	270	1300	170	1600	180	1300	130	
	12	2300	670	2300	670	2200	460	1500	270	1100	170	1300	180	1100	130	
	16	1700	550	1700	550	1600	370	1100	230	800	140	1000	150	800	100	
	20	1350	490	1350	490	1300	330	900	210	650	120	800	130	650	90	
	切削量 Depth of cut	ap	1.5DC								1.0DC					
	ae	0.05DC								0.02DC						
槽加工 Grooving	1	19600	240	19600	300	18300	210	12700	130	9000	80	11000	65	4500	25	
	2	11200	320	11200	410	10500	280	7300	170	5300	100	6400	85	2650	35	
	4	6400	450	6400	550	6000	370	4200	230	3000	140	3600	100	1500	50	
	6	4600	540	4600	670	4300	460	3000	270	2200	170	2650	130	1150	55	
	8	3400	540	3400	670	3200	460	2200	270	1600	170	2000	130	800	55	
	10	2800	540	2800	670	2600	460	1800	270	1300	170	1600	130	650	55	
	12	2300	540	2300	670	2200	460	1500	270	1100	170	1300	130	500	55	
	16	1700	440	1700	550	1600	370	1100	230	800	140	1000	110	400	45	
	20	1350	390	1350	490	1300	330	900	210	650	120	800	90	320	40	
		切削量 Depth of cut	ap	0.2DC		0.5DC		0.2DC		0.05DC		0.2DC				



侧面加工时
Side Milling

DC: 立铣刀外径
Dia. of Mill



槽加工时
Grooving

DC: 立铣刀外径
Dia. of Mill

GSX3C-1.5D/2D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时, 请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 4) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。
- 5) 在高速切削条件下, 推荐使用气吹。但加工不锈钢时, 请使用水溶性切削油剂。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.
- 5) Recommend dry process (air blow) for high speed milling. However, use the water soluble cutting fluid for Stainless Steel.

D-21, D-22 ◀ ▶ 尺寸表 Stocked Sized

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSXSLT-1.5D | GSX 铣刀 开槽型 1.5D GSX MILL Slot 1.5D

	被削材 Work Material	一般结构用钢 SS		碳钢 铸铁		S-C FC-		合金钢 SCM		调质钢		淬硬钢		不锈钢		耐热合金		
		Structural Steel		Carbon Steel		Cast Iron		Alloy Steel		Heat Treated Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy		
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC										
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 侧面加工时 Side Milling
	1	19600	300	19600	300	18300	210	12700	130	9000	80	11000	90	9000	65			
	2	11200	410	11200	410	10500	280	7300	170	5300	100	6400	120	5300	90			
	4	6400	550	6400	550	6000	370	4200	230	3000	140	3600	150	3000	120			
	6	4600	670	4600	670	4300	460	3000	270	2200	170	2700	180	2200	130			
	8	3400	670	3400	670	3200	460	2200	270	1600	170	2000	180	1600	130			
	10	2800	670	2800	670	2600	460	1800	270	1300	170	1600	180	1300	130			
	12	2300	670	2300	670	2200	460	1500	270	1100	170	1300	180	1100	130			
	16	1700	550	1700	550	1600	370	1100	230	800	140	1000	150	800	100			
	切削量 Depth of cut	a _p	1.5DC										1.0DC					
	a _e	0.05DC										0.02DC						
槽加工 Grooving	1	19600	240	19600	300	18300	210	12700	130	9000	80	11000	65	4500	25	 槽加工时 Grooving		
	2	11200	320	11200	410	10500	280	7300	170	5300	100	6400	85	2650	35			
	4	6400	450	6400	550	6000	370	4200	230	3000	140	3600	100	1500	50			
	6	4600	540	4600	670	4300	460	3000	270	2200	170	2650	130	1150	55			
	8	3400	540	3400	670	3200	460	2200	270	1600	170	2000	130	800	55			
	10	2800	540	2800	670	2600	460	1800	270	1300	170	1600	130	650	55			
	12	2300	540	2300	670	2200	460	1500	270	1100	170	1300	130	500	55			
	16	1700	440	1700	550	1600	370	1100	230	800	140	1000	110	400	45			
切削量 Depth of cut	a _p	0.2DC		0.5DC				0.2DC		0.05DC		0.2DC				DC: 立铣刀外径 Dia. of Mill		
钻孔 Drilling	1	19600	70	19600	90	18300	60	12700	40	9000	25	11000	20	4500	10			
	2	11200	90	11200	120	10500	80	7300	50	5300	30	6400	25	2650	15			
	4	6400	130	6400	160	6000	110	4200	70	3000	40	3600	30	1500	20			
	6	4600	160	4600	200	4300	130	3000	80	2200	50	2650	40	1150	20			
	8	3400	160	3400	200	3200	130	2200	80	1600	50	2000	40	800	20			
	10	2800	160	2800	200	2600	130	1800	80	1300	50	1600	40	650	20			
	12	2300	160	2300	200	2200	130	1500	80	1100	50	1300	40	500	20			
	16	1700	130	1700	160	1600	110	1100	70	800	40	1000	35	400	15			

GSXSLT-1.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 4) 对不锈钢、耐热合金、钛合金进行钻头加工时，请按 0.1DC 进行分级加工。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) Use step feed in drilling for Stainless Steel, Heat Resistant Alloy, Titanium Alloy. The amount of the step is $0.1 \times DC$

D-22 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSSLT | GS 铣刀 开槽型 GS MILL SLOT

侧面加工、槽加工 Side Milling & Grooving

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		铸铁 FC,FCD		合金钢 SCM 调质钢 NAK, HPM		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		侧面加工时 Side Milling 	
	Structural Steel Carbon Steel		Cast Iron		Alloy Steel Heat Treated Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy			
	150 ~ 250HB				25 ~ 35HRC		35 ~ 50HRC							
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 	
4	6000	500	6000	500	5800	350	3600	190	3300	130	2000	70		
6	4600	580	4600	580	4300	390	2500	200	2200	140	1400	80		
8	3400	580	3400	580	3200	390	1850	200	1600	140	1000	80		
10	2800	590	2800	590	2600	390	1500	200	1300	140	800	80		
12	2300	590	2300	590	2200	400	1250	200	1100	140	700	80		
16	1700	470	1700	470	1600	380	900	190	800	130	500	70		
侧面加工	ap	1.5DC						1.0DC		1.5DC		1.0DC		DC: 立铣刀外径 Dia. of Mill
	ae	0.1DC						0.05DC		0.1DC		0.05DC		
槽加工	ap	1.0DC				0.5DC		0.2DC		0.3DC		0.2DC		

钻头加工 Drilling

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		铸铁 FC,FCD		合金钢 SCM 调质钢 NAK, HPM		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
	Structural Steel Carbon Steel		Cast Iron		Alloy Steel Heat Treated Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy	
	150 ~ 250HB				25 ~ 35HRC		35 ~ 50HRC					
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
4	4000	150	4000	150	2400	90	2000	60	2400	70	1600	40
6	2700	150	2700	150	1600	90	1300	60	1600	70	1100	40
8	2000	140	2000	140	1200	90	1000	60	1200	70	800	40
10	1600	130	1600	130	1000	80	800	50	1000	60	640	40
12	1300	110	1300	110	800	70	660	40	800	50	530	30
16	1000	100	1000	100	600	70	500	40	600	50	400	30

D-23 ◀ ▶ 尺寸表 Stocked Sized

GSSLT

- 1) 为了进行稳定的加工，推荐使用刚性高的机械。
- 2) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 3) 钻头加工条件是假设使用薄板和主轴锥度为 30 号的机械时的值。加工高刚性机械、工件时，可将转速、进给速度提升到 1.5 倍。

- 1) Use highly rigid machining center.
- 2) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 3) Cutting condition assumes use in thin sheet or #30 taper spindle machining center. When processing highly rigid machining center and workpieces, both the rotation speed and feed rate can be increased up to 1.5 times.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件
Standard Cutting Condition for Carbide End Mills

GEOSLT | X's 铣刀 GEO 开槽型 X's-mill Geo SLOT

侧面加工、槽加工 Side Milling & Grooving

被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC- Structural Steel Carbon Steel Cast Iron		合金钢 SCM 调质钢 NAK, HPM Alloy Steel Heat Treated Steel		调质钢 淬硬钢 Heat Treated Steel Hardened Steel		不锈钢 SUS304, SUS316 Stainless Steel		耐热合金 钛合金 Heat Resistant Alloy Titanium Alloy		侧面加工时 Side Milling 	
	150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC							
	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)		进给速度 Feed (mm/min)
2	9000	540	6000	320	4000	240	5500	240	2600	90	槽加工时 Grooving 	
4	6600	600	4500	340	3000	280	4000	240	2000	90		
6	4800	720	3000	360	2500	280	3000	360	1200	90		
8	3600	750	2200	460	2000	300	2000	390	1000	100		
10	2800	750	1800	460	1500	300	1700	410	800	120		
12	2400	710	1500	410	1200	280	1500	380	700	100		
14	2200	660	1300	370	1000	270	1200	320	600	95		
16	1800	490	1100	320	800	230	1000	270	500	90		
侧面加工	ap					1.5DC						DC: 立铣刀外径 Dia. of Mill
	ae	0.1DC				0.05DC		0.1DC		0.05DC		
槽加工	ap	1.0DC		0.5DC		0.1DC		0.15DC		0.1DC		

钻头加工 Drilling

被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC- Structural Steel Carbon Steel Cast Iron		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
	150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC					
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	钻头速度 Slotting Feed (mm/min)	转速 Rotation (min ⁻¹)	钻头速度 Slotting Feed (mm/min)	转速 Rotation (min ⁻¹)	钻头速度 Slotting Feed (mm/min)	转速 Rotation (min ⁻¹)	钻头速度 Slotting Feed (mm/min)	转速 Rotation (min ⁻¹)	钻头速度 Slotting Feed (mm/min)
2	9000	150	6000	100	4000	60	5500	60	2600	20
4	6600	250	4500	170	3000	80	4000	110	2000	40
6	4800	300	3000	200	2500	110	3000	120	1200	40
8	3600	300	2200	200	2000	120	2000	120	1000	50
10	2800	300	1800	200	1500	120	1700	130	800	50
12	2400	300	1500	200	1200	120	1500	130	700	50
14	2200	250	1300	150	1000	80	1200	100	600	40
16	1800	200	1100	120	800	60	1000	80	500	30

GEOSLT

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。

2) 干式加工时, 请进行气吹。

3) 对不锈钢进行槽加工时, 请将转速降低到表中数值的 60%、进给速度降低到表中数值的 40%。

4) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 1) Use highly rigid machining center and holder.

2) Use an air blow for dry process.

3) When grooving Stainless Steel, reduce the rotation to 60%, and the feed to 40% of table values.

4) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.

D-23 尺寸表 Stacked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSXVLSLT3-2.5D GSXVLSLT3-R-2.5D

GSX 铣刀 VL 开槽型 2.5D GSX MILL VL SLOT 2.5D GSX 铣刀 VL 开槽 圆角型 2.5D GSX MILL VL SLOT Radius 2.5D

侧面加工、槽加工 Side Milling & Grooving

被削材 Work Material			一般结构用钢 SS 碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		不锈钢 SS SUS304, SUS316		耐热合金 钛合金		侧面加工时 Side Milling 
			Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		
			150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC						
外径 Dia. of Mill (mm)			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
3			10500	500	5800	200	5300	150	5700	180	2600	80	
4			8000	550	4400	250	4000	180	4300	230	2000	90	
5			6400	750	3500	330	3100	200	3400	300	1600	100	
6			5300	750	3000	330	2600	200	2900	300	1300	100	
8			4000	750	2200	330	2000	200	2100	300	1000	100	
10			3200	750	1700	330	1600	200	1700	300	800	100	
12			2500	700	1500	300	1300	180	1400	270	660	90	
16			1800	500	1100	250	1000	150	1100	230	500	70	
切削量 Depth of cut	侧面 加工 槽加工	ap	1.5DC										DC: 立铣刀外径 Dia. of Mill
		ae	0.3DC		0.2DC		0.1DC		0.2DC		0.1DC		
		ae	1.0DC		0.2DC								

钻头加工 Drilling

被削材 Work Material	一般结构用钢 碳钢 铸铁 Structural Steel Carbon Steel Cast Iron		合金钢 调质钢 Alloy Steel Heat Treated Steel		调质钢 淬硬钢 Heat Treated Steel Hardened Steel		不锈钢 SUS304, SUS316 Stainless Steel		耐热合金 钛合金 Heat Resistant Alloy Titanium Alloy	
	150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC					
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	10500	150	5800	80	5300	70	5700	70	2600	30
4	8000	180	4400	100	4000	80	4300	90	2000	30
5	6400	210	3500	120	3100	100	3400	100	1600	30
6	5300	210	3000	120	2600	100	2900	100	1300	35
8	4000	210	2200	120	2000	100	2100	100	1000	35
10	3200	210	1700	120	1600	100	1700	100	800	30
12	2500	180	1500	100	1300	80	1400	90	660	25
16	1800	80	1100	60	1000	50	1100	50	500	20

GSXVLSLT3-2.5D/GSXVLSLT3-R-2.5D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时, 请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 4) 对不锈钢、耐热合金、钛合金进行钻头加工时, 请按 0.1DC 进行分级加工。其他被削材的切屑长度较长时, 也请按 0.1 ~ 0.5DC 的大致标准进行分级加工。
- 5) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) Use step feed in drilling for Stainless Steel, Heat Resistant Alloy, Titanium Alloy. The amount of the step is $0.1 \times DC$. In case of the other work material's chip is also long, the amount step is $0.1 \sim 0.5 \times DC$.
- 5) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

D-24, D-43 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSX4C-1D | GSX 铣刀 4 刃型 1D GSX MILL Four Flutes 1D

	被削材 Work Material	一般结构用钢 SS		碳钢 铸铁		合金钢 SCM		调质钢		淬硬钢		不锈钢		耐热合金		
		Structural Steel		Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		
				150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC						
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
	1	26,000	510	26,000	510	24,200	330	17,700	220	13,700	160	15,800	150	13,700	110	
	2	14,000	630	14,000	630	13,600	430	10,000	280	7,600	190	8,800	200	7,600	140	
	4	7,600	820	7,600	820	7,200	550	5,200	350	4,000	250	4,600	250	4,000	160	
	6	5,100	870	5,100	870	4,800	580	3,500	370	2,700	260	3,200	270	2,700	180	
	8	3,800	870	3,800	870	3,600	580	2,600	370	2,000	260	2,400	270	2,000	180	
	10	3,000	840	3,000	840	2,900	580	2,100	370	1,600	260	1,900	270	1,600	180	
	12	2,500	840	2,500	840	2,500	580	1,800	370	1,400	260	1,600	270	1,300	180	
	16	1,800	690	1,800	690	1,800	470	1,300	330	1,000	210	1,200	220	1,000	150	
	20	1,500	670	1,500	670	1,450	430	1,050	310	800	190	950	190	800	120	
切削量 Depth of cut	a _p	1.0DC								0.5DC						DC: 立铣刀外径 Dia. of Mill
	a _e	0.05DC								0.02DC						
槽加工 Grooving	1	26,000	420	26,000	510	24,200	330	17,700	220	13,700	160	15,800	110	8,400	50	
	2	14,000	500	14,000	630	13,600	430	10,000	280	7,600	190	8,800	130	4,600	60	
	4	7,600	640	7,600	820	7,200	550	5,200	350	4,000	250	4,600	160	2,400	80	
	6	5,100	690	5,100	870	4,800	580	3,500	370	2,700	260	3,200	190	1,600	100	
	8	3,800	690	3,800	870	3,600	580	2,600	370	2,000	260	2,400	190	1,200	100	
	10	3,000	670	3,000	840	2,900	580	2,100	370	1,600	260	1,900	190	1,000	100	
	12	2,500	670	2,500	840	2,500	580	1,800	370	1,400	260	1,600	190	800	100	
	16	1,800	550	1,800	690	1,800	470	1,300	330	1,000	210	1,200	160	600	80	
	20	1,500	530	1,500	670	1,450	430	1,050	310	800	190	950	130	500	75	
	切削量 Depth of cut	a _p	0.2DC		0.5DC		0.2DC		0.05DC		0.2DC				DC: 立铣刀外径 Dia. of Mill	
高速侧面加工 High Speed Milling	1	60,000	1,200	60,000	1,200	60,000	850	60,000	720	48,000	500	32,000	300	22,000	150	
	2	47,800	2,200	47,800	2,200	47,800	1,600	39,800	1,200	31,800	900	15,900	400	11,000	200	
	4	23,900	2,600	23,900	2,600	23,900	1,900	19,900	1,400	15,900	1,100	8,000	490	5,500	260	
	6	16,000	2,700	16,000	2,700	16,000	2,000	13,300	1,500	10,600	1,200	5,300	520	3,700	330	
	8	12,000	2,700	12,000	2,700	12,000	2,000	10,000	1,500	8,000	1,200	4,000	520	2,800	330	
	10	9,600	2,700	9,600	2,700	9,600	2,000	8,000	1,500	6,400	1,200	3,200	520	2,200	330	
	12	8,000	2,700	8,000	2,700	8,000	2,000	6,700	1,500	5,300	1,200	2,700	520	1,900	330	
	16	6,000	2,200	6,000	2,200	6,000	1,600	5,000	1,200	4,000	900	2,000	450	1,400	290	
	20	4,800	2,000	4,800	2,000	4,800	1,400	4,000	1,100	3,200	750	1,600	380	1,100	240	
	侧面加工 Surface Milling	a _p	1.0DC								0.5DC				—	
a _e		0.05DC								0.02DC				—		
平面加工 Planar Milling	a _p	0.01DC														仅合金 钢限于平面加工。
	a _e	0.8DC														

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSX4C-1.5D/2D | GSX 铣刀 4 刃型 1.5D/2D GSX MILL Four Flutes 1.5D/2D

	被削材 Work Material	一般结构用钢 SS		碳钢 铸铁	S-C FC-	合金钢 调质钢	SCM NAK, HPM	调质钢 淬硬钢	淬硬钢		不锈钢 SUS304, SUS316	耐热合金 钛合金			
		Structural Steel		Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy	
				150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC					
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	1	24000	470	24000	470	21000	290	14500	180	10500	120	12600	120	10500	85
	2	12800	570	12800	570	12000	380	8300	230	6000	150	7200	160	6000	110
	4	6800	730	6800	730	6400	490	4400	300	3200	200	3800	210	3200	130
	6	4600	780	4600	780	4300	520	3000	320	2200	210	2650	220	2200	150
	8	3400	780	3400	780	3200	520	2200	320	1600	210	2000	220	1600	150
	10	2800	780	2800	780	2600	520	1800	320	1300	210	1600	220	1300	150
	12	2300	780	2300	780	2200	520	1500	320	1100	210	1300	220	1100	150
	16	1700	650	1700	650	1600	420	1100	280	800	170	1000	180	800	120
	20	1350	600	1350	600	1300	380	900	260	650	150	800	160	650	100
	切削量 Depth of cut	a _p		1.5DC						1.0DC					
	a _e	0.05DC						0.02DC							
槽加工 Grooving	1	24000	380	24000	470	21000	290	14500	180	10500	120	12600	85	5200	30
	2	12800	460	12800	570	12000	380	8300	230	6000	150	7200	110	3000	40
	4	6800	580	6800	730	6400	490	4400	300	3200	200	3800	130	1600	55
	6	4600	620	4600	780	4300	520	3000	320	2200	210	2650	160	1100	65
	8	3400	620	3400	780	3200	520	2200	320	1600	210	2000	160	800	65
	10	2800	620	2800	780	2600	520	1800	320	1300	210	1600	160	650	65
	12	2300	620	2300	780	2200	520	1500	320	1100	210	1300	160	550	65
	16	1700	520	1700	650	1600	420	1100	280	800	170	1000	130	400	55
	20	1350	480	1350	600	1300	380	900	260	650	150	800	110	320	50
		切削量 Depth of cut	a _p		0.2DC			0.5DC			0.2DC		0.05DC		0.2DC
a _p															
高速侧面加工 High Speed Milling	1	60000	1200	60000	1200	60000	850	60000	720	48000	500	32000	300		
	2	47800	2200	47800	2200	47800	1600	39800	1200	31800	900	15900	400		
	4	23900	2600	23900	2600	23900	1900	19900	1400	15900	1100	8000	490		
	6	16000	2700	16000	2700	16000	2000	13300	1500	10600	1200	5300	520		
	8	12000	2700	12000	2700	12000	2000	10000	1500	8000	1200	4000	520		
	10	9600	2700	9600	2700	9600	2000	8000	1500	6400	1200	3200	520		
	12	8000	2700	8000	2700	8000	2000	6700	1500	5300	1200	2700	520		
	16	6000	2200	6000	2200	6000	1600	5000	1200	4000	900	2000	450		
	20	4800	2000	4800	2000	4800	1400	4000	1100	3200	750	1600	380		
		切削量 Depth of cut	a _p		1.5DC						1.0DC				
a _e		0.05DC						0.02DC							

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

GSX4C-1.5D/2D

- 1) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 2) 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。
- 3) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 4) 干式加工时，请进行气吹。
- 5) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 6) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。
- 7) 在高速切削条件下，推荐使用气吹。但加工不锈钢时，请使用水溶性切削油剂。

- 1) Adjust cutting condition when an unusual vibration, different sound occur by cutting.
- 2) When using low speed machines, use the maximum speed and adjust the feed rate.
- 3) Use highly rigid machining center and holder.
- 4) Use an air blow for dry process.
- 5) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 6) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.
- 7) Recommend dry process (air blow) for high speed milling. However, use the water soluble cutting fluid for Stainless Steel.

D-25, D-26 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

4GS
4PLXS
GSX4P-2.5D

GS 铣刀 4 刃型 GS MILL Four Flutes

X's 铣刀 4 刃型 X's-mill Four Flutes

GSX 铣刀 4 刃 P 型 2.5D GSX MILL Four Flutes 2.5D P Type

侧面加工 Side Milling

被削材 Work Material	一般结构用钢 SS		碳钢 铸铁 S-C FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
	Structural Steel		Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	1	2	4	6	8	10	12	16	20	25	30	40	50	65
1	22,000	360	22,000	360	19,000	220	13,000	140	9,500	90	11,300	90	9,500	65
2	11,500	440	11,500	440	11,000	290	7,500	180	5,400	110	6,500	120	5,400	85
4	6,000	560	6,000	560	5,800	370	4,000	230	2,900	150	3,400	160	2,900	100
6	4,200	600	4,200	600	4,000	400	2,700	240	2,000	160	2,400	170	2,000	120
8	3,000	600	3,000	600	2,800	400	2,000	240	1,450	160	1,800	170	1,450	120
10	2,500	600	2,500	600	2,350	400	1,600	240	1,200	160	1,450	170	1,200	120
12	2,100	600	2,100	600	2,000	400	1,350	240	1,000	160	1,200	170	1,000	120
16	1,500	500	1,500	500	1,450	320	1,000	210	750	130	900	140	750	90
20	1,200	460	1,200	460	1,150	290	800	200	600	110	700	120	600	75
切削量 Depth of cut	a _p		2.5DC						2.0DC					
	a _e		0.03DC						0.01DC					

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

槽加工 Grooving

被削材 Work Material	一般结构用钢 SS		碳钢 铸铁 S-C FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
	Structural Steel		Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	1	2	4	6	8	10	12	16	20	25	30	40	50	65
1	22,000	360	22,000	360	19,000	220	13,000	140	9,500	90	11,300	90	9,500	65
2	11,500	440	11,500	440	11,000	290	7,500	180	5,400	110	6,500	120	5,400	85
4	6,000	560	6,000	560	5,800	370	4,000	230	2,900	150	3,400	160	2,900	100
6	4,200	600	4,200	600	4,000	400	2,700	240	2,000	160	2,400	170	2,000	120
8	3,000	600	3,000	600	2,800	400	2,000	240	1,450	160	1,800	170	1,450	120
10	2,500	600	2,500	600	2,350	400	1,600	240	1,200	160	1,450	170	1,200	120
12	2,100	600	2,100	600	2,000	400	1,350	240	1,000	160	1,200	170	1,000	120
16	1,500	500	1,500	500	1,450	320	1,000	210	750	130	900	140	750	90
20	1,200	460	1,200	460	1,150	290	800	200	600	110	700	120	600	75
切削量 Depth of cut	a _p		1.5DC											
	a _e		0.02DC 以下											

槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

4GS/4PLXS/GSX4P-2.5D

- 1) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
- 2) 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。
- 3) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 4) 干式加工时, 请进行气吹。
- 5) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 6) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。

D-26, D-29, D-32 尺寸表 Stacked Sized

- 1) Adjust cutting condition when an unusual vibration, different sound occur by cutting.
- 2) When using low speed machines, use the maximum speed and adjust the feed rate.
- 3) Use highly rigid machining center and holder.
- 4) Use an air blow for dry process.
- 5) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 6) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSXVL4XT-2D GSXVL4XT-R-2D

GSX铣刀 VL型超级装夹用 不锈钢钛合金专用 2D GSX MILL VL 2D for X-Treme chuck for Ti · SUS

GSX铣刀 VL圆角型超级装夹用 不锈钢钛合金专用 2D GSX MILL VL Radius 2D for X-Treme chuck for Ti · SUS

	被削材 Work Material		奥氏体不锈钢 SUS304, SUS316 Austenitic Stainless Steel		马氏体不锈钢 铁氧体不锈钢 SUS420, SUS430 Martensitic Ferritic Stainless Steel		耐热合金 钛合金 Ti-6Al-4V Heat Resistant Alloy Titanium Alloy		耐热合金 铬镍铁合金 718 Heat Resistant Alloy Inconel718		
侧面加工 Side Milling	外径 Dia. of Mill (mm)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
	12		2600	860	2400	910	2100	720	1100	230	
	16		2000	680	1800	820	1600	600	780	170	
	20		1600	620	1400	720	1300	550	620	140	
	25		1250	540	1150	650	1000	480	500	110	
	切削量 Depth of cut	a _p	1.5DC								
a _e		0.1DC		0.2DC			0.05DC				
槽加工 Grooving	12		1800	400	1800	600	1600	350	660	140	
	16		1400	360	1400	460	1200	310	500	110	
	20		1100	320	1100	420	900	260	390	85	
	25		900	280	900	380	750	230	320	70	
	切削量 Depth of cut	a _p	0.5DC		1.0DC			0.5DC		0.2DC	



DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill

D-27, D-44 ◀ ▶ 尺寸表 Stocked Sized

GSXVL4XT-2D/GSXVL4XT-R-2D

- 1) 为了进行稳定的加工，请使用带一定刚性的精密度的机床、刀杆。
- 2) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 3) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

GSXVL4XT-4D GSXVL4XT-R-4D

GSX铣刀 VL型超级装夹用 不锈钢钛合金专用 4D GSX MILL VL 4D for X-Treme chuck for Ti · SUS

GSX铣刀 VL圆角型超级装夹用 不锈钢钛合金专用 4D GSX MILL VL Radius 4D for X-Treme chuck for Ti · SUS

	被削材 Work Material		奥氏体不锈钢 SUS304, SUS316		马氏体不锈钢 铁氧体不锈钢 SUS420, SUS430		耐热合金 钛合金 Ti-6Al-4V		耐热合金 铬镍铁合金 718		
			Austenitic Stainless Steel		Martensitic Ferritic Stainless Steel		Heat Resistant Alloy Titanium Alloy		Heat Resistant Alloy Inconel718		
侧面加工 Side Milling	外径 Dia. of Mill (mm)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
	12		1100	500	900	410	1100	500	500	140	
	16		800	360	700	330	800	360	380	110	
	20		600	280	500	240	600	280	300	90	
	25		500	250	430	220	500	250	250	70	
	切削量 Depth of cut	a _p	3.5DC								
		a _e	0.01DC								
侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill											

D-35, D-47 ◀ ▶ 尺寸表 Stocked Sized

GSXVL4XT-4D/GSXVL4XT-R-4D

- 1) 为了进行稳定的加工，请使用带一定刚性的精密度的机床、刀杆。
- 2) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 3) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

4CE | 超硬铣刀 4 刃型 ANCHOR V Four Flutes

被削材 Work Material		模具钢 预硬钢	工具钢 预硬钢	碳钢 合金钢	不锈钢 SUS304, SUS316		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属				
		Mold Steel Pre-Hardened Steel	Tool Steel Pre-Hardened Steel	Carbon Steel Alloy Steel	Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal				
		35 ~ 45HRC	25 ~ 35HRC	~ 250HB					~ 200HB						
外径 Dia. of Mill (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度			
	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)			
2	4000	95	5600	150	8000	240	3200	75	3200	50	8000	525	14300	945	
3	2700	110	3700	165	5300	240	2100	85	2100	55	5300	525	9500	985	
5	1600	110	2200	180	3200	260	1300	85	1300	70	3200	580	5700	985	
6	1300	115	1900	205	2700	290	1100	100	1060	75	2700	585	4800	1040	
8	990	120	1400	220	2000	315	800	95	800	75	2000	600	3600	1040	
10	800	120	1100	220	1600	315	640	95	640	75	1600	600	2900	1050	
12	660	105	930	220	1300	310	530	95	530	75	1300	585	2400	1040	
15	530	95	740	205	1100	300	420	85	420	65	1100	595	1900	985	
20	400	85	560	190	800	265	320	75	320	70	800	525	1400	925	
侧面加工	a _p	1.5DC		1.5DC		1.5DC		1.5DC		1.5DC		1.5DC		1.5DC	
	a _e	0.15DC		0.2DC		0.25DC		0.15DC		0.1DC		0.25DC		0.25DC	

侧面加工时
Side Milling

DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

D-27 尺寸表 Stocked Sized

4CE

- 1) 为了进行稳定的加工，请使用高精度的机床、刀杆。
- 2) 采用干式加工（推荐使用气吹），请分别将转速和进给速度降低到 70%。
- 3) 加工不锈钢时，请采用湿式加工。
- 4) 对于耐热合金、钛合金，推荐使用非水溶性切削剂。

- 1) Use precise machine and holder.
- 2) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 3) Use in wet condition in case of Stainless Steel.
- 4) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

4XS GEO 4XS GEO-R

X's 铣刀 GEO 型 X's-mill Geo

X's 铣刀 GEO 圆角型 X's-mill Geo Radius

被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC-	合金钢 SCM 调质钢 NAK, HPM	调质钢 淬硬钢	不锈钢 SUS304, SUS316	耐热合金 钛合金						
	Structural Steel Carbon Steel Cast Iron	Alloy Steel Heat Treated Steel	Heat Treated Steel Hardened Steel	Stainless Steel	Heat Resistant Alloy Titanium Alloy						
	150 ~ 250HB	25 ~ 35HRC	35 ~ 50HRC								
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)			
2	9000	720	6000	430	4000	320	5500	320	2600	120	
4	6600	800	4500	450	3000	380	4000	320	2000	120	
6	4800	960	3000	480	2500	380	3000	480	1200	120	
8	3600	1000	2200	610	2000	400	2000	520	1000	140	
10	2800	1000	1800	610	1500	400	1700	550	800	160	
12	2400	950	1500	550	1200	380	1500	500	700	140	
14	2200	880	1300	490	1000	360	1200	430	600	130	
16	1800	650	1100	420	800	300	1000	360	500	120	
18	1600	580	1000	360	750	270	900	340	450	110	
20	1400	500	900	330	700	250	820	300	400	100	
侧面加工	a _p	1.5DC									
	a _e	0.1DC			0.05DC		0.1DC		0.05DC		
槽加工	a _p	1.0DC		0.5DC		0.1DC		0.15DC		0.1DC	

侧面加工时
Side Milling



槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

D-28, D-44 尺寸表 Stocked Sized

4XS GEO/4XS GEO-R

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 采用干式加工时，为进行冷却及去除切屑，请采取气冷措施。
- 3) 对不锈钢进行槽加工时，请将转速降低到表中数值的 60%、进给速度降低到表中数值的 40%。
- 4) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 5) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险，因此请采取防火对策。

- 1) Use highly rigid machining center and holder.
- 2) Use air blow for cooling and the chips exclusion in dry process.
- 3) When grooving Stainless Steel, reduce the rotation to 60%, and the feed to 40% of table values.
- 4) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 5) By sparks during cutting, or heat by breakage, or hot chips, there is danger of fire. Take fire prevention measures.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSXVL4-2.5D GSXVL4-R-2.5D

GSX 铣刀 VL 型 2.5D GSX MILL VL 2.5D

GSX 铣刀 VL 圆角型 2.5D GSX MILL VL Radius 2.5D

被削材 Work Material		一般结构用钢 SS		合金钢 SCM		调质钢		淬硬钢	
		碳钢 S-C		调质钢 NAK, HPM		淬硬钢			
		铸铁 FC-							
		Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel	
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC	
側面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	3	12700	1100	10600	930	8500	680	7400	400
	4	9600	1200	8000	1000	6400	760	5600	420
	5	8300	1300	7000	1100	5700	920	4800	480
	6	6900	1500	5800	1300	4800	1000	4000	530
	8	5200	1500	4400	1300	3600	1000	3000	530
	10	4200	1500	3500	1300	3000	920	2400	530
	12	3500	1400	2900	1200	2400	760	2000	500
	16	2600	1200	2200	1000	1800	680	1500	450
	20	2100	980	1800	800	1400	600	1200	430
	切削量 Depth of cut	a _p	1.5DC						
a _e		0.2DC						0.05DC	
槽加工 Grooving	3	12700	760	10600	640	7400	430	5300	340
	4	9600	840	8000	700	5600	500	4000	380
	5	8300	1100	7000	880	4500	560	3200	380
	6	6900	1200	5800	950	3700	600	2600	400
	8	5200	1200	4400	950	2800	600	2000	400
	10	4200	1000	3500	800	2200	500	1600	400
	12	3500	950	2900	700	1900	500	1300	380
	16	2600	700	2200	610	1400	380	1000	300
	20	2100	620	1800	530	1100	350	800	250
	切削量 Depth of cut	a _p	1.0DC(MAX12mm)						0.2DC



DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill

GSXVL4-2.5D/GSXVL4-R-2.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

D-30, D-45 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSXVL4T-2.5D GSXVL4T-R-2.5D

GSX 铣刀 VL 型 耐热合金用 2.5D GSX MILL VL 2.5D for Ti·SUS

GSX 铣刀 VL 圆角型 2.5D 不锈钢钛合金专用 GSX MILL VL Radius 2.5D for Ti·SUS

	被削材 Work Material	奥氏体不锈钢 SUS304, SUS316 Austenitic Stainless Steel			马氏体不锈钢 铁氧体不锈钢 SUS420, SUS430 Martensitic Ferritic Stainless Steel		耐热合金 钛合金 Ti-6Al-4V Heat Resistant Alloy Titanium Alloy		耐热合金 铬镍铁合金 718 Heat Resistant Alloy Inconel 718	
側面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
	3	10600	850	8500	680	8500	680	4200	220	
	4	8000	960	6400	760	6300	720	3200	230	
	5	6300	960	5700	920	5100	750	2500	260	
	6	5300	1000	4800	1000	4200	800	2100	260	
	8	4000	1000	3600	1000	3200	800	1600	260	
	10	3200	760	3000	920	2500	650	1300	210	
	12	2600	720	2400	760	2100	600	1100	190	
	16	2000	570	1800	680	1600	500	780	140	
	20	1600	520	1400	600	1300	460	620	120	
切削量 Depth of cut	a _p	1.5DC								
	a _e	0.1DC		0.2DC		0.05DC				
槽加工 Grooving	3	7400	420	7400	430	6400	360	2600	130	
	4	5600	450	5600	500	4800	380	2000	130	
	5	4500	450	4500	560	3800	380	1600	130	
	6	3700	480	3700	600	3200	410	1300	150	
	8	2800	480	2800	600	2400	410	1000	150	
	10	2200	390	2200	500	1900	330	800	130	
	12	1800	330	1900	500	1600	290	660	120	
	16	1400	300	1400	380	1200	260	500	90	
	20	1100	270	1100	350	900	220	390	70	
	切削量 Depth of cut	a _p	0.5DC		1.0DC(MAX12mm)		0.5DC		0.2DC	

側面加工时
Side Milling

DC: 立铣刀外径
Dia. of Mill

槽加工时
Grooving

DC: 立铣刀外径
Dia. of Mill

D-30, D-45 ◀尺寸表 Stacked Sized

GSXVL4T-2.5D/GSXVL4T-R-2.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 4) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSX4C-2.5D/3D | GSX 铣刀 4 刃型 2.5D/3D GSX MILL Four Flutes 2.5D/3D

	被削材 Work Material	一般结构用钢 SS		碳钢 铸铁	S-C FC-	合金钢 调质钢	SCM NAK, HPM	调质钢 淬硬钢	淬硬钢	不锈钢 SUS304, SUS316		耐热合金 钛合金			
		Structural Steel		Carbon Steel Cast Iron	Alloy Steel Heat Treated Steel	Heat Treated Steel Hardened Steel	Hardened Steel	Stainless Steel		Heat Resistant Alloy Titanium Alloy					
				150 ~ 250HB	25 ~ 35HRC	35 ~ 45HRC	45 ~ 55HRC								
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	1	19000	300	19000	300	16000	190	11000	120	8000	80	9600	75	8100	55
	2	9800	370	9800	370	9400	250	6400	150	4600	95	5500	100	4600	70
	4	5100	480	5100	480	4900	310	3400	200	2500	130	2900	135	2500	85
	6	3500	510	3500	510	3400	340	2300	200	1700	135	2000	145	1700	100
	8	2600	510	2600	510	2400	340	1700	200	1200	135	1500	145	1200	100
	10	2100	510	2100	510	2000	340	1400	200	1000	135	1200	145	1000	100
	12	1800	510	1800	510	1700	340	1100	200	850	135	1000	145	850	100
	16	1300	430	1300	430	1200	270	850	180	640	110	770	120	640	75
	20	1050	390	1050	390	1000	250	680	170	510	95	600	100	510	65
切削量 Depth of cut	ap	2.5DC								2.0DC					
	ae	0.03DC								0.01DC					
槽加工 Grooving	1 <td>19000</td> <td>200</td> <td>19000</td> <td>260</td> <td>16000</td> <td>155</td> <td>11000</td> <td>95</td> <td>8100</td> <td>65</td> <td>9600</td> <td>45</td> <td>4000</td> <td>17</td>	19000	200	19000	260	16000	155	11000	95	8100	65	9600	45	4000	17
	2	9800	250	9800	310	9400	205	6400	120	4600	80	5500	60	2300	21
	4	5100	310	5100	390	4900	265	3400	160	2500	100	2900	70	1200	30
	6	3600	330	3600	415	3400	280	2300	170	1700	110	2000	85	850	35
	8	2600	330	2600	415	2400	280	1700	170	1200	110	1500	85	600	35
	10	2100	330	2100	415	2000	280	1400	170	1000	110	1200	85	500	35
	12	1800	330	1800	415	1700	280	1150	170	850	110	1000	85	420	35
	16	1300	280	1300	350	1200	220	850	155	640	95	770	70	310	30
	20	1000	260	1000	320	980	205	680	135	510	80	600	60	260	26
	切削量 Depth of cut	ap	0.1DC		0.2DC				0.05DC		0.1DC				

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill

GSX4C-2.5D/3D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时, 请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 4) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。
- 5) 在高速切削条件下, 推荐使用气吹。但加工不锈钢时, 请使用水溶性切削油剂。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.
- 5) Recommend dry process (air blow) for high speed milling. However, use the water soluble cutting fluid for Stainless Steel.

4GEOM | X's 铣刀 GEO 通用型 X's-mill Geo Medium

被削材 Work Material		一般结构用钢 SS 碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
		Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy	
		150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC					
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
2	9000	570	6000	340	4000	250	5500	250	2600	95	
4	6600	640	4500	360	3000	300	4000	250	2000	95	
6	4800	770	3000	380	2500	300	3000	380	1200	95	
8	3600	800	2200	480	2000	320	2000	420	1000	110	
10	2800	800	1800	480	1500	320	1700	440	800	130	
12	2400	760	1500	440	1200	300	1500	400	700	110	
14	2200	700	1300	390	1000	290	1200	340	600	100	
16	1800	520	1100	330	800	240	1000	290	500	95	
20	1400	400	900	260	700	200	820	240	400	80	
侧面加工	ap										
	ae	0.05DC		0.02DC		0.05DC		0.02DC			



DC: 立铣刀外径
Dia. of Mill

4GEOM

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 采用干式加工时, 为进行冷却及去除切屑, 请采取气冷措施。
- 3) 对不锈钢进行槽加工时, 请将转速降低到表中数值的 60%、进给速度降低到表中数值的 40%。
- 4) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 5) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险, 因此请采取防火对策。

- 1) Use highly rigid machining center and holder.
- 2) Use air blow for cooling and the chips exclusion in dry process.
- 3) When grooving Stainless Steel, reduce the rotation to 60% , and the feed to 40% of table values.
- 4) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 5) By sparks during cutting, or heat by breakage, or hot chips, there is danger of fire. Take fire prevention measures.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSXVL4-4D GSXVL4-R-4D

GSX 铣刀 VL 型 4D GSX MILL VL 4D GSX 铣刀 VL 圆角型 4D GSX MILL VL Radius 4D

被削材 Work Material		一般结构用钢 SS 碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢	
		Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel	
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC	
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	3	7500	1100	6250	930	5300	660	4200	390
	4	6800	1200	5700	1000	4800	730	3850	410
	5	6000	1300	5100	1100	4300	790	3450	450
	6	5300	1500	4500	1300	3800	910	3000	510
	8	4000	1500	3350	1400	2800	900	2300	520
	10	3200	1500	2700	1300	2250	900	1800	520
	12	2650	1350	2250	1150	1900	820	1500	470
	16	2000	1000	1700	860	1400	600	1150	350
	20	1600	850	1350	730	1150	520	900	290
切削量 Depth of cut	a _p	3.5DC							
	a _e	0.04DC						0.03DC	

DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

D-33, D-46 ◀ ▶ 尺寸表 Stocked Sized

GSXVL4-4D/GSXVL4-R-4D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

GSXVL4T-4D GSXVL4T-R-4D

GSX 铣刀 VL 型 耐热合金用 4D GSX MILL VL 4D for Ti · SUS GSX 铣刀 VL 圆角型 4D 不锈钢钛合金专用 GSX MILL VL Radius 4D for Ti · SUS

被削材 Work Material	奥氏体不锈钢 SUS304, SUS316			马氏体不锈钢 铁氧体不锈钢 SUS420, SUS430		耐热合金 钛合金 Ti-6Al-4V		耐热合金 铬镍铁合金 718	
	Austenitic Stainless Steel			Martensitic Ferritic Stainless Steel		Heat Resistant Alloy Titanium Alloy		Heat Resistant Alloy Inconel718	
	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
侧面加工 Side Milling	3	3200	300	2800	270	3200	300	1600	100
	4	2400	350	2100	300	2400	350	1200	120
	5	2200	400	2000	350	2200	400	1100	140
	6	2100	500	1800	450	2100	500	1000	150
	8	1600	500	1400	450	1600	500	750	150
	10	1300	500	1100	450	1300	500	600	150
	12	1100	450	900	370	1100	400	500	130
	16	800	330	700	300	800	300	380	100
	20	600	250	500	220	600	250	300	80
	切削量 Depth of cut	a _p	3.5DC						
a _p		0.01DC							



侧面加工时
Side Milling

DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

D-34, D-46 ◀ ▶ 尺寸表 Stocked Sized

GSXVL4T-4D/GSXVL4T-R-4D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 4) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSX4C-4D | GSX 铣刀 4 刃型 4D GSX MILL Four Flutes 4D

被削材 Work Material		一般结构用钢 SS		碳钢 铸铁	S-C FC-	合金钢 调质钢	SCM NAK, HPM	调质钢 淬硬钢	淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		
		Structural Steel		Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel	Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		
				150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC	45 ~ 55HRC						
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
1	13,400	200	13,400	200	11,700	120	8,100	80	5,900	50	7,000	50	5,900	35	
2	7,000	240	7,000	240	6,700	160	4,600	100	3,400	60	4,000	65	3,400	45	
4	3,800	300	3,800	300	3,500	200	2,500	130	1,800	85	2,100	90	1,800	55	
6	2,600	330	2,600	330	2,400	220	1,700	130	1,200	90	1,500	100	1,200	65	
8	1,900	330	1,900	330	1,800	220	1,250	130	910	90	1,100	100	900	65	
10	1,500	330	1,500	330	1,400	220	1,000	130	740	90	900	100	750	65	
12	1,300	330	1,300	330	1,200	220	850	130	630	90	740	100	600	65	
16	1,000	270	1,000	270	900	180	630	120	450	70	560	80	450	50	
20	800	250	800	250	700	160	500	110	350	60	450	70	350	40	
切削量 Depth of cut	a _p	3.5DC								3.0DC					
	a _e	0.02DC				0.01DC				0.01DC					



侧面加工时
Side Milling

DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill

D-34 尺寸表 Stocked Sized

GSX4C-4D

- 1) 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 2) 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。
- 3) 为了进行稳定的加工，请使用带一定刚性的精密度的机床、刀杆。
- 4) 干式加工时，请进行气吹。
- 5) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 6) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。
- 7) 在高速切削条件下，推荐使用气吹。但加工不锈钢时，请使用水溶性切削油剂。

- 1) Adjust cutting condition when an unusual vibration, different sound occur by cutting.
- 2) When using low speed machines, use the maximum speed and adjust the feed rate.
- 3) Use highly rigid machining center and holder.
- 4) Use an air blow for dry process.
- 5) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 6) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.
- 7) Recommend dry process (air blow) for high speed milling. However, use the water soluble cutting fluid for Stainless Steel.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

SL4GEO | X's 铣刀 GEO 长刃型 X's-mill Geo Long

被削材 Work Material		一般结构用钢 SS 碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
		Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy	
		150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC					
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
3	8500	370	5500	210	4000	180	5500	160	2600	60	
4	6600	400	4500	220	3000	190	4000	160	2000	60	
6	4800	480	3000	240	2500	190	3000	240	1200	60	
8	3600	500	2200	300	2000	200	2000	260	1000	70	
10	2800	500	1800	300	1500	200	1700	270	800	80	
12	2400	470	1500	270	1200	190	1500	250	700	70	
16	1800	320	1100	210	800	150	1000	180	500	60	
20	1400	250	900	160	700	120	820	150	400	50	
侧面加工	ap	3.0DC									
	ae	0.05DC				0.02DC		0.05DC		0.02DC	



DC: 立铣刀外径
Dia. of Mill

D-35 尺寸表 Stocked Sized

SL4GEO

- 1) 为了进行稳定的加工，请使用带一定刚性的精密度的机床、刀杆。
- 2) 采用干式加工时，为进行冷却及去除切屑，请采取气冷措施。
- 3) 对不锈钢进行槽加工时，请将转速降低到表中数值的 60%、进给速度降低到表中数值的 40%。
- 4) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 5) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险，因此请采取防火对策。
- 6) 工具突出长度较长时，请降低转速、进给速度、a_{eo}。

- 1) Use highly rigid machining center and holder.
- 2) Use air blow for cooling and the chips exclusion in dry process.
- 3) When grooving Stainless Steel, reduce the rotation to 60% , and the feed to 40% of table values.
- 4) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 5) By sparks during cutting, or heat by breakage, or hot chips, there is danger of fire. Take fire prevention measures.
- 6) When the length of tool extension from machine is long, reduce the rotation, the feed and a_e.

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSXVLLS4-1.5D GSXVLLS4-R-1.5D

GSX铣刀 VL长柄型 1.5D GSX MILL VL Long Shank 1.5D
GSX铣刀 VL圆角长柄型 1.5D GSX MILL VL Long Shank Radius 1.5D

	被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		
		Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
	3	11000	770	9500	650	7600	470	6600	280	
	4	8300	840	7200	700	5800	530	5000	300	
	5	6600	910	6300	770	5100	640	4300	330	
	6	6200	1050	5200	910	4300	700	3600	370	
	8	4700	1050	4000	910	3200	700	2700	370	
	10	3800	1050	3200	910	2600	640	2200	370	
	12	3200	980	2600	840	2200	550	1800	350	
	16	2300	840	2000	700	1600	460	1400	320	
	20	1900	690	1600	560	1300	400	1100	300	
	切削量 Depth of cut	a _p	1.0DC							
		a _e	0.2DC				0.1DC		0.05DC	
槽加工 Grooving	3	11000	530	9500	440	6600	300	4700	240	
	4	8300	580	7200	490	5100	350	3500	270	
	5	6600	770	6300	610	4000	390	2800	260	
	6	6200	840	5200	660	3300	420	2300	280	
	8	4700	840	4000	660	2500	420	1800	280	
	10	3800	700	3200	560	1900	350	1400	270	
	12	3200	660	2600	490	1600	350	1200	260	
	16	2300	490	2000	420	1200	270	900	210	
	20	1900	430	1600	370	1000	230	700	170	
	切削量 Depth of cut	a _p	0.5DC						0.2DC	



DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill

GSXVLLS4-1.5D/GSXVLLS4-R-1.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

D-36, D-47 尺寸表 Stacked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSXVLLS4T-1.5D GSXVLLS4T-R-1.5D

GSX 铣刀 VL 长柄型 1.5D 耐热合金用 GSX MILL VL Long Shank 1.5D for Ti · SUS

GSX 铣刀 VL 圆角长柄型 1.5D 不锈钢钛合金专用 GSX MILL VL Long Shank Radius 1.5D for Ti · SUS

	被削材 Work Material	奥氏体不锈钢 SUS304, SUS316 Austenitic Stainless Steel			马氏体不锈钢 铁氧体不锈钢 SUS420, SUS430 Martensitic Ferritic Stainless Steel		耐热合金 钛合金 Ti-6Al-4V Heat Resistant Alloy Titanium Alloy		耐热合金 铬镍铁合金 718 Heat Resistant Alloy Inconel 718	
側面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	側面加工时 Side Milling 
	3	9500	600	7600	470	7600	470	3800	150	
	4	7200	660	5800	530	5600	500	2900	160	
	5	5600	660	5100	640	4600	520	2200	180	
	6	4800	690	4300	700	3800	560	1900	180	
	8	3600	660	3200	700	2900	520	1400	160	
	10	2900	550	2600	640	2300	450	1200	140	
	12	2400	500	2200	550	1900	420	1000	130	
	16	1800	400	1600	460	1400	350	700	100	
	20	1400	360	1300	400	1100	320	560	80	
	切削量 Depth of cut	ap	0.85DC							DC: 立铣刀外径 Dia. of Mill
	ae	0.1DC				0.05DC				
槽加工 Grooving	3	6600	300	6600	300	5700	250	2300	90	槽加工时 Grooving 
	4	5000	310	5100	350	4200	260	1800	90	
	5	4000	310	4000	390	3400	260	1400	90	
	6	3300	320	3300	420	2900	270	1100	100	
	8	2500	320	2500	420	2100	270	850	90	
	10	2000	280	1900	350	1700	230	750	90	
	12	1600	230	1600	350	1400	200	600	80	
	16	1200	200	1200	270	1000	170	450	60	
	20	950	180	1000	230	850	150	350	50	
	切削量 Depth of cut	ap	0.5DC				0.25DC			DC: 立铣刀外径 Dia. of Mill

GSXVLLS4T-1.5D/GSXVLLS4T-R-1.5D



- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时, 请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 4) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

4GEOLS 4GEOLS-R

X's 铣刀 GEO 长柄型 X's-mill Geo Long Shank

X's 铣刀 GEO 长柄 圆角型 X's-mill Geo Radius Long Shank

被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		侧面加工时 Side Milling 	
	Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy			
	150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC							
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 	
3	8500	520	5500	300	3800	260	5000	220	2500	80		
4	6600	560	4500	320	3000	270	4000	220	2000	80		
6	4800	670	3000	340	2500	270	3000	340	1200	80		
8	3600	700	2200	430	2000	280	2000	360	1000	100		
10	2800	700	1800	430	1500	280	1700	390	800	110		
12	2400	670	1500	390	1200	270	1500	350	700	100		
16	1800	460	1100	290	800	210	1000	250	500	80		
20	1400	350	900	230	700	180	820	210	400	70		
侧面加工	ap	1.2DC										DC: 立铣刀外径 Dia. of Mill
	ae	0.05DC				0.02DC		0.05DC		0.02DC		
槽加工	ap	0.2DC				0.05DC		0.1DC		0.05DC		

4GEOLS/4GEOLS-R

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 采用干式加工时, 为进行冷却及去除切屑, 请采取气冷措施。
- 3) 对不锈钢进行槽加工时, 请将转速降低到表中数值的 60%、进给速度降低到表中数值的 40%。
- 4) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 5) 高温的切屑以及钻头折断时的火花可能引发烧伤、火灾等危险, 因此请采取防火对策。
- 6) 工具突出长度较长时, 请降低转速、进给速度、ae。

- 1) Use highly rigid machining center and holder.
- 2) Use air blow for cooling and the chips exclusion in dry process.
- 3) When grooving Stainless Steel, reduce the rotation to 60%, and the feed to 40% of table values.
- 4) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 5) By sparks during cutting, or heat by breakage, or hot chips, there is danger of fire. Take fire prevention measures.
- 6) When the length of tool extension from machine is long, reduce the rotation, the feed and ae.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSXVL6-2.5D GSXVL6-R-2.5D

GSX 铣刀 VL 多刃型 2.5D GSX MILL VL Multi-Flutes 2.5D
GSX 铣刀 VL 多刃圆角型 2.5D GSX MILL VL Multi-Flutes Radius 2.5D


	被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢	
		Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel	
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC	
		外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
侧面加工 Side Milling	6	6900	2200	5800	1900	4800	1500	4000	800
	8	5200	2200	4400	1900	3600	1500	3000	800
	10	4200	2200	3500	1900	3000	1400	2400	800
	12	3500	2100	2900	1800	2400	1200	2000	750
	16	2600	1800	2200	1500	1800	1000	1500	700
	20	2100	1500	1800	1200	1400	900	1200	650
	高速加工 High Speed Milling	切削量 Depth of cut	a _p	1.5DC					
a _e			0.2DC			1.0DC		0.05DC	
6		16000	6000	16000	6000	16000	5800	16000	4000
8		12000	6000	12000	6000	12000	5800	12000	4000
10		10000	6000	10000	6000	10000	5700	9500	4200
12		8000	7600	8000	7600	8000	5300	8000	4600
16		6000	7600	6000	7600	6000	5300	6000	4000
20		5000	7000	5000	7000	5000	5000	4800	3000
切削量 Depth of cut		a _p	1.0 ~ 1.5DC						
		a _e	0.1DC			0.05DC		0.02 ~ 0.05DC	



侧面加工时
Side Milling

DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

D-38, D-49 尺寸表 Stocked Sized

GSXVL6-2.5D/GSXVL6-R-2.5D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时, 请进行气吹。
- 3) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

GSXVL6T-2.5D GSXVL6T-R-2.5D


GSX 铣刀 VL 多刃型 2.5D 耐热合金用 GSX MILL Multi-Flutes 2.5D for Ti · SUS
GSX 铣刀 VL 多刃圆角型 2.5D 耐热合金用 GSX MILL Multi-Flutes Radius 2.5D for Ti · SUS

	被削材 Work Material	奥氏体不锈钢 SUS304, SUS316		马氏体不锈钢 铁氧体不锈钢 SUS420, SUS430		耐热合金 钛合金 Ti-6Al-4V		耐热合金 铬镍铁合金 718	
		Austenitic Stainless Steel		Martensitic Ferritic Stainless Steel		Heat Resistant Alloy Titanium Alloy		Heat Resistant Alloy Inconel718	
侧面加工 Side Milling	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
	6	5300	1400	4800	1500	4200	1100	2100	350
	8	4000	1400	3600	1500	3200	1100	1600	350
	10	3200	1200	3000	1400	2500	1000	1300	300
	12	2600	1000	2400	1200	2100	900	1100	260
	16	2000	900	1800	1000	1600	800	780	220
	20	1600	800	1400	900	1300	700	620	180
	切削量 Depth of cut	a _p	1.5DC						
	a _e	0.1DC				0.05DC			



DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

D-38, D-49 尺寸表 Stocked Sized

GSXVL6T-2.5D/GSXVL6T-R-2.5D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时, 请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 4) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSXVLH6-2.5D | GSX 铣刀 VL 高硬型 2.5D GSX MILL VL Hard 2.5D

泛用条件 Conventional Milling

被削材 Work Material		低硬度钢 碳钢 合金钢		中硬度钢 预硬钢 模具钢		淬硬钢 SKD61		淬硬钢 SKD11		淬硬钢 SKH51		淬硬钢 SKH55,PM		侧面加工时 Side Milling 
		Low Hardness Steel Carbon Steel Alloy Steel		Medium Hardness Steel Pre-Hardened Steel Mold Steel		Hardened Steel		Hardened Steel		Hardened Steel		Hardened Steel		
		~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC		60 ~ 65HRC		65 ~ 70HRC		
外径 Dia. of Mill (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	槽加工时 Grooving 	
	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)		
	6	7500	2700	6700	1930	5200	1300	4100	810	3700	670	2600		470
	8	5600	2700	5000	1930	3900	1300	3050	810	2800	670	1950		470
	10	4500	2700	4000	1930	3100	1300	2450	810	2200	670	1550		470
	12	3750	2700	3350	1930	2600	1300	2050	810	1850	670	1300		470
	16	2800	2500	2500	1800	1950	1220	1530	760	1400	630	980		440
20	2250	2100	2000	1540	1550	1050	1230	650	1100	540	780	380		
切削量 Depth of cut	侧面加工	1.0 ~ 1.5DC												DC: 立铣刀外径 Dia. of Mill
	槽加工	0.1DC				0.05DC				0.02DC				
		0.1DC				0.05DC				~ 0.05DC 最大 0.5mm				

新商品

硬质合金钻头

高速钢钻头

高速条件 High-Speed Milling

被削材 Work Material		低硬度钢 碳钢 合金钢 Low Hardness Steel Carbon Steel Alloy Steel		中硬度钢 预硬钢 模具钢 Medium Hardness Steel Pre-Hardened Steel Mold Steel		淬硬钢 SKD61		淬硬钢 SKD11		淬硬钢 SKH51		淬硬钢 SKH55,PM		侧面加工时 Side Milling						
		~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC		60 ~ 65HRC		65 ~ 70HRC								
		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)							
外径 Dia. of Mill (mm)		6	16000 5800	6000 5800	16000 5800	6000 5800	16000 5800	12000 3200	8000 2000	5300 1200	8	12000 5800	12000 5800	9000 3200	6000 2000	4000 1200				
10		9600 5800	9600 5800	9600 5800	9600 5800	7200 3200	4800 2000	3200 1200	12	8000 5800	8000 5800	6000 3200	4000 2000	2700 1200	16	6000 5400	6000 5400	4500 3000	3000 1900	2000 1000
20		4800 4600	4800 4600	4800 4600	4800 4600	3600 2580	2400 1600	1600 850												
切削量 Depth of cut	ap	1.0 ~ 1.5DC																		
	ae														0.05DC				0.02DC	

DC: 立铣刀外径
Dia. of Mill

丝锥

硬质合金立铣刀

高速
钢立铣刀

GSXVLH6-2.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 推荐采用干式加工（气吹）。
- 3) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Recommend dry process (air blow).
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

D-39 ◀ ▶ 尺寸表 Stocked Sized

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSH
GSH-R

GS 铣刀 高硬型 GS MILL Hard
GS 铣刀 高硬圆角型 GS MILL Hard Radius

泛用条件 Conventional Milling

被削材 Work Material	低硬度钢 碳钢 合金钢		中硬度钢 预硬钢 模具钢		淬硬钢 SKD61		淬硬钢 SKD11		淬硬钢 SKH51		淬硬钢 SKH55,PM		侧面加工时 Side Milling
	Low Hardness Steel Carbon Steel Alloy Steel		Medium Hardness Steel Pre-Hardened Steel Mold Steel		Hardened Steel		Hardened Steel		Hardened Steel		Hardened Steel		
	~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC		60 ~ 65HRC		65 ~ 70HRC		
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 槽加工时 Grooving  DC: 立铣刀外径 Dia. of Mill
1	20000	540	20000	390	15600	260	12300	160	11100	140	7800	95	
2	19000	1100	17200	770	13400	530	10500	320	9500	270	6700	190	
3	15000	2150	13400	1540	10400	1050	8200	650	7400	540	5200	380	
4	11200	2400	10000	1740	7800	1180	6100	730	5600	600	3900	420	
5	9000	2700	8000	1930	6200	1300	4900	810	4400	670	3100	470	
6	7500	2700	6700	1930	5200	1300	4100	810	3700	670	2600	470	
8	5600	2700	5000	1930	3900	1300	3050	810	2800	670	1950	470	
10	4500	2700	4000	1930	3100	1300	2450	810	2200	670	1550	470	
12	3750	2700	3350	1930	2600	1300	2050	810	1850	670	1300	470	
16	2800	2500	2500	1800	1950	1220	1530	760	1400	630	980	440	
20	2250	2100	2000	1540	1550	1050	1230	650	1100	540	780	380	
侧面加工	ap	1.0 ~ 1.5DC											
	ae	0.1DC				0.05DC				0.02DC			
槽加工	ao	0.1DC				0.05DC				~ 0.05DC 最大 0.5mm			

高速条件 High-Speed Milling

被削材 Work Material	低硬度钢 碳钢 合金钢 Low Hardness Steel Carbon Steel Alloy Steel		中硬度钢 预硬钢 模具钢 Medium Hardness Steel Pre-Hardened Steel Mold Steel		淬硬钢 SKD61 Hardened Steel		淬硬钢 SKD11 Hardened Steel		淬硬钢 SKH51 Hardened Steel		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill	
	~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC		60 ~ 65HRC			
	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)		进给速度 Feed (mm/min)
	1	48000	1250	48000	1250	48000	1250	48000	930	38000		700
2	48000	2850	48000	2850	48000	2850	36000	1600	24000	1000		
3	32000	4900	32000	4900	32000	4900	24000	2740	16000	1700		
4	24000	5200	24000	5200	24000	5200	18000	2900	12000	1800		
5	19200	5800	19200	5800	19200	5800	14300	3200	9600	2000		
6	16000	5800	16000	5800	16000	5800	12000	3200	8000	2000		
8	12000	5800	12000	5800	12000	5800	9000	3200	6000	2000		
10	9600	5800	9600	5800	9600	5800	7200	3200	4800	2000		
12	8000	5800	8000	5800	8000	5800	6000	3200	4000	2000		
16	6000	5400	6000	5400	6000	5400	4500	3000	3000	1900		
20	4800	4600	4800	4600	4800	4600	3600	2580	2400	1600		
切削量 Depth of cut	ap	1.0 ~ 1.5DC										
	ae											
		0.1DC		0.05DC				0.02DC		0.01DC		

GSH/GSH-R

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 推荐采用干式加工（气吹）。

- 1) Use highly rigid machining center and holder.
- 2) Recommend dry process (air blow).

D-39, D-50 ◀ 尺寸表 Stacked Sized


有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

SLXSMH | X's 铣刀 高硬长刃型 X's-mill Hard Long

被削材 Work Material		低硬度钢		中硬度钢		淬硬钢		淬硬钢		淬硬钢		淬硬钢		侧面加工时 Side Milling
		Low Hardness Steel	Medium Hardness Steel	Hardened Steel	Hardened Steel	Hardened Steel	Hardened Steel							
		~ 35HRC		35 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC		60 ~ 65HRC		65HRC ~		
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		
6	2700	530	2100	400	1600	280	1350	210	1100	140	800	100	 DC: 立铣刀外径 Dia. of Mill	
8	2000	550	1600	420	1200	290	1000	220	800	150	600	105		
10	1600	550	1300	420	950	290	800	220	640	150	480	105		
12	1300	600	1100	500	800	350	650	260	530	190	400	130		
16	1000	520	800	410	600	290	500	210	400	160	300	115		
20	800	460	640	360	480	250	400	190	320	150	240	105		
切削量 Depth of cut	a _p	3.0DC ~ 4.0DC												
	a _e													0.01DC 以下 MAX.
		0.005DC 以下 MAX.												

D-40 ◀ ▶ 尺寸表 Stocked Sized

SLXSMH

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 突出量较长时, 请将转速、进给速度按相同比例降低。

- 1) Use highly rigid machining center and holder.
- 2) When the length of tool extension is long, please reduce speed and feed at same rate.

GSHV | GS 铣刀 重切削型 GS MILL HEAVY

侧面加工 Side Milling

被削材 Work Material	一般结构用钢 SS 碳钢 SC		铸铁 FC,FCD		合金钢 SCM 调质钢 NAK, HPM		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Cast Iron		Alloy Steel Heat Treated Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		
	150 ~ 250HB				25 ~ 35HRC		35 ~ 50HRC						
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
6	4800	800	5300	890	4200	510	2700	290	3200	230	1600	110	
8	3600	800	4000	890	3200	510	2000	290	2400	230	1200	110	
10	2800	800	3200	890	2500	510	1600	290	1900	230	950	110	
12	2400	800	2700	890	2100	510	1300	290	1600	230	800	110	
16	1800	740	2000	830	1600	460	1000	250	1200	190	600	100	
20	1400	700	1600	780	1300	410	800	220	950	150	480	80	
侧面加工	a _p	1.5DC				1.0DC		1.5DC		1.0DC			
	a _e	0.3DC				0.2DC		0.2DC		0.1DC			
侧面加工	a _p	1.0DC				0.6DC		1.0DC		0.6DC			
	a _e	0.05DC				0.03DC		0.01DC		0.02DC		0.01DC	



DC: 立铣刀外径
Dia. of Mill

槽加工 Grooving

被削材 Work Material		一般结构用钢 SS 碳钢 SC		铸铁 FC,FCD		合金钢 SCM 调质钢 NAK, HPM		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		槽加工时 Grooving
		Structural Steel Carbon Steel		Cast Iron		Alloy Steel Heat Treated Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		
		150 ~ 250HB				25 ~ 35HRC		35 ~ 50HRC						
外径 Dia. of Mill (mm)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
6	3700	620	4200	710	3200	380	1900	200	2700	190	1100	80		
8	2800	620	3200	710	2400	380	1400	200	2000	190	800	80		
10	2200	620	2600	710	1900	380	1100	200	1600	190	650	80		
12	1900	620	2100	710	1600	380	900	200	1300	190	550	80		
16	1400	580	1600	660	1200	340	700	180	1000	160	400	60		
20	1100	540	1300	620	950	300	550	160	800	130	320	50		
槽加工	a _p	0.7DC				0.2DC		0.3DC		0.2DC				

D-40 ◀ ▶ 尺寸表 Stocked Sized

GSHV

※ 1 使用主轴锥度为 30 号的机械时的切削量。

- 1) 为了进行稳定的加工, 推荐使用刚性高的机械。
- 2) 不推荐在槽加工中使用主轴锥度为 30 号的机械。
- 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。

※ 1 It is depth of the cut when it used the #30 taper spindle machining center.

- 1) Use highly rigid machining center.
- 2) Grooving is not recommended use in #30 taper spindle machining center.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSXVLRE4-2.5D

GSX 粗铣刀 VL 型 2.5D GSX MILL VL Roughing 2.5D

侧面加工 Side Milling

被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC- Structural Steel Carbon Steel Cast Iron		合金钢 SCM 调质钢 NAK, HPM		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		侧面加工时 Side Milling
			Alloy Steel Heat Treated Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		
	150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC						
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
4	12000	900	10300	630	6400	360	6400	280	4000	180	
6	8000	1200	6900	680	4200	400	4200	330	2600	210	
8	6000	1200	5100	680	3200	400	3200	330	2000	210	
10	4800	1200	4100	680	2500	400	2500	330	1600	210	
12	4000	1200	3400	680	2100	400	2100	330	1300	210	
16	3000	900	2600	630	1600	360	1600	280	1000	180	
20	2400	720	2000	560	1250	300	1250	230	800	150	
切削量 Depth of cut	a _p	1.5DC									
	a _e	0.5DC		0.3DC							

槽加工 Grooving

被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC- Structural Steel Carbon Steel Cast Iron		合金钢 SCM 调质钢 NAK, HPM		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		
			Alloy Steel Heat Treated Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		
	150 ~ 250HB		25 ~ 35HRC		35 ~ 50HRC						
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
4	9000	700	7500	350	4800	200	4800	180	3000	100	
6	6000	900	5000	440	3200	220	3100	210	2000	130	
8	4500	900	3700	440	2400	220	2400	210	1500	130	
10	3600	900	3000	440	1900	220	1900	210	1200	130	
12	3000	900	2500	440	1600	220	1600	210	1000	130	
16	2200	700	1900	350	1200	200	1200	180	750	100	
20	1800	520	1500	300	950	170	950	150	600	90	
切削量 Depth of cut	a _p	1.0DC				0.5DC		1.0DC			

槽加工时
Grooving

a_p

DC

D-41 尺寸表 Stocked Sized

GSXVLRE4-2.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 4) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSXRE-2.5D GSRE GSRE-R

GSX 粗铣刀 2.5D GSX MILL Roughing 2.5D

GS 铣刀 粗铣型 GS MILL Roughing

GS 铣刀 粗铣圆角型 GS MILL Roughing Radius

侧面加工 Side Milling

被削材 Work Material	一般结构用钢 SS 碳钢 S-C Structural Steel Carbon Steel		铸铁 FC,FCD Cast Iron		合金钢 SCM 调质钢 NAK, HPM Alloy Steel Heat Treated Steel		淬硬钢 Hardened Steel		不锈钢 SUS304, SUS316 Stainless Steel		耐热合金 钛合金 Heat Resistant Alloy Titanium Alloy		侧面加工时 Side Milling
	150 ~ 250HB				25 ~ 35HRC		35 ~ 50HRC						
	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	
4	7100	900	8700	1100	4800	360	4000	360	7900	210	2400	90	 DC: 立铣刀外径 Dia. of Mill
6	4800	1200	5800	1500	3200	380	2600	400	5300	250	1600	90	
8	3600	1200	4500	1500	2400	380	2000	400	4000	250	1250	90	
10	2800	1200	3500	1500	1900	380	1600	400	3200	250	1000	100	
12	2400	1200	2900	1400	1600	400	1300	400	2600	250	800	100	
16	1800	900	2200	1100	1200	360	1000	360	2000	210	600	90	
20	1400	700	1700	850	850	340	800	300	1600	150	500	80	
侧面加工	ap												
	ae												

槽加工 Grooving

被削材 Work Material	一般结构用钢 SS 碳钢 S-C Structural Steel Carbon Steel		铸铁 FC,FCD Cast Iron		合金钢 SCM 调质钢 NAK, HPM Alloy Steel Heat Treated Steel		淬硬钢 Hardened Steel		不锈钢 SUS304, SUS316 Stainless Steel		耐热合金 钛合金 Heat Resistant Alloy Titanium Alloy		槽加工时 Grooving ap  (图1) 开槽加工 Pocket milling  DC: 立铣刀外径 Dia. of Mill	
	150 ~ 250HB				25 ~ 35HRC		35 ~ 50HRC							
	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)		进给速度 Feed (mm/min)
4	5400	700	6400	850	3400	280	2800	240	6300	210	1600	60		
6	3600	900	4300	1100	2400	300	1700	260	4200	250	1100	60		
8	2700	900	3400	1100	1800	280	1350	260	3200	250	800	60		
10	2100	900	2600	1100	1400	280	1100	270	2500	250	650	65		
12	1800	900	2200	1100	1200	300	900	270	2100	250	550	70		
16	1350	700	1650	850	900	280	700	240	1600	210	400	60		
20	1050	520	1350	700	700	260	550	220	1250	170	300	55		
槽加工 Work	ap	1.0DC				0.3DC				0.5DC				0.3DC

GSXRE-2.5D/GSRE/GSRE-R

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 3) 进行开槽加工(图1)和槽加工时, 使用气吹或冷却剂无法轻松将切屑从加工面附近清除时, 请将进给速度降低到小于表中数值。
外径不足10mm时, 请降低到表中数值的25%, 10mm以上时, 降低到表中数值的20%。

- 1) Use highly rigid machining center and holder.
- 2) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 3) In case of pocket milling, please reduce feed rate from the value in the chart. When diameter is under 10mm, it makes 25% of values in the chart. When it is above 10mm, it makes 20% of values in the chart. However, when horizontal machining center it is used, it does not apply.

XSRE | X's 铣刀 粗铣型 X's-mill Roughing

被削材 Work Material	碳钢 合金钢 球墨铸铁 Carbon Steel Alloy Steel Ductile Cast Iron		合金钢 模具钢 Alloy Steel Mold Steel		不锈钢 SUS304, SUS316 Stainless Steel		耐热合金 钛合金 Heat Resistant Alloy Titanium Alloy		铸铁 Cast Iron		侧面加工时 Side Milling 
	~ 35HRC		35 ~ 45HRC						~ 200HB		
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
外径 Dia. of Mill (mm)											槽加工时 Grooving 
6	3200	320	2700	270	1900	170	1300	100	3200	610	
8	2400	290	2000	240	1400	150	1000	100	2400	760	
10	1900	270	1600	220	1110	140	800	90	1910	760	
12	1600	260	1300	220	930	130	660	80	1590	760	
15	1300	260	1100	220	740	130	530	80	1270	760	
20	1000	260	800	210	560	130	400	80	960	610	
侧面加工	ap										
	ae	1.5DC 0.5DC									
槽加工	ap	1.0DC									

XSRE

- 1) 加工不锈钢时, 请采用湿式加工。
- 2) 对于耐热合金、钛合金, 推荐使用非水溶性切削剂。

- 1) Use in wet condition in case of Stainless Steel.
- 2) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

D-42 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GS4-R | GS 铣刀 圆角型 GS MILL Radius

泛用条件 Conventional Condition

被削材 Work Material	一般结构用钢 SS 碳钢 S-C 铸铁 FC- Structural Steel Carbon Steel Cast Iron		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		侧面加工时 Side Milling 
	150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC						
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
2	12800	570	12000	380	8300	230	6000	150	6000	130	3700	70	
4	6800	730	6400	490	4400	300	3200	200	3200	170	2000	90	
6	4600	770	4300	520	3000	320	2200	210	2200	180	1400	100	
8	3400	770	3200	520	2200	320	1600	210	1600	180	1000	100	
10	2800	780	2600	520	1800	320	1300	210	1300	180	800	100	
12	2300	780	2200	530	1500	320	1100	210	1100	180	700	100	
16	1700	650	1600	420	1100	280	800	170	800	150	500	80	
20	1350	600	1300	380	900	260	650	150	650	140	400	75	
侧面加工	ap	1.5DC					1.0DC		1.5DC		1.0DC		DC: 立铣刀外径 Dia. of Mill
	ae	0.1DC					0.05DC		0.1DC		0.05DC		
槽加工	ap	0.5DC		0.3DC		0.2DC		0.05DC		0.3DC		0.1DC	

高速条件 High Speed Condition

被削材 Work Material		一般结构用钢 SS 碳钢 S-C 铸铁 FC-		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316	
		Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel	
		150 ~ 250HB		25 ~ 35HRC		35 ~ 45HRC		45 ~ 55HRC			
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
2	47800	2200	47800	1600	39800	1200	31800	900	15900	400	
4	23900	2600	23900	1900	19900	1400	15900	1100	8000	490	
6	16000	2700	16000	2000	13300	1500	10600	1200	5300	510	
8	12000	2700	12000	2000	10000	1500	8000	1200	4000	520	
10	9600	2700	9600	2000	8000	1500	6400	1200	3200	520	
12	8000	2700	8000	2000	6700	1500	5300	1200	2700	520	
16	6000	2200	6000	1600	5000	1200	4000	900	2000	450	
20	4800	2000	4800	1400	4000	1100	3200	750	1600	380	
切削量 Depth of cut	ap	1.5DC					1.0DC		1.5DC		
	ae	0.05DC					0.02DC		0.1DC		

D-43 尺寸表 Stocked Sized

GS4-R

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 干式加工时，请进行气吹。
- 3) 对不锈钢进行槽加工时，请将转数降低到表中数值的 60%、进给速度降低到表中数值的 40%。
- 4) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 5) 对于耐热合金、钛合金，推荐使用非水溶性切削油剂。

- 1) Use highly rigid machining center and holder.
- 2) Use an air blow for dry process.
- 3) When grooving Stainless Steel, reduce the rotation to 60% , and the feed to 40% of table values.
- 4) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium.
- 5) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

**GSXB
2GSR**

GSX 球头 铣刀 GSX MILL Ball

GS 球头 铣刀 GS MILL Ball

泛用条件 Conventional Condition

被削材 Work Material	一般结构用钢 SS 碳钢 SC 铸铁 FC		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316		耐热合金 钛合金	
	Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy, Titanium Alloy	
球头半径 Ball Radius (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
RE1	19100	770	12800	370	10200	270	8900	190	8900	210	6400	120
RE2	10800	1100	7200	550	5700	400	5000	280	5000	310	3600	180
RE3	7700	1300	5200	660	4100	480	3600	330	3600	380	2600	210
RE4	6000	1400	4000	700	3200	510	2800	360	2800	400	2000	230
RE5	4800	1400	3200	700	2600	520	2300	370	2300	410	1600	230
RE6	4000	1400	2700	710	2200	530	1900	370	1900	410	1400	240
切削量 Depth of cut	ap	0.1DC		0.05DC		0.1DC		0.1DC		0.05DC		
	Pf	0.2DC				0.1DC		0.2DC		0.1DC		



DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius


新商品

硬质合金钻头

高速钢钻头

高速条件 High Speed Condition

被削材 Work Material	一般结构用钢 SS 碳钢 SC 铸铁 FC		合金钢 SCM 调质钢 NAK, HPM		调质钢 淬硬钢		淬硬钢		不锈钢 SUS304, SUS316	
	Structural Steel Carbon Steel Cast Iron		Alloy Steel Heat Treated Steel		Heat Treated Steel Hardened Steel		Hardened Steel		Stainless Steel	
球头半径 Ball Radius (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
RE1	51000	2100	39800	1300	35700	960	23700	640	35700	960
RE2	25500	2700	19900	1700	17900	1300	11900	830	17900	1300
RE3	17000	3000	13300	1900	11900	1400	7900	920	11900	1400
RE4	12800	3100	10000	2000	9000	1500	6000	960	9000	1500
RE5	10200	3100	8000	2000	7200	1500	4800	960	7200	1500
RE6	8500	3100	6700	2000	6000	1500	4000	960	6000	1500
切削量 Depth of cut	ap	0.05DC		0.02DC		0.05DC		0.05DC		
	Pf	0.1DC				0.05DC		0.1DC		



DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

丝锥

硬质合金立铣刀

高速
钢立铣刀

GSXB/2GSR

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 推荐使用气吹或油雾加工。
- 3) 不锈钢、耐热合金、钛合金加工时, 请采用湿式加工。
- 4) 在降低了切削量的情况下, 可进一步提高进给速度。

- 1) Use highly rigid machining center and holder.
- 2) Recommend air blow or oil mist process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When depth of the cut is small, can increase feed speed more.

D-51 尺寸表 Stocked Sized

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

2GEOR
2GEOLSR
2MMR

X's 铣刀 GEO 球型 X's-mill Geo Ball

X's 铣刀 GEO 长柄 球型 X's-mill Geo Ball Long Shank

模具用 球型 Mold Meister Ball

泛用条件 Conventional Condition

被削材 Work Material	碳钢 SC 铸铁 FC Carbon Steel Cast Iron		合金钢 SCM 模具钢 SKD Alloy Steel Mold Steel		调质钢 预硬钢 Heat Treated Steel Pre-Hardened Steel		不锈钢 调质钢 Stainless Steel Heat Treated Steel		高硬度钢 Hardened Steel		高硬度钢 Hardened Steel		 DC: 立铣刀外径 Dia. of Mill RE: 球头半径 Ball Radius	
	~ 250HB				30 ~ 38HRC		38 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC			
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		
球头半径 Ball Radius (mm)														
RE 0.5	32000	820	31000	620	25000	440	22000	330	19000	240	14000	130		
RE 1	16000	920	15000	680	13000	510	11000	380	9600	280	7200	160		
RE 2	8000	1000	7600	760	6400	560	5600	430	4800	310	3600	170		
RE 3	5300	1000	5100	770	4200	550	3700	420	3200	310	2400	170		
RE 5	3200	1000	3100	780	2500	550	2200	420	1900	300	1400	170		
RE 8	2000	920	1900	680	1600	510	1400	380	1200	280	900	160		
RE10	1600	820	1500	600	1300	460	1100	330	960	250	720	140		
RE15	1100	740	1000	530	850	390	700	280	640	220	480	120		
基准切削量 Depth of cut PF	0.05DC (RE < 0.5)				0.1DC (RE ≥ 0.5)				0.05DC					
					0.2DC				0.1DC					

高速条件 High Speed Condition

被削材 Work Material		碳钢 SC 铸铁 FC Carbon Steel Cast Iron		合金钢 SCM 模具钢 SKD Alloy Steel Mold Steel		调质钢 预硬钢 Heat Treated Steel Pre-Hardened Steel		不锈钢 调质钢 Stainless Steel Heat Treated Steel		高硬度钢 Hardened Steel		高硬度钢 Hardened Steel		
		~ 250HB				30 ~ 38HRC		38 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC		
		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
球头半径 Ball Radius (mm)		RE 0.5	60000	3600	60000	3600	60000	3000	60000	3000	60000	2400	48000	1900
		RE 1	51000	5100	48000	4800	40000	3200	37000	3000	35000	2100	24000	1400
		RE 2	25000	5000	24000	4800	20000	3200	18000	2500	18000	2200	12000	1400
		RE 3	17000	4100	16000	3800	13000	2900	12000	2200	12000	1900	8000	1300
		RE 5	10200	3100	9600	2500	8000	1900	7300	1500	7000	1400	4800	960
		RE 8	6400	1900	6000	1800	5000	1200	4600	1000	4400	900	3000	600
		RE10	5100	1600	4800	1400	4000	1000	3700	890	3500	700	2400	480
		RE15	3400	1100	3200	960	2700	650	2400	600	2300	460	1600	320
切削量 Depth of cut														
PF														
		0.1DC												
		0.05DC												
		0.05DC												



DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

2GEOR/2GEOLSR/2MMR

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 推荐使用气吹或油雾加工。
- 3) 对铅笔颈型，请降低到上述条件的 70%。
- 4) 对长柄型，请根据突出长度降低条件。
- 5) 加工不锈钢时，请采用湿式加工。

- 1) Use highly rigid machining center and holder.
- 2) Recommend air blow or oil mist process.
- 3) When using Pencil Neck Type End Mills, reduce the feed to 70% of table values.
- 4) When using Long Shank Type End Mills, reduce cutting condition according to its over hang length.
- 5) Use in wet condition in case of Stainless Steel.

D-52, D-55 ◀ ▶ 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

2PLXSR | X's 球头 铣刀 X's-mill Ball

球头半径 Ball Radius (mm)			被削材 Work Material		低硬度钢 碳钢 合金钢		中硬度钢 合金钢 模具钢		高硬度钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		铸铁 FC, FCD		
					Low Hardness Steel Carbon Steel Alloy Steel		Medium Hardness Steel Alloy Steel Mold Steel		Hardened Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		
			切削量 Depth of cut		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	~ 200HB
粗加工 Roughing	RE 1	0.8	0.8	9700	235	5700	115	不适用于粗加工。 Not suitable for roughing.								10600	300
	RE 2	1.6	1.6	5300	295	3200	190									5700	365
	RE 3	2.4	2.4	3500	335	2200	210									3800	410
	RE 5	4.0	4.0	2100	355	1300	220									2300	460
	RE 8	6.4	6.4	1300	335	810	180									1400	450
	RE10	8.0	8.0	1100	285	650	155									1100	395
精加工 Finishing	RE12.5	10.0	10.0	840	230	520	115	5300	105	8000	160	5300	95	17200	620	910 365	
	RE 1	0.2	0.3	15900	570	10600	340	3200	155	6400	305	4600	185	12800	1000		
	RE 2	0.2	0.4	11000	880	7300	585	1900	180	3700	355	2700	210	7400	1050		
	RE 3	0.4	0.5	6400	920	4300	620	1300	220	2600	440	1800	215	5100	1300		
	RE 5	0.5	0.6	4400	1150	2900	755	1000	255	2000	510	1400	270	4000	1550		
	RE 8	0.5	0.8	3400	1300	2300	885	890	250	1800	505	1300	310	3600	1600		
	RE10	0.5	0.9	3100	1350	2000	880	800	220	1600	440	1100	305	3200	1450		
RE12.5	0.5	1.0	2700	1200	1800	900											

DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

D-53 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

2CER | 超硬槽刀 V 球头型 ANCHOR V Ball

球头半径 Ball Radius (mm)			被削材 Work Material		模具钢 预硬钢		工具钢 预硬钢		碳钢 合金钢		不锈钢 SUS304, SUS316		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属			
					Mold Steel Pre-Hardened Steel		Tool Steel Pre-Hardened Steel		Carbon Steel Alloy Steel		Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal			
					35~45HRC		25~35HRC		~250HB						~200HB					
			切削量 Depth of cut		转速 Rotation		进给速度 Feed		转速 Rotation		进给速度 Feed		转速 Rotation		进给速度 Feed		转速 Rotation		进给速度 Feed	
			ap	Pr	(min ⁻¹)	(mm/min)	(min ⁻¹)	(mm/min)	(min ⁻¹)	(mm/min)	(min ⁻¹)	(mm/min)	(min ⁻¹)	(mm/min)	(min ⁻¹)	(mm/min)	(min ⁻¹)	(mm/min)	(min ⁻¹)	(mm/min)
粗加工 Roughing	RE 1.5	1.2	1.2	2700	40	4000	85	5300	125	2700	50	2700	30	6600	220	11900	535			
	RE 2	1.6	1.6	2000	50	3000	95	4000	145	2000	55	2000	40	5000	240	9000	575			
	RE 3	2.4	2.4	1300	55	2000	95	2700	160	1300	60	1300	45	3300	255	6000	610			
	RE 5	4.0	4.0	800	65	1200	110	1600	160	800	70	800	55	2000	280	3600	650			
	RE 6	4.8	4.8	660	65	1000	110	1300	155	660	70	660	55	1700	285	3000	650			
	RE 8	6.4	6.4	500	55	750	95	1000	145	500	65	500	50	1200	250	2200	600			
精加工 Finishing	RE10	8.0	8.0	400	50	600	85	800	145	400	55	400	50	1000	240	1800	575			
	RE 1.5	0.2	0.3	5300	125	7400	200	9600	375	4300	115	4300	75	10600	350	19100	915			
	RE 2	0.2	0.4	4600	165	6400	255	8200	460	3700	135	3700	105	9100	435	16400	1100			
	RE 3	0.5	0.5	2700	165	3700	245	4800	430	2100	125	2100	100	5300	415	9600	1050			
	RE 5	0.5	0.6	1800	200	2600	310	3300	530	1500	165	1500	120	3700	520	6600	1300			
	RE 6	0.5	0.7	1700	225	2300	330	3000	575	1300	170	1300	125	3300	555	6000	1450			
	RE 8	0.5	0.8	1400	225	2000	350	2600	625	1100	175	1100	125	2900	605	5100	1450			
	RE10	0.5	0.9	1300	235	1800	360	2300	645	1000	180	1000	140	2600	625	4600	1550			

DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

D-54 尺寸表 Stocked Sized

2PLXSR/2CER

- 1) 已设定好 a_p 、 P_f , 以便使精加工的 h 值达到 0.01mm。
- 2) 2CER、2MNER 在进行干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 3) 加工不锈钢时, 请采用湿式加工。
- 4) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) Depth of cut (a_p & P_f) is calculated to be 0.01mm ($=h$) in finishing process.
- 2) When using 2CER and 2MNER in dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 3) Use in wet condition in case of Stainless Steel.
- 4) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

2MNER | 超硬铣刀 微球型 2 刃型 Carbide Mini-Ball End Mills Two Flutes

被削材 Work Material	合金钢 Alloy Steel ~ 40HRC	碳钢 Carbon Steel	特殊钢 Special Steel	铝合金 铜合金 Aluminum Alloy Copper Alloy	铸铁 Cast Iron	
球头半径 Ball Radius (mm)	切削速度 speed (m/min)	进给量 Feed (mm/tooth)	切削速度 speed (m/min)	进给量 Feed (mm/tooth)	切削速度 speed (m/min)	进给量 Feed (mm/tooth)
R0.05 ~ R0.1	5 ~ 10	0.001 ~ 0.003	6 ~ 12	0.001 ~ 0.005	4 ~ 18	0.001 ~ 0.003
R0.15 ~ R0.2	6 ~ 12	0.001 ~ 0.005	8 ~ 15	0.001 ~ 0.005	4 ~ 18	0.001 ~ 0.003
R0.25 ~ R0.3	8 ~ 15	0.001 ~ 0.005	10 ~ 18	0.001 ~ 0.005	5 ~ 10	0.001 ~ 0.003
R0.35 ~ R0.45	10 ~ 18	0.003 ~ 0.01	15 ~ 25	0.003 ~ 0.01	8 ~ 15	0.003 ~ 0.008
R0.50 ~ R1	10 ~ 20	0.003 ~ 0.01	15 ~ 25	0.005 ~ 0.015	8 ~ 15	0.003 ~ 0.008
切削量 Depth of cut	Δp	0.2DC				
	Pf	0.6DC				



2MNER


- 1) 已设定好 Δp 、Pf，以便使精加工的 h 值达到 0.01mm。
- 2) 2CER、2MNER 在进行干式加工（推荐使用气吹）时，请分别将转数和进给速度降低到 70%。
- 3) 加工不锈钢时，请采用湿式加工。
- 4) 对于耐热合金、钛合金，推荐使用非水溶性切削油剂。

- 1) Depth of cut (Δp & Pf) is calculated to be 0.01mm (=h) in finishing process.
- 2) When using 2CER and 2MNER in dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 3) Use in wet condition in case of Stainless Steel.
- 4) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

D-54 尺寸表 Stocked Sized

OVM | 椭圆形 铣刀 Oval mills

泛用条件 Conventional Condition

被削材 Work Material		碳钢 SC 铸铁 FC		合金钢 SCM 模具钢 SKD		调质钢 预硬钢		不锈钢 调质钢		高硬度钢		高硬度钢		S 型 S type
		Carbon Steel Cast Iron		Alloy Steel Mold Steel		Heat Treated Steel Pre-Hardened Steel		Stainless Steel Heat Treated Steel		Hardened Steel		Hardened Steel		
		~ 250HB				30 ~ 38HRC		38 ~ 45HRC		45 ~ 55HRC		55 ~ 60HRC		
螺纹尺寸 Type		转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	
		Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	
S 型 S type	OVM6 x 1	5300	1000	4800	780	4200	600	3700	430	3200	320	1600	120	E 型 E type
	OVM10 x 1.5	3200	930	2900	760	2500	580	2200	410	1900	300	1000	120	
	OVM12 x 1.5	2700	820	2400	660	2100	500	1900	370	1600	270	800	100	
	OVM12 x 3	2700	910	2400	730	2100	560	1900	410	1600	300	800	110	
	OVM16 x 1.5	2000	800	1800	650	1600	510	1400	360	1200	260	600	100	
E 型 E type	OVM20 x 1.5	1600	700	1400	550	1300	460	1100	310	1000	240	480	80	
	OVM12 x 12	2700	540	2400	430	2100	340	1900	250	1600	180	800	60	
	OVM12 x 18	2700	490	2400	390	2100	310	1900	230	1600	160	800	50	
	OVM12 x 24	2700	430	2400	340	2100	270	1900	200	1600	140	800	50	
	OVM16 x 24	2000	400	1800	320	1600	260	1400	180	1200	130	600	50	
切削量 Depth of cut	OVM16 x 32	2000	360	1800	290	1600	230	1400	160	1200	120	600	50	
	△ a (mm)	0.1DC						0.05DC						




高速条件 High Speed Condition

被削材 Work Material		碳钢 铸铁	SC FC	合金钢 模具钢	SCM SKD	调质钢 预硬钢	不锈钢 调质钢	高硬度钢		高硬度钢		S 型 S type
		Carbon Steel Cast Iron		Alloy Steel Mold Steel		Heat Treated Steel Pre-Hardened Steel	Stainless Steel Heat Treated Steel	Hardened Steel		Hardened Steel		
		~ 250HB				30 ~ 38HRC	38 ~ 45HRC	45 ~ 55HRC		55 ~ 60HRC		
螺纹尺寸 Type		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
S 型 S type	OVM6 x 1	17000	4100	16000	3800	13000	3100	12000	2300	12000	2000	8000 960
	OVM10 x 1.5	10000	3000	10000	3000	8000	2400	7300	1800	7000	1500	4800 720
	OVM12 x 1.5	8500	2000	8000	1900	6600	1600	6100	1200	5800	1000	4000 480
	OVM12 x 3	8500	2000	8000	1900	6600	1600	6100	1200	5800	1000	4000 480
	OVM16 x 1.5	6400	1800	6000	1700	5000	1400	4600	1100	4400	900	3000 430
OVM20 x 1.5	5100	1500	4800	1400	4000	1200	3700	900	3500	700	2400 360	
E 型 E type	OVM12 x 12	8500	1200	8000	1100	6600	920	6100	850	5800	810	4000 560
	OVM12 x 18	8500	1100	8000	1000	6600	830	6100	770	5800	730	4000 500
	OVM12 x 24	8500	1000	8000	880	6600	740	6100	680	5800	650	4000 450
	OVM16 x 24	6400	900	6000	840	5000	700	4600	640	4400	620	3000 420
	OVM16 x 32	6400	810	6000	800	5000	630	4600	580	4400	560	3000 380
切削量 Depth of cut	△a (mm)	0.05DC					0.02DC					

Diagram illustrating the S-type thread profile, showing the depth of cut (Δa) and the diameter (DC).

Diagram illustrating the E-type thread profile, showing the depth of cut (Δa) and the diameter (DC).



D-56 尺寸表 Stocked Sized

OVM

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 推荐使用气吹或油雾加工。

- 1) Use highly rigid machining center and holder.
- 2) Recommend air blow or oil mist process.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

GSBH | GS 铣刀 高硬球头型 GS MILL Hard Ball

被削材 Work Material	预硬钢 模具钢 Pre-Hardened Steel Mold Steel		淬硬钢 Hardened Steel		淬硬钢 Hardened Steel		淬硬钢 Hardened Steel	
	40 ~ 50HRC		50 ~ 55HRC		55 ~ 60HRC		60 ~ 65HRC	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
球头半径 Ball Radius (mm)								
RE0.2	50000	530	50000	530	50000	500	50000	450
RE0.3	50000	830	50000	830	50000	760	50000	690
RE0.5	50000	1360	50000	1360	50000	1250	41970	960
RE0.75	50000	2040	50000	2040	37310	1400	27980	960
RE1	38130	2070	38130	2070	27980	1400	20990	960
RE1.25	30510	2070	30510	2070	22390	1400	16790	960
RE1.5	25420	2070	25420	2070	18660	1400	13990	960
RE2	19070	2070	19070	2070	13990	1400	10490	960
RE2.5	15250	2070	15250	2070	11190	1400	8390	960
RE3	12710	2070	12710	2070	9330	1400	7000	960
RE4	9530	2070	9530	2070	7000	1400	5250	960
RE5	7630	2070	7630	2070	5600	1400	4200	960
RE6	6360	2070	6360	2070	4660	1400	3500	960
切削量 Depth of cut	a _p Pf	0.08DC 0.25DC			0.05DC 0.15DC			



DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

GSBH

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 推荐使用气吹或油雾加工。
- 3) 不锈钢、耐热合金、钛合金加工时，请采用湿式加工。
- 4) 在降低了切削量的情况下，可进一步提高进给速度。

- 1) Use highly rigid machining center and holder.
- 2) Recommend air blow or oil mist process.
- 3) Use in wet condition in case of Stainless Steel, Heat Resistant Alloy, Titanium Alloy.
- 4) When depth of the cut is small, can increase feed speed more.

D-57 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

2DLCM 2DLCM-R

DLC 铣刀 铝材用 DLC-mill for Aluminum DLC 铣刀 圆角型 DLC-mill Radius

被削材 Work Material	纯铝 A1070		铝合金 Si, Mg-Si 类 A4032, A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC, ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2	50000	1000	11500	230	38000	760	38000	840	34000	750	15300	240
3	41000	1200	9600	300	32000	1000	32000	1100	29000	960	12700	300
5	25000	1300	5700	300	19000	1000	19000	1100	17000	960	7600	310
6	21000	1300	4800	300	16000	1000	16000	1100	14000	960	6400	310
8	16000	1300	3600	300	12000	1000	12000	1100	10700	960	4800	310
10	12000	1300	2900	300	9600	1000	10000	1100	8600	960	3800	310
12	10000	1300	2400	300	8000	1000	8000	1100	7200	960	3200	310
16	7800	1300	1800	300	6000	1000	6000	1100	5400	960	2400	310
20	6200	1300	1400	300	4800	1000	4800	1100	4300	960	1900	310
侧面加工	a _p	1.5DC										
	a _e	0.2DC									0.1DC	
槽加工	a _p	0.5DC (干式加工时 In dry process) 1.0DC (湿式加工时 In wet-milling)										

2DLCM/2DLCM-R

- 1) 使用的加工设备的最高转数未达到上表时, 请以其最高转数进行加工。此时, 请按相同比例降低进给速度。
- 2) 采用湿式加工时, 请将进给速度升至上表的 1.25 倍。
- 3) 进行槽加工时, 请将转数降低到 70%、进给速度降低到 25%。
- 4) 采用干式加工时, 推荐进行气吹。

- 1) When using low speed machines, use the maximum speed and adjust the feed rate.
- 2) In wet-milling, increase 1.25 times of feed.
- 3) In groove milling, reduce the rotation to 70%, and the feed to 25% of table values.
- 4) In dry-milling, recommend air blow.

D-60, D-67 ◀ ▶ 尺寸表 Stocked Sized

2DLCSC SL2DLCSC

DLC 铣刀 锋利型 2 刃型 DLC-mill Sharp Corner DLC 铣刀 长颈锋利型 2 刃型 DLC-mill Long Sharp Corner

被削材 Work Material	纯铝 A1070			铝合金 Si, Mg-Si 类 A4032, A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC, ADC		铜合金 C1100		侧面加工时 Side Milling 
	Aluminum			Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy		
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
2	50000	1000		11500	230	38000	760	38000	840	34000	750	15300	240	槽加工时 Grooving 
3	41000	1200	9600	300	32000	1000	32000	1100	29000	960	12700	300		
5	25000	1300	5700	300	19000	1000	19000	1100	17000	960	7600	310		
6	21000	1300	4800	300	16000	1000	16000	1100	14000	960	6400	310		
8	16000	1300	3600	300	12000	1000	12000	1100	10700	960	4800	310		
10	12000	1300	2900	300	9600	1000	10000	1100	8600	960	3800	310		
12	10000	1300	2400	300	8000	1000	8000	1100	7200	960	3200	310		
16	7800	1300	1800	300	6000	1000	6000	1100	5400	960	2400	310		
20	6200	1300	1400	300	4800	1000	4800	1100	4300	960	1900	310		
侧面加工	ap	1.5DC (长刃 3.0DC)												DC: 立铣刀外径 Dia. of Mill
	ae	0.2DC (长刃 0.1DC)										0.1DC (长刃 0.05DC)		
槽加工	ap	1.0DC (长颈型不适用)												

D-61, D-62 ◀ ▶ 尺寸表 Stocked Sized

2DLCSC/SL2DLCSC

- 1) 为了进行稳定的加工, 请使用高精度的机床、刀杆。
- 2) 使用锋利型时, 请采用半干式或湿式加工。
- 3) 对长颈锋利型, 请将进给速度降低到 50%。
- 4) 进行槽加工时, 请将转数降低到 70%、进给速度降低到 25%。

- 1) Use precise machine and holder.
- 2) Use in MQL condition or wet condition in case of Sharp corner.
- 3) Reduce only the feed to 50% of table values in case of DLC-mill Long Sharp Corner.
- 4) When grooving, reduce the rotation to 70%, and the feed to 25% of table values.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

2CEAL | 铝用 铣刀 ANCHOR V for Aluminum

被削材 Work Material	纯铝 A1070		铝合金 Si, Mg-Si 类 A4032, A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC, ADC		铜合金 C1100		侧面加工时 Side Milling	
	Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy			
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 槽加工时 Grooving	
3	32000	800	5300	200	13000	400	27000	400	16000	500	7900	200		
5	19200	1000	3200	250	8000	500	16000	500	9600	600	4700	240		
6	16000	1000	2650	250	6500	500	13500	500	8000	600	3900	240		
8	12000	1000	2000	300	5000	600	10000	600	6000	700	2900	240		
10	9600	1200	1600	300	4000	600	8000	600	4800	700	2300	240		
12	8000	1200	1300	350	3300	700	6600	700	4000	800	1900	280		
16	6000	1200	1000	350	2500	700	5000	700	3000	800	1400	280		
20	4800	1200	800	350	2000	700	4000	700	2400	800	1100	280		
侧面加工	ap	1.5DC										1.5DC		 DC: 立铣刀外径 Dia. of Mill
	ae	0.2DC										0.1DC		
槽加工	ap	1.0DC										0.5DC		

D-61 ◀ ▶ 尺寸表 Stocked Sized

2CEAL

- 1) 为了进行稳定的加工, 请使用高精度的机床、刀杆。
- 2) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 3) 加工不锈钢时, 请采用湿式加工。
- 4) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) Use precise machine and holder.
- 2) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 3) Use in wet condition in case of Stainless Steel.
- 4) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

DLCVL4-5D | DLC 铣刀 VL 型 5D DLC MILL VL 5D

被削材 Work Material		纯铝 A1070		铝合金 Si、Mg-Si 类 A4032、A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC、ADC		铜合金 C1100	
		Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy	
外径 Dia. of Mill (mm)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3		20300	540	4700	140	15700	450	15700	500	14200	410	6200	140
4		15400	540	3500	140	11800	450	11800	500	10300	410	4700	140
5		12300	590	2800	140	9300	450	9300	500	8300	410	3700	145
6		10200	590	2300	140	7800	450	7800	500	6900	410	3200	145
8		7800	590	1800	140	5900	450	5900	500	5300	410	2300	145
10		5900	590	1400	140	4700	450	4700	500	4200	410	1900	145
12		4900	590	1200	140	3900	450	3900	500	3500	410	1600	145
16		3800	590	900	140	2900	450	2900	500	2700	410	1200	145
20		3000	590	700	140	2300	450	2300	500	2100	410	900	145
切削量 Depth of cut	侧面加工 ae	4.0DC											
		0.07DC											
		0.03DC											

D-65 ◀ ▶ 尺寸表 Stocked Sized

DLCVL4-5D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 请在湿式加工或者油雾加工时使用。
- 3) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Please use in wet condition or MQL condition.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

DLCVLSLT3-2.5D DLCVLSLT3-R-2.5D

DLC 铣刀 VL 开槽型 2.5D DLC MILL VL SLOT 2.5D
DLC 铣刀 VL 开槽 圆角型 2.5D DLC MILL VL SLOT Radius 2.5D

侧面加工、槽加工 Side Milling & Grooving

被削材 Work Material		纯铝 A1070		铝合金 Si、Mg-Si 类 A4032、A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC、ADC		铜合金 C1100		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
		Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy		
外径 Dia. of Mill (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	槽加工时 Grooving  DC: 立铣刀外径 Dia. of Mill	
	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)		
	3	41000	1500	21300	800	32000	1200	32000	1300	29000	1150	12700		380
	4	31000	1500	16000	800	24000	1200	24000	1300	21000	1150	9500		380
	5	25000	1600	12800	850	19000	1300	19000	1400	17000	1200	7600		380
	6	21000	1600	10700	850	16000	1300	16000	1400	14000	1200	6400		380
	8	16000	1600	8000	850	12000	1300	12000	1400	10700	1200	4800		380
	10	12000	1600	6400	850	9600	1300	10000	1400	8600	1200	3800		380
12	10000	1600	5400	850	8000	1300	8000	1400	7200	1200	3200	380		
16	7800	1500	4000	850	6000	1200	6000	1300	5400	1150	2400	380		
切削量 Depth of cut	侧面加工 a _p	a _e	1.5DC											
		a _e	0.2DC											
		a _e	1.0DC											

孔加工 Drilling

被削材 Work Material	纯铝 A1070		铝合金 Si、Mg-Si 类 A4032、A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC、ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	41000	1000	21300	500	32000	700	32000	510	29000	550	12700	210
4	31000	1100	16000	600	24000	750	24000	580	21000	600	9500	240
5	25000	1100	12800	600	19000	750	19000	580	17000	600	7600	240
6	21000	1100	10700	600	16000	750	16000	580	14000	600	6400	240
8	16000	1200	8000	600	12000	800	12000	640	10700	700	4800	240
10	12000	1200	6400	600	9600	800	10000	640	8600	700	3800	240
12	10000	1200	5400	600	8000	800	8000	640	7200	700	3200	240
16	7800	1100	4000	500	6000	750	6000	580	5400	600	2400	210

D-63, D-67 尺寸表 Stocked Sized

DLCVLSLT3-2.5D/DLCVLSLT3-R-2.5D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 请在湿式加工或者半干式加工时使用。
- 3) 切屑长度较长时，请按 0.1 ~ 0.5DC 的大致标准进行分级加工。
- 4) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Use in wet condition or MQL condition.
- 3) In case of the chip is also long, the amount step is 0.1 ~ 0.5 × DC.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

DLCVLSLTLS3-1.5D | DLC 铣刀 VL 开槽 长柄型 1.5D

DLC MILL VL SLOT Long Shank 1.5D

侧面加工、槽加工 Side Milling & Grooving

被削材 Work Material		纯铝 A1070		铝合金 Si、Mg-Si 类 A4032、A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC、ADC		铜合金 C1100		侧面加工时 Side Milling 
		Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy		
外径 Dia. of Mill (mm)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
3		32800	1050	14900	900	25600	900	25600	990	23200	860	10150	270	
4		24800	1050	11200	1100	19200	900	19200	990	16800	860	7600	270	
5		20000	1160	9000	1100	15200	900	15200	990	13600	860	6050	280	
6		16800	1160	7500	1200	12800	900	12800	990	11200	860	5100	280	
8		12800	1160	5600	1200	9600	900	9600	990	8600	860	3850	280	
10		9600	1160	4500	1200	8000	900	8000	990	6900	860	3050	280	
12		8000	1160	3800	1200	6400	900	6400	990	5800	860	2550	280	
16		6200	1160	2800	1100	4800	900	4800	990	4300	860	1900	280	
切削量 Depth of cut	侧面加工 a _p a _e	0.85DC												DC: 立铣刀外径 Dia. of Mill
		0.2DC												
	槽加工 a _p	0.5DC												

孔加工 Drilling

被削材 Work Material	纯铝 A1070 Aluminum		铝合金 Si、Mg-Si 类 A4032、A6061 Aluminum Alloy		铝合金 Mg 类 A5052 Aluminum Alloy		铝合金 Zn-Mg 类 A7075 Aluminum Alloy		铝合金铸件 AC、ADC Aluminum Alloy Casting		铜合金 C1100 Copper Alloy	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
外径 Dia. of Mill (mm)												
3	32800	800	14900	350	25600	570	25600	410	23200	440	10150	170
4	24800	880	11200	420	19200	570	19200	460	16800	480	7600	190
5	20000	880	9000	420	15200	570	15200	460	13600	480	6050	190
6	16800	880	7500	420	12800	570	12800	460	11200	480	5100	190
8	12800	960	5600	420	9600	640	9600	510	8600	560	3850	190
10	9600	960	4500	420	8000	640	8000	510	6900	560	3050	190
12	8000	960	3800	420	6400	640	6400	510	5800	560	2550	190
16	6200	880	2800	350	4800	570	4800	460	4300	480	1900	170

DLCVLSLTLS3-1.5D

- 1) 本切削条件表是侧面加工时的条件。进行槽加工时, 请将转数和进给速度降低到 50%。
- 2) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 3) 请在湿式或者半干式时使用。
- 4) 切屑长度较长时, 请按 0.1 ~ 0.5Dc 的大致标准进行分级加工。
- 5) 发生颤动时, 请按相同比例降低上表中的转数和进给速度, 或降低切削量。

- 1) Cutting condition listed here are for side milling. When grooving, reduce the rotation and the feed to 50% of table values.
- 2) Use highly rigid machining center and holder.
- 3) Use in wet condition or MQL condition.
- 4) In case of the chip is also long, the amount step is 0.1 ~ 0.5 × DC.
- 5) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

D-64 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

DLC SLT LS | DLC 铣刀 开槽 长柄型 DLC-mill SLOT Long Shank

泛用条件 侧面加工 Conventional Condition Side Milling

被削材 Work Material	纯铝 A1070 Aluminum		铝合金 Si 类 A4032 Aluminum Alloy		铝合金 Mg 类 A5052 Aluminum Alloy		铝合金 Mg-Si 类 A6061 Aluminum Alloy		铝合金 Cu,Zn-Mg 类 A2014, A7075 Aluminum Alloy		铝合金铸件 Si ~ 12% AC2A, AC8C Aluminum Alloy Casting		铝合金铸件 Si 12% ADC12 Aluminum Alloy Casting		铜合金 C1100 Copper Alloy	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
外径 Dia. of Mill (mm)																
3	34500	2400	21300	1300	26600	1700	23900	1440	23400	1330	23900	1440	22600	1290	10700	480
4	25900	3100	16000	1600	19900	2200	18000	1900	17600	1720	18000	1900	17000	1660	8000	700
6	17300	3300	10700	1700	13300	2300	12000	2000	11700	1810	12000	2000	11300	1740	5400	700
8	13000	3500	8000	1800	10000	2400	9000	2100	8800	1910	9000	2100	8500	1840	4000	700
10	10400	3500	6400	1800	8000	2400	7200	2100	7100	1920	7200	2100	6800	1840	3200	700
12	8700	3500	5400	1800	6700	2500	6000	2100	5900	1920	6000	2100	5700	1850	2700	700
13	7900	3500	4800	1800	6100	2500	5500	2100	5400	1920	5500	2100	5100	1850	2400	700
16	6500	3300	4000	1600	5000	2300	4500	1900	4400	1800	4500	1900	4200	1700	2000	600
17	6000	3100	3700	1580	4600	2200	4200	1900	4100	1800	4200	1900	4000	1800	1900	600
20	5200	2700	3200	1400	4000	1900	3600	1600	3500	1500	3600	1600	3400	1500	1600	500
侧面加工	a _p	1.2DC														
	a _e	0.2DC														

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

泛用条件 槽加工 Conventional Condition Grooving

被削材 Work Material	纯铝 A1070 Aluminum		铝合金 Si 类 A4032 Aluminum Alloy		铝合金 Mg 类 A5052 Aluminum Alloy		铝合金 Mg-Si 类 A6061 Aluminum Alloy		铝合金 Cu,Zn-Mg 类 A2014, A7075 Aluminum Alloy		铝合金铸件 Si ~ 12% AC2A, AC8C Aluminum Alloy Casting		铝合金铸件 Si 12% ADC12 Aluminum Alloy Casting	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
外径 Dia. of Mill (mm)														
3	34500	2100	21300	1100	26600	1500	23900	1230	23400	1140	23900	1230	22600	1100
4	25900	2300	16000	1200	19900	1600	18000	1400	17600	1240	18000	1400	17000	1200
6	17300	2400	10700	1200	13300	1700	12000	1400	11700	1290	12000	1400	11300	1250
8	13000	2500	8000	1300	10000	1700	9000	1500	8800	1340	9000	1500	8500	1290
10	10400	2500	6400	1300	8000	1700	7200	1500	7100	1350	7200	1500	6800	1290
12	8700	2500	5400	1300	6700	1700	6000	1500	5900	1340	6000	1500	5700	1300
13	7900	2500	4800	1300	6100	1700	5500	1500	5400	1340	5500	1500	5100	1300
16	6500	2300	4000	1200	5000	1600	4500	1400	4400	1300	4500	1400	4200	1200
17	6000	2300	3700	1100	4600	1500	4200	1300	4100	1200	4200	1300	4000	1200
20	5200	2100	3200	1000	4000	1400	3600	1200	3500	1100	3600	1200	3400	1100
槽加工	a _p	1.0DC												

槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

孔加工 Drilling

被削材 Work Material	纯铝 A1070 Aluminum		铝合金 Si 类 A4032 Aluminum Alloy		铝合金 Mg 类 A5052 Aluminum Alloy		铝合金 Mg-Si 类 A6061 Aluminum Alloy		铝合金 Cu,Zn-Mg 类 A2014, A7075 Aluminum Alloy		铝合金铸件 Si ~ 12% AC2A, AC8C Aluminum Alloy Casting		铝合金铸件 Si 12% ADC12 Aluminum Alloy Casting	
	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
外径 Dia. of Mill (mm)														
3	34500	1000	21300	500	26600	700	23900	550	23400	510	23900	550	18600	410
4	25900	1100	16000	600	19900	800	18000	700	17600	580	18000	700	14000	460
6	17300	1100	10700	600	13300	800	12000	700	11700	610	12000	700	9300	480
8	13000	1200	8000	600	10000	800	9000	700	8800	640	9000	700	7000	510
10	10400	1200	6400	600	8000	800	7200	700	7100	640	7200	700	5600	510
12	8700	1200	5400	600	6700	900	6000	700	5900	640	6000	700	4700	510
13	7900	1200	4800	600	6100	900	5500	700	5400	640	5500	700	4300	510
16	6500	1100	4000	500	5000	800	4500	600	4400	600	4500	600	3500	500
17	6000	1000	3700	500	4600	700	4200	600	4100	600	4200	600	3300	500
20	5200	900	3200	500	4000	600	3600	500	3500	500	3600	500	2800	400

D-62 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

DLC SLTSL | DLC 铣刀 开槽 长柄型 DLC-mill SLOT Long Shank

高速条件 侧面加工 High Speed Condition Side Milling

被削材 Work Material		纯铝 A1070		铝合金 Si 类 A4032		铝合金 Mg 类 A5052		铝合金 Mg-Si 类 A6061		铝合金 Cu,Zn-Mg 类 A2014, A7075		铝合金铸件 Si ~ 12% AC2A, AC8C		铝合金铸件 Si 12% ADC12		铜合金 C1100		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
		Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Aluminum Alloy Casting		Copper Alloy		
外径 Dia. of Mill (mm)		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
3		62100	5200	38200	2600	47800	3700	43000	3090	42100	2870	43000	3090	33500	2280	19100	1020	
4		51800	7400	31900	3800	39800	5200	35900	4500	35100	4100	35900	4500	27900	3260	16000	1500	
6		38000	8600	23400	4400	29200	6000	26300	5200	25700	4750	26300	5200	20500	3790	11700	1700	
8		31100	9900	19100	5000	23900	6900	21500	5900	21100	5470	21500	5900	16800	4360	9600	2000	
10		24900	9900	15300	5000	19100	6900	17200	5900	16900	5480	17200	5900	13400	4350	7700	2000	
12		20700	9900	12800	5000	16000	7000	14400	6000	14100	5490	14400	6000	11200	4360	6400	2000	
13		19000	9900	11700	5000	14600	7000	13200	6000	13000	5500	13000	6000	10000	4400	5900	2000	
16		15500	9300	9500	4700	11900	6500	10700	5600	10500	5200	10700	5600	8400	4100	4800	1800	
17		13300	8500	8200	4300	10300	6000	9300	5200	9100	4700	9300	5200	7200	3800	4100	1700	
20		10300	6500	6400	3300	8000	4600	7200	3900	7000	3600	7200	3900	5600	2900	3200	1300	
侧面加工		ap	1.2DC															
		ae	0.1DC															

高速条件 槽加工 High Speed Condition Grooving

被削材 Work Material		纯铝 A1070		铝合金 Si 类 A4032		铝合金 Mg 类 A5052		铝合金 Mg-Si 类 A6061		铝合金 Cu,Zn-Mg 类 A2014, A7075		铝合金铸件 Si ~ 12% AC2A, AC8C		铝合金铸件 Si 12% ADC12		槽加工时 Grooving	
		Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Aluminum Alloy Casting			
外径 Dia. of Mill (mm)	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	转速	进给速度	 DC: 立铣刀外径 Dia. of Mill
	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	Rotation (min ⁻¹)	Feed (mm/min)	
3	62100	3700	38200	1900	47800	2600	43000	2210	42100	2050	43000	2210	33500	1630			
4	51800	4500	31900	2300	39800	3200	35900	2700	35100	2470	35900	2700	27900	1960			
6	38000	5200	23400	2600	29200	3600	26300	3100	25700	2840	26300	3100	20500	2260			
8	31100	5800	19100	2900	23900	4100	21500	3500	21100	3200	21500	3500	16800	2550			
10	24900	5800	15300	2900	19100	4100	17200	3500	16900	3200	17200	3500	13400	2540			
12	20700	5800	12800	3000	16000	4100	14400	3500	14100	3200	14400	3500	11200	2550			
13	19000	6100	11700	3000	14600	4300	13200	3500	13000	3200	13000	3500	10000	2500			
16	15500	5600	9500	2800	11900	3900	10700	3300	10500	3100	10700	3300	8400	2500			
17	13300	5200	8300	2600	10300	3600	9300	3000	9100	2900	9300	3000	7200	2200			
20	10300	4100	6400	2100	8000	2900	7200	2500	7000	2300	7200	2500	5600	1800			
槽加工	ap	1.0DC															

D-62 ◀ ▶ 尺寸表 Stocked Sized

DLC SLTSL

- 1) 为了进行稳定的加工，请使用高精度的机床、刀杆。
- 2) 采用干式加工（推荐使用气吹）时，请分别将转速和进给降低到 70%。采用干式加工进行钻头加工时，请将转速降低到表中数值的 70%、进给速度降低到 20%。
- 3) 请确保钻孔的深度不超过直径的 1 倍。

- 1) Use precise machine and holder.
- 2) When dry process, reduce the rotation and feed by 70% . In dry slotting, reduce the rotation to 70% , and the feed to 20% of table values.
- 3) Using slotting depth, under 1 time of end mill diameter.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

DLCVL4-2.5D DLCVL4-R-2.5D

DLC 铣刀 VL 型 2.5D DLC MILL VL 2.5D DLC 铣刀 VL 圆角型 2.5D DLC MILL VL Radius 2.5D

被削材 Work Material	纯铝 A1070		铝合金 Si, Mg-Si 类 A4032, A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC, ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	41000	1800	9600	450	32000	1500	32000	1650	29000	1450	12700	450
4	31000	1800	7100	450	24000	1500	24000	1650	21000	1450	9500	450
5	25000	1950	5700	450	19000	1500	19000	1650	17000	1450	7600	460
6	21000	1950	4800	450	16000	1500	16000	1650	14000	1450	6400	460
8	16000	1950	3600	450	12000	1500	12000	1650	10700	1450	4800	460
10	12000	1950	2900	450	9600	1500	10000	1650	8600	1450	3800	460
12	10000	1950	2400	450	8000	1500	8000	1650	7200	1450	3200	460
16	7800	1950	1800	450	6000	1500	6000	1650	5400	1450	2400	460
20	6200	1950	1400	450	4800	1500	4800	1650	4300	1450	1900	460
侧面加工	a _p	1.5DC										
	a _e	0.2DC										0.1DC
槽加工	a _n	1.0DC(Max12mm)										

D-64, D-68 尺寸表 Stocked Sized

DLCVL4-2.5D/DLCVL4-R-2.5D

- 1) 本切削条件表是侧面加工时的条件。进行槽加工时，请将转速降低到 70%、进给速度降低到 25%。
- 2) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 3) 请在湿式加工或者油雾加工时使用。
- 4) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Cutting condition listed here are for side milling. When grooving, reduce the rotation to 70%, and the feed to 25% of table values.
- 2) Use highly rigid machining center and holder.
- 3) Please use in wet condition or MQL condition.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

DLCVL4-4D DLCVL4-R-4D

DLC 铣刀 VL 型 4D DLC MILL VL 4D DLC 铣刀 VL 圆角型 4D DLC MILL VL Radius 4D

被削材 Work Material	纯铝 A1070		铝合金 Si, Mg-Si 类 A4032, A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC, ADC		铜合金 C1100	
	Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	29000	900	6700	230	22400	750	22400	830	20300	730	8900	230
4	22000	900	5000	230	16800	750	16800	830	14700	730	6650	230
5	17500	980	4000	230	13300	750	13300	830	11900	730	5300	240
6	14500	980	3350	230	11200	750	11200	830	9800	730	4500	240
8	11200	980	2500	230	8400	750	8400	830	7500	730	3350	240
10	8400	980	2000	230	6700	750	7000	830	6000	730	2650	240
12	7000	980	1700	230	5600	750	5600	830	5000	730	2250	240
16	5450	980	1250	230	4200	750	4200	830	3800	730	1700	240
20	4350	980	980	230	3350	750	3360	830	3000	730	1300	240
侧面加工	a _p	3.0DC										
	a _e	0.1DC										0.05DC

D-65, D-68 尺寸表 Stocked Sized

DLCVL4-4D/DLCVL4-R-4D

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 请在湿式加工或者油雾加工时使用。
- 3) 发生颤动时，请按相同比例降低上表中的转速和进给速度，或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Please use in wet condition or MQL condition.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

DLCVLLS4-1.5D DLCVLLS4-R-1.5D

DLC 铣刀 VL 长柄型 1.5D DLC MILL VL Long Shank 1.5D DLC 铣刀 VL 长柄 圆角型 1.5D DLC MILL VL Long Shank Radius 1.5D

被削材 Work Material		纯铝 A1070		铝合金 Si、Mg-Si 类 A4032、A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC、ADC		铜合金 C1100		侧面加工时 Side Milling
		Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy		
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill	
3	32800	1400	7650	360	25600	1200	25600	1320	23200	1150	10150	360		
4	24800	1400	5650	360	19200	1200	19200	1320	16800	1150	7600	360		
5	20000	1550	4550	360	15200	1200	15200	1320	13600	1150	6050	370		
6	16800	1550	3850	360	12800	1200	12800	1320	11200	1150	5100	370		
8	12800	1550	3000	360	9600	1200	9600	1320	8550	1150	3850	370		
10	9600	1550	2300	360	8000	1200	8000	1320	6850	1150	3050	370		
12	8000	1550	1900	360	6400	1200	6400	1320	5750	1150	2550	370		
16	6200	1550	1400	360	4800	1200	4800	1320	4300	1150	1900	370		
20	4900	1550	1100	360	3800	1200	3800	1320	3450	1150	1500	370		
切削量 Depth of cut	侧面加工 槽加工	ap	0.85DC											DC: 立铣刀外径 Dia. of Mill
		ae	0.2DC											
		ap	0.5DC											
			0.1DC											



DC: 立铣刀外径
Dia. of Mill



DC: 立铣刀外径
Dia. of Mill

D-66, D-69 ◀ ▶ 尺寸表 Stocked Sized

DLCVLLS4-1.5D/DLCVLLS4-R-1.5D

- 1) 本切削条件表是侧面加工时的条件。进行槽加工时, 请将转速降低到 70%、进给速度降低到 25%。
- 2) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 3) 请在湿式加工或者油雾加工时使用。
- 4) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。

- 1) Cutting condition listed here are for side milling. When grooving, reduce the rotation to 70%, and the feed to 25% of table values.
- 2) Use highly rigid machining center and holder.
- 3) Please use in wet condition or MQL condition.
- 4) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

DLCVL6-2.5D DLCVL6-R-2.5D

DLC 铣刀 VL 多刃型 2.5D DLC MILL VL Multi-Flutes 2.5D DLC 铣刀 VL 多刃 圆角型 2.5D DLC MILL VL Multi-Flutes Radius 2.5D

被削材 Work Material			纯铝 A1070		铝合金 Si、Mg-Si 类 A4032、A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC、ADC		铜合金 C1100		侧面加工时 Side Milling
			Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy		
外径 Dia. of Mill (mm)			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
6			21000	2900	4800	670	16000	2200	16000	2450	14000	2150	6400	690	
8			16000	2900	3600	670	12000	2200	12000	2450	10700	2150	4800	690	
10			12000	2900	2900	670	9600	2200	10000	2450	8600	2150	3800	690	
12			10000	2900	2400	670	8000	2200	8000	2450	7200	2150	3200	690	
16			7800	2900	1800	670	6000	2200	6000	2450	5400	2150	2400	690	
20			6200	2900	1400	670	4800	2200	4800	2450	4300	2150	1900	690	
切削量 Depth of cut	侧面加工	ap	1.5DC												0.05DC
		ae	0.1DC												



DC: 立铣刀外径
Dia. of Mill

D-66, D-69 ◀ ▶ 尺寸表 Stocked Sized

DLCVL6-2.5D/DLCVL6-R-2.5D

- 1) 为了进行稳定的加工, 请使用带一定刚性的高精度的机床、刀杆。
- 2) 请在湿式加工或者油雾加工时使用。
- 3) 发生颤动时, 请按相同比例降低上表中的转速和进给速度, 或降低切削量。

- 1) Use highly rigid machining center and holder.
- 2) Please use in wet condition or MQL condition.
- 3) When chattering occurs, reduce the rotation and feed rate, or reduce the depth of cut.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

2DLCR | DLC 铣刀 球头型 DLC-mill Ball

泛用条件 Conventional Condition

被削材 Work Material	纯铝 A1070		铝合金 Si, Mg-Si 类 A4032, A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC, ADC		铜合金 C1100		DC: 立铣刀外径 Dia. of Mill RE: 球头半径 Ball Radius
	Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy		
球头半径 Ball Radius (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
RE 0.5	41000	800	10000	200	32000	600	32000	700	29000	600	13000	200	
RE 1	31000	1200	7000	300	24000	1000	24000	1100	21000	900	10000	300	
RE 2	21000	1700	5000	400	16000	1300	16000	1400	14000	1200	6000	400	
RE 3	14000	1700	3200	400	11000	1300	11000	1500	10000	1300	4000	400	
RE 5	8000	1600	1900	400	6000	1200	6000	1300	6000	1300	2500	400	
RE 8	5000	1600	1200	400	4000	1300	4000	1400	3600	1300	1600	400	
RE10	4000	1600	1000	400	3200	1300	3200	1400	2900	1300	1300	400	
切削量 Depth of cut	ap	0.1DC											
Pf	0.2DC												

高速条件 High Speed Condition

被削材 Work Material	纯铝 A1070		铝合金 Si, Mg-Si 类 A4032, A6061		铝合金 Mg 类 A5052		铝合金 Zn-Mg 类 A7075		铝合金铸件 AC, ADC		铜合金 C1100		DC: 立铣刀外径 Dia. of Mill RE: 球头半径 Ball Radius
	Aluminum		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy		Aluminum Alloy Casting		Copper Alloy		
	球头半径 Ball Radius (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	
RE 0.5	62000	1200	19000	400	60000	1200	60000	1300	57000	1300	25000	400	
RE 1	54000	2200	14000	600	48000	1900	48000	2100	43000	1900	19000	600	
RE 2	47000	3800	11000	900	36000	2900	36000	3200	32000	2800	14000	900	
RE 3	34000	4100	8000	1000	27000	3200	27000	3600	24000	3200	11000	1000	
RE 5	21000	4200	4800	1000	16000	3200	16000	3500	14000	3100	6400	1000	
RE 8	13000	4200	3000	1000	9900	3200	9900	3500	9000	3200	4000	1000	
RE 10	10000	4000	2400	1000	8000	3200	8000	3500	7200	3200	3200	1000	
切削量 Depth of cut	ap	0.05DC											
	Pf	0.1DC											

2DLCR

- 1) 为了进行稳定的加工，请使用带一定刚性的高精度的机床、刀杆。
- 2) 采用干式加工（推荐使用气吹）时，请分别将转速和进给速度降低到 70%。

- 1) Use highly rigid machining center and holder.

- 2) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.

D-70 ◀ 尺寸表 Stocked Sized

2DSE | 金刚石涂层 铣刀 Diamond Coating Stub End Mills

被削材 Work Material	铝合金 Aluminum Alloy			高硅铝合金 High Silicon Aluminum Alloy		侧面加工时 Side Milling 
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)		
1	20000 ~ 30000	100 ~ 240	20000 ~ 24000	100 ~ 190		
2	20000 ~ 30000	200 ~ 300	20000 ~ 24000	200 ~ 240		
3	16000 ~ 30000	580 ~ 1100	16000 ~ 24000	580 ~ 860		
5	10000 ~ 19000	700 ~ 1350	10000 ~ 15000	700 ~ 1000		
6	8000 ~ 16000	700 ~ 1350	8000 ~ 12000	700 ~ 1000		
8	6500 ~ 12000	700 ~ 1350	6500 ~ 9600	700 ~ 1000		
10	5000 ~ 9500	700 ~ 1350	5000 ~ 7500	700 ~ 1000		
12	4000 ~ 8000	700 ~ 1350	4000 ~ 6000	700 ~ 1000		
15	3200 ~ 6000	550 ~ 1050	3200 ~ 4800	550 ~ 850		
20	2500 ~ 4800	500 ~ 950	2500 ~ 3800	500 ~ 750		
侧面加工	ap	1.5DC 以下 Max.		1.5DC 以下 Max.		
	ae	0.2DC 以下 Max.		0.1DC 以下 Max.		
槽加工	ap	0.2DC 以下 Max.		0.2DC 以下 Max.		
	ap	0.2DC 以下 Max.		0.2DC 以下 Max.		

槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

D-70 ◀ 尺寸表 Stocked Sized

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

2DCE | 金刚石涂层 铣刀 2 刃型 Diamond Coating End Mills Two Flutes

被削材 Work Material	切削速度 Speed (m/min)	进给量 Feed (mm/rev)	最大切削量 (a_p or a_e) Depth of cut (mm)	侧面加工时 Side Milling 	槽加工时 Grooving 
石墨 Graphite	100 ~ 400	0.02 ~ 0.25	0.3DC		
铝合金 Aluminum Alloy	50 ~ 300	0.02 ~ 0.20	0.2DC		
铜合金 Copper Alloy	50 ~ 300	0.02 ~ 0.25	0.2DC		
铸铁 Cast Iron	50 ~ 300	0.02 ~ 0.20	0.1DC		

D-71 尺寸表 Stocked Sized

新商品

硬质合金钻头

DCECFF | 金刚石涂层 纤维 铣刀 Crystal Diamond Coat Fiber Mill

被削材 Work Material	CFRP	
外径 Dia. of Mill (mm)	切削速度 Speed (m/min)	进给量 Feed (mm/rev)
3	200 (100 ~ 200)	0.05
4		0.06
5		0.08
6		0.09
7		0.11
8		0.13
10		0.16
12		0.19
16		0.25
18		0.28
20		0.31

DCECFF

- 1) 本切削条件是干式加工时的条件。
- 2) 切削量较大时, 请降低进给速度。
- 3) CFRP 的被削性因材质而不同。请参考推荐条件, 调整切削速度和进给量。
- 4) 请使用筒夹、铣夹。
- 5) 为防止切屑飞散, 请采用全面的防尘对策。
- 6) 作业时, 请穿戴防护眼镜、防尘口罩。

- 1) Cutting condition listed here are for dry process.
- 2) Reduce the feed speed if cuts are deep.
- 3) CFRP performance varies depending on the CFRP material. Refer to the recommended condition to adjust the feed and the cutting speed.
- 4) Use collet chuck or milling chuck.
- 5) Use sufficient dust protection measures to protect against flying chips.
- 6) Use a dust mask and protective glasses during work.

D-71 尺寸表 Stocked Sized

高速钢钻头


丝锥

硬质合金立铣刀

高速
钢立铣刀

DCRE | 金刚石涂层 球头 铣刀 Diamond Coating Ball End Mills

球头半径 RE1 以上时的切削条件 For ball radius is above RE1.0


被削材 Work Material	切削速度 Speed (m/min)	进给量 Feed (mm/rev)	最大切削量 (H) Depth of cut (mm)	
石墨 Graphite	100 ~ 400	0.02 ~ 0.25	0.3DC	
铝合金 Aluminum Alloy	50 ~ 300	0.02 ~ 0.20	0.2DC	
铜合金 Copper Alloy	50 ~ 300	0.02 ~ 0.25	0.2DC	
铸铁 Cast Iron	50 ~ 300	0.02 ~ 0.20	0.1DC	

DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

切削工具

套装商品
其它

球头半径 RE0.95 以下时的切削条件 For ball radius is up to RE0.95

被削材 Work Material	切削速度 Speed (m/min)	进给量 Feed (mm/rev)	最大切削量 (H) Depth of cut (mm)	
石墨 Graphite	50 ~ 300	0.02 ~ 0.15	0.3DC	
铝合金 Aluminum Alloy	50 ~ 200	0.02 ~ 0.10	0.1DC	

DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

精密工具

技术资料
索引

2DCE/2DSE/DCRE

- 1) 石墨以外的被削材请采用湿式加工。
- 2) DCRE 球头半径 RE0.95 以下时不能用于铜合金。

- 1) Use in wet condition except graphite.
- 2) DCRE which radius is up to RE0.95 are not applied in milling Copper Alloy.


D-72 尺寸表 Stocked Sized

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSN2 | GS 铣刀 长颈 2 刃型

GS MILL Long Neck Two Flutes



被削材 Work Material		碳钢 合金钢 Carbon Steel Alloy Steel					不锈钢 模具钢 Stainless Steel Mold Steel				
		150 ~ 250HB					25 ~ 35HRC				
		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		
外径 Dia. of Mill (mm)	颈长 LU (mm)			ap	ae	H			ap	ae	H
0.2	0.5	50000	300	0.02	0.005	0.020	50000	270	0.02	0.005	0.020
0.2	1.0	50000	300	0.02	0.005	0.014	50000	270	0.02	0.005	0.013
0.2	1.5	50000	300	0.02	0.005	0.008	50000	270	0.02	0.005	0.007
0.3	1.0	50000	500	0.03	0.005	0.021	50000	450	0.03	0.005	0.020
0.3	2.0	50000	500	0.03	0.005	0.012	50000	450	0.03	0.005	0.011
0.3	3.0	50000	500	0.03	0.005	0.009	50000	450	0.03	0.005	0.008
0.3	6.0	50000	500	0.03	0.005	0.006	50000	450	0.03	0.005	0.005
0.3	9.0	50000	500	0.03	0.005	0.003	50000	350	0.03	0.005	0.003
0.4	2.0	50000	750	0.04	0.010	0.028	50000	680	0.04	0.009	0.030
0.4	3.0	50000	750	0.04	0.010	0.016	50000	680	0.04	0.009	0.014
0.4	4.0	50000	750	0.04	0.008	0.012	50000	680	0.04	0.007	0.011
0.4	8.0	48000	550	0.04	0.006	0.008	38000	500	0.04	0.005	0.007
0.4	12.0	48000	450	0.04	0.005	0.004	38000	410	0.04	0.005	0.004
0.5	2.0	50000	900	0.10	0.020	0.035	43000	770	0.05	0.020	0.030
0.5	4.0	50000	900	0.10	0.015	0.020	43000	770	0.05	0.014	0.020
0.5	6.0	48000	860	0.10	0.012	0.015	41000	730	0.05	0.011	0.014
0.5	8.0	38000	680	0.10	0.010	0.010	32000	580	0.05	0.009	0.009
0.5	10.0	38000	600	0.10	0.008	0.010	32000	510	0.05	0.007	0.009
0.5	15.0	38000	500	0.10	0.006	0.005	32000	430	0.05	0.005	0.005
0.6	2.0	50000	1000	0.12	0.020	0.040	43000	850	0.06	0.020	0.040
0.6	4.0	50000	1000	0.12	0.020	0.020	43000	850	0.06	0.020	0.020
0.6	6.0	42000	840	0.12	0.015	0.020	36000	710	0.06	0.014	0.016
0.6	8.0	32000	640	0.12	0.012	0.020	27000	540	0.06	0.011	0.016
0.6	10.0	32000	640	0.12	0.012	0.012	27000	540	0.06	0.011	0.011
0.6	12.0	32000	640	0.12	0.010	0.012	27000	540	0.06	0.009	0.011
0.6	18.0	32000	640	0.12	0.005	0.006	27000	540	0.06	0.005	0.005
0.7	2.0	45000	990	0.14	0.020	0.070	38000	840	0.07	0.020	0.060
0.7	4.0	45000	990	0.14	0.015	0.030	38000	840	0.07	0.014	0.030
0.7	6.0	36000	790	0.14	0.015	0.020	31000	670	0.07	0.014	0.020
0.7	8.0	36000	790	0.14	0.010	0.020	31000	670	0.07	0.009	0.020
0.7	10.0	28000	620	0.14	0.005	0.014	24000	530	0.07	0.005	0.013
0.8	4.0	40000	1000	0.24	0.040	0.060	34000	850	0.08	0.040	0.050
0.8	6.0	40000	1000	0.24	0.030	0.030	34000	850	0.08	0.030	0.030
0.8	8.0	32000	800	0.24	0.020	0.020	27000	680	0.08	0.020	0.020
0.8	10.0	24000	600	0.24	0.020	0.020	20000	510	0.08	0.020	0.020
0.8	12.0	24000	600	0.24	0.015	0.016	20000	510	0.08	0.014	0.014
0.8	16.0	24000	600	0.24	0.010	0.016	20000	510	0.08	0.009	0.014
0.8	24.0	24000	600	0.24	0.008	0.008	20000	510	0.08	0.007	0.007
0.9	6.0	36000	1190	0.27	0.050	0.040	31000	1010	0.09	0.050	0.030
0.9	8.0	30000	990	0.27	0.030	0.030	26000	840	0.09	0.030	0.020
0.9	10.0	30000	990	0.27	0.020	0.030	26000	840	0.09	0.020	0.020
0.9	15.0	22000	730	0.27	0.010	0.020	19000	620	0.09	0.010	0.016
1.0	4.0	32000	1280	0.50	0.080	0.070	27000	900	0.10	0.070	0.060
1.0	6.0	32000	1280	0.50	0.060	0.040	27000	900	0.10	0.050	0.040
1.0	8.0	32000	1280	0.50	0.050	0.040	27000	900	0.10	0.050	0.040
1.0	10.0	26000	1040	0.50	0.040	0.030	22000	730	0.10	0.040	0.030
1.0	12.0	26000	1040	0.50	0.030	0.030	22000	730	0.10	0.030	0.030
1.0	16.0	19000	760	0.50	0.030	0.020	16000	530	0.10	0.030	0.020
1.0	20.0	19000	760	0.50	0.020	0.020	16000	530	0.10	0.020	0.020
1.0	25.0	19000	760	0.50	0.015	0.010	16000	530	0.10	0.014	0.009
1.0	30.0	19000	760	0.50	0.010	0.010	16000	530	0.10	0.009	0.009
1.2	6.0	26000	1170	0.60	0.120	0.080	22000	820	0.12	0.110	0.080
1.2	8.0	26000	1170	0.60	0.060	0.050	22000	820	0.12	0.050	0.040
1.2	10.0	22000	990	0.60	0.050	0.050	19000	690	0.12	0.050	0.040
1.2	12.0	22000	990	0.60	0.040	0.040	19000	690	0.12	0.040	0.030
1.2	16.0	16000	720	0.60	0.020	0.040	14000	500	0.12	0.020	0.030
1.2	20.0	16000	720	0.60	0.010	0.020	14000	500	0.12	0.010	0.020
1.5	6.0	21000	1130	0.75	0.120	0.110	18000	790	0.15	0.110	0.090
1.5	8.0	21000	1130	0.75	0.100	0.060	18000	790	0.15	0.090	0.050
1.5	10.0	21000	1130	0.75	0.080	0.060	18000	790	0.15	0.070	0.050
1.5	12.0	21000	1130	0.75	0.070	0.060	18000	790	0.15	0.060	0.050
1.5	14.0	17000	920	0.75	0.050	0.050	14000	640	0.15	0.050	0.040
1.5	16.0	17000	920	0.75	0.040	0.050	14000	640	0.15	0.040	0.040

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

被削材 Work Material		预硬钢						淬硬钢					
		Pre-Hardened Steel						Hardened Steel					
		35 ~ 45HRC						45 ~ 55HRC					
外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut				
				a _p	a _e	H			a _p	a _e	H		
0.2	0.5	50000	240	0.02	0.004	0.014	50000	210	0.02	0.003	0.010		
0.2	1.0	50000	240	0.02	0.004	0.010	50000	210	0.02	0.003	0.007		
0.2	1.5	50000	240	0.02	0.004	0.006	50000	210	0.02	0.003	0.004		
0.3	1.0	50000	400	0.03	0.004	0.015	42000	300	0.03	0.003	0.011		
0.3	2.0	50000	400	0.03	0.004	0.008	42000	300	0.03	0.003	0.006		
0.3	3.0	45000	400	0.03	0.004	0.006	42000	300	0.03	0.003	0.005		
0.3	6.0	42000	400	0.03	0.004	0.004	42000	300	0.03	0.003	0.003		
0.3	9.0	40000	300	0.03	0.004	0.002	42000	250	0.03	0.003	0.002		
0.4	2.0	50000	560	0.04	0.007	0.020	34000	340	0.04	0.005	0.014		
0.4	3.0	50000	560	0.04	0.007	0.011	34000	340	0.04	0.005	0.008		
0.4	4.0	35000	560	0.04	0.006	0.008	34000	340	0.04	0.004	0.006		
0.4	8.0	32000	410	0.04	0.004	0.006	34000	250	0.04	0.003	0.004		
0.4	12.0	32000	340	0.04	0.004	0.003	34000	200	0.04	0.003	0.002		
0.5	2.0	30000	450	0.05	0.014	0.020	25000	320	0.05	0.010	0.018		
0.5	4.0	30000	450	0.05	0.011	0.014	25000	320	0.05	0.008	0.010		
0.5	6.0	29000	430	0.05	0.008	0.011	24000	300	0.05	0.006	0.008		
0.5	8.0	23000	340	0.05	0.007	0.007	19000	240	0.05	0.005	0.005		
0.5	10.0	23000	300	0.05	0.006	0.007	19000	210	0.05	0.004	0.005		
0.5	15.0	23000	250	0.05	0.004	0.004	19000	180	0.05	0.003	0.003		
0.6	2.0	30000	500	0.06	0.014	0.030	25000	350	0.06	0.010	0.021		
0.6	4.0	30000	500	0.06	0.014	0.020	25000	350	0.06	0.010	0.012		
0.6	6.0	25000	420	0.06	0.011	0.013	21000	290	0.06	0.008	0.009		
0.6	8.0	19000	320	0.06	0.008	0.013	16000	220	0.06	0.006	0.009		
0.6	10.0	19000	320	0.06	0.008	0.008	16000	220	0.06	0.006	0.006		
0.6	12.0	19000	320	0.06	0.007	0.008	16000	220	0.06	0.005	0.006		
0.6	18.0	19000	320	0.06	0.004	0.004	16000	220	0.06	0.003	0.003		
0.7	2.0	27000	500	0.07	0.014	0.050	23000	350	0.07	0.010	0.035		
0.7	4.0	27000	500	0.07	0.011	0.020	23000	350	0.07	0.008	0.014		
0.7	6.0	22000	400	0.07	0.011	0.015	18000	280	0.07	0.008	0.011		
0.7	8.0	22000	400	0.07	0.007	0.015	18000	280	0.07	0.005	0.011		
0.7	10.0	17000	310	0.07	0.004	0.010	14000	220	0.07	0.003	0.007		
0.8	4.0	24000	500	0.08	0.030	0.040	20000	350	0.08	0.020	0.030		
0.8	6.0	24000	500	0.08	0.020	0.020	20000	350	0.08	0.015	0.016		
0.8	8.0	19000	400	0.08	0.014	0.020	16000	280	0.08	0.010	0.012		
0.8	10.0	14000	300	0.08	0.014	0.020	12000	210	0.08	0.010	0.012		
0.8	12.0	14000	300	0.08	0.011	0.011	12000	210	0.08	0.008	0.008		
0.8	16.0	14000	300	0.08	0.007	0.011	12000	210	0.08	0.005	0.008		
0.8	24.0	14000	300	0.08	0.006	0.006	12000	210	0.08	0.004	0.004		
0.9	6.0	22000	600	0.09	0.040	0.030	18000	420	0.09	0.030	0.020		
0.9	8.0	18000	500	0.09	0.020	0.020	15000	350	0.09	0.015	0.014		
0.9	10.0	18000	500	0.09	0.014	0.020	15000	350	0.09	0.010	0.014		
0.9	15.0	13000	370	0.09	0.007	0.013	11000	260	0.09	0.005	0.009		
1.0	4.0	22000	640	0.10	0.060	0.050	11000	300	0.10	0.040	0.040		
1.0	6.0	22000	640	0.10	0.040	0.030	11000	300	0.10	0.030	0.020		
1.0	8.0	22000	640	0.10	0.040	0.030	11000	300	0.10	0.030	0.020		
1.0	10.0	18000	520	0.10	0.030	0.020	9000	250	0.10	0.020	0.015		
1.0	12.0	18000	520	0.10	0.020	0.020	9000	250	0.10	0.015	0.015		
1.0	16.0	13000	380	0.10	0.020	0.014	9000	250	0.10	0.015	0.010		
1.0	20.0	13000	380	0.10	0.014	0.014	9000	250	0.10	0.010	0.010		
1.0	25.0	13000	380	0.10	0.011	0.007	9000	250	0.10	0.008	0.005		
1.0	30.0	13000	380	0.10	0.007	0.007	9000	250	0.10	0.005	0.005		
1.2	6.0	18000	590	0.12	0.080	0.060	9000	290	0.12	0.060	0.040		
1.2	8.0	18000	590	0.12	0.040	0.030	9000	290	0.12	0.030	0.020		
1.2	10.0	15000	500	0.12	0.040	0.030	8000	260	0.12	0.030	0.020		
1.2	12.0	15000	500	0.12	0.030	0.030	8000	260	0.12	0.020	0.020		
1.2	16.0	11000	360	0.12	0.014	0.030	8000	260	0.12	0.010	0.020		
1.2	20.0	11000	360	0.12	0.007	0.020	8000	260	0.12	0.005	0.012		
1.5	6.0	15000	570	0.15	0.080	0.070	7000	300	0.15	0.060	0.050		
1.5	8.0	15000	570	0.15	0.070	0.040	7000	300	0.15	0.050	0.030		
1.5	10.0	15000	570	0.15	0.060	0.040	7000	300	0.15	0.040	0.030		
1.5	12.0	15000	570	0.15	0.050	0.040	7000	300	0.15	0.040	0.030		
1.5	14.0	12000	460	0.15	0.040	0.030	6000	260	0.15	0.030	0.020		
1.5	16.0	12000	460	0.15	0.030	0.030	6000	260	0.15	0.020	0.020		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSN2 | GS 铣刀 长颈 2 刃型 GS MILL Long Neck Two Flutes

被削材 Work Material		碳钢 合金钢 Carbon Steel Alloy Steel					不锈钢 模具钢 Stainless Steel Mold Steel				
		150 ~ 250HB					25 ~ 35HRC				
外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		
				a _p	a _e	H			a _p	a _e	H
1.5	18.0	17000	920	0.75	0.030	0.050	14000	640	0.15	0.030	0.040
1.5	20.0	12800	690	0.75	0.030	0.050	11000	480	0.15	0.030	0.040
1.5	25.0	12800	690	0.75	0.020	0.030	11000	480	0.15	0.020	0.030
1.5	30.0	12800	690	0.75	0.020	0.030	11000	480	0.15	0.020	0.030
1.5	38.0	12800	690	0.75	0.015	0.015	11000	480	0.15	0.014	0.014
1.5	45.0	12800	690	0.75	0.010	0.015	11000	480	0.15	0.009	0.014
2.0	6.0	16000	1120	1.00	0.150	0.200	14000	780	0.20	0.140	0.180
2.0	8.0	16000	1120	1.00	0.120	0.140	14000	780	0.20	0.110	0.130
2.0	10.0	16000	1120	1.00	0.110	0.140	14000	780	0.20	0.100	0.130
2.0	12.0	16000	1120	1.00	0.100	0.080	14000	780	0.20	0.090	0.070
2.0	14.0	16000	1120	1.00	0.080	0.080	14000	780	0.20	0.070	0.070
2.0	16.0	16000	1120	1.00	0.080	0.080	14000	780	0.20	0.070	0.070
2.0	18.0	12000	840	1.00	0.070	0.060	10000	590	0.20	0.060	0.050
2.0	20.0	12000	840	1.00	0.050	0.060	10000	590	0.20	0.050	0.050
2.0	25.0	10000	700	1.00	0.030	0.060	9000	490	0.20	0.020	0.050
2.0	30.0	10000	700	1.00	0.030	0.040	9000	490	0.20	0.020	0.040
2.0	35.0	10000	700	1.00	0.020	0.040	9000	490	0.20	0.020	0.040
2.0	40.0	10000	700	1.00	0.020	0.040	9000	490	0.20	0.020	0.040
2.0	50.0	10000	700	1.00	0.015	0.020	9000	490	0.20	0.014	0.020
2.0	60.0	10000	700	1.00	0.010	0.020	9000	490	0.20	0.010	0.020
2.5	8.0	13000	1300	1.25	0.150	0.180	11000	910	0.25	0.140	0.160
2.5	10.0	13000	1300	1.25	0.120	0.180	11000	910	0.25	0.110	0.160
2.5	12.0	13000	1300	1.25	0.100	0.180	11000	910	0.25	0.090	0.160
2.5	14.0	13000	1300	1.25	0.070	0.100	11000	910	0.25	0.060	0.090
2.5	16.0	13000	1300	1.25	0.060	0.100	11000	910	0.25	0.050	0.090
2.5	18.0	13000	1300	1.25	0.050	0.100	11000	910	0.25	0.050	0.090
2.5	20.0	13000	1300	1.25	0.040	0.100	11000	910	0.25	0.040	0.090
2.5	25.0	10000	1000	1.25	0.030	0.080	9000	700	0.25	0.030	0.070
2.5	30.0	10000	1000	1.25	0.020	0.080	9000	700	0.25	0.020	0.070
2.5	40.0	8300	830	1.25	0.015	0.050	7000	580	0.25	0.014	0.050
2.5	50.0	8300	830	1.25	0.010	0.050	7000	580	0.25	0.010	0.050
3.0	8.0	11000	1760	1.50	0.150	0.300	9000	1230	0.30	0.140	0.270
3.0	10.0	11000	1760	1.50	0.130	0.210	9000	1230	0.30	0.120	0.190
3.0	12.0	11000	1760	1.50	0.120	0.210	9000	1230	0.30	0.110	0.190
3.0	14.0	11000	1760	1.50	0.110	0.210	9000	1230	0.30	0.100	0.190
3.0	16.0	11000	1760	1.50	0.100	0.120	9000	1230	0.30	0.090	0.110
3.0	18.0	11000	1760	1.50	0.080	0.120	9000	1230	0.30	0.070	0.110
3.0	20.0	11000	1760	1.50	0.070	0.120	9000	1230	0.30	0.060	0.110
3.0	25.0	8000	1280	1.50	0.060	0.090	7000	900	0.30	0.050	0.080
3.0	30.0	8000	1280	1.50	0.040	0.090	7000	900	0.30	0.040	0.080
3.0	40.0	6900	1100	1.50	0.020	0.090	6000	770	0.30	0.020	0.080
3.0	50.0	6900	1100	1.50	0.010	0.060	6000	770	0.30	0.010	0.050
4.0	12.0	8000	1440	2.00	0.150	0.400	7000	1010	0.40	0.140	0.360
4.0	20.0	8000	1440	2.00	0.100	0.280	7000	1010	0.40	0.090	0.250
4.0	25.0	8000	1440	2.00	0.070	0.160	7000	1010	0.40	0.060	0.140
4.0	30.0	8000	1440	2.00	0.050	0.160	7000	1010	0.40	0.050	0.140
4.0	35.0	6000	1080	2.00	0.040	0.120	5000	760	0.40	0.040	0.110
4.0	40.0	6000	1080	2.00	0.030	0.120	5000	760	0.40	0.030	0.110
4.0	45.0	6000	1080	2.00	0.020	0.120	5000	760	0.40	0.020	0.110
4.0	50.0	5200	940	2.00	0.015	0.120	4000	660	0.40	0.014	0.110
4.0	60.0	5200	940	2.00	0.010	0.080	4000	660	0.40	0.010	0.070
5.0	16.0	6400	1280	2.50	0.150	0.350	5000	900	0.50	0.140	0.320
5.0	25.0	6400	1280	2.50	0.100	0.350	5000	900	0.50	0.090	0.320
5.0	35.0	6400	1280	2.50	0.070	0.200	5000	900	0.50	0.060	0.180
5.0	50.0	4800	960	2.50	0.040	0.150	4000	670	0.50	0.040	0.140
5.0	60.0	4800	960	2.50	0.015	0.150	4000	670	0.50	0.014	0.140
6.0	20.0	5300	1170	3.00	0.150	0.420	5000	820	0.60	0.140	0.380
6.0	30.0	5300	1170	3.00	0.100	0.420	5000	820	0.60	0.090	0.380
6.0	40.0	5300	1170	3.00	0.070	0.240	5000	820	0.60	0.060	0.220
6.0	50.0	4000	880	3.00	0.040	0.180	3000	620	0.60	0.040	0.160
6.0	60.0	4000	880	3.00	0.015	0.180	3000	620	0.60	0.014	0.160

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

被削材 Work Material		预硬钢 Pre-Hardened Steel						淬硬钢 Hardened Steel					
		35 ~ 45HRC						45 ~ 55HRC					
		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut				
外径 Dia. of Mill (mm)	颈长 LU (mm)			a _p	a _e	H			a _p	a _e	H		
1.5	18.0	12000	460	0.15	0.020	0.030	6000	260	0.15	0.015	0.020		
1.5	20.0	9000	350	0.15	0.020	0.030	6000	260	0.15	0.015	0.020		
1.5	25.0	9000	350	0.15	0.014	0.020	6000	260	0.15	0.010	0.015		
1.5	30.0	9000	350	0.15	0.014	0.020	6000	260	0.15	0.010	0.015		
1.5	38.0	9000	350	0.15	0.011	0.011	6000	260	0.15	0.008	0.008		
1.5	45.0	9000	350	0.15	0.007	0.011	6000	260	0.15	0.005	0.008		
2.0	6.0	11000	560	0.20	0.110	0.140	6000	360	0.20	0.080	0.100		
2.0	8.0	11000	560	0.20	0.080	0.100	6000	360	0.20	0.060	0.070		
2.0	10.0	11000	560	0.20	0.080	0.100	6000	360	0.20	0.060	0.070		
2.0	12.0	11000	560	0.20	0.070	0.060	6000	360	0.20	0.050	0.040		
2.0	14.0	11000	560	0.20	0.060	0.060	6000	360	0.20	0.040	0.040		
2.0	16.0	11000	560	0.20	0.050	0.060	6000	360	0.20	0.040	0.040		
2.0	18.0	8000	420	0.20	0.050	0.040	5000	300	0.20	0.040	0.030		
2.0	20.0	8000	420	0.20	0.040	0.040	5000	300	0.20	0.030	0.030		
2.0	25.0	7000	350	0.20	0.020	0.040	5000	300	0.20	0.010	0.030		
2.0	30.0	7000	350	0.20	0.020	0.030	5000	300	0.20	0.010	0.020		
2.0	35.0	7000	350	0.20	0.014	0.030	5000	300	0.20	0.010	0.020		
2.0	40.0	7000	350	0.20	0.014	0.030	5000	300	0.20	0.010	0.020		
2.0	50.0	7000	350	0.20	0.011	0.014	5000	300	0.20	0.008	0.010		
2.0	60.0	7000	350	0.20	0.007	0.014	5000	300	0.20	0.005	0.010		
2.5	8.0	9000	650	0.25	0.110	0.120	5000	400	0.25	0.080	0.090		
2.5	10.0	9000	650	0.25	0.080	0.120	5000	400	0.25	0.060	0.090		
2.5	12.0	9000	650	0.25	0.070	0.120	5000	400	0.25	0.050	0.090		
2.5	14.0	9000	650	0.25	0.050	0.070	5000	400	0.25	0.040	0.050		
2.5	16.0	9000	650	0.25	0.040	0.070	5000	400	0.25	0.030	0.050		
2.5	18.0	9000	650	0.25	0.040	0.070	5000	400	0.25	0.030	0.050		
2.5	20.0	9000	650	0.25	0.030	0.070	5000	400	0.25	0.020	0.050		
2.5	25.0	7000	500	0.25	0.020	0.050	4000	320	0.25	0.015	0.040		
2.5	30.0	7000	500	0.25	0.014	0.050	4000	320	0.25	0.010	0.040		
2.5	40.0	6000	420	0.25	0.010	0.040	4000	320	0.25	0.008	0.030		
2.5	50.0	6000	420	0.25	0.007	0.040	4000	320	0.25	0.005	0.030		
3.0	8.0	8000	880	0.30	0.110	0.210	4000	450	0.30	0.080	0.150		
3.0	10.0	8000	880	0.30	0.090	0.150	4000	450	0.30	0.070	0.110		
3.0	12.0	8000	880	0.30	0.080	0.150	4000	450	0.30	0.060	0.110		
3.0	14.0	8000	880	0.30	0.080	0.150	4000	450	0.30	0.060	0.110		
3.0	16.0	8000	880	0.30	0.070	0.080	4000	450	0.30	0.050	0.060		
3.0	18.0	8000	880	0.30	0.060	0.080	4000	450	0.30	0.040	0.060		
3.0	20.0	8000	880	0.30	0.050	0.080	4000	450	0.30	0.040	0.060		
3.0	25.0	6000	640	0.30	0.040	0.060	3000	330	0.30	0.030	0.050		
3.0	30.0	6000	640	0.30	0.030	0.060	3000	330	0.30	0.020	0.050		
3.0	40.0	5000	550	0.30	0.014	0.060	3000	330	0.30	0.010	0.050		
3.0	50.0	5000	550	0.30	0.007	0.040	3000	330	0.30	0.005	0.030		
4.0	12.0	6000	720	0.40	0.110	0.280	3000	420	0.40	0.080	0.200		
4.0	20.0	6000	720	0.40	0.070	0.200	3000	420	0.40	0.050	0.140		
4.0	25.0	6000	720	0.40	0.050	0.110	3000	420	0.40	0.040	0.080		
4.0	30.0	6000	720	0.40	0.040	0.110	3000	420	0.40	0.030	0.080		
4.0	35.0	4000	540	0.40	0.030	0.080	2500	350	0.40	0.020	0.060		
4.0	40.0	4000	540	0.40	0.020	0.080	2500	350	0.40	0.015	0.060		
4.0	45.0	4000	540	0.40	0.014	0.080	2500	350	0.40	0.010	0.060		
4.0	50.0	4000	470	0.40	0.010	0.080	2500	350	0.40	0.008	0.060		
4.0	60.0	4000	470	0.40	0.007	0.060	2500	350	0.40	0.005	0.040		
5.0	16.0	4000	640	0.50	0.110	0.250	2000	360	0.50	0.080	0.180		
5.0	25.0	4000	640	0.50	0.070	0.250	2000	360	0.50	0.050	0.180		
5.0	35.0	4000	640	0.50	0.050	0.140	2000	360	0.50	0.040	0.100		
5.0	50.0	3000	480	0.50	0.030	0.110	2000	360	0.50	0.020	0.080		
5.0	60.0	3000	480	0.50	0.010	0.110	2000	360	0.50	0.008	0.080		
6.0	20.0	4000	590	0.60	0.110	0.290	2000	400	0.60	0.080	0.210		
6.0	30.0	4000	590	0.60	0.070	0.290	2000	400	0.60	0.050	0.210		
6.0	40.0	4000	590	0.60	0.050	0.170	2000	400	0.60	0.040	0.120		
6.0	50.0	3000	440	0.60	0.030	0.130	2000	400	0.60	0.020	0.090		
6.0	60.0	3000	440	0.60	0.010	0.130	2000	400	0.60	0.008	0.090		

GSN2

- 1) 为了进行稳定的加工, 请使用高精度的机床、刀杆。
- 2) 进行刀尖部的加工时, 请将进给速度降低到 1/2。
- 3) 推荐使用非溶于水性切削油剂。
- 4) 请根据槽深, 从颈长短的铣刀开始依次使用。
- 5) 因为要以高速转动进行加工, 因此请将安装振动控制在 10μm 以下。

- 1) Use precise machine and holder.
- 2) When corner processing, reduce the feed rate by approximately half.
- 3) Recommend non-water soluble cutting fluid.
- 4) To achieve flute depth, sequential use of each neck length is most effective.
- 5) The run out of the end mill should be in 10 μm after chucking.

D-75 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSN4 | GS 铣刀 长颈 4 刃型

GS MILL Long Neck Four Flutes



被削材 Work Material		碳钢 合金钢 Carbon Steel Alloy Steel					不锈钢 模具钢 Stainless Steel Mold Steel				
		150 ~ 250HB					25 ~ 35HRC				
外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		
				ap	ae	H			ap	ae	H
1.0	4.0	32000	1920	0.50	0.080	0.07	27000	1340	0.10	0.070	0.060
1.0	6.0	32000	1920	0.50	0.060	0.04	27000	1340	0.10	0.050	0.040
1.0	8.0	32000	1920	0.50	0.050	0.04	27000	1340	0.10	0.050	0.040
1.0	10.0	26000	1560	0.50	0.040	0.03	22000	1090	0.10	0.040	0.030
1.0	12.0	26000	1560	0.50	0.030	0.03	22000	1090	0.10	0.030	0.030
1.0	16.0	19000	1140	0.50	0.030	0.02	16000	800	0.10	0.030	0.020
1.0	20.0	19000	1140	0.50	0.020	0.02	16000	800	0.10	0.020	0.020
1.0	25.0	19000	1140	0.50	0.015	0.01	16000	800	0.10	0.014	0.010
1.0	30.0	19000	1140	0.50	0.010	0.01	16000	800	0.10	0.010	0.010
1.2	6.0	26000	1760	0.60	0.120	0.08	22000	1230	0.12	0.110	0.080
1.2	8.0	26000	1760	0.60	0.060	0.05	22000	1230	0.12	0.050	0.040
1.2	10.0	22000	1490	0.60	0.050	0.05	19000	1040	0.12	0.050	0.040
1.2	12.0	22000	1490	0.60	0.040	0.04	19000	1040	0.12	0.040	0.030
1.2	16.0	16000	1080	0.60	0.020	0.04	14000	760	0.12	0.020	0.030
1.2	20.0	16000	1080	0.60	0.010	0.02	14000	760	0.12	0.010	0.020
1.5	6.0	21000	1700	0.75	0.120	0.11	18000	1190	0.15	0.110	0.090
1.5	8.0	21000	1700	0.75	0.100	0.06	18000	1190	0.15	0.090	0.050
1.5	10.0	21000	1700	0.75	0.080	0.06	18000	1190	0.15	0.070	0.050
1.5	12.0	21000	1700	0.75	0.070	0.06	18000	1190	0.15	0.060	0.050
1.5	14.0	17000	1380	0.75	0.050	0.05	14000	970	0.15	0.050	0.040
1.5	16.0	17000	1380	0.75	0.040	0.05	14000	970	0.15	0.040	0.040
1.5	18.0	17000	1380	0.75	0.030	0.05	14000	970	0.15	0.030	0.040
1.5	20.0	12800	1040	0.75	0.030	0.05	11000	730	0.15	0.030	0.040
1.5	25.0	12800	1040	0.75	0.020	0.03	11000	730	0.15	0.018	0.030
1.5	30.0	12800	1040	0.75	0.020	0.03	11000	730	0.15	0.018	0.030
1.5	38.0	12800	1040	0.75	0.020	0.02	11000	730	0.15	0.014	0.014
1.5	45.0	12800	1040	0.75	0.010	0.02	11000	730	0.15	0.010	0.014
2.0	6.0	16000	1680	1.00	0.150	0.20	14000	1180	0.20	0.140	0.180
2.0	8.0	16000	1680	1.00	0.120	0.14	14000	1180	0.20	0.110	0.130
2.0	10.0	16000	1680	1.00	0.110	0.14	14000	1180	0.20	0.100	0.130
2.0	12.0	16000	1680	1.00	0.100	0.08	14000	1180	0.20	0.090	0.070
2.0	14.0	16000	1680	1.00	0.080	0.08	14000	1180	0.20	0.070	0.070
2.0	16.0	16000	1680	1.00	0.080	0.08	14000	1180	0.20	0.070	0.070
2.0	18.0	12000	1260	1.00	0.070	0.06	10000	880	0.20	0.060	0.050
2.0	20.0	12000	1260	1.00	0.050	0.06	10000	880	0.20	0.050	0.050
2.0	25.0	10000	1050	1.00	0.030	0.06	9000	740	0.20	0.020	0.050
2.0	30.0	10000	1050	1.00	0.030	0.04	9000	740	0.20	0.020	0.040
2.0	35.0	10000	1050	1.00	0.020	0.04	9000	740	0.20	0.018	0.040
2.0	40.0	10000	1050	1.00	0.020	0.04	9000	740	0.20	0.018	0.040
2.0	50.0	10000	1050	1.00	0.015	0.02	9000	740	0.20	0.014	0.018
2.0	60.0	10000	1050	1.00	0.010	0.02	9000	740	0.20	0.010	0.018
2.5	8.0	13000	1950	1.25	0.150	0.18	11000	1370	0.25	0.140	0.160
2.5	10.0	13000	1950	1.25	0.120	0.18	11000	1370	0.25	0.110	0.160
2.5	12.0	13000	1950	1.25	0.100	0.18	11000	1370	0.25	0.090	0.160
2.5	14.0	13000	1950	1.25	0.070	0.10	11000	1370	0.25	0.060	0.090
2.5	16.0	13000	1950	1.25	0.060	0.10	11000	1370	0.25	0.050	0.090
2.5	18.0	13000	1950	1.25	0.050	0.10	11000	1370	0.25	0.050	0.090
2.5	20.0	13000	1950	1.25	0.040	0.10	11000	1370	0.25	0.040	0.090
2.5	25.0	10000	1500	1.25	0.030	0.08	9000	1050	0.25	0.030	0.070
2.5	30.0	10000	1500	1.25	0.020	0.08	9000	1050	0.25	0.018	0.070
2.5	40.0	8300	1250	1.25	0.015	0.05	7000	880	0.25	0.014	0.050
2.5	50.0	8300	1250	1.25	0.010	0.05	7000	880	0.25	0.010	0.050
3.0	8.0	11000	2640	1.50	0.150	0.30	9000	1850	0.30	0.140	0.270
3.0	10.0	11000	2640	1.50	0.130	0.21	9000	1850	0.30	0.120	0.190
3.0	12.0	11000	2640	1.50	0.120	0.21	9000	1850	0.30	0.110	0.190
3.0	14.0	11000	2640	1.50	0.110	0.21	9000	1850	0.30	0.100	0.190
3.0	16.0	11000	2640	1.50	0.100	0.12	9000	1850	0.30	0.090	0.110
3.0	18.0	11000	2640	1.50	0.080	0.12	9000	1850	0.30	0.070	0.110
3.0	20.0	11000	2640	1.50	0.070	0.12	9000	1850	0.30	0.060	0.110
3.0	25.0	8000	1920	1.50	0.060	0.09	7000	1340	0.30	0.050	0.080
3.0	30.0	8000	1920	1.50	0.040	0.09	7000	1340	0.30	0.040	0.080
3.0	40.0	6900	1650	1.50	0.020	0.09	6000	1740	0.30	0.020	0.080
3.0	50.0	6900	1650	1.50	0.010	0.06	6000	1740	0.30	0.010	0.050

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

被削材 Work Material		预硬钢					淬硬钢				
		Pre-Hardened Steel					Hardened Steel				
		35 ~ 45HRC					45 ~ 55HRC				
外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		
				a _p	a _e	H			a _p	a _e	H
1.0	4.0	22000	960	0.10	0.060	0.050	11000	450	0.10	0.040	0.040
1.0	6.0	22000	960	0.10	0.040	0.030	11000	450	0.10	0.030	0.020
1.0	8.0	22000	960	0.10	0.040	0.030	11000	450	0.10	0.030	0.020
1.0	10.0	18000	780	0.10	0.030	0.020	9000	370	0.10	0.020	0.015
1.0	12.0	18000	780	0.10	0.020	0.020	9000	370	0.10	0.015	0.015
1.0	16.0	13000	570	0.10	0.020	0.014	9000	370	0.10	0.015	0.010
1.0	20.0	13000	570	0.10	0.014	0.014	9000	370	0.10	0.010	0.010
1.0	25.0	13000	570	0.10	0.010	0.007	9000	370	0.10	0.008	0.005
1.0	30.0	13000	570	0.10	0.007	0.007	9000	370	0.10	0.005	0.005
1.2	6.0	18000	880	0.12	0.080	0.060	9000	440	0.12	0.060	0.040
1.2	8.0	18000	880	0.12	0.040	0.030	9000	440	0.12	0.030	0.020
1.2	10.0	15000	750	0.12	0.040	0.030	8000	390	0.12	0.030	0.020
1.2	12.0	15000	750	0.12	0.030	0.030	8000	390	0.12	0.020	0.020
1.2	16.0	11000	540	0.12	0.014	0.030	8000	390	0.12	0.010	0.020
1.2	20.0	11000	540	0.12	0.007	0.017	8000	390	0.12	0.005	0.010
1.5	6.0	15000	850	0.15	0.080	0.070	7000	450	0.15	0.060	0.050
1.5	8.0	15000	850	0.15	0.070	0.040	7000	450	0.15	0.050	0.030
1.5	10.0	15000	850	0.15	0.060	0.040	7000	450	0.15	0.040	0.030
1.5	12.0	15000	850	0.15	0.050	0.040	7000	450	0.15	0.040	0.030
1.5	14.0	12000	690	0.15	0.040	0.030	6000	390	0.15	0.030	0.020
1.5	16.0	12000	690	0.15	0.030	0.030	6000	390	0.15	0.020	0.020
1.5	18.0	12000	690	0.15	0.020	0.030	6000	390	0.15	0.015	0.020
1.5	20.0	9000	520	0.15	0.020	0.030	6000	390	0.15	0.015	0.020
1.5	25.0	9000	520	0.15	0.014	0.020	6000	390	0.15	0.010	0.015
1.5	30.0	9000	520	0.15	0.014	0.020	6000	390	0.15	0.010	0.015
1.5	38.0	9000	520	0.15	0.010	0.010	6000	390	0.15	0.008	0.008
1.5	45.0	9000	520	0.15	0.007	0.010	6000	390	0.15	0.005	0.008
2.0	6.0	11000	840	0.20	0.110	0.140	6000	540	0.20	0.080	0.100
2.0	8.0	11000	840	0.20	0.080	0.100	6000	540	0.20	0.060	0.070
2.0	10.0	11000	840	0.20	0.080	0.100	6000	540	0.20	0.060	0.070
2.0	12.0	11000	840	0.20	0.070	0.060	6000	540	0.20	0.050	0.040
2.0	14.0	11000	840	0.20	0.060	0.060	6000	540	0.20	0.040	0.040
2.0	16.0	11000	840	0.20	0.050	0.060	6000	540	0.20	0.040	0.040
2.0	18.0	8000	630	0.20	0.050	0.040	5000	450	0.20	0.040	0.030
2.0	20.0	8000	630	0.20	0.040	0.040	5000	450	0.20	0.030	0.030
2.0	25.0	7000	530	0.20	0.018	0.040	5000	450	0.20	0.013	0.030
2.0	30.0	7000	530	0.20	0.018	0.030	5000	450	0.20	0.013	0.020
2.0	35.0	7000	530	0.20	0.014	0.030	5000	450	0.20	0.010	0.020
2.0	40.0	7000	530	0.20	0.014	0.030	5000	450	0.20	0.010	0.020
2.0	50.0	7000	530	0.20	0.010	0.014	5000	450	0.20	0.008	0.010
2.0	60.0	7000	530	0.20	0.007	0.014	5000	450	0.20	0.005	0.010
2.5	8.0	9000	980	0.25	0.110	0.120	5000	600	0.25	0.080	0.090
2.5	10.0	9000	980	0.25	0.080	0.120	5000	600	0.25	0.060	0.090
2.5	12.0	9000	980	0.25	0.070	0.120	5000	600	0.25	0.050	0.090
2.5	14.0	9000	980	0.25	0.050	0.070	5000	600	0.25	0.040	0.050
2.5	16.0	9000	980	0.25	0.040	0.070	5000	600	0.25	0.030	0.050
2.5	18.0	9000	980	0.25	0.040	0.070	5000	600	0.25	0.030	0.050
2.5	20.0	9000	980	0.25	0.030	0.070	5000	600	0.25	0.020	0.050
2.5	25.0	7000	750	0.25	0.020	0.050	4000	480	0.25	0.015	0.040
2.5	30.0	7000	750	0.25	0.010	0.050	4000	480	0.25	0.010	0.040
2.5	40.0	6000	630	0.25	0.010	0.040	4000	480	0.25	0.008	0.030
2.5	50.0	6000	630	0.25	0.007	0.040	4000	480	0.25	0.005	0.030
3.0	8.0	8000	1320	0.30	0.110	0.210	4000	680	0.30	0.080	0.150
3.0	10.0	8000	1320	0.30	0.090	0.150	4000	680	0.30	0.070	0.110
3.0	12.0	8000	1320	0.30	0.080	0.150	4000	680	0.30	0.060	0.110
3.0	14.0	8000	1320	0.30	0.080	0.150	4000	680	0.30	0.060	0.110
3.0	16.0	8000	1320	0.30	0.070	0.080	4000	680	0.30	0.050	0.060
3.0	18.0	8000	1320	0.30	0.060	0.080	4000	680	0.30	0.040	0.060
3.0	20.0	8000	1320	0.30	0.050	0.080	4000	680	0.30	0.040	0.060
3.0	25.0	6000	960	0.30	0.040	0.060	3000	500	0.30	0.030	0.050
3.0	30.0	6000	960	0.30	0.030	0.060	3000	500	0.30	0.020	0.050
3.0	40.0	5000	1250	0.30	0.014	0.060	3000	500	0.30	0.010	0.050
3.0	50.0	5000	1250	0.30	0.007	0.040	3000	500	0.30	0.005	0.030

GSN4 | GS 铣刀 长颈 4 刃型 GS MILL Long Neck Four Flutes

被削材 Work Material		碳钢 合金钢 Carbon Steel Alloy Steel					不锈钢 模具钢 Stainless Steel Mold Steel				
		150 ~ 250HB					25 ~ 35HRC				
		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		
外径 Dia. of Mill (mm)	颈长 LU (mm)			ap	ae	H			ap	ae	H
4.0	12.0	8000	2160	2.00	0.150	0.400	7000	2270	0.40	0.140	0.360
4.0	20.0	8000	2160	2.00	0.100	0.280	7000	2270	0.40	0.090	0.250
4.0	25.0	8000	2160	2.00	0.070	0.160	7000	2270	0.40	0.060	0.140
4.0	30.0	8000	2160	2.00	0.050	0.160	7000	2270	0.40	0.050	0.140
4.0	35.0	6000	1620	2.00	0.040	0.120	5000	1700	0.40	0.040	0.110
4.0	40.0	6000	1620	2.00	0.030	0.120	5000	1700	0.40	0.030	0.110
4.0	45.0	6000	1620	2.00	0.020	0.120	5000	1700	0.40	0.020	0.110
4.0	50.0	5200	1410	2.00	0.015	0.120	4000	1490	0.40	0.014	0.110
4.0	60.0	5200	1410	2.00	0.010	0.080	4000	1490	0.40	0.010	0.070
5.0	16.0	6400	1920	2.50	0.150	0.350	5000	2010	0.50	0.140	0.320
5.0	25.0	6400	1920	2.50	0.100	0.350	5000	2010	0.50	0.090	0.320
5.0	35.0	6400	1920	2.50	0.070	0.200	5000	2010	0.50	0.060	0.180
5.0	50.0	4800	1440	2.50	0.040	0.150	4000	1520	0.50	0.040	0.140
5.0	60.0	4800	1440	2.50	0.015	0.150	4000	1520	0.50	0.014	0.140
6.0	20.0	5300	1760	3.00	0.150	0.420	5000	1850	0.60	0.140	0.380
6.0	30.0	5300	1760	3.00	0.100	0.420	5000	1850	0.60	0.090	0.380
6.0	40.0	5300	1760	3.00	0.070	0.240	5000	1850	0.60	0.060	0.220
6.0	50.0	4000	1320	3.00	0.040	0.180	3000	1380	0.60	0.040	0.160
6.0	60.0	4000	1320	3.00	0.015	0.180	3000	1380	0.60	0.014	0.160

← 上一页 Previous Page

硬质合金立铣刀

高速立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

被削材 Work Material		预硬钢					淬硬钢				
		Pre-Hardened Steel					Hardened Steel				
		35 ~ 45HRC					45 ~ 55HRC				
外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		
				a _p	a _e	H			a _p	a _e	H
4.0	12.0	6000	1620	0.40	0.110	0.280	3000	630	0.40	0.080	0.200
4.0	20.0	6000	1620	0.40	0.070	0.200	3000	630	0.40	0.050	0.140
4.0	25.0	6000	1620	0.40	0.050	0.110	3000	630	0.40	0.040	0.080
4.0	30.0	6000	1620	0.40	0.040	0.110	3000	630	0.40	0.030	0.080
4.0	35.0	4000	1220	0.40	0.030	0.080	2500	530	0.40	0.020	0.060
4.0	40.0	4000	1220	0.40	0.020	0.080	2500	530	0.40	0.015	0.060
4.0	45.0	4000	1220	0.40	0.014	0.080	2500	530	0.40	0.010	0.060
4.0	50.0	4000	1070	0.40	0.010	0.080	2500	530	0.40	0.008	0.060
4.0	60.0	4000	1070	0.40	0.007	0.060	2500	530	0.40	0.005	0.040
5.0	16.0	4000	1440	0.50	0.110	0.250	2000	540	0.50	0.080	0.180
5.0	25.0	4000	1440	0.50	0.070	0.250	2000	540	0.50	0.050	0.180
5.0	35.0	4000	1440	0.50	0.050	0.140	2000	540	0.50	0.040	0.100
5.0	50.0	3000	1080	0.50	0.030	0.110	2000	540	0.50	0.020	0.080
5.0	60.0	3000	1080	0.50	0.010	0.110	2000	540	0.50	0.008	0.080
6.0	20.0	4000	1320	0.60	0.110	0.290	2000	600	0.60	0.080	0.210
6.0	30.0	4000	1320	0.60	0.070	0.290	2000	600	0.60	0.050	0.210
6.0	40.0	4000	1320	0.60	0.050	0.170	2000	600	0.60	0.040	0.120
6.0	50.0	3000	990	0.60	0.030	0.130	2000	600	0.60	0.020	0.090
6.0	60.0	3000	990	0.60	0.010	0.130	2000	600	0.60	0.008	0.090

GSN4

- 1) 为了进行稳定的加工, 请使用高精度的机床、刀杆。
- 2) 进行刃尖部的加工时, 请将进给速度降低到 1/2。
- 3) 推荐使用非溶于水性切削油剂。
- 4) 请根据槽深, 从颈长短的铣刀开始依次使用。
- 5) 因为要以高速转动进行加工, 因此请将安装振动控制在 10μm 以下。

- 1) Use precise machine and holder.
- 2) When corner processing, reduce the feed rate by approximately half.
- 3) Recommend non-water soluble cutting fluid.
- 4) To achieve flute depth, sequential use of each neck length is most effective.
- 5) The run out of the end mill should be in 10 μm after chucking.

D-77 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSBNH2 | GS 铣刀 长颈 高硬型

GS MILL Long Neck Hard Ball



被削材 Work Material			碳钢 合金钢 Carbon Steel Alloy Steel						不锈钢 模具钢 Stainless Steel Mold Steel					
			150 ~ 250HB						25 ~ 35HRC					
球头半径 Ball Radius (mm)	外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut				
					a _p	a _e	H			a _p	a _e	H		
0.10	0.2	0.5	50000	410	0.005	0.005	0.020	50000	370	0.005	0.005	0.018		
0.10	0.2	1.0	50000	410	0.005	0.005	0.014	50000	370	0.005	0.005	0.013		
0.10	0.2	2.0	50000	280	0.005	0.005	0.006	50000	250	0.005	0.005	0.005		
0.15	0.3	1.0	50000	600	0.005	0.005	0.020	50000	540	0.005	0.005	0.020		
0.15	0.3	2.0	50000	600	0.005	0.005	0.010	50000	540	0.005	0.005	0.010		
0.15	0.3	3.0	50000	450	0.005	0.005	0.010	50000	540	0.005	0.005	0.007		
0.20	0.4	1.0	50000	900	0.020	0.050	0.040	50000	810	0.020	0.050	0.040		
0.20	0.4	1.5	50000	900	0.020	0.030	0.030	50000	810	0.020	0.030	0.030		
0.20	0.4	2.0	50000	800	0.010	0.020	0.030	50000	810	0.010	0.020	0.025		
0.20	0.4	2.5	50000	800	0.005	0.010	0.016	50000	740	0.005	0.010	0.014		
0.20	0.4	3.0	50000	800	0.005	0.010	0.016	50000	740	0.005	0.010	0.014		
0.20	0.4	4.0	50000	800	0.005	0.005	0.010	50000	740	0.005	0.005	0.010		
0.20	0.4	5.0	48000	480	0.005	0.005	0.010	46000	420	0.005	0.005	0.010		
0.25	0.5	2.0	50000	1100	0.020	0.030	0.040	50000	990	0.020	0.030	0.030		
0.25	0.5	4.0	50000	1100	0.010	0.010	0.020	50000	990	0.010	0.010	0.020		
0.25	0.5	5.0	50000	1100	0.005	0.010	0.015	40000	790	0.005	0.010	0.014		
0.25	0.5	6.0	50000	1100	0.005	0.005	0.013	40000	790	0.005	0.005	0.012		
0.25	0.5	8.0	38000	480	0.005	0.005	0.010	34000	390	0.005	0.005	0.010		
0.30	0.6	2.0	50000	1300	0.030	0.050	0.040	48000	1110	0.030	0.050	0.040		
0.30	0.6	3.0	50000	1300	0.020	0.030	0.040	46000	1060	0.020	0.030	0.040		
0.30	0.6	4.0	50000	1300	0.010	0.020	0.020	43000	990	0.010	0.020	0.020		
0.30	0.6	5.0	42000	1090	0.010	0.020	0.020	38000	880	0.010	0.020	0.016		
0.30	0.6	6.0	42000	1090	0.010	0.010	0.020	33000	760	0.010	0.010	0.016		
0.30	0.6	8.0	42000	840	0.005	0.005	0.020	33000	600	0.005	0.005	0.016		
0.30	0.6	10.0	32000	640	0.005	0.005	0.010	30000	550	0.005	0.005	0.010		
0.40	0.8	2.0	48000	1750	0.100	0.100	0.080	36000	1180	0.100	0.100	0.070		
0.40	0.8	4.0	48000	1750	0.050	0.100	0.060	36000	1180	0.050	0.100	0.050		
0.40	0.8	5.0	40000	1460	0.050	0.100	0.030	30000	980	0.050	0.100	0.030		
0.40	0.8	6.0	40000	1460	0.030	0.050	0.030	30000	980	0.030	0.050	0.030		
0.40	0.8	7.0	32000	1120	0.010	0.020	0.020	24000	780	0.010	0.020	0.020		
0.40	0.8	8.0	32000	1120	0.005	0.010	0.020	24000	780	0.005	0.010	0.020		
0.40	0.8	10.0	24000	840	0.005	0.005	0.020	21000	680	0.005	0.005	0.020		
0.50	1.0	3.0	38000	1710	0.200	0.300	0.100	29000	1160	0.200	0.300	0.090		
0.50	1.0	4.0	38000	1710	0.200	0.300	0.070	29000	1160	0.200	0.300	0.060		
0.50	1.0	5.0	38000	1710	0.100	0.300	0.070	29000	1160	0.100	0.300	0.060		
0.50	1.0	6.0	32000	1440	0.100	0.300	0.040	24000	960	0.100	0.300	0.040		
0.50	1.0	7.0	32000	1440	0.100	0.200	0.040	24000	960	0.100	0.200	0.040		
0.50	1.0	8.0	32000	1440	0.050	0.100	0.040	24000	960	0.050	0.100	0.040		
0.50	1.0	9.0	26000	1170	0.030	0.050	0.030	20000	800	0.030	0.050	0.030		
0.50	1.0	10.0	26000	1170	0.010	0.010	0.030	20000	800	0.010	0.010	0.030		
0.50	1.0	12.0	26000	1170	0.010	0.010	0.030	20000	800	0.010	0.010	0.030		
0.50	1.0	14.0	20000	900	0.005	0.010	0.030	16000	640	0.005	0.010	0.030		
0.50	1.0	16.0	20000	900	0.005	0.010	0.020	16000	640	0.005	0.010	0.020		
0.50	1.0	18.0	20000	900	0.005	0.005	0.015	16000	640	0.005	0.005	0.010		
0.50	1.0	20.0	20000	900	0.005	0.005	0.015	16000	640	0.005	0.005	0.010		
0.60	1.2	6.0	32000	1600	0.100	0.200	0.080	24000	1120	0.100	0.200	0.080		
0.60	1.2	8.0	26000	1300	0.100	0.200	0.050	19500	910	0.100	0.200	0.040		
0.60	1.2	10.0	22000	1100	0.050	0.100	0.040	16500	770	0.050	0.100	0.030		
0.60	1.2	12.0	22000	1100	0.030	0.050	0.040	16500	770	0.030	0.050	0.030		
0.75	1.5	8.0	22000	1500	0.100	0.200	0.060	16500	1050	0.100	0.200	0.050		
0.75	1.5	10.0	22000	1500	0.100	0.200	0.060	16500	1050	0.100	0.200	0.050		
0.75	1.5	12.0	22000	1500	0.100	0.100	0.060	16500	1050	0.100	0.100	0.050		
0.75	1.5	14.0	17000	1160	0.050	0.100	0.050	12750	810	0.050	0.100	0.040		
0.75	1.5	16.0	17000	1160	0.030	0.050	0.050	12750	810	0.030	0.050	0.040		
0.75	1.5	18.0	17000	1160	0.020	0.030	0.050	12750	810	0.020	0.030	0.040		
0.75	1.5	20.0	12800	870	0.010	0.020	0.050	9600	610	0.010	0.020	0.040		
0.80	1.6	8.0	24000	1800	0.100	0.300	0.110	18000	1260	0.100	0.300	0.100		
0.80	1.6	12.0	20000	1500	0.050	0.100	0.060	15000	1050	0.050	0.100	0.060		
0.80	1.6	16.0	16000	1200	0.030	0.050	0.050	12000	840	0.030	0.050	0.040		
0.80	1.6	20.0	12000	900	0.020	0.030	0.050	9000	630	0.020	0.030	0.040		

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

被削材 Work Material			预硬钢						淬硬钢					
			Pre-Hardened Steel						Hardened Steel					
			35 ~ 45HRC						45 ~ 55HRC					
球头半径 Ball Radius (mm)	外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut				
					a _p	a _e	H			a _p	a _e	H		
0.10	0.2	0.5	50000	320	0.005	0.005	0.015	50000	290	0.005	0.005	0.013		
0.10	0.2	1.0	50000	320	0.005	0.005	0.010	50000	290	0.005	0.005	0.010		
0.10	0.2	2.0	50000	220	0.005	0.005	0.004	50000	200	0.005	0.005	0.004		
0.15	0.3	1.0	50000	360	0.005	0.005	0.020	50000	310	0.005	0.005	0.014		
0.15	0.3	2.0	50000	360	0.005	0.005	0.010	50000	310	0.005	0.005	0.008		
0.15	0.3	3.0	50000	330	0.005	0.005	0.006	50000	280	0.005	0.005	0.005		
0.20	0.4	1.0	50000	720	0.020	0.050	0.030	50000	500	0.020	0.050	0.030		
0.20	0.4	1.5	50000	720	0.020	0.030	0.020	50000	500	0.020	0.030	0.020		
0.20	0.4	2.0	50000	640	0.010	0.020	0.020	50000	500	0.010	0.020	0.020		
0.20	0.4	2.5	50000	640	0.005	0.010	0.010	50000	500	0.005	0.010	0.010		
0.20	0.4	3.0	50000	640	0.005	0.010	0.010	50000	500	0.005	0.010	0.010		
0.20	0.4	4.0	50000	640	0.005	0.005	0.008	50000	500	0.005	0.005	0.008		
0.20	0.4	5.0	44000	350	0.005	0.005	0.008	42000	290	0.005	0.005	0.008		
0.25	0.5	2.0	45000	770	0.020	0.030	0.030	32000	500	0.020	0.030	0.020		
0.25	0.5	4.0	40000	700	0.010	0.010	0.016	29000	450	0.010	0.010	0.010		
0.25	0.5	5.0	40000	700	0.005	0.010	0.010	29000	450	0.005	0.010	0.010		
0.25	0.5	6.0	31000	540	0.005	0.005	0.009	29000	450	0.005	0.005	0.008		
0.25	0.5	8.0	31000	310	0.005	0.005	0.008	29000	270	0.005	0.005	0.007		
0.30	0.6	2.0	37000	780	0.030	0.050	0.035	27000	520	0.030	0.050	0.030		
0.30	0.6	3.0	35000	740	0.020	0.030	0.030	25000	480	0.020	0.030	0.030		
0.30	0.6	4.0	33000	700	0.010	0.020	0.020	24000	460	0.010	0.020	0.016		
0.30	0.6	5.0	30000	630	0.010	0.020	0.015	24000	440	0.010	0.020	0.010		
0.30	0.6	6.0	26000	550	0.010	0.010	0.012	24000	440	0.010	0.010	0.010		
0.30	0.6	8.0	26000	420	0.005	0.005	0.010	24000	330	0.005	0.005	0.010		
0.30	0.6	10.0	26000	420	0.005	0.005	0.010	24000	330	0.005	0.005	0.007		
0.40	0.8	2.0	28800	840	0.100	0.100	0.060	20000	500	0.100	0.100	0.050		
0.40	0.8	4.0	28800	840	0.050	0.100	0.040	20000	500	0.050	0.100	0.040		
0.40	0.8	5.0	24000	700	0.050	0.100	0.030	18000	420	0.050	0.100	0.020		
0.40	0.8	6.0	24000	700	0.030	0.050	0.024	18000	420	0.030	0.050	0.020		
0.40	0.8	7.0	20000	560	0.010	0.020	0.020	18000	420	0.010	0.020	0.016		
0.40	0.8	8.0	20000	560	0.005	0.010	0.016	18000	420	0.005	0.010	0.016		
0.40	0.8	10.0	18000	500	0.005	0.005	0.016	16000	380	0.005	0.005	0.016		
0.50	1.0	3.0	22800	770	0.200	0.300	0.080	16000	480	0.200	0.300	0.070		
0.50	1.0	4.0	22800	770	0.200	0.300	0.060	16000	480	0.200	0.300	0.050		
0.50	1.0	5.0	22800	770	0.100	0.300	0.050	16000	480	0.100	0.300	0.040		
0.50	1.0	6.0	19200	650	0.100	0.300	0.030	14500	435	0.100	0.300	0.030		
0.50	1.0	7.0	19200	650	0.100	0.200	0.030	14500	435	0.100	0.200	0.030		
0.50	1.0	8.0	19200	650	0.050	0.100	0.030	14500	435	0.050	0.100	0.030		
0.50	1.0	9.0	15600	530	0.030	0.050	0.020	14500	435	0.030	0.050	0.020		
0.50	1.0	10.0	15600	530	0.010	0.010	0.020	13000	390	0.010	0.010	0.020		
0.50	1.0	12.0	15600	530	0.010	0.010	0.020	13000	390	0.010	0.010	0.020		
0.50	1.0	14.0	12000	410	0.005	0.010	0.020	13000	390	0.005	0.010	0.020		
0.50	1.0	16.0	12000	410	0.005	0.010	0.016	13000	390	0.005	0.010	0.010		
0.50	1.0	18.0	12000	410	0.005	0.005	0.012	13000	390	0.005	0.005	0.010		
0.50	1.0	20.0	12000	410	0.005	0.005	0.012	13000	390	0.005	0.005	0.010		
0.60	1.2	6.0	19200	720	0.100	0.200	0.070	12800	480	0.100	0.200	0.050		
0.60	1.2	8.0	15600	590	0.100	0.200	0.040	10400	390	0.100	0.200	0.030		
0.60	1.2	10.0	13200	500	0.050	0.100	0.030	8800	330	0.050	0.100	0.020		
0.60	1.2	12.0	13200	500	0.030	0.050	0.030	8800	330	0.030	0.050	0.020		
0.75	1.5	8.0	13200	680	0.100	0.200	0.050	8800	450	0.100	0.200	0.040		
0.75	1.5	10.0	13200	680	0.100	0.200	0.050	8800	450	0.100	0.200	0.040		
0.75	1.5	12.0	13200	680	0.100	0.100	0.050	8800	450	0.100	0.100	0.040		
0.75	1.5	14.0	10200	520	0.050	0.100	0.040	6800	350	0.050	0.100	0.030		
0.75	1.5	16.0	10200	520	0.030	0.050	0.040	6800	350	0.030	0.050	0.030		
0.75	1.5	18.0	10200	520	0.020	0.030	0.040	6800	350	0.020	0.030	0.030		
0.75	1.5	20.0	7680	390	0.010	0.020	0.040	5120	260	0.010	0.020	0.030		
0.80	1.6	8.0	14400	810	0.100	0.300	0.090	9600	540	0.100	0.300	0.070		
0.80	1.6	12.0	12000	680	0.050	0.100	0.050	8000	450	0.050	0.100	0.040		
0.80	1.6	16.0	9600	540	0.030	0.050	0.040	6400	360	0.030	0.050	0.030		
0.80	1.6	20.0	7200	410	0.020	0.030	0.040	4800	270	0.020	0.030	0.030		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSBNH2 | GS 铣刀 长颈 高硬型

GS MILL Long Neck Hard Ball

← 上一页 Previous Page

被削材 Work Material			碳钢 合金钢 Carbon Steel Alloy Steel					不锈钢 模具钢 Stainless Steel Mold Steel				
			150 ~ 250HB					25 ~ 35HRC				
			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		
a _p	a _e	H			a _p	a _e	H					
球头半径 Ball Radius (mm)	外径 Dia. of Mill (mm)	颈长 LU (mm)	19000	1710	0.300	0.500	0.200	14250	1200	0.300	0.500	0.180
1.00	2.0	6.0	19000	1710	0.200	0.500	0.200	14250	1200	0.200	0.500	0.180
1.00	2.0	8.0	19000	1710	0.100	0.300	0.140	14250	1200	0.100	0.300	0.130
1.00	2.0	12.0	16000	1440	0.100	0.200	0.080	12000	1010	0.100	0.200	0.070
1.00	2.0	14.0	16000	1440	0.100	0.200	0.080	12000	1010	0.100	0.200	0.070
1.00	2.0	16.0	16000	1440	0.100	0.100	0.080	12000	1010	0.100	0.100	0.070
1.00	2.0	18.0	12800	1150	0.100	0.100	0.060	9600	810	0.100	0.100	0.050
1.00	2.0	20.0	12800	1150	0.050	0.100	0.060	9600	810	0.050	0.100	0.050
1.00	2.0	22.0	12800	1150	0.030	0.050	0.060	9600	810	0.030	0.050	0.050
1.00	2.0	25.0	10000	900	0.020	0.030	0.060	7500	630	0.020	0.030	0.050
1.00	2.0	30.0	10000	900	0.010	0.020	0.040	7500	630	0.010	0.020	0.040
1.50	3.0	8.0	12800	2180	0.300	0.500	0.300	9600	1530	0.300	0.500	0.270
1.50	3.0	10.0	12800	2180	0.200	0.500	0.210	9600	1530	0.200	0.500	0.190
1.50	3.0	16.0	10600	1800	0.100	0.300	0.120	7950	1260	0.100	0.300	0.110
1.50	3.0	20.0	10600	1800	0.100	0.200	0.120	7950	1260	0.100	0.200	0.110
1.50	3.0	25.0	8500	1450	0.050	0.100	0.090	6375	1020	0.050	0.100	0.080
1.50	3.0	30.0	8500	1450	0.030	0.050	0.090	6375	1020	0.030	0.050	0.080
1.50	3.0	35.0	8500	1450	0.020	0.030	0.090	6375	1020	0.020	0.030	0.080
2.00	4.0	10.0	10000	2200	0.300	0.500	0.400	7500	1540	0.300	0.500	0.360
2.00	4.0	16.0	10000	2200	0.200	0.500	0.280	7500	1540	0.200	0.500	0.250
2.00	4.0	20.0	10000	2200	0.100	0.300	0.280	7500	1540	0.100	0.300	0.250
2.00	4.0	25.0	8000	1760	0.100	0.300	0.160	6000	1230	0.100	0.300	0.140
2.00	4.0	30.0	8000	1760	0.100	0.200	0.160	6000	1230	0.100	0.200	0.140
2.00	4.0	35.0	6400	1410	0.100	0.200	0.120	4800	990	0.100	0.200	0.110
2.00	4.0	40.0	6400	1410	0.050	0.100	0.120	4800	990	0.050	0.100	0.110
2.00	4.0	45.0	6400	1410	0.030	0.050	0.120	4800	990	0.030	0.050	0.110
2.00	4.0	50.0	4800	1060	0.020	0.030	0.120	3600	740	0.020	0.030	0.110
2.50	5.0	20.0	7700	1930	0.200	0.300	0.350	5775	1350	0.200	0.300	0.320
2.50	5.0	25.0	7700	1930	0.200	0.300	0.350	5775	1350	0.200	0.300	0.320
2.50	5.0	30.0	6400	1600	0.100	0.300	0.200	4800	1120	0.100	0.300	0.180
2.50	5.0	35.0	6400	1600	0.100	0.300	0.200	4800	1120	0.100	0.300	0.180
3.00	6.0	30.0	6400	1860	0.300	0.500	0.420	4800	1300	0.300	0.500	0.380
3.00	6.0	50.0	4200	1220	0.200	0.300	0.180	3150	850	0.200	0.300	0.160

切削工具

套装商品
其它

精密工具

技术资料
索引

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

被削材 Work Material			预硬钢						淬硬钢					
			Pre-Hardened Steel						Hardened Steel					
			35 ~ 45HRC						45 ~ 55HRC					
球头半径 Ball Radius (mm)	外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut			转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut				
					a _p	a _e	H			a _p	a _e	H		
1.00	2.0	4.0	11400	770	0.300	0.500	0.160	7600	510	0.300	0.500	0.130		
1.00	2.0	6.0	11400	770	0.200	0.500	0.160	7600	510	0.200	0.500	0.130		
1.00	2.0	8.0	11400	770	0.100	0.300	0.110	7600	510	0.100	0.300	0.090		
1.00	2.0	12.0	9600	650	0.100	0.200	0.060	6400	430	0.100	0.200	0.050		
1.00	2.0	14.0	9600	650	0.100	0.200	0.060	6400	430	0.100	0.200	0.050		
1.00	2.0	16.0	9600	650	0.100	0.100	0.060	6400	430	0.100	0.100	0.050		
1.00	2.0	18.0	7680	520	0.100	0.100	0.050	5120	350	0.100	0.100	0.040		
1.00	2.0	20.0	7680	520	0.050	0.100	0.050	5120	350	0.050	0.100	0.040		
1.00	2.0	22.0	7680	520	0.030	0.050	0.050	5120	350	0.030	0.050	0.040		
1.00	2.0	25.0	6000	410	0.020	0.030	0.050	4000	270	0.020	0.030	0.040		
1.00	2.0	30.0	6000	410	0.010	0.020	0.030	4000	270	0.010	0.020	0.030		
1.50	3.0	8.0	7680	980	0.300	0.500	0.240	5120	650	0.300	0.500	0.200		
1.50	3.0	10.0	7680	980	0.200	0.500	0.170	5120	650	0.200	0.500	0.140		
1.50	3.0	16.0	6360	810	0.100	0.300	0.100	4240	540	0.100	0.300	0.080		
1.50	3.0	20.0	6360	810	0.100	0.200	0.100	4240	540	0.100	0.200	0.080		
1.50	3.0	25.0	5100	650	0.050	0.100	0.070	3400	440	0.050	0.100	0.060		
1.50	3.0	30.0	5100	650	0.030	0.050	0.070	3400	440	0.030	0.050	0.060		
1.50	3.0	35.0	5100	650	0.020	0.030	0.070	3400	440	0.020	0.030	0.060		
2.00	4.0	10.0	6000	990	0.300	0.500	0.320	4000	660	0.300	0.500	0.260		
2.00	4.0	16.0	6000	990	0.200	0.500	0.220	4000	660	0.200	0.500	0.180		
2.00	4.0	20.0	6000	990	0.100	0.300	0.220	4000	660	0.100	0.300	0.180		
2.00	4.0	25.0	4800	790	0.100	0.300	0.130	3200	530	0.100	0.300	0.100		
2.00	4.0	30.0	4800	790	0.100	0.200	0.130	3200	530	0.100	0.200	0.100		
2.00	4.0	35.0	3840	630	0.100	0.200	0.100	2560	420	0.100	0.200	0.080		
2.00	4.0	40.0	3840	630	0.050	0.100	0.100	2560	420	0.050	0.100	0.080		
2.00	4.0	45.0	3840	630	0.030	0.050	0.100	2560	420	0.030	0.050	0.080		
2.00	4.0	50.0	2880	480	0.020	0.030	0.100	1920	320	0.020	0.030	0.080		
2.50	5.0	20.0	4620	870	0.200	0.300	0.280	3080	580	0.200	0.300	0.230		
2.50	5.0	25.0	4620	870	0.200	0.300	0.280	3080	580	0.200	0.300	0.230		
2.50	5.0	30.0	3840	720	0.100	0.300	0.160	2560	480	0.100	0.300	0.130		
2.50	5.0	35.0	3840	720	0.100	0.300	0.160	2560	480	0.100	0.300	0.130		
3.00	6.0	30.0	3840	840	0.300	0.500	0.340	2560	560	0.300	0.500	0.270		
3.00	6.0	50.0	2520	550	0.200	0.300	0.140	1680	370	0.200	0.300	0.120		

GSBNH2

- 1) 为了进行稳定的加工, 请使用高精度的机床、刀杆。
- 2) 进行刃尖部的加工时, 请将进给速度降低到 1/2。
- 3) 推荐使用非溶于水性切削油剂。
- 4) 请根据槽深, 从颈长短的铣刀开始依次使用。
- 5) 因为要以高速转动进行加工, 因此请将安装振动控制在 10μm 以下。

- 1) Use precise machine and holder.
- 2) When corner processing, reduce the feed rate by approximately half.
- 3) Recommend non-water soluble cutting fluid.
- 4) To achieve flute depth, sequential use of each neck length is most effective.
- 5) The run out of the end mill should be in 10 μm after chucking.

Next
Page 下一页 →

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

GSBNH2 | GS 铣刀 长颈 高硬型

GS MILL Long Neck Hard Ball



← 上一页 Previous Page

被削材 Work Material			调质钢 预硬钢				高硬度钢				高硬度钢			
			Heat Treated Steel Pre-Hardened Steel				Hardened Steel				Hardened Steel			
			38 ~ 45HRC				45 ~ 55HRC				55 ~ 60HRC			
球头半径 Ball Radius (mm)	外径 Dia. of Mill (mm)	颈长 LU (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	切削量 (mm) Depth of cut	
					a _p	P _f			a _p	P _f			a _p	P _f
0.10	0.2	0.5	50000	380	0.005	0.005	50000	260	0.005	0.005	50000	200	0.004	0.005
0.10	0.2	1.0	50000	340	0.005	0.005	50000	230	0.005	0.005	50000	180	0.004	0.005
0.10	0.2	1.5	50000	310	0.005	0.005	50000	220	0.005	0.005	45000	140	0.004	0.005
0.10	0.2	2.0	42000	230	0.005	0.005	41000	160	0.005	0.005	36000	110	0.004	0.005
0.10	0.2	2.5	35000	180	0.005	0.005	34000	110	0.005	0.005	34000	90	0.004	0.005
0.10	0.2	3.0	35000	150	0.004	0.005	34000	100	0.004	0.005	34000	80	0.004	0.005
0.20	0.4	1.0	50000	850	0.010	0.020	50000	550	0.010	0.020	50000	470	0.008	0.015
0.20	0.4	2.0	50000	660	0.010	0.020	50000	460	0.010	0.020	50000	370	0.008	0.015
0.20	0.4	3.0	47000	510	0.008	0.015	47000	350	0.008	0.015	42000	240	0.005	0.010
0.20	0.4	4.0	40000	390	0.005	0.005	39000	260	0.005	0.005	34000	180	0.005	0.005
0.20	0.4	5.0	35000	280	0.004	0.005	34000	190	0.004	0.005	31000	130	0.004	0.005
0.25	0.5	2.0	50000	950	0.015	0.030	50000	650	0.015	0.030	50000	520	0.010	0.020
0.25	0.5	3.0	50000	890	0.010	0.020	50000	570	0.010	0.020	47000	430	0.010	0.020
0.25	0.5	4.0	47000	620	0.010	0.020	47000	430	0.010	0.020	42000	300	0.010	0.010
0.25	0.5	5.0	33000	420	0.005	0.010	32000	280	0.005	0.010	29000	190	0.005	0.010
0.25	0.5	6.0	29000	260	0.004	0.005	28000	170	0.004	0.005	24000	110	0.004	0.005
0.25	0.5	8.0	24000	160	0.004	0.005	23000	120	0.004	0.005	22000	110	0.004	0.005
0.30	0.6	2.0	50000	1200	0.030	0.050	50000	820	0.030	0.050	50000	650	0.010	0.020
0.30	0.6	3.0	50000	1100	0.020	0.030	50000	750	0.020	0.030	50000	600	0.010	0.020
0.30	0.6	4.0	50000	1060	0.010	0.020	50000	740	0.010	0.020	42000	490	0.010	0.020
0.30	0.6	5.0	50000	1070	0.010	0.020	48000	700	0.010	0.020	35000	400	0.010	0.020
0.30	0.6	6.0	48000	1050	0.010	0.020	42000	640	0.010	0.020	30000	350	0.010	0.020
0.30	0.6	8.0	37000	560	0.005	0.010	33000	350	0.005	0.010	23000	190	0.005	0.010
0.30	0.6	10.0	31000	290	0.005	0.008	28000	180	0.005	0.008	19000	110	0.005	0.008
0.50	1.0	4.0	50000	3560	0.050	0.100	44000	2420	0.050	0.100	44000	1870	0.020	0.050
0.50	1.0	6.0	44000	2790	0.050	0.100	38000	1900	0.050	0.100	33000	1320	0.020	0.050
0.50	1.0	8.0	34000	2480	0.020	0.050	31000	1430	0.050	0.100	29000	1070	0.020	0.050
0.50	1.0	10.0	28000	1270	0.010	0.020	26000	940	0.010	0.020	20000	580	0.010	0.020
0.50	1.0	12.0	24000	910	0.010	0.010	22000	660	0.010	0.010	19000	450	0.010	0.010
0.50	1.0	14.0	21000	670	0.010	0.010	20000	510	0.005	0.010	17000	340	0.005	0.010
0.50	1.0	16.0	19000	480	0.005	0.010	18000	360	0.005	0.010	14000	220	0.005	0.010
0.50	1.0	18.0	17000	360	0.005	0.005	16000	270	0.005	0.005	13000	170	0.004	0.005
0.50	1.0	20.0	16000	350	0.005	0.005	15000	230	0.005	0.005	13000	150	0.004	0.005
0.50	1.0	22.0	14000	220	0.005	0.005	14000	130	0.005	0.005	13000	110	0.004	0.005
0.75	1.5	8.0	32000	2800	0.075	0.150	28000	1980	0.075	0.150	23000	1200	0.030	0.060
0.75	1.5	10.0	26000	2060	0.075	0.150	26000	1630	0.075	0.150	23000	1100	0.030	0.060
0.75	1.5	16.0	18000	1410	0.050	0.100	16000	690	0.050	0.100	11000	370	0.030	0.050
0.75	1.5	20.0	15000	380	0.020	0.050	14000	310	0.020	0.050	10000	170	0.020	0.050
1.00	2.0	4.0	50000	5600	0.100	0.200	50000	5640	0.100	0.200	44000	3960	0.050	0.100
1.00	2.0	6.0	40000	3110	0.100	0.200	39000	3010	0.100	0.200	33000	1980	0.050	0.100
1.00	2.0	8.0	31000	2980	0.100	0.200	26000	2490	0.100	0.200	22000	1650	0.050	0.100
1.00	2.0	10.0	25000	2750	0.100	0.200	22000	2320	0.100	0.200	19000	1560	0.050	0.100
1.00	2.0	16.0	17000	1940	0.100	0.100	15000	1620	0.100	0.100	12000	1040	0.050	0.100
1.00	2.0	20.0	14000	1400	0.050	0.100	13000	1160	0.050	0.100	10000	710	0.050	0.100
1.00	2.0	25.0	11000	930	0.030	0.050	11000	830	0.030	0.030	8000	480	0.030	0.050
1.00	2.0	30.0	10000	840	0.030	0.050	10000	400	0.020	0.050	8000	260	0.020	0.050
1.00	2.0	35.0	8000	250	0.020	0.030	8000	150	0.020	0.030	7000	120	0.020	0.030
1.50	3.0	8.0	33000	4620	0.150	0.300	28000	3920	0.150	0.300	24000	2620	0.060	0.150
1.50	3.0	10.0	28000	4030	0.150	0.300	22000	3080	0.150	0.300	20000	2220	0.060	0.150
1.50	3.0	15.0	18000	2480	0.100	0.300	14000	1940	0.100	0.300	12000	1310	0.060	0.150
1.50	3.0	20.0	15000	1820	0.100	0.200	12000	1750	0.100	0.200	11000	1100	0.060	0.150
1.50	3.0	25.0	13000	1190	0.050	0.100	10000	910	0.050	0.100	9000	650	0.050	0.100
1.50	3.0	30.0	10000	840	0.030	0.050	8000	670	0.030	0.050	7000	470	0.030	0.050
1.50	3.0	35.0	8000	610	0.020	0.050	7000	540	0.020	0.050	6000	360	0.020	0.050
2.00	4.0	10.0	28000	4700	0.200	0.500	22000	4840	0.200	0.500	20000	2560	0.080	0.200
2.00	4.0	15.0	22000	3740	0.200	0.500	18000	3040	0.200	0.500	13000	1730	0.080	0.200
2.00	4.0	20.0	18000	2930	0.200	0.400	15000	2460	0.200	0.400	9000	1130	0.080	0.200
2.00	4.0	25.0	18000	2930	0.100	0.300	14000	2370	0.100	0.300	7000	950	0.080	0.200
2.00	4.0	30.0	15000	2360	0.100	0.200	13000	2060	0.100	0.200	6000	760	0.080	0.200
2.00	4.0	35.0	13000	1840	0.100	0.200	10000	1330	0.100	0.200	5000	530	0.080	0.200
2.00	4.0	40.0	10000	1330	0.050	0.100	9000	1130	0.050	0.100	4500	450	0.050	0.100
2.00	4.0	45.0	8000	1010	0.050	0.050	8000	1020	0.050	0.050	4100	410	0.050	0.050
2.00	4.0	50.0	7000	710	0.020	0.050	7000	700	0.020	0.050	4000	310	0.020	0.050

有关切削条件的注意事项

- 1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
- 2. 因工件和加工设备的关系出现振动和异常声响时，请根据情况变更切削条件。
- 3. 您使用的加工设备的最高转速未达到基准切削条件时，请以其最高转速进行加工。此时，请按相同比例降低进给速度。

Attention on using the cutting condition tables

- 1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
- 2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
- 3. When using low speed machines, use the maximum speed and adjust the feed rate.

被削材 Work Material			调质钢 预硬钢				高硬度钢				高硬度钢			
			Heat Treated Steel Pre-Hardened Steel				Hardened Steel				Hardened Steel			
			38 ~ 45HRC				45 ~ 55HRC				55 ~ 60HRC			
球头半径	外径	颈长	转速	进给速度	切削量 (mm)		转速	进给速度	切削量 (mm)		转速	进给速度	切削量 (mm)	
Ball Radius	Dia. of Mill	LU	Rotation	Feed	Depth of cut		Rotation	Feed	Depth of cut		Rotation	Feed	Depth of cut	
(mm)	(mm)	(mm)	(min ⁻¹)	(mm/min)	a _p	P _f	(min ⁻¹)	(mm/min)	a _p	P _f	(min ⁻¹)	(mm/min)	a _p	P _f
2.50	5.0	20.0	22000	4290	0.250	0.500	14000	2910	0.250	0.500	9000	1460	0.100	0.250
2.50	5.0	25.0	17000	3400	0.200	0.300	13000	2600	0.200	0.300	7000	1120	0.100	0.250
2.50	5.0	30.0	15000	2460	0.100	0.300	12000	1960	0.100	0.300	5600	730	0.100	0.250
2.50	5.0	35.0	13000	1630	0.100	0.300	11000	1210	0.100	0.300	4900	430	0.100	0.250
3.00	6.0	30.0	11000	2640	0.300	0.500	10000	2330	0.300	0.500	5400	1000	0.100	0.200
3.00	6.0	50.0	8000	1710	0.200	0.300	8000	1600	0.200	0.300	3500	560	0.100	0.200

D-78 尺寸表 Stocked Sized

GSBNH2

- 1) 为了进行稳定的加工，请使用高精度的机床、刀杆。
- 2) 推荐使用气吹、油雾。
- 3) 使用时，工具的突出量尽量缩短。
- 4) 由于机械刚性等原因，条件会有所不同，因此，请根据每次的情况调整条件。
- 5) 请根据必要的加工面粗糙度，调整切削量。
- 6) 因为要以高速转动进行加工，因此请将安装振动控制在 10μm 以下。

- 1) Use precise machine and holder.
- 2) Air blow or oil mist coolant is recommended.
- 3) Shorten overhang as much as possible.
- 4) Cutting condition should be adjusted according to machine rigidity.
- 5) It should be adjusted according to surface roughness required.
- 6) The run out of the end mill should be in 10 μm after chucking.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

硬质合金立铣刀的基准切削条件

Standard Cutting Condition for Carbide End Mills

CURIB | 铜加工用 2 刃 铣刀 长颈型

Long Neck Two Flutes for Copper



新商品

外径 (mm)	颈长 (mm)	转速 (min ⁻¹)	进给速度 (mm/min)	切削量 H (mm)
0.3	1	50,000	500	0.021
	2			0.012
	3			0.009
	6			0.006
	9			0.003
0.4	2	50,000	750	0.028
	3			0.016
	4			0.012
	8			0.008
	12			0.004
0.5	2	50,000	1,000	0.035
	4	48,000	960	0.020
	6			0.015
	8			0.010
	15	41,000	570	0.005
0.6	2	50,000	1,000	0.042
	4			0.024
	6			0.018
	8	34,000	680	0.018
	10、12			0.012
0.7	18	45,000	1,350	0.006
	2			0.049
	4			0.028
	6、8	34,000	1,020	0.021
	10	30,000	900	0.014
0.8	4	40,000	1,200	0.056
	6			0.032
	8			0.024
	10	26,000	780	0.024
	12、16			0.016
0.9	24	36,000	1,440	0.008
	6			0.036
	8、10			0.027
	15	23,000	920	0.018
	4	32,000	1,280	0.070
1.0	6、8			0.040
	10、12	24,000	960	0.030
	16、20			0.020
	25、30			0.010
	6	27,000	1,210	0.084
1.2	8			0.048
	10、12			0.036
	16	20,000	900	0.036
	20			0.024
1.4	6	17,000	770	0.098
	8、10			0.056
	12、14、16			0.042

外径 (mm)	颈长 (mm)	转速 (min ⁻¹)	进给速度 (mm/min)	切削量 H (mm)
1.5	6	21,000	1,150	0.105
	8、10、12			0.060
	14、16、18			0.045
	20	16,000	880	0.045
	25、30			0.030
1.6	38、45			0.015
	6、8	20,000	1,200	0.112
	10、12			0.064
	14、16、18			0.048
	20	15,000	900	0.048
1.7	20	13,000	780	0.048
	6、8	19,000	1,140	0.119
	10、12			0.068
	14、16、18、20			0.051
	6、8	18,000	1,170	0.126
1.8	10、12、14			0.072
	16、18、20			0.054
	6、8	17,000	1,100	0.133
	10、12、14			0.076
	16、18、20			0.057
1.9	6、8、10	13,000	850	0.140
	12、14、16			0.080
	18、20			0.060
	25	12,000	1,000	0.060
	30、35、40			0.040
2.0	50、60			0.020
	8、10、12	10,000	700	0.175
	14、16、18、20			0.100
	25、30			0.075
	40、50	8,300	720	0.050
2.5	8、10、12、14			0.210
	16、18、20			0.120
	25、30、40	11,000	1,650	0.090
	50			0.060
3.0	50	8,000	1,200	0.060
	12、20	6,900	1,030	0.280
	25			0.160
	30			0.160
	35、40、45	8,000	1,600	0.120
4.0	50			0.120
	60			0.080
	16、25	5,200	1,040	0.350
	35			0.200
	50、60			0.150
5.0	20、30	4,800	1,200	0.420
	40			0.240
	50、60			0.180

D-82 尺寸表 Stocked Sized

CURIB

- 1) 为了进行稳定的加工，请使用高精度的机床、刀杆。
- 2) 推荐使用气吹、油雾。
- 3) 使用时，工具的突出量尽量缩短。
- 4) 由于机械刚性等原因，条件会有所不同，因此，请根据每次的情况调整条件。
- 5) 请根据必要的加工面粗糙度，调整切削量。
- 6) 因为要以高速转动进行加工，因此请将安装振动控制在 10μm 以下。

- 1) Use precise machine and holder.
- 2) Air blow or oil mist coolant is recommended.
- 3) Shorten overhang as much as possible.
- 4) Cutting condition should be adjusted according to machine rigidity.
- 5) It should be adjusted according to surface roughness required.
- 6) The run out of the end mill should be in 10 μm after chucking.

精密工具

技术资料
索引

有关切削条件的注意事项


1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

CURIBR | 铜加工用 球头 铣刀 长颈型

Long Neck Ball for Copper



球头半径 (mm)	外径 (mm)	颈长 (mm)	转速 (min ⁻¹)	进给速度 (mm/min)	切削量 H (mm)
0.20	0.4	1, 1.5, 2	50,000	1,000	0.028
		2.5, 3			0.016
		4, 5			0.012
0.25	0.5	2	50,000	1,250	0.035
		4			0.020
		5, 6			0.015
0.30	0.6	8	48,000	1,200	0.010
		2, 3			0.042
		4			0.024
0.40	0.8	5, 6, 7	40,000	1,200	0.018
		2, 4			0.056
		5, 6			0.032
0.50	1.0	7, 8	40,000	1,600	0.024
		10			0.024
		3, 4, 5			0.070
0.60	1.2	6, 7, 8	40,000	2,000	0.040
		9, 10, 12			0.030
		14			0.020
0.70	1.4	16, 18, 20	32,000	1,600	0.030
		6			0.084
		8			0.048
0.70	1.4	10, 12	27,000	1,620	0.036
		8			0.056
		12, 16			0.042

球头半径 (mm)	外径 (mm)	颈长 (mm)	转速 (min ⁻¹)	进给速度 (mm/min)	切削量 H (mm)
0.75	1.5	8, 10, 12	27,000	2,025	0.060
		14, 16, 18			0.045
		20			0.045
0.80	1.6	8	25,000	2,000	0.112
		12			0.064
		16			0.048
0.90	1.8	20	22,000	1,980	0.048
		8			0.126
		12			0.072
1.00	2.0	16, 20	18,000	1,620	0.054
		4, 6, 8			0.140
		12, 14, 16			0.080
1.50	3.0	18, 20, 22	20,000	2,000	0.060
		25			0.060
		30			0.040
2.00	4.0	8, 10	13,000	1,950	0.210
		16, 20			0.120
		25, 30, 35			0.090
2.50	5.0	10, 16, 20	11,000	1,650	0.280
		25, 30			0.160
		35, 40, 45			0.120
3.00	6.0	50	8,000	2,000	0.120
		20, 25			0.350
		30, 35			0.200
3.00	6.0	30	6,600	1,980	0.420
		50			0.180
		50			0.180

D-85 ◀ ▶ 尺寸表 Stocked Sized

CURIBR

- 1) 为了进行稳定的加工, 请使用高精度的机床、刀杆。
- 2) 推荐使用气吹、油雾。
- 3) 使用时, 工具的突出量尽量缩短。
- 4) 由于机械刚性等原因, 条件会有所不同, 因此, 请根据每次的情况调整条件。
- 5) 请根据必要的加工面粗糙度, 调整切削量。
- 6) 因为要以高速转动进行加工, 因此请将安装振动控制在 10μm 以下。

- 1) Use precise machine and holder.
- 2) Air blow or oil mist coolant is recommended.
- 3) Shorten overhang as much as possible.
- 4) Cutting condition should be adjusted according to machine rigidity.
- 5) It should be adjusted according to surface roughness required.
- 6) The run out of the end mill should be in 10 μm after chucking.

CU2 | 铜加工用 2 刃 铣刀

Two Flutes End Mill for Copper

被削材 Work Material		铜合金 C1100 Copper Alloy	槽加工时 Grooving
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
2	16000	576	
3	12700	762	
5	7600	821	
6	6400	922	
8	4800	922	
10	3800	912	
12	3200	922	
侧面加工 Side Milling	ap	1.5DC	
槽加工 Grooving	ae	0.1DC	
槽加工 Grooving	ap	0.5DC	
槽加工 Grooving	ap	0.5DC	
槽加工 Grooving	ap	0.5DC	

D-73 ◀ ▶ 尺寸表 Stocked Sized

CU4 | 铜加工用 4 刃 铣刀

Four Flutes End Mill for Copper

被削材 Work Material		铜合金 C1100 Copper Alloy	槽加工时 Grooving
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
2	16000	864	
3	12700	1143	
5	7600	1231	
6	6400	1382	
8	4800	1382	
10	3800	1368	
12	3200	1382	
侧面加工 Side Milling	ap	1.5DC	
槽加工 Grooving	ae	0.1DC	
槽加工 Grooving	ap	0.5DC	
槽加工 Grooving	ap	0.5DC	
槽加工 Grooving	ap	0.5DC	

D-74 ◀ ▶ 尺寸表 Stocked Sized

- 1) 加工钨铜时, 请将转速、进给速度降低到表中数值的 70%。
- 1) When copper tungsten, reduce the rotation and the feed to 70% of table values.

- 1) 加工钨铜时, 请将转速、进给速度降低到表中数值的 70%。
- 1) When copper tungsten, reduce the rotation and the feed to 70% of table values.

CUB2 | 铜加工用 球头 铣刀

Ball End Mill for Copper

被削材 Work Material		铜合金 C1100 Copper Alloy	球头半径 Ball Radius (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
球头半径 Ball Radius (mm)	RE1	20000			
		14000			
		10000			
		6400			
		5300			
基准切削量 Depth of cut	Pr	0.1DC			
		0.2DC			

D-74 ◀ ▶ 尺寸表 Stocked Sized

- 1) 加工钨铜时, 请将转速、进给速度降低到表中数值的 70%。
- 1) When copper tungsten, reduce the rotation and the feed to 70% of table values.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

硬质合金立铣刀的基准切削条件
Standard Cutting Condition for Carbide End Mills

WAVY MILL NWEX | WAVY 铣刀 NWEX 型 WAVY MILL NWEX type

被削材 Work Material	工件 硬度 (HB) Hardness	断屑 槽形 状 Chip breaker	材料 Grade																	
			NCP100			NCP200			NCP300			NCK200			NCK300			NDL100		
			单刃进给 (mm / 刃) Feed rate (mm/tooth)																	
			0.12	0.25	0.35	0.12	0.25	0.35	0.12	0.25	0.35	0.12	0.25	0.35	0.12	0.25	0.35	0.05	0.15	0.25
			切削速度 (m / min)									Cutting speed (m/min)								
钢、碳钢 S15C Steel, Carbon Steel	125	G	400	370	350	330	350	330	350	330	310									
钢、碳钢 S45C Steel, Carbon Steel	190	G	300	270	250	270	250	230	250	230	210									
钢、碳钢 S45C 淬硬 Steel, Carbon Steel Hardened	250	G	250	220	200	220	200	180	200	180	160									
钢、碳钢 S75C Steel, Carbon Steel	270	G	200	170	150	180	160	140	160	140	120									
钢、碳钢 S75C 淬硬 Steel, Carbon Steel Hardened	300	G	150	120	100	120	100	80	100	80	60									
低合金钢 SCM、SNCM Low Alloy Steel	180	G	280	250	230	250	230	210	230	210	190									
低合金钢 SCM、SNCM 淬硬 Low Alloy Steel Hardened	275	G	180	150	130	160	140	120	140	120	100									
低合金钢 SCM、SNCM 淬硬 Low Alloy Steel Hardened	300	G	160	130	110	140	120	100	120	100	80									
低合金钢 SCM、SNCM 淬硬 Low Alloy Steel Hardened	350	G	130	100	80	110	90	70	90	70	50									
高合金钢 SKD、SKT、SKH High Alloy Steel	200	G	250	220	200	220	200	180	200	180	160									
高合金钢 SKD、SKT、SKH 淬硬 High Alloy Steel Hardened	325	G	130	100	80	100	80	60	80	60	40									
马氏体不锈钢 铁氧体不锈钢 SUS403 其他 Martensitic, Ferritic Stainless Steel	200	G	210	180	160	180	160	140	160	140	120									
马氏体不锈钢 淬硬 Hardened SUS403 其他 Martensitic Stainless Steel	240	G	180	150	130	150	130	110	130	110	90									
奥氏体不锈钢 SUS304、SUS316 Austenitic Stainless Steel	180	G	230	200	180	200	180	160	180	160	140									
铸铁 Cast Iron		G										300	270	250	270	250	230			
球墨铸铁 Ductile Cast Iron		G										200	170	150	170	150	130			
耐热合金、钛合金 Heat Resistant Alloy, Titanium Alloy		G										50	30		50	30				
铝合金 Si < 13% Aluminum Alloy		S															1000	750	500	
铝合金 Si > 13% Aluminum Alloy		S															250	200	170	
铜合金 Copper Alloy		S															350	330	300	

D-88, D-89, D-90, D-91, D-92 尺寸表 Stocked Sized



工 具 NWEX3032E
刀 片 NAXMT170508PEER-G
切削条件 切削量 5mm、切削宽度 16mm

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

XSWMM2000E/EL XSWMM3000E/EL

X's 铣刀 WAVY 多功能 2000E/EL 型 X's-mill WAVY Multi2000E/EL

X's 铣刀 WAVY 多功能 3000E/EL 型 X's-mill WAVY Multi3000E/EL

外径 Dia. of Mill (mm)	被削材 Work Material		碳钢 S-C	合金钢 SCM	不锈钢 SUS	铸铁 FC, FCD	铝合金
			Carbon Steel	Alloy Steel	Stainless Steel	Cast Iron	Aluminum Alloy
				~ 40HRC		~ 200HB	
20 ~ 30	切削速度 Speed (m/min)	—	80- 120 -160	60- 100 -140	80- 100 -120	70- 150 -180	200- 300 -500
	进给量 Feed (mm/rev)	侧面加工 Side Milling	0.05- 0.12 -0.20	0.05- 0.10 -0.15	0.05- 0.10 -0.15	0.05- 0.12 -0.20	0.10- 0.15 -0.20
		槽加工 Grooving	0.05- 0.08 -0.12	0.05- 0.07 -0.10	0.05- 0.07 -0.10	0.05- 0.08 -0.12	0.05-0.10
		插铣加工 Slotting	0.05- 0.11 -0.18	0.05- 0.08 -0.12	0.05- 0.08 -0.12	0.05- 0.11 -0.18	0.05-0.10
32 ~ 50	切削速度 Speed (m/min)	—	80- 120 -160	60- 100 -140	80- 100 -120	70- 150 -180	200- 300 -500
	进给量 Feed (mm/rev)	侧面加工 Side Milling	0.05- 0.15 -0.25	0.05- 0.12 -0.20	0.05- 0.12 -0.20	0.05- 0.15 -0.25	0.10- 0.15 -0.20
		槽加工 Grooving	0.05- 0.10 -0.15	0.05- 0.08 -0.12	0.05- 0.08 -0.12	0.05- 0.10 -0.15	0.05-0.10
		插铣加工 Slotting	0.05- 0.12 -0.20	0.05- 0.11 -0.18	0.05- 0.11 -0.18	0.05- 0.12 -0.20	0.05-0.10
刀片材料			XSZ350	XSZ350	XSZ350	XSZ310	DLC100



刃长
DC: 立铣刀外径
Dia. of Mill

D-93, D-94 ◀ ▶ 尺寸表 Stacked Sized

XSWMM2000E/EL/XSWMM3000E/EL


- 1) 钻头加工时, 必须进行分级加工 (0.5 ~ 1.0mm)。
- 2) 推荐采用干式加工 (气吹)。但被削材为不锈钢时, 请采用湿式加工。

- 1) Use step feed (0.5 ~ 1.0mm) in slotting.
- 2) Recommend dry process (air blow), but in case of Stainless Steel, use in wet condition.


XSWBMR

X's 铣刀 WAVY 球头型 X's-mill WAVY Ball

侧面加工 Side Milling

被削材 Work Material	碳钢 合金钢 Carbon Steel Alloy Steel	模具钢 调质钢 Mold Steel Heat Treated Steel	铸铁 Cast Iron	
	~ 25HRC	~ 45HRC		
切削速度 Speed (m/min)	200 - 250 - 300	50 - 80 - 100	100 - 120 - 150	
进给量 Feed (mm/tooth)	0.1 - 0.2 - 0.3	0.1 - 0.2 - 0.3	0.2 - 0.3 - 0.4	


槽加工 Grooving

被削材 Work Material	碳钢 合金钢 Carbon Steel Alloy Steel	模具钢 调质钢 Mold Steel Heat Treated Steel	铸铁 Cast Iron	
	~ 25HRC	~ 45HRC		
切削速度 Speed (m/min)	150 - 200 - 250	50 - 70 - 100	100 - 120 - 150	
进给量 Feed (mm/tooth)	0.10 - 0.15 - 0.20	0.05 - 0.10 - 0.15	0.20 - 0.25 - 0.40	

D-95 ◀ ▶ 尺寸表 Stacked Sized

XSWBMF

X's 铣刀 WAVY 球头型 (WBMF) X's-mill WAVY Ball (WBMF)

被削材 Work Material	碳钢	合金钢	模具钢 不锈钢 Mold Steel Stainless Steel	铸铁	
	Carbon Steel	Alloy Steel		Cast Iron	
切削速度 Speed (m/min)	~ 25HRC	~ 45HRC			
进给量 Feed (mm/tooth)	200 - 250 - 300	100 - 150 - 200	50 - 80 - 100	100 - 120 - 150	
进给量 Feed (mm/tooth)	0.10 - 0.20 - 0.30	0.10 - 0.20 - 0.30	0.10 - 0.15 - 0.20	0.20 - 0.30 - 0.40	

D-96 ◀ ▶ 尺寸表 Stacked Sized

XSWBMR/XSWBMF

- 1) 推荐采用干式 (气吹) 切削。但加工不锈钢时, 请采用湿式切削。

- 1) Recommend Dry-Process. (air blow) Use in wet condition in case of Stainless Steel.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



高速钢立铣刀

HSS End Mills

商品一览 Product List	E-2
各类被削材选型基准表 Selection Chart According to Work Materials	E-4
尺寸表 Size List	E-8
高速钢立铣刀的基本切削条件 Standard Cutting Condition for HSS End Mills	E-48

页 Page	商品编码 Code	品名 Product Name	表面处理 Coating	刃数、形状 Appearance	尺寸 Size
新品	E-8	2SGE SG-FAX 2 刃铣刀 SG-FAX End Mills Two Flutes	SG	2刃型	φ1~φ50
	E-10	2AGE AG 2 刃铣刀 AG-mill Two Flutes	AG		φ1~φ50
	E-12	2GE G 2 刃铣刀 G End Mills Standard Two Flutes	G		φ1~φ50
硬质合金钻头	E-14	GHKEY/ GKKEY/GLKEY G 2 刃键槽铣刀 G End Mills for Keyway Two Flutes	G		φ3~φ20
	E-15	2NAC NATAC 2 刃铣刀 NATAC End Mills Two Flutes	—		φ1~φ20
	E-17	2DLCHE DLC 高速钢铣刀 DLC-HSS Mills	DLC		φ1~φ20
高速钢钻头	E-17	2MSGE SG-FAX 2 刃中等刃长铣刀 SG-FAX End Mills Medium Two Flutes	SG		φ1~φ30
	E-18	2AGEM AG 2 刃中长铣刀 AG-mill Two Flutes Medium	AG		φ1~φ20
	E-18	2MGE G 2 刃中长铣刀 G End Mills Medium Two Flutes	G		φ1~φ20
丝锥	E-19	2SE 高硬 2 刃铣刀 SUPER HARD End Mills Two Flutes	—		φ1~φ50
	E-20	2RSE 高硬 2 刃标准柄铣刀 SUPER HARD End Mills Regular Shank Two Flutes	—		φ4~φ18
	E-21	SL2SGE SG-FAX 2 刃加长刃铣刀 SG-FAX End Mills Long Two Flutes	SG	3刃型	φ3~φ30
硬质合金立铣刀	E-21	2AGEL AG 2 刃长柄铣刀 AG-mill Two Flutes Long	AG		φ3~φ40
	E-22	SL2GE G 2 刃加长铣刀 G End Mills Long Two Flutes	G		φ3~φ40
	E-22	SL2SE 高硬 2 刃加长铣刀 SUPER HARD End Mills Long Two Flutes	—		φ3~φ40
高速 钢立铣刀	E-23	RSL2SE 高硬 2 刃标准柄加长铣刀 SUPER HARD End Mills Regular Shank Long Two Flutes	—		φ4~φ18
	E-23	3GE G 3 刃铣刀 G End Mills Standard Three Flutes	G		φ3~φ40
	E-24	3NAC NATAC 3 刃铣刀 NATAC End Mills Three Flutes	—		φ3~φ20
切削工具	E-24	4SGE SG-FAX 4 刃铣刀 SG-FAX End Mills Four Flutes	SG		φ3~φ30
	E-25	4AGE AG 4 刃铣刀 AG-mill Four Flutes	AG		φ2.5~φ50
	E-26	4GE G 4 刃铣刀 G End Mills Standard Four Flutes	G		φ2.5~φ50
套装商品 其它	E-27	4NAC NATAC 4 刃铣刀 NATAC End Mills Four Flutes	—	4刃型	φ2.1~φ20
	E-29	4SE 高硬 4 刃铣刀 SUPER HARD End Mills Four Flutes	—		φ2.5~φ50
	E-30	4RSE 高硬 4 刃标准柄铣刀 SUPER HARD End Mills Regular Shank Four Flutes	—		φ4~φ18
精密工具	E-30	SL4SGE SG-FAX 4 刃加长铣刀 SG-FAX End Mills Long Four Flutes	SG		φ3~φ30
	E-31	4AGEL AG 4 刃加长铣刀 AG-mill Four Flutes Long	AG		φ3~φ40
	E-31	SL4GE G 4 刃加长铣刀 G End Mills Long Four Flutes	G		φ3~φ40
技术资料 索引	E-32	SL4SE 高硬 4 刃加长铣刀 SUPER HARD End Mills Long Four Flutes	—		φ3~φ40
	E-32	RSL4SE 高硬 4 刃标准柄加长铣刀 SUPER HARD End Mills Regular Shank Long Four Flutes	—		φ4~φ18
	E-33	SGFRERS SG-FAX 粗铣刀短刃型 SG-FAX Roughing End Mills Regular Length Short	SG	梳齿铣刀	φ6~φ50
	E-33	SGFRE SG-FAX 粗铣刀短型 SG-FAX Roughing End Mills Short With Neck	SG		φ6~φ50
	E-34	AGRERS AG 粗铣刀标准型 AG-mill Roughing Regular Length Short	AG		φ6~φ50
	E-34	AGRES AG 粗铣刀短刃型 AG-mill Roughing Short	AG		φ6~φ50
	E-35	SRE 高速钢粗铣刀短型 Roughing End Mills Short	—		φ6~φ50

页 Page	商品编码 Code	品名 Product Name	表面处理 Coating	刃数、形状 Appearance	尺寸 Size
E-35	SGFREM	SG-FAX 粗铣刀中等刃长型 SG-FAX Roughing End Mills Medium With Neck	SG	梳齿铣刀	$\phi 6 \sim \phi 50$
E-36	SGLREM	SG-FAX 粗铣刀大齿距中等刃长型 SG-FAX Roughing End Mills Large Pitch Medium	SG		$\phi 6 \sim \phi 50$
E-36	AGREM	AG 粗铣刀中等刃长型 AG-mill Roughing Medium	AG		$\phi 6 \sim \phi 50$
E-37	MRE	粗铣刀中等刃长型 Roughing End Mills Medium	—		$\phi 6 \sim \phi 50$
E-37	SGFREL	SG-FAX 粗铣刀加长刃型 SG-FAX Roughing End Mills Long	SG		$\phi 6 \sim \phi 50$
E-38	AGREL	AG 粗铣刀长刃型 AG-mill Roughing Long	AG		$\phi 6 \sim \phi 50$
E-38	LRE	粗铣刀加长刃型 Roughing End Mills Long	—		$\phi 12 \sim \phi 50$
E-39	SGFREX	SG-FAX 粗铣刀长柄 SX 型 SG-FAX Roughing End Mills Long Shank SX Type	SG		$\phi 16 \sim \phi 50$
E-39	SGFREU	SG-FAX 粗铣刀长柄 SLX 型 SG-FAX Roughing End Mills Long Shank SLX Type	SG		$\phi 16 \sim \phi 50$
E-39	AGREX	AG 粗铣刀长柄 SX 型 AG-mill Roughing Long Shank SX Type	AG		$\phi 10 \sim \phi 50$
E-39	AGREU	AG 粗铣刀长柄 SLX 型 AG-mill Roughing Long Shank SLX Type	AG		$\phi 10 \sim \phi 50$
E-40	SGHV	SG-FAX 重切铣刀 SG-FAX HEAVY End Mills	SG	重切削	$\phi 3 \sim \phi 50$
E-40	AGHV	AG 重切铣刀 AG-mill HEAVY	AG		$\phi 3 \sim \phi 50$
E-41	HV	重切削 HEAVY End Mills	—		$\phi 3 \sim \phi 50$
E-42	SGLHV	SG-FAX 重切铣刀长刃型 SG-FAX HEAVY End Mills Long	SG		$\phi 3 \sim \phi 50$
E-42	AGLHV	AG 铣刀重切长刃型 AG-mill HEAVY Long	AG		$\phi 3 \sim \phi 50$
E-43	SLHV	重切削 长刃型 HEAVY End Mills Long	—		$\phi 3 \sim \phi 50$
E-43	SGELHV	SG-FAX 重切铣刀加长刃型 SG-FAX HEAVY End Mills Extra Long	SG		$\phi 15 \sim \phi 50$
E-44	AGELHV	AG 铣刀重切加长刃型 AG-mill HEAVY Extra Long	AG		$\phi 3 \sim \phi 50$
E-44	ELHV	重切削 加长刃型 HEAVY End Mills Extra Long	—		$\phi 15 \sim \phi 60$
E-45	AGRERS-R	AG 粗铣刀圆角型 AG-mill Roughing Radius	AG	圆角型	$\phi 6 \sim \phi 25$
E-45	AGREX-R	AG 粗铣刀长柄带圆角 SX 型 AG-mill Roughing Long Shank Radius SX Type	AG		$\phi 10 \sim \phi 50$
E-46	AGREU-R	AG 粗铣刀长柄带圆角 SLX 型 AG-mill Roughing Long Shank Radius SLX Type	AG		$\phi 10 \sim \phi 50$
E-46	2AGRE	AG 球头铣刀 AG-mill Ball	AG	球头型	RE0.5 ~ RE12.5
E-47	RE	球头铣刀 2 刃型 Ball End Mills Two Flutes	—		RE0.75 ~ RE20
E-47	SGFRR	SG-FAX 粗铣刀球头型 SG-FAX Roughing Ball End Mills Fine Pitch	SG		RE5 ~ RE25

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表


Selection Chart According to Work Materials

高速钢立铣刀

HSS End Mills

商品编码 Code	品名 Product Name	刊载页数 Page		刃数 No. of Flutes	刃长・种类 Length of Cut	尺寸 Size	表面 处理 Coating	用途・特征 Application Merit	库存 Stock	
		尺寸表 Size List	切削条件 Cutting Condition							
2SGE	SG-FAX 2 刃铣刀 SG-FAX End Mills Two Flutes	E-8	E-48	2	短刃 Short	$\phi 1 \sim \phi 50$	SG		●□	
2AGE	AG 2 刃铣刀 AG-mill Two Flutes	E-10	E-48	2	短刃 Short	$\phi 1 \sim \phi 50$	AG		●	
2GE	G 2 刃铣刀 G End Mills Standard Two Flutes	E-12	E-49	2	短刃 Short	$\phi 1 \sim \phi 50$	G		●□	
GHKEY/GKKEY/GKUEY	G 2 刃键槽铣刀 G End Mills for Keyway Two Flutes	E-14	E-49	2	短刃 Short	$\phi 3 \sim \phi 20$	G		●△	
2NAC	NATAC 2 刃铣刀 NATAC End Mills Two Flutes	E-15	E-49	2	短刃 Short	$\phi 1 \sim \phi 20$	—		●	
2DLCHE	DLC 高速钢铣刀 DLC-HSS Mills	E-17	E-50	2	短刃 Short	$\phi 1 \sim \phi 20$	DLC	铝、有色金属用 For Aluminum・Non-Ferrous Metal	●	
2MSGE	SG-FAX 2 刃中等刃长铣刀 SG-FAX End Mills Medium Two Flutes	E-17	E-48	2	中长刃 Medium	$\phi 1 \sim \phi 30$	SG		●□	
2AGEM	AG 2 刃中长铣刀 AG-mill Two Flutes Medium	E-18	E-48	2	中长刃 Medium	$\phi 1 \sim \phi 20$	AG		●	
2MGE	G 2 刃中长铣刀 G End Mills Medium Two Flutes	E-18	E-49	2	中长刃 Medium	$\phi 1 \sim \phi 20$	G		●	
2SE	高硬 2 刃铣刀 SUPER HARD End Mills Two Flutes	E-19	E-50	2	中长刃 Medium	$\phi 1 \sim \phi 50$	—		●□	
2RSE	高硬 2 刃标准柄铣刀 SUPER HARD End Mills Regular Shank Two Flutes	E-20	E-50	2	中长刃 Medium	$\phi 4 \sim \phi 18$	—		●	
SL2SGE	SG-FAX 2 刃加长刃铣刀 SG-FAX End Mills Long Two Flutes	E-21	E-51	2	长刃 Long	$\phi 3 \sim \phi 30$	SG		●	
2AGEL	AG 2 刃长柄铣刀 AG-mill Two Flutes Long	E-21	E-51	2	长刃 Long	$\phi 3 \sim \phi 40$	AG		●	
SL2GE	G 2 刃加长铣刀 G End Mills Long Two Flutes	E-22	E-51	2	长刃 Long	$\phi 3 \sim \phi 40$	G		●	
SL2SE	高硬 2 刃加长铣刀 SUPER HARD End Mills Long Two Flutes	E-22	E-52	2	长刃 Long	$\phi 3 \sim \phi 40$	—		●	
RSL2SE	高硬 2 刃标准柄加长铣刀 SUPER HARD End Mills Regular Shank Long Two Flutes	E-23	E-52	2	长刃 Long	$\phi 4 \sim \phi 18$	—		●	
3GE	G 3 刃铣刀 G End Mills Standard Three Flutes	E-23	E-52	3	短刃 Short	$\phi 3 \sim \phi 40$	G		●	
3NAC	NATAC 3 刃铣刀 NATAC End Mills Three Flutes	E-24	E-52	3	短刃 Short	$\phi 3 \sim \phi 20$	—		●	
4SGE	SG-FAX 4 刃铣刀 SG-FAX End Mills Four Flutes	E-24	E-53	4	中长刃 Medium	$\phi 3 \sim \phi 30$	SG		●	
4AGE	AG 4 刃铣刀 AG-mill Four Flutes	E-25	E-53	4	中长刃 Medium	$\phi 25 \sim \phi 50$	AG		●	
4GE	G 4 刃铣刀 G End Mills Standard Four Flutes	E-26	E-53	4	中长刃 Medium	$\phi 25 \sim \phi 50$	G		●	
4NAC	NATAC 4 刃铣刀 NATAC End Mills Four Flutes	E-27	E-54	4	中长刃 Medium	$\phi 21 \sim \phi 20$	—		●□	
4SE	高硬 4 刃铣刀 SUPER HARD End Mills Four Flutes	E-29	E-54	4	中长刃 Medium	$\phi 25 \sim \phi 50$	—		●□	
4RSE	高硬 4 刃标准柄铣刀 SUPER HARD End Mills Regular Shank Four Flutes	E-30	E-54	4	中长刃 Medium	$\phi 4 \sim \phi 18$	—		●	
SL4SGE	SG-FAX 4 刃加长铣刀 SG-FAX End Mills Long Four Flutes	E-30	E-54	4	长刃 Long	$\phi 3 \sim \phi 30$	SG		●	
4AGEL	AG 4 刃加长铣刀 AG-mill Four Flutes Long	E-31	E-55	4	长刃 Long	$\phi 3 \sim \phi 40$	AG		●	
SL4GE	G 4 刃加长铣刀 G End Mills Long Four Flutes	E-31	E-55	4	长刃 Long	$\phi 3 \sim \phi 40$	G		●	
SL4SE	高硬 4 刃加长铣刀 SUPER HARD End Mills Long Four Flutes	E-32	E-55	4	长刃 Long	$\phi 3 \sim \phi 40$	—		●	
RSL4SE	高硬 4 刃标准柄加长铣刀 SUPER HARD End Mills Regular Shank Long Four Flutes	E-32	E-55	4	长刃 Long	$\phi 4 \sim \phi 18$	—		●	
SGFRERS	SG-FAX 粗铣刀短刃型 SG-FAX Roughing End Mills Regular Length Short	E-33	E-56	3~6	短刃 Short	$\phi 6 \sim \phi 50$	SG	粗加工 Roughing	●	

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

商品照片 Product Photography	一般结构用钢 Structural Steel	被削材 Work Materials											石墨 Graphite		
		碳钢 Carbon Steel	合金钢 Alloy Steel	预硬钢 Pre-Hardened Steel	调质钢・模具钢 Heat Treated Steel / Mold Steel	高硬度钢 Hardened Steel			不锈钢 Stainless Steel	钛合金・耐热合金 Titanium Alloy / Heat Resistant Alloy	铸铁 Cast Iron	铝合金 Aluminum Alloy		铜合金 Copper Alloy	
						SS400	S45C S50C	SCM SCR							NAK
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		○	○	○	○	○	×	×	×	○	○	○	○	○	—
		○	○	○	○	○	×	×	×	○	○	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		—	—	×	×	×	×	×	×	×	×	◎	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		○	○	○	○	○	×	×	×	○	○	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	—	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	—	○	○	○	—
		○	○	○	○	○	×	×	×	○	—	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		○	○	○	○	○	×	×	×	○	○	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		○	○	○	○	○	×	×	×	○	○	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	—	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	—	○	○	○	—
		○	○	○	○	○	×	×	×	○	—	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		○	○	○	○	—	×	×	×	○	—	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

各类被削材选型基准表





Selection Chart According to Work Materials

高速钢立铣刀

HSS End Mills

	商品编码 Code	品名 Product Name	刊载页数 Page		刃数 No. of Flutes	刃长・种类 Length of Cut	尺寸 Size	表面 处理 Coating	用途・特征 Application Merit	库存 Stock	
			尺寸表 Size List	切削条件 Cutting Condition							
新商品	SGFRE	SG-FAX 粗铣刀短型 SG-FAX Roughing End Mills Short With Neck	E-33	E-56	3~6	短刃 Short	$\phi 6 \sim \phi 50$	SG	粗加工 Roughing	●	
硬质合金钻头	AGRERS	AG 粗铣刀标准型 AG-mill Roughing Regular Length Short	E-34	E-56	4~6	短刃 Short	$\phi 6 \sim \phi 50$	AG	粗加工 Roughing	●□	
	AGRES	AG 粗铣刀短刃型 AG-mill Roughing Short	E-34	E-56	4~6	短刃 Short	$\phi 6 \sim \phi 50$	AG	粗加工 Roughing	●□	
高速钢钻头	SRE	高速钢粗铣刀短型 Roughing End Mills Short	E-35	E-57	4~6	短刃 Short	$\phi 6 \sim \phi 50$	—	粗加工 Roughing	●	
	SGFREM	SG-FAX 粗铣刀中等刃长型 SG-FAX Roughing End Mills Medium With Neck	E-35	E-57	3~6	中长刃 Medium	$\phi 6 \sim \phi 50$	SG	粗加工 Roughing	●	
	SGLREM	SG-FAX 粗铣刀大齿距中等刃长型 SG-FAX Roughing End Mills Large Pitch Medium	E-36	E-57	3~6	中长刃 Medium	$\phi 6 \sim \phi 50$	SG	粗加工 Roughing	●	
	AGREM	AG 粗铣中等刃长型 AG-mill Roughing Medium	E-36	E-57	4~6	中长刃 Medium	$\phi 6 \sim \phi 50$	AG	粗加工 Roughing	●□	
丝锥	MRE	粗铣刀中等刃长型 Roughing End Mills Medium	E-37	E-58	4~6	中长刃 Medium	$\phi 6 \sim \phi 50$	—	粗加工 Roughing	●	
	SGFREL	SG-FAX 粗铣刀加长刃型 SG-FAX Roughing End Mills Long	E-37	E-58	3~6	长刃 Long	$\phi 6 \sim \phi 50$	SG	粗加工 Roughing	●	
	AGREL	AG 粗铣刀长刃型 AG-mill Roughing Long	E-38	E-58	4~6	长刃 Long	$\phi 6 \sim \phi 50$	AG	粗加工 Roughing	●	
硬质合金立铣刀	LRE	粗铣刀加长刃型 Roughing End Mills Long	E-38	E-59	4~6	长刃 Long	$\phi 12 \sim \phi 50$	—	粗加工 Roughing	●	
	SGFREX	SG-FAX 粗铣刀长柄 SX 型 SG-FAX Roughing End Mills Long Shank SX Type	E-39	E-59	4~6	长柄 Long Shank	$\phi 16 \sim \phi 50$	SG	粗加工 Roughing	●	
	SGFREU	SG-FAX 粗铣刀长柄 SLX 型 SG-FAX Roughing End Mills Long Shank SLX Type	E-39	E-59	4~6	长柄 Long Shank	$\phi 16 \sim \phi 50$	SG	粗加工 Roughing	●	
高速钢立铣刀	AGREX	AG 粗铣刀长柄 SX 型 AG-mill Roughing Long Shank SX Type	E-39	E-59	4~6	长柄 Long Shank	$\phi 10 \sim \phi 50$	AG	粗加工 Roughing	□	
	AGREU	AG 粗铣刀长柄 SLX 型 AG-mill Roughing Long Shank SLX Type	E-39	E-59	4~6	长柄 Long Shank	$\phi 10 \sim \phi 50$	AG	粗加工 Roughing	□	
	SGHV	SG-FAX 重切铣刀 SG-FAX HEAVY End Mills	E-40	E-60	4, 6	中长刃 Medium	$\phi 3 \sim \phi 50$	SG	半精加工 Semi-Finishing	●	
切削工具	AGHV	AG 重切铣刀 AG-mill HEAVY	E-40	E-60	4, 6	中长刃 Medium	$\phi 3 \sim \phi 50$	AG	半精加工 Semi-Finishing	●	
	HV	重切削 HEAVY End Mills	E-41	E-60	4, 6	中长刃 Medium	$\phi 3 \sim \phi 50$	—	半精加工 Semi-Finishing	●□	
	SGLHV	SG-FAX 重切铣刀长刃型 SG-FAX HEAVY End Mills Long	E-42	E-61	4, 6	长刃 Long	$\phi 3 \sim \phi 50$	SG	半精加工 Semi-Finishing	●	
	AGLHV	AG 铣刀重切长刃型 AG-mill HEAVY Long	E-42	E-61	4, 6	长刃 Long	$\phi 3 \sim \phi 50$	AG	半精加工 Semi-Finishing	●	
套装商品 其它	SLHV	重切削 长刃型 HEAVY End Mills Long	E-43	E-61	4, 6	长刃 Long	$\phi 3 \sim \phi 50$	—	半精加工 Semi-Finishing	●□	
	SGELHV	SG-FAX 重切铣刀加长刃型 SG-FAX HEAVY End Mills Extra Long	E-43	E-62	4, 6	长刃 Long	$\phi 15 \sim \phi 50$	SG	半精加工 Semi-Finishing	□	
	AGELHV	AG 铣刀重切加长刃型 AG-mill HEAVY Extra Long	E-44	E-62	4, 6	长刃 Long	$\phi 3 \sim \phi 50$	AG	半精加工 Semi-Finishing	□	
精密工具	ELHV	重切削 加长刃型 HEAVY End Mills Extra Long	E-44	E-62	4, 6	长刃 Long	$\phi 15 \sim \phi 60$	—	半精加工 Semi-Finishing	□	
	AGRERS-R	AG 粗铣刀圆角型 AG-mill Roughing Radius	E-45	E-56	4, 5	短刃 Short	$\phi 6 \sim \phi 25$	AG	粗加工、圆角型 Roughing, Radius	●	
	AGREX-R	AG 粗铣刀长柄带圆角 SX 型 AG-mill Roughing Long Shank Radius SX Type	E-45	E-59	4~6	长柄 Long Shank	$\phi 10 \sim \phi 50$	AG	粗加工、圆角型 Roughing, Radius	□	
	AGREU-R	AG 粗铣刀长柄带圆角 SLX 型 AG-mill Roughing Long Shank Radius SLX Type	E-46	E-59	4~6	长柄 Long Shank	$\phi 10 \sim \phi 50$	AG	粗加工、圆角型 Roughing, Radius	□	
技术资料 索引	2AGRE	AG 球头铣刀 AG-mill Ball	E-46	E-63	2	短刃 Short	RE0.5~RE12.5	AG	球头型 Ball	●	
	RE	球头铣刀 2 刃型 Ball End Mills Two Flutes	E-47	E-63	2	短刃 Short	RE0.75~RE20	—	球头型 Ball	○	
	SGFRR	SG-FAX 粗铣刀球头型 SG-FAX Roughing Ball End Mills Fine Pitch	E-47	E-63	4, 6	短刃 Short	RE5~RE25	SG	粗加工、球头 Roughing, Ball	○	

◎：优选 Excellent ○：适用 Good ×：不适用 Not Used —：不推荐 Not recommended

	商品照片 Product Photography	被削材 Work Materials													
		一般 结构用 钢	碳 钢	合金 钢	预硬 钢	调质 钢・模 具钢	高 硬 度 钢			不 锈 钢	钛 合 金・耐 热 合 金	铸 铁	铝 合 金	铜 合 金	石 墨
							30~45 HRC	45~55 HRC	55~60 HRC						
		SS400	S45C S50C	SCM SCR	NAK	30~45 HRC	45~55 HRC	55~60 HRC	60~66 HRC	SUS304 SUS316		FC FCD	Al AC ADC	Cu	
		○	○	○	○	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		○	○	○	○	—	×	×	×	—	—	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—
		◎	◎	◎	◎	○	×	×	×	◎	○	○	○	○	—

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 可以对从普通钢到不锈钢以及铝，进行高速、高效率加工。

This end mill is suitable for high-feed grooving of workpiece material from Steel and Stainless Steel to Aluminum.



LIST 7472P

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2SGE1	1.0	2.0	50	6	
2SGE1.1	1.1	2.5			
2SGE1.2	1.2	3.0			
2SGE1.3	1.3				
2SGE1.4	1.4				
2SGE1.5	1.5	3.5			
2SGE1.6	1.6				
2SGE1.7	1.7				
2SGE1.8	1.8	4.0			
2SGE1.9	1.9				
2SGE2	2.0				
2SGE2.1	2.1	4.5			
2SGE2.2	2.2	5.0			
2SGE2.3	2.3				
2SGE2.4	2.4				
2SGE2.5	2.5	5.5			
2SGE2.6	2.6				
2SGE2.7	2.7				
2SGE2.8	2.8	6.0			
2SGE2.9	2.9				
2SGE3	3.0				
2SGE3.1	3.1				
2SGE3.2	3.2				
2SGE3.3	3.3	7.0			
2SGE3.4	3.4				
2SGE3.5	3.5				
2SGE3.6	3.6	8.0			
2SGE3.7	3.7				
2SGE3.8	3.8				
2SGE3.9	3.9				
2SGE4	4.0				
2SGE4.1	4.1		9.0		
2SGE4.2	4.2				
2SGE4.3	4.3				
2SGE4.4	4.4	10.0			
2SGE4.5	4.5				
2SGE4.6	4.6				
2SGE4.7	4.7				
2SGE4.8	4.8				
2SGE4.9	4.9				
2SGE5	5.0	12.0			
2SGE5.1	5.1				
2SGE5.2	5.2				
2SGE5.3	5.3				
2SGE5.4	5.4				
2SGE5.5	5.5				
2SGE5.6	5.6				
2SGE5.7	5.7				
2SGE5.8	5.8				
2SGE5.9	5.9				
2SGE6	6.0	14.0			
2SGE6.1	6.1				
2SGE6.2	6.2				
2SGE6.3	6.3				
2SGE6.4	6.4				
2SGE6.5	6.5				
2SGE6.6	6.6				
2SGE6.7	6.7				
2SGE6.8	6.8				
2SGE6.9	6.9				

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2SGE7	7.0	14.0	65	10	●
2SGE7.1	7.1				
2SGE7.2	7.2				
2SGE7.3	7.3				
2SGE7.4	7.4				
2SGE7.5	7.5				
2SGE7.6	7.6				
2SGE7.7	7.7				
2SGE7.8	7.8				
2SGE7.9	7.9				
2SGE8	8.0	18.0	75	12	●
2SGE8.1	8.1				
2SGE8.2	8.2				
2SGE8.3	8.3				
2SGE8.4	8.4				
2SGE8.5	8.5				
2SGE8.6	8.6				
2SGE8.7	8.7				
2SGE8.8	8.8				
2SGE8.9	8.9				
2SGE9	9.0	22.0	80	16	●
2SGE9.1	9.1				
2SGE9.2	9.2				
2SGE9.3	9.3				
2SGE9.4	9.4				
2SGE9.5	9.5				
2SGE9.6	9.6				
2SGE9.7	9.7				
2SGE9.8	9.8				
2SGE9.9	9.9				
2SGE10	10.0	26.0	90	16	●
2SGE10.1	10.1				
2SGE10.2	10.2				
2SGE10.3	10.3				
2SGE10.4	10.4				
2SGE10.5	10.5				
2SGE10.6	10.6				
2SGE10.7	10.7				
2SGE10.8	10.8				
2SGE10.9	10.9				
2SGE11	11.0	26.0	90	16	●
2SGE11.1	11.1				
2SGE11.2	11.2				
2SGE11.3	11.3				
2SGE11.4	11.4				
2SGE11.5	11.5				
2SGE11.6	11.6				
2SGE11.7	11.7				
2SGE11.8	11.8				
2SGE11.9	11.9				
2SGE12	12.0	26.0	90	16	●
2SGE12.1	12.1				
2SGE12.2	12.2				
2SGE12.3	12.3				
2SGE12.4	12.4				
2SGE12.5	12.5				
2SGE12.6	12.6				
2SGE12.7	12.7				
2SGE12.8	12.8				
2SGE12.9	12.9				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock			
2SGE13	13.0	26.0	90	16	●			
2SGE13.5	13.5				□			
2SGE14	14.0				●			
2SGE14.5	14.5	30.0	95		□			
2SGE15	15.0				●			
2SGE15.5	15.5				□			
2SGE16	16.0	35.0	105	20	●			
2SGE16.5	16.5				□			
2SGE17	17.0				●			
2SGE17.5	17.5	40.0	110		□			
2SGE18	18.0				●			
2SGE18.5	18.5				□			
2SGE19	19.0	45.0	125	25	●			
2SGE19.5	19.5				□			
2SGE20	20.0				●			
2SGE21	21.0	50.0	130					
2SGE22	22.0							
2SGE23	23.0							
2SGE24	24.0	55.0	135					
2SGE25	25.0							
2SGE26	26.0							
2SGE27	27.0	60.0	145	32	□			
2SGE28	28.0							
2SGE29	29.0							
2SGE30	30.0	65.0	150					
2SGE31	31.0							
2SGE32	32.0							
2SGE33	33.0	70.0	160					
2SGE34	34.0							
2SGE35	35.0							
2SGE36	36.0	70.0	160	42				
2SGE37	37.0							
2SGE38	38.0							
2SGE39	39.0	70.0	160					
2SGE40	40.0							
2SGE42 × 32	42.0			42				
2SGE42 × 42	70.0	160	32					
2SGE45 × 32			42					
2SGE45 × 42			45.0			32		
2SGE48 × 32						42		
2SGE48 × 42	70.0	160	32					
2SGE50 × 32			50.0			42		
2SGE50 × 42						42		


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ -0.020
10	30	0 ~ -0.025
30		0 ~ -0.030

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	◎	○	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

- 可以对从普通钢到不锈钢以及铝，进行高速、高效率加工。

This end mill is suitable for high-feed grooving of workpiece material from Steel and Stainless Steel to Aluminum.



LIST 6490

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2AGE1	1.0	2.0	50	6	
2AGE1.1	1.1	2.5			
2AGE1.2	1.2	3.0			
2AGE1.3	1.3				
2AGE1.4	1.4				
2AGE1.5	1.5	3.5			
2AGE1.6	1.6				
2AGE1.7	1.7	4.0			
2AGE1.8	1.8				
2AGE1.9	1.9				
2AGE2	2.0	4.5			
2AGE2.1	2.1				
2AGE2.2	2.2	5.0			
2AGE2.3	2.3				
2AGE2.4	2.4				
2AGE2.5	2.5	5.5			
2AGE2.6	2.6				
2AGE2.7	2.7	6.0			
2AGE2.8	2.8				
2AGE2.9	2.9				
2AGE3	3.0	6.5			
2AGE3.1	3.1				
2AGE3.2	3.2	7.0			
2AGE3.3	3.3				
2AGE3.4	3.4				
2AGE3.5	3.5	8.0			
2AGE3.6	3.6				
2AGE3.7	3.7				
2AGE3.8	3.8				
2AGE3.9	3.9				
2AGE4	4.0		9.0		
2AGE4.1	4.1				
2AGE4.2	4.2				
2AGE4.3	4.3				
2AGE4.4	4.4				
2AGE4.5	4.5	10.0			
2AGE4.6	4.6				
2AGE4.7	4.7				
2AGE4.8	4.8				
2AGE4.9	4.9				
2AGE5	5.0	12.0			
2AGE5.1	5.1				
2AGE5.2	5.2				
2AGE5.3	5.3				
2AGE5.4	5.4				
2AGE5.5	5.5				
2AGE5.6	5.6				
2AGE5.7	5.7				
2AGE5.8	5.8				
2AGE5.9	5.9				
2AGE6	6.0	14.0			
2AGE6.1	6.1				
2AGE6.2	6.2				
2AGE6.3	6.3				
2AGE6.4	6.4				
2AGE6.5	6.5				
2AGE6.6	6.6				
2AGE6.7	6.7				
2AGE6.8	6.8				
2AGE6.9	6.9				

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2AGE7	7.0	14.0	65	10	
2AGE7.1	7.1				
2AGE7.2	7.2				
2AGE7.3	7.3				
2AGE7.4	7.4				
2AGE7.5	7.5				
2AGE7.6	7.6				
2AGE7.7	7.7				
2AGE7.8	7.8				
2AGE7.9	7.9				
2AGE8	8.0	18.0	70	12	
2AGE8.1	8.1				
2AGE8.2	8.2				
2AGE8.3	8.3				
2AGE8.4	8.4				
2AGE8.5	8.5				
2AGE8.6	8.6				
2AGE8.7	8.7				
2AGE8.8	8.8				
2AGE8.9	8.9				
2AGE9	9.0	22.0	80	16	
2AGE9.1	9.1				
2AGE9.2	9.2				
2AGE9.3	9.3				
2AGE9.4	9.4				
2AGE9.5	9.5				
2AGE9.6	9.6				
2AGE9.7	9.7				
2AGE9.8	9.8				
2AGE9.9	9.9				
2AGE10	10.0	26.0	90		
2AGE10.1	10.1				
2AGE10.2	10.2				
2AGE10.3	10.3				
2AGE10.4	10.4				
2AGE10.5	10.5				
2AGE10.6	10.6				
2AGE10.7	10.7				
2AGE10.8	10.8				
2AGE10.9	10.9				
2AGE11	11.0	26.0	90		
2AGE11.1	11.1				
2AGE11.2	11.2				
2AGE11.3	11.3				
2AGE11.4	11.4				
2AGE11.5	11.5				
2AGE11.6	11.6				
2AGE11.7	11.7				
2AGE11.8	11.8				
2AGE11.9	11.9				
2AGE12	12.0	26.0	90		
2AGE12.1	12.1				
2AGE12.2	12.2				
2AGE12.3	12.3				
2AGE12.4	12.4				
2AGE12.5	12.5				
2AGE12.6	12.6				
2AGE12.7	12.7				
2AGE12.8	12.8				
2AGE12.9	12.9				

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2AGE13	13.0	26.0	90	16	●
2AGE13.5	13.5				
2AGE14	14.0				
2AGE14.5	14.5				
2AGE15	15.0	30.0	95		
2AGE15.5	15.5				
2AGE16	16.0				
2AGE16.5	16.5	35.0	105		
2AGE17	17.0				
2AGE17.5	17.5				
2AGE18	18.0	40.0	110		
2AGE18.5	18.5				
2AGE19	19.0				
2AGE19.5	19.5	45.0	120		
2AGE20	20.0				
2AGE21	21.0				
2AGE22	22.0	50.0	125		
2AGE23	23.0				
2AGE24	24.0				
2AGE25	25.0	55.0	125		
2AGE26	26.0				
2AGE27	27.0				
2AGE28	28.0	60.0	145		
2AGE29	29.0				
2AGE30	30.0				
2AGE31	31.0	65.0	150		
2AGE32	32.0				
2AGE33	33.0				
2AGE34	34.0	70.0	155		
2AGE35	35.0				
2AGE36	36.0				
2AGE37	37.0	70.0	160		
2AGE38	38.0				
2AGE39	39.0				
2AGE40	40.0	70.0	160		
2AGE42	42.0				
2AGE42 × 42	42.0				
2AGE45	45.0	70.0	160		
2AGE45 × 42	45.0				
2AGE48	48.0				
2AGE48 × 42	48.0	70.0	160		
2AGE50	50.0				
2AGE50 × 42	50.0				


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
10	10	0 ~ -0.020
31	31	0 ~ -0.025
31		0 ~ -0.030

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	◎	○	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●可用于从普通钢到不锈钢以及铝的泛用涂层立铣刀。

This is general coated end mill for grooving.



LIST 6272P

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2GE1	1.00	2.050	6	●	
2GE1.05	1.05	2.5		□	
2GE1.1	1.10			●	
2GE1.15	1.15			□	
2GE1.2	1.20			●	
2GE1.25	1.25	3.0		□	
2GE1.3	1.30			●	
2GE1.35	1.35			□	
2GE1.4	1.40			●	
2GE1.45	1.45	3.5		□	
2GE1.5	1.50			●	
2GE1.55	1.55			□	
2GE1.6	1.60			●	
2GE1.65	1.65	4.0		□	
2GE1.7	1.70			●	
2GE1.75	1.75			□	
2GE1.8	1.80			●	
2GE1.85	1.85	4.5		□	
2GE1.9	1.90			●	
2GE1.95	1.95			□	
2GE2	2.00			●	
2GE2.05	2.05	5.0		□	
2GE2.1	2.10			●	
2GE2.15	2.15			□	
2GE2.2	2.20			●	
2GE2.25	2.25	5.5		□	
2GE2.3	2.30			●	
2GE2.35	2.35			□	
2GE2.4	2.40			●	
2GE2.45	2.45	6.0		□	
2GE2.5	2.50			●	
2GE2.55	2.55			□	
2GE2.6	2.60			●	
2GE2.65	2.65	6.5		□	
2GE2.7	2.70			●	
2GE2.75	2.75			□	
2GE2.8	2.80			●	
2GE2.85	2.85	7.0		□	
2GE2.9	2.90			●	
2GE2.95	2.95			□	
2GE3	3.00			●	
2GE3.05	3.05	7.5		□	
2GE3.1	3.10			●	
2GE3.15	3.15			□	
2GE3.2	3.20		●		
2GE3.25	3.25	8.0	□		
2GE3.3	3.30		●		
2GE3.35	3.35		□		
2GE3.4	3.40		●		
2GE3.45	3.45	8.5	□		
2GE3.5	3.50		●		
2GE3.55	3.55		□		
2GE3.6	3.60		●		
2GE3.65	3.65	9.0	□		
2GE3.7	3.70		●		
2GE3.75	3.75		□		
2GE3.8	3.80		●		
2GE3.85	3.85	9.5	□		
2GE3.9	3.90		●		
2GE3.95	3.95		□		
2GE4	4.00		●		
2GE4.05	4.05	10.0	□		
2GE4.1	4.10		●		
2GE4.15	4.15		□		
2GE4.2	4.20		●		
2GE4.25	4.25	10.5	□		
2GE4.3	4.30		●		
2GE4.35	4.35		□		
2GE4.4	4.40		●		

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock		
2GE4.3	4.30	10.0	60	8	●		
2GE4.35	4.35				□		
2GE4.4	4.40				●		
2GE4.45	4.45				□		
2GE4.5	4.50				●		
2GE4.55	4.55				□		
2GE4.6	4.60				●		
2GE4.65	4.65				□		
2GE4.7	4.70				●		
2GE4.75	4.75				□		
2GE4.8	4.80				●		
2GE4.85	4.85				□		
2GE4.9	4.90	●					
2GE4.95	4.95	□					
2GE5	5.00	●					
2GE5.05	5.05	□					
2GE5.1	5.10	●					
2GE5.15	5.15	□					
2GE5.2	5.20	●					
2GE5.25	5.25	□					
2GE5.3	5.30	●					
2GE5.35	5.35	□					
2GE5.4	5.40	●					
2GE5.45	5.45	□					
2GE5.5	5.50	●					
2GE5.55	5.55	□					
2GE5.6	5.60	●					
2GE5.65	5.65	□					
2GE5.7	5.70	●					
2GE5.75	5.75	□					
2GE5.8	5.80	●					
2GE5.85	5.85	□					
2GE5.9	5.90	●					
2GE5.95	5.95	□					
2GE6	6.00	14.0			65	10	●
2GE6.05	6.05						□
2GE6.1	6.10		●				
2GE6.15	6.15		□				
2GE6.2	6.20		●				
2GE6.25	6.25		□				
2GE6.3	6.30		●				
2GE6.35	6.35		□				
2GE6.4	6.40		●				
2GE6.45	6.45		□				
2GE6.5	6.50		●				
2GE6.55	6.55		□				
2GE6.6	6.60		●				
2GE6.65	6.65		□				
2GE6.7	6.70		●				
2GE6.75	6.75		□				
2GE6.8	6.80		●				
2GE6.85	6.85		□				
2GE6.9	6.90		●				
2GE6.95	6.95		□				
2GE7	7.00		●				
2GE7.05	7.05		□				
2GE7.1	7.10		●				
2GE7.15	7.15		□				
2GE7.2	7.20	●					
2GE7.25	7.25	□					
2GE7.3	7.30	●					
2GE7.35	7.35	□					
2GE7.4	7.40	●					
2GE7.45	7.45	□					
2GE7.5	7.50	●					
2GE7.55	7.55	□					

单位 (Unit) : mm


商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2GE7.6	7.60	14.0	65		●
2GE7.65	7.65				□
2GE7.7	7.70				●
2GE7.75	7.75				□
2GE7.8	7.80				●
2GE7.85	7.85				□
2GE7.9	7.90				●
2GE7.95	7.95				□
2GE8	8.00				●
2GE8.05	8.05				□
2GE8.1	8.10	18.0	70	10	●
2GE8.15	8.15				□
2GE8.2	8.20				●
2GE8.25	8.25				□
2GE8.3	8.30				●
2GE8.35	8.35				□
2GE8.4	8.40				●
2GE8.45	8.45				□
2GE8.5	8.50				●
2GE8.55	8.55				□
2GE8.6	8.60				●
2GE8.65	8.65				□
2GE8.7	8.70				●
2GE8.75	8.75				□
2GE8.8	8.80				●
2GE8.85	8.85				□
2GE8.9	8.90				●
2GE8.95	8.95				□
2GE9	9.00				●
2GE9.05	9.05				□
2GE9.1	9.10				●
2GE9.15	9.15				□
2GE9.2	9.20				●
2GE9.25	9.25				□
2GE9.3	9.30				●
2GE9.35	9.35				□
2GE9.4	9.40				●
2GE9.45	9.45				□
2GE9.5	9.50				●
2GE9.55	9.55				□
2GE9.6	9.60				●
2GE9.65	9.65				□
2GE9.7	9.70				●
2GE9.75	9.75				□
2GE9.8	9.80				●
2GE9.85	9.85				□
2GE9.9	9.90				●
2GE9.95	9.95				□
2GE10	10.00				□
2GE10.1	10.10	22.0	80	12	●
2GE10.2	10.20				
2GE10.3	10.30				
2GE10.4	10.40				
2GE10.5	10.50				
2GE10.6	10.60				
2GE10.7	10.70				
2GE10.8	10.80				
2GE10.9	10.90				
2GE11	11.00				
2GE11.1	11.10				
2GE11.2	11.20				
2GE11.3	11.30				
2GE11.4	11.40				
2GE11.5	11.50				
2GE11.6	11.60				
2GE11.7	11.70				

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2GE11.8	11.80	22.0	80	12	●
2GE11.9	11.90				
2GE12	12.00				
2GE12.1	12.10	26.0	90	16	
2GE12.2	12.20				
2GE12.3	12.30				
2GE12.4	12.40				
2GE12.5	12.50				
2GE12.6	12.60				
2GE12.7	12.70				
2GE12.8	12.80				
2GE12.9	12.90				
2GE13	13.00				
2GE13.5	13.50				
2GE14	14.00				
2GE14.5	14.50				
2GE15	15.00				
2GE15.5	15.50	35.0	105	20	
2GE16	16.00				
2GE16.5	16.50				
2GE17	17.00				
2GE17.5	17.50				
2GE18	18.00	40.0	110		
2GE18.5	18.50				
2GE19	19.00				
2GE19.5	19.50	45.0			
2GE20	20.00				
2GE21	21.00	50.0	120	25	
2GE22	22.00				
2GE23	23.00				
2GE24	24.00	55.0	125		
2GE25	25.00				
2GE26	26.00				
2GE27	27.00	60.0	145	32	
2GE28	28.00				
2GE29	29.00				
2GE30	30.00	65.0	150		
2GE31	31.00				
2GE32	32.00				
2GE33	33.00				
2GE34	34.00				
2GE35	35.00	70.0	155	32	
2GE36	36.00				
2GE37	37.00				
2GE38	38.00				
2GE39	39.00				
2GE40	40.00		160	42	
2GE42	42.00				
2GE42 × 42	45.00				
2GE45	45.00				
2GE45 × 42	48.00				
2GE48	48.00		165	32	
2GE48 × 42	50.00				
2GE50	50.00				
2GE50 × 42	50.00				
2GE50 × 42	50.00				

外径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
10	30	0 ~ -0.020
30		0 ~ -0.025
		0 ~ -0.030

● 键槽加工用的立铣刀。

This is coated end mill for key way milling.



LIST 6244P

● H 式 H Type

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GHKEY3	3	6	50	6	●
GHKEY4	4	7	60	8	
GHKEY5	5	8			
GHKEY6	6	10		10	
GHKEY7	7				
GHKEY8	8	12	12		
GHKEY9	9				
GHKEY10	10	14		70	
GHKEY11	11	16			
GHKEY12	12				
GHKEY13	13		18	80	
GHKEY14	14				
GHKEY15	15				
GHKEY16	16				
GHKEY18	18	85	20		
GHKEY20	20			20	

● L 式 L Type

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock	
GLKEY3	3	6	50	6	●	
GLKEY4	4	7	60	8		
GLKEY5	5	8		10		
GLKEY6	6	10				
GLKEY7	7	12	70	12	△	
GLKEY8	8			14		
GLKEY9	9	16			12	●
GLKEY10	10		80	16		△
GLKEY11	11				85	20
GLKEY12	12					
GLKEY13	13					
GLKEY14	14					
GLKEY15	15					
GLKEY16	16					
GLKEY18	18					
GLKEY20	20	20				

● K 式 K Type

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
GKKEY3	3	6	50	6	●
GKKEY4	4	7	60	8	
GKKEY5	5	8		10	
GKKEY6	6	10			
GKKEY7	7	12		70	
GKKEY8	8				
GKKEY9	9	16	80	16	
GKKEY10	10				
GKKEY11	11				
GKKEY12	12				
GKKEY13	13	18	85	20	
GKKEY14	14				
GKKEY15	15				
GKKEY16	16				
GKKEY18	18	20			
GKKEY20	20	20			

外径 DC (mm)		公差 Tolerance (mm)			
超过 Above	以下 Up to	H 式 H Type	K 式 K Type	L 式 L Type	L 式 L Type
	10	+0.025 +0.005	0 - 0.02	- 0.02 - 0.04	
10	15	+0.03 +0.01			
15		+0.035 +0.015			

●可用于从普通钢到不锈钢以及铝的泛用立铣刀。

This is general end mill for grooving.



新品

LIST 6272

订货方式 商品编码

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2NAC1	1.0	2.0	50	6	
2NAC1.1	1.1	2.5			
2NAC1.2	1.2	3.0			
2NAC1.3	1.3				
2NAC1.4	1.4				
2NAC1.5	1.5	3.5			
2NAC1.6	1.6				
2NAC1.7	1.7				
2NAC1.8	1.8	4.0			
2NAC1.9	1.9				
2NAC2	2.0				
2NAC2.1	2.1	4.5			
2NAC2.2	2.2				
2NAC2.3	2.3				
2NAC2.4	2.4	5.0			
2NAC2.5	2.5				
2NAC2.6	2.6				
2NAC2.7	2.7	5.5			
2NAC2.8	2.8				
2NAC2.9	2.9				
2NAC3	3.0	6.0			
2NAC3.1	3.1				
2NAC3.2	3.2				
2NAC3.3	3.3	6.5			
2NAC3.4	3.4				
2NAC3.5	3.5				
2NAC3.6	3.6	7.0			
2NAC3.7	3.7				
2NAC3.8	3.8				
2NAC3.9	3.9	8.0			
2NAC4	4.0				
2NAC4.1	4.1				
2NAC4.2	4.2	9.0			
2NAC4.3	4.3				
2NAC4.4	4.4				
2NAC4.5	4.5	10.0			
2NAC4.6	4.6				
2NAC4.7	4.7				
2NAC4.8	4.8	11.0			
2NAC4.9	4.9				
2NAC5	5.0				
2NAC5.1	5.1	12.0			
2NAC5.2	5.2				
2NAC5.3	5.3				
2NAC5.4	5.4	13.0			
2NAC5.5	5.5				
2NAC5.6	5.6				
2NAC5.7	5.7	14.0			
2NAC5.8	5.8				
2NAC5.9	5.9				
2NAC6	6.0	15.0			
2NAC6.1	6.1				
2NAC6.2	6.2				
2NAC6.3	6.3	16.0			
2NAC6.4	6.4				
2NAC6.5	6.5				
2NAC6.6	6.6	17.0			
2NAC6.7	6.7				
2NAC6.8	6.8				
2NAC6.9	6.9	18.0			
		19.0			
		20.0			
		21.0			
		22.0			
		23.0			
		24.0			
		25.0			
		26.0			
		27.0			
		28.0			
		29.0			
		30.0			
		31.0			
		32.0			
		33.0			
		34.0			
		35.0			
		36.0			
		37.0			
		38.0			
		39.0			
		40.0			
		41.0			
		42.0			
		43.0			
		44.0			
		45.0			
		46.0			
		47.0			
		48.0			
		49.0			
		50.0			
		51.0			
		52.0			
		53.0			
		54.0			
		55.0			
		56.0			
		57.0			
		58.0			
		59.0			
		60.0			
		61.0			
		62.0			
		63.0			
		64.0			
		65.0			
		66.0			
		67.0			
		68.0			
		69.0			
		70.0			
		71.0			
		72.0			
		73.0			
		74.0			
		75.0			
		76.0			
		77.0			
		78.0			
		79.0			
		80.0			
		81.0			
		82.0			
		83.0			
		84.0			
		85.0			
		86.0			
		87.0			
		88.0			
		89.0			
		90.0			
		91.0			
		92.0			
		93.0			
		94.0			
		95.0			
		96.0			
		97.0			
		98.0			
		99.0			
		100.0			

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2NAC7	7.0	14.0	65	10	
2NAC7.1	7.1				
2NAC7.2	7.2				
2NAC7.3	7.3				
2NAC7.4	7.4				
2NAC7.5	7.5				
2NAC7.6	7.6				
2NAC7.7	7.7				
2NAC7.8	7.8				
2NAC7.9	7.9				
2NAC8	8.0	18.0	70	12	
2NAC8.1	8.1				
2NAC8.2	8.2				
2NAC8.3	8.3				
2NAC8.4	8.4				
2NAC8.5	8.5				
2NAC8.6	8.6				
2NAC8.7	8.7				
2NAC8.8	8.8				
2NAC8.9	8.9				
2NAC9	9.0	22.0	80	16	
2NAC9.1	9.1				
2NAC9.2	9.2				
2NAC9.3	9.3				
2NAC9.4	9.4				
2NAC9.5	9.5				
2NAC9.6	9.6				
2NAC9.7	9.7				
2NAC9.8	9.8				
2NAC9.9	9.9				
2NAC10	10.0	26.0	90	16	
2NAC10.1	10.1				
2NAC10.2	10.2				
2NAC10.3	10.3				
2NAC10.4	10.4				
2NAC10.5	10.5				
2NAC10.6	10.6				
2NAC10.7	10.7				
2NAC10.8	10.8				
2NAC10.9	10.9				
2NAC11	11.0	30.0	100	16	
2NAC11.1	11.1				
2NAC11.2	11.2				
2NAC11.3	11.3				
2NAC11.4	11.4				
2NAC11.5	11.5				
2NAC11.6	11.6				
2NAC11.7	11.7				
2NAC11.8	11.8				
2NAC11.9	11.9				
2NAC12	12.0	32.0	110	16	
2NAC12.1	12.1				
2NAC12.2	12.2				
2NAC12.3	12.3				
2NAC12.4	12.4				
2NAC12.5	12.5				
2NAC12.6	12.6				
2NAC12.7	12.7				
2NAC12.8	12.8				
2NAC12.9	12.9				

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

新商品

← 上一页 Previous Page

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2NAC13	13.0	26.0	90	16	●
2NAC13.1	13.1				
2NAC13.2	13.2				
2NAC13.3	13.3				
2NAC13.4	13.4				
2NAC13.5	13.5				
2NAC13.6	13.6				
2NAC13.7	13.7				
2NAC13.8	13.8				
2NAC13.9	13.9				
2NAC14	14.0	30.0	95	20	
2NAC14.1	14.1				
2NAC14.2	14.2				
2NAC14.3	14.3				
2NAC14.4	14.4				
2NAC14.5	14.5				
2NAC14.6	14.6				
2NAC14.7	14.7				
2NAC14.8	14.8				
2NAC14.9	14.9				
2NAC15	15.0	35.0	105	20	
2NAC15.1	15.1				
2NAC15.2	15.2				
2NAC15.3	15.3				
2NAC15.4	15.4				
2NAC15.5	15.5				
2NAC15.6	15.6				
2NAC15.7	15.7				
2NAC15.8	15.8				
2NAC15.9	15.9				
2NAC16	16.0	40.0	110	20	
2NAC16.1	16.1				
2NAC16.2	16.2				
2NAC16.3	16.3				
2NAC16.4	16.4				
2NAC16.5	16.5				
2NAC16.6	16.6				
2NAC16.7	16.7				
2NAC16.8	16.8				
2NAC16.9	16.9				
2NAC17	17.0	40.0	110	20	
2NAC17.1	17.1				
2NAC17.2	17.2				
2NAC17.3	17.3				
2NAC17.4	17.4				
2NAC17.5	17.5				
2NAC17.6	17.6				
2NAC17.7	17.7				
2NAC17.8	17.8				
2NAC17.9	17.9				
2NAC18	18.0	40.0	110	20	
2NAC18.1	18.1				
2NAC18.2	18.2				
2NAC18.3	18.3				
2NAC18.4	18.4				
2NAC18.5	18.5				
2NAC18.6	18.6				
2NAC18.7	18.7				
2NAC18.8	18.8				
2NAC18.9	18.9				

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2NAC19	19.0	40.0	110	20	●
2NAC19.1	19.1				
2NAC19.2	19.2				
2NAC19.3	19.3				
2NAC19.4	19.4				
2NAC19.5	19.5				
2NAC19.6	19.6				
2NAC19.7	19.7				
2NAC19.8	19.8				
2NAC19.9	19.9				
2NAC20	20.0	40.0	110	20	●


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ -0.020
10		0 ~ -0.025

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


●铝材用立铣刀。 适用于槽加工。

This end mill is suitable for grooving of Aluminum.



●可以对从普通钢到不锈钢以及铝，进行高速、高效率加工。

This end mill is suitable for high-feed grooving of workpiece material from Steel and Stainless Steel to Aluminum.



LIST 6450

切削条件 Cutting Condition ▶ E-50

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock	
2DLCHE1	1.0	2	50	6	●	
2DLCHE1.5	1.5	3				
2DLCHE2	2.0	4				
2DLCHE2.5	2.5	5				
2DLCHE3	3.0	6				
2DLCHE3.5	3.5	8	60	8		
2DLCHE4	4.0					
2DLCHE4.5	4.5					
2DLCHE5	5.0	10				
2DLCHE5.5	5.5	12				65
2DLCHE6	6.0					
2DLCHE6.5	6.5	14				
2DLCHE7	7.0					
2DLCHE7.5	7.5					
2DLCHE8	8.0	18	70	12		
2DLCHE8.5	8.5					
2DLCHE9	9.0					
2DLCHE9.5	9.5					
2DLCHE10	10.0					
2DLCHE11	11.0	22	80	16		20
2DLCHE12	12.0	26	90			
2DLCHE13	13.0					
2DLCHE14	14.0					
2DLCHE15	15.0	30	95			
2DLCHE16	16.0	35	105			
2DLCHE17	17.0					
2DLCHE18	18.0					
2DLCHE19	19.0	40	110			
2DLCHE20	20.0					

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ 0.020
10		0 ~ 0.025

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
—	—	X	X	X	X	X
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
X	X	X	X	◎	○	—

◎: 优选 Excellent ○: 适用 Good X: 不适用 Not Used —: 不推荐 Not recommended

LIST 7468P

切削条件 Cutting Condition ▶ E-48

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2MSGE1	1.0	3.0	50	6	●
2MSGE1.5	1.5	4.5			
2MSGE2	2.0	7.0			
2MSGE2.5	2.5	9.0			
2MSGE3	3.0	12.0	60	8	
2MSGE3.5	3.5	15.0			
2MSGE4	4.0				
2MSGE4.5	4.5				
2MSGE5	5.0		20.0	65	
2MSGE5.5	5.5				
2MSGE6	6.0				
2MSGE6.5	6.5				
2MSGE7	7.0	25.0	75	12	
2MSGE7.5	7.5				
2MSGE8	8.0				
2MSGE8.5	8.5				
2MSGE9	9.0	30.0	80	16	
2MSGE9.5	9.5				
2MSGE10	10.0				
2MSGE11	11.0				
2MSGE12	12.0	35.0	90	20	
2MSGE13	13.0				
2MSGE14	14.0				
2MSGE15	15.0				
2MSGE16	16.0	40.0	95	25	
2MSGE17	17.0				
2MSGE18	18.0				
2MSGE19	19.0				
2MSGE20	20.0	45.0	110	30	
2MSGE21	21.0				
2MSGE22	22.0				
2MSGE23	23.0				
2MSGE24	24.0	50.0	125	35	
2MSGE25	25.0				
2MSGE26	26.0				
2MSGE27	27.0				
2MSGE28	28.0	55.0	130	40	
2MSGE29	29.0				
2MSGE30	30.0				
2MSGE31	31.0				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ 0.020
10		0 ~ 0.025

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

2AGEM

AG 2 刃中长铣刀

AG-mill Two Flutes Medium

2MGE

G 2 刃中长铣刀




G End Mills Medium Two Flutes

- 可以对从普通钢到不锈钢以及铝，进行高速、高效率加工。

This end mill is suitable for high-feed grooving of workpiece material from Steel and Stainless Steel to Aluminum.

- 泛用涂层立铣刀。

This is general coated end mill.



LIST 6492

切削条件 Cutting Condition ●▶E-48

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2AGEM1	1.0	3.0	50	6	●
2AGEM1.5	1.5	4.5			
2AGEM2	2.0	7.0			
2AGEM2.5	2.5				
2AGEM3	3.0	9.0	60	8	
2AGEM3.5	3.5				
2AGEM4	4.0	12.0			
2AGEM4.5	4.5				
2AGEM5	5.0	15.0	65	10	
2AGEM5.5	5.5				
2AGEM6	6.0	20.0			
2AGEM6.5	6.5				
2AGEM7	7.0		25.0		
2AGEM7.5	7.5				
2AGEM8	8.0	75	12		
2AGEM8.5	8.5				
2AGEM9	9.0			80	
2AGEM9.5	9.5				
2AGEM10	10.0	90			
2AGEM11	11.0				
2AGEM12	12.0		95		
2AGEM13	13.0				
2AGEM14	14.0	105			
2AGEM15	15.0				
2AGEM16	16.0		110		
2AGEM17	17.0				
2AGEM18	18.0				
2AGEM19	19.0				
2AGEM20	20.0	45.0	110	20	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ -0.020
10		0 ~ -0.025

LIST 6230P

切削条件 Cutting Condition ●▶E-49

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2MGE1	1.0	3.0	50	6	●
2MGE1.5	1.5	4.5			
2MGE2	2.0	7.0			
2MGE2.5	2.5	9.0			
2MGE3	3.0				
2MGE3.5	3.5				
2MGE4	4.0	12.0	60	8	
2MGE4.5	4.5				
2MGE5	5.0				
2MGE5.5	5.5				
2MGE6	6.0	15.0	60	8	
2MGE6.5	6.5				
2MGE7	7.0				
2MGE7.5	7.5	20.0	65	10	
2MGE8	8.0				
2MGE8.5	8.5				
2MGE9	9.0	25.0	75	10	
2MGE9.5	9.5				
2MGE10	10.0				
2MGE11	11.0	30.0	80	12	
2MGE12	12.0				
2MGE13	13.0				
2MGE14	14.0	35.0	90	16	
2MGE15	15.0				
2MGE16	16.0				
2MGE17	17.0	40.0	95	16	
2MGE18	18.0				
2MGE19	19.0				
2MGE20	20.0	45.0	110	20	


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ -0.020
10		0 ~ -0.025

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	○	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●可用于从普通钢到不锈钢以及铝的泛用立铣刀。

This is general end mill for grooving.



新商品

LIST 6230

订货方式 商品编码

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2SE1	1.0	2	50	6	
2SE1.5	1.5	3			
2SE2	2.0	7			
2SE2.5	2.5	9			
2SE3	3.0	12	60	8	
2SE3.5	3.5	15			
2SE4	4.0	20			
2SE4.5	4.5	25			
2SE5	5.0	30	65	10	●
2SE5.5	5.5	35			
2SE6	6.0	40			
2SE6.5	6.5	45			
2SE7	7.0	50	75	12	
2SE7.5	7.5	55			
2SE8	8.0	60			
2SE8.5	8.5	65			
2SE9	9.0	70	80	16	
2SE9.5	9.5	75			
2SE10	10.0	80			
2SE11	11.0	85			
2SE12	12.0	90	90	20	●
2SE13	13.0	95			
2SE14	14.0	100			
2SE15	15.0	105			
2SE16	16.0	110	110	25	□
2SE17	17.0	115			
2SE18	18.0	120			
2SE19	19.0	125			
2SE20	20.0	130	120	25	●
2SE20.1	20.1	131			
2SE20.2	20.2	132			
2SE20.3	20.3	133			
2SE20.4	20.4	134	125	55	□
2SE20.5	20.5	135			
2SE20.6	20.6	136			
2SE20.7	20.7	137			
2SE20.8	20.8	138	130	55	□
2SE20.9	20.9	139			
2SE21	21.0	140			
2SE21.1	21.1	141			
2SE21.2	21.2	142	135	55	□
2SE21.3	21.3	143			
2SE21.4	21.4	144			
2SE21.5	21.5	145			
2SE21.6	21.6	146	140	55	□
2SE21.7	21.7	147			
2SE21.8	21.8	148			
2SE21.9	21.9	149			
2SE22	22.0	150	145	55	●
2SE22.1	22.1	151			
2SE22.2	22.2	152			
2SE22.3	22.3	153			
2SE22.4	22.4	154	150	55	□
2SE22.5	22.5	155			
2SE22.6	22.6	156			
2SE22.7	22.7	157			
2SE22.8	22.8	158	155	55	□
2SE22.9	22.9	159			
2SE23	23.0	160			
2SE23.1	23.1	161			

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2SE23.2	23.2	162	120	25	□
2SE23.3	23.3	163			
2SE23.4	23.4	164			
2SE23.5	23.5	165			
2SE23.6	23.6	166	125	55	□
2SE23.7	23.7	167			
2SE23.8	23.8	168			
2SE23.9	23.9	169			
2SE24	24.0	170	130	55	●
2SE24.1	24.1	171			
2SE24.2	24.2	172			
2SE24.3	24.3	173			
2SE24.4	24.4	174	135	55	□
2SE24.5	24.5	175			
2SE24.6	24.6	176			
2SE24.7	24.7	177			
2SE24.8	24.8	178	140	55	□
2SE24.9	24.9	179			
2SE25	25.0	180			
2SE25.1	25.1	181			
2SE25.2	25.2	182	145	55	□
2SE25.3	25.3	183			
2SE25.4	25.4	184			
2SE25.5	25.5	185			
2SE25.6	25.6	186	150	55	□
2SE25.7	25.7	187			
2SE25.8	25.8	188			
2SE25.9	25.9	189			
2SE26	26.0	190	155	55	●
2SE26.1	26.1	191			
2SE26.2	26.2	192			
2SE26.3	26.3	193			
2SE26.4	26.4	194	160	55	□
2SE26.5	26.5	195			
2SE26.6	26.6	196			
2SE26.7	26.7	197			
2SE26.8	26.8	198	165	55	□
2SE26.9	26.9	199			
2SE27	27.0	200			
2SE27.1	27.1	201			
2SE27.2	27.2	202	170	55	□
2SE27.3	27.3	203			
2SE27.4	27.4	204			
2SE27.5	27.5	205			
2SE27.6	27.6	206	175	55	□
2SE27.7	27.7	207			
2SE27.8	27.8	208			
2SE27.9	27.9	209			
2SE28	28.0	210	180	55	●
2SE28.1	28.1	211			
2SE28.2	28.2	212			
2SE28.3	28.3	213			
2SE28.4	28.4	214	185	55	□
2SE28.5	28.5	215			
2SE28.6	28.6	216			
2SE28.7	28.7	217			
2SE28.8	28.8	218	190	55	□
2SE28.9	28.9	219			
2SE29	29.0	220			
2SE29.1	29.1	221			

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

● 泛用立铣刀。

This is general end mill for grooving.



LIST 6204

订货方式 商品编码

切削条件 Cutting Condition ▶ E-50

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2RSE4	4	12	45	6	●
2RSE5	5	15	50		
2RSE6	6				
2RSE7	7	20	60	8	
2RSE8	8				
2RSE9	9	25	70	10	
2RSE10	10				
2RSE13	13	35	85	12	
2RSE14	14				
2RSE17	17	40	95	16	
2RSE18	18				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ 0.020
10	30	0 ~ 0.025
30		0 ~ 0.025

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2SE29.2	29.2	55	125	25	□
2SE29.3	29.3				
2SE29.4	29.4				
2SE29.5	29.5				
2SE29.6	29.6				
2SE29.7	29.7				
2SE29.8	29.8	60	145	32	●
2SE29.9	29.9				
2SE30	30.0				
2SE31	31.0				
2SE32	32.0				
2SE33	33.0				
2SE34	34.0	65	150	32	
2SE35	35.0				
2SE36	36.0				
2SE37	37.0				
2SE38	38.0				
2SE39	39.0				
2SE40	40.0	70	155	42	
2SE42	42.0				
2SE42 × 42	45.0			32	
2SE45			160	42	
2SE45 × 42			155	32	
2SE48	48.0		160	42	
2SE48 × 42			155	32	
2SE50			160	42	
2SE50 × 42	50.0		155	32	
		160	42		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ 0.020
10	30	0 ~ 0.025
30		0 ~ 0.030

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎ : 优选 Excellent ○ : 适用 Good × : 不适用 Not Used — : 不推荐 Not recommended

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30 ~ 45HRC	45 ~ 55HRC	55 ~ 60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60 ~ 66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎ : 优选 Excellent ○ : 适用 Good × : 不适用 Not Used — : 不推荐 Not recommended

2RSE 的外径在 13mm 以上的为小柄型。


SL2SGE

SG-FAX 2 刃加长刃铣刀

SG-FAX End Mills Long Two Flutes

- 可以对从普通钢到不锈钢以及铝进行粗加工。适用于深槽或深位置的槽加工。

This end mill is suitable for grooving of workpiece material from Steel and Stainless Steel to Aluminum.

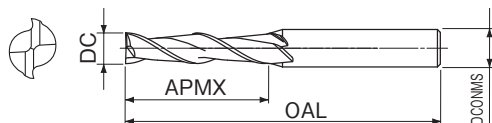

LIST 7464P

切削条件 Cutting Condition ▶▶E-51

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
SL2SGE3	3	15	65	6	●
SL2SGE4	4	20	70	8	
SL2SGE5	5	25	75	10	
SL2SGE6	6	35	95	12	
SL2SGE7	7	45	110	16	
SL2SGE8	8	55	120	20	
SL2SGE9	9	65	135	25	
SL2SGE10	10	75	145	30	
SL2SGE11	11	85	155	32	
SL2SGE12	12	90	160	36	
SL2SGE13	13	95	165	40	
SL2SGE14	14	100	170	45	
SL2SGE15	15	105	175	50	
SL2SGE16	16	110	180	55	
SL2SGE17	17	115	185	60	
SL2SGE18	18	120	190	65	
SL2SGE19	19	125	195	70	
SL2SGE20	20	130	200	75	
SL2SGE21	21	135	205	80	
SL2SGE22	22	140	210	85	
SL2SGE23	23	145	215	90	
SL2SGE24	24	150	220	95	
SL2SGE25	25	155	225	100	
SL2SGE26	26	160	230	105	
SL2SGE27	27	165	235	110	
SL2SGE28	28	170	240	115	
SL2SGE29	29	175	245	120	
SL2SGE30	30	180	250	125	

外径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
10	10	
		0 ~ 0.020
		0 ~ 0.025

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

○: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


2AGEL

AG 2 刃长柄铣刀

AG-mill Two Flutes Long

- 可以对从普通钢到不锈钢以及铝进行粗加工。适用于深槽或深位置的槽加工。

This end mill is suitable for grooving of workpiece material from Steel and Stainless Steel to Aluminum.



LIST 6494

切削条件 Cutting Condition ▶▶E-51

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2AGEL3	3	15	60	6	●
2AGEL4	4	20	65	8	
2AGEL5	5	25	70	10	
2AGEL6	6	35	90	12	
2AGEL7	7	45	105	16	
2AGEL8	8	55	120	20	
2AGEL9	9	65	135	25	
2AGEL10	10	75	145	30	
2AGEL11	11	85	155	32	
2AGEL12	12	90	160	36	
2AGEL13	13	95	165	40	
2AGEL14	14	100	170	45	
2AGEL15	15	105	175	50	
2AGEL16	16	110	180	55	
2AGEL17	17	115	185	60	
2AGEL18	18	120	190	65	
2AGEL19	19	125	195	70	
2AGEL20	20	130	200	75	
2AGEL21	21	135	205	80	
2AGEL22	22	140	210	85	
2AGEL23	23	145	215	90	
2AGEL24	24	150	220	95	
2AGEL25	25	155	225	100	
2AGEL26	26	160	230	105	
2AGEL27	27	165	235	110	
2AGEL28	28	170	240	115	
2AGEL29	29	175	245	120	
2AGEL30	30	180	250	125	
2AGEL31	31	185	255	130	
2AGEL32	32	190	260	135	
2AGEL33	33	195	265	140	
2AGEL34	34	200	270	145	
2AGEL35	35	205	275	150	
2AGEL36	36	210	280	155	
2AGEL37	37	215	285	160	
2AGEL38	38	220	290	165	
2AGEL39	39	225	295	170	
2AGEL40	40	230	300	175	

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

○: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

SL2GE

G 2 刃加长铣刀

G End Mills Long Two Flutes

SL2SE

高硬 2 刃加长铣刀

SUPER HARD End Mills Long Two Flutes

●泛用涂层立铣刀。


适用于深槽或深位置的槽加工。

This is general coated long end mill for deep grooving.

●泛用立铣刀。

适用于深槽或深位置的槽加工。

This is general long end mill for deep grooving.



LIST 6232P

切削条件 Cutting Condition ●●E-51

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
SL2GE3	3	15	60	6	
SL2GE4	4	20	60	8	
SL2GE5	5	25	65	10	
SL2GE6	6	35	80		
SL2GE7	7	45	95	12	
SL2GE8	8	55	105		
SL2GE9	9	65	110	16	
SL2GE10	10	75	120		
SL2GE11	11	85	130	20	
SL2GE12	12	90	140		
SL2GE13	13	95	160	25	
SL2GE14	14	100	170		
SL2GE15	15	105	190	32	
SL2GE16	16	110	210		
SL2GE17	17	115	220	36	
SL2GE18	18	120	230		
SL2GE19	19	125	240	40	
SL2GE20	20	130	250		
SL2GE21	21	135	260	45	
SL2GE22	22	140	270		
SL2GE23	23	145	280	50	
SL2GE24	24	150	290		
SL2GE25	25	155	300	55	
SL2GE26	26	160	310		
SL2GE27	27	165	320	60	
SL2GE28	28	170	330		
SL2GE29	29	175	340	65	
SL2GE30	30	180	350		
SL2GE31	31	185	360	70	
SL2GE32	32	190	370		
SL2GE33	33	195	380	75	
SL2GE34	34	200	390		
SL2GE35	35	205	400	80	
SL2GE36	36	210	410		
SL2GE37	37	215	420	85	
SL2GE38	38	220	430		
SL2GE39	39	225	440	90	
SL2GE40	40	230	450		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
10	30	0 ~ -0.020
30	40	0 ~ -0.025
40	50	0 ~ -0.030

LIST 6232

切削条件 Cutting Condition ●●E-52

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
SL2SE3	3	15	60	6	
SL2SE4	4	20	60	8	
SL2SE5	5	25	65	10	
SL2SE6	6	35	80		
SL2SE7	7	45	95	12	
SL2SE8	8	55	105		
SL2SE9	9	65	110	16	
SL2SE10	10	75	120		
SL2SE11	11	85	130	20	
SL2SE12	12	90	140		
SL2SE13	13	95	160	25	
SL2SE14	14	100	170		
SL2SE15	15	105	190	32	
SL2SE16	16	110	210		
SL2SE17	17	115	220	36	
SL2SE18	18	120	230		
SL2SE19	19	125	240	40	
SL2SE20	20	130	250		
SL2SE21	21	135	260	45	
SL2SE22	22	140	270		
SL2SE23	23	145	280	50	
SL2SE24	24	150	290		
SL2SE25	25	155	300	55	
SL2SE26	26	160	310		
SL2SE27	27	165	320	60	
SL2SE28	28	170	330		
SL2SE29	29	175	340	65	
SL2SE30	30	180	350		
SL2SE31	31	185	360	70	
SL2SE32	32	190	370		
SL2SE33	33	195	380	75	
SL2SE34	34	200	390		
SL2SE35	35	205	400	80	
SL2SE36	36	210	410		
SL2SE37	37	215	420	85	
SL2SE38	38	220	430		
SL2SE39	39	225	440	90	
SL2SE40	40	230	450		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
10	30	0 ~ -0.020
30	40	0 ~ -0.025
40	50	0 ~ -0.030

RSL2SE


高硬 2 刃标准柄加长铣刀

SUPER HARD End Mills Regular Shank Long Two Flutes

● 泛用立铣刀。

适用于深槽或深位置的槽加工。

This is general long end mill for deep grooving.



LIST 6208

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RSL2SE4	4	20	55	6	●
RSL2SE5	5	25	60		
RSL2SE6	6				
RSL2SE7	7	35	75	8	
RSL2SE8	8				
RSL2SE9	9	45	90	10	
RSL2SE10	10				
RSL2SE13	13				
RSL2SE14	14	55	105	12	
RSL2SE17	17				
RSL2SE18	18	65	120	16	

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	0 ~ -0.020
10		0 ~ -0.025

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

RSL2SE 的外径在 13mm 以上的为小柄型。



3GE

G 3 刃铣刀

G End Mills Standard Three Flutes

● 泛用涂层立铣刀。

This is general coated end mill.



LIST 6270P

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock		
3GE3	3.0	6	50	6	●		
3GE3.5	3.5	8	60	8			
3GE4	4.0						
3GE4.5	4.5	10					
3GE5	5.0						
3GE5.5	5.5	12	65	10			
3GE6	6.0						
3GE6.5	6.5	14					
3GE7	7.0						
3GE7.5	7.5	18	70	12			
3GE8	8.0						
3GE8.5	8.5	22				90	16
3GE9	9.0						
3GE9.5	9.5	26	95	20			
3GE10	10.0						
3GE11	11.0	30				105	25
3GE12	12.0						
3GE13	13.0	35	110	32			
3GE14	14.0						
3GE15	15.0	40				120	32
3GE16	16.0						
3GE17	17.0	45	125	32			
3GE18	18.0						
3GE19	19.0	50				145	32
3GE20	20.0						
3GE21	21.0	55	150	32			
3GE22	22.0						
3GE23	23.0	60				150	32
3GE24	24.0						
3GE25	25.0	65	150	32			
3GE26	26.0						
3GE27	27.0	60				150	32
3GE28	28.0						
3GE29	29.0	65	150	32			
3GE30	30.0						
3GE31	31.0	60				150	32
3GE32	32.0						
3GE33	33.0	65	150	32			
3GE34	34.0						
3GE35	35.0	60				150	32
3GE36	36.0						
3GE37	37.0	65	150	32			
3GE38	38.0						
3GE39	39.0	60				150	32
3GE40	40.0						

3GE 外径公差 Tolerance of Mill Dia. : 0 ~ -0.02mm.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具



技术资料
索引

●泛用立铣刀。

This is general end mill.

●可以对从普通钢到不锈钢以及铝，进行高速、高效率加工。适用于侧面加工。

This end mill is suitable for high-feed side milling of workpiece material from Steel and Stainless Steel to Aluminum.



LIST 6270

切削条件 Cutting Condition ▶▶E-52

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
3NAC3	3.0	6	50	6	●
3NAC3.5	3.5	8	60	8	
3NAC4	4.0				
3NAC4.5	4.5				
3NAC5	5.0				
3NAC5.5	5.5				
3NAC6	6.0	12	65	10	
3NAC6.5	6.5				
3NAC7	7.0				
3NAC7.5	7.5				
3NAC8	8.0				
3NAC8.5	8.5	18	70		
3NAC9	9.0				
3NAC9.5	9.5				
3NAC10	10.0				
3NAC11	11.0	22	80	12	
3NAC12	12.0				
3NAC13	13.0				
3NAC14	14.0	26	90	16	
3NAC15	15.0				
3NAC16	16.0				
3NAC17	17.0	35	105	20	
3NAC18	18.0				
3NAC19	19.0				
3NAC20	20.0	40	110		

LIST 7474P

切削条件 Cutting Condition ▶▶E-53

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock		
4SGE3	3.0	9	50	6	●		
4SGE3.5	3.5	12	60	8			
4SGE4	4.0						
4SGE4.5	4.5	15					
4SGE5	5.0						
4SGE5.5	5.5						
4SGE6	6.0						
4SGE6.5	6.5	20	65	10			
4SGE7	7.0						
4SGE7.5	7.5						
4SGE8	8.0						
4SGE8.5	8.5	25				75	12
4SGE9	9.0						
4SGE9.5	9.5						
4SGE10	10.0						
4SGE11	11.0	30	80				
4SGE12	12.0						
4SGE13	13.0	35	90	16			
4SGE14	14.0						
4SGE15	15.0	40	95				
4SGE16	16.0						
4SGE17	17.0						
4SGE18	18.0						
4SGE19	19.0	45	105	20			
4SGE20	20.0						
4SGE21	21.0						
4SGE22	22.0						
4SGE23	23.0	50	130			25	
4SGE24	24.0						
4SGE25	25.0						
4SGE26	26.0						
4SGE27	27.0	55	135				
4SGE28	28.0						
4SGE29	29.0						
4SGE30	30.0						


一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	+ 0.020 ~ 0
10		+ 0.025 ~ 0

- 可以对从普通钢到不锈钢以及铝，进行高速、高效率加工。适用于侧面加工。

This end mill is suitable for high-feed side milling of workpiece material from Steel and Stainless Steel to Aluminum.



LIST 6496

4AGE

订货方式 商品编码

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4AGE2.5	2.5	7	50	6	
4AGE3	3.0	9			
4AGE3.5	3.5	12			
4AGE4	4.0				
4AGE4.5	4.5		60	8	
4AGE5	5.0	15			
4AGE5.5	5.5				
4AGE6	6.0				
4AGE6.5	6.5				
4AGE7	7.0	20	65		
4AGE7.5	7.5				
4AGE8	8.0				
4AGE8.5	8.5		75	10	
4AGE9	9.0	25			
4AGE9.5	9.5				
4AGE10	10.0				
4AGE10.5	10.5				
4AGE11	11.0	30	80	12	
4AGE11.5	11.5				
4AGE12	12.0				
4AGE12.5	12.5		90	16	
4AGE13	13.0	35			
4AGE13.5	13.5				
4AGE14	14.0				
4AGE14.5	14.5		95		
4AGE15	15.0	40			
4AGE15.5	15.5				
4AGE16	16.0				
4AGE16.5	16.5		105		
4AGE17	17.0	45			
4AGE17.5	17.5				
4AGE18	18.0				
4AGE18.5	18.5		110	20	
4AGE19	19.0	45			
4AGE19.5	19.5				
4AGE20	20.0				
4AGE21	21.0				
4AGE22	22.0	50	120		
4AGE23	23.0				
4AGE24	24.0				
4AGE25	25.0				
4AGE26	26.0	55	125		
4AGE27	27.0				
4AGE28	28.0				
4AGE29	29.0				
4AGE30	30.0	60	145		
4AGE31	31.0				
4AGE32	32.0				
4AGE33	33.0				
4AGE34	34.0	65	150		
4AGE35	35.0				
4AGE36	36.0				
4AGE37	37.0				
4AGE38	38.0				
4AGE39	39.0				
4AGE40	40.0				
4AGE42	42.0				
4AGE42 × 42			155	42	
4AGE45	45.0	70		32	
4AGE45 × 42			160	42	

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4AGE48	48.0	70	155	32	●
4AGE48 × 42			160	42	
4AGE50	50.0		155	32	
4AGE50 × 42			160	42	

4AGEPT

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4AGEPT10	10	25	75	10	●
4AGEPT12	12	30	80	12	
4AGEPT16	16	40	95	16	
4AGEPT20	20	45	110	20	
4AGEPT25	25	50	120	25	

外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	4AGE	4AGEPT
	10	0 ~ -0.020	+0.020 ~ 0
10	30	0 ~ -0.025	+0.025 ~ 0
30		0 ~ -0.030	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	○	○	○	○	—

○: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 可用于从普通钢到不锈钢以及铝的泛用涂层立铣刀。
适用于侧面加工。

It's suitable for side milling of workpiece material from Steel and Stainless Steel to Aluminum.



LIST 6274P

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4GE2.5	2.5	7	50	6	●
4GE3	3.0	9			
4GE3.5	3.5	12			
4GE4	4.0		60	8	
4GE4.5	4.5				
4GE5	5.0	15			
4GE5.5	5.5				
4GE6	6.0				
4GE6.5	6.5				
4GE7	7.0	20	65		
4GE7.5	7.5				
4GE8	8.0			10	
4GE8.5	8.5				
4GE9	9.0	25	75		
4GE9.5	9.5				
4GE10	10.0				
4GE10.5	10.5				
4GE11	11.0	30	80	12	
4GE11.5	11.5				
4GE12	12.0				
4GE12.5	12.5	35	90		
4GE13	13.0			16	
4GE13.5	13.5				
4GE14	14.0				
4GE14.5	14.5	40	95		
4GE15	15.0				
4GE15.5	15.5				
4GE16	16.0				
4GE16.5	16.5				
4GE17	17.0		105		
4GE17.5	17.5			20	
4GE18	18.0				
4GE18.5	18.5				
4GE19	19.0				
4GE19.5	19.5	45	110		
4GE20	20.0				
4GE21	21.0				
4GE22	22.0				
4GE23	23.0				
4GE24	24.0	50	120		
4GE25	25.0			25	
4GE26	26.0				
4GE27	27.0				
4GE28	28.0	55	125		
4GE29	29.0				
4GE30	30.0				
4GE31	31.0				
4GE32	32.0				
4GE33	33.0	60	145		
4GE34	34.0			32	
4GE35	35.0				
4GE36	36.0				
4GE37	37.0				
4GE38	38.0	65	150		
4GE39	39.0				
4GE40	40.0				
4GE42					
4GE42 × 42	42.0		155	42	
4GE45				32	
4GE45 × 42	45.0	70	160	42	

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4GE48	48.0	70	155	32	●
4GE48 × 42			160	42	
4GE50	50.0		155	32	
4GE50 × 42			160	42	


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	+ 0.020 ~ 0
10	30	+ 0.025 ~ 0
30		+ 0.030 ~ 0

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	○	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

●泛用立铣刀。
适用于侧面加工。

This is general end mill for side milling.



LIST 6274

订货方式 商品编码

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4NAC2.1	2.1	7	50	6	☐
4NAC2.2	2.2				
4NAC2.3	2.3				
4NAC2.4	2.4				
4NAC2.5	2.5				
4NAC2.6	2.6	9			☐
4NAC2.7	2.7				
4NAC2.8	2.8				
4NAC2.9	2.9				
4NAC3	3.0				
4NAC3.1	3.1	12	60	8	☐
4NAC3.2	3.2				
4NAC3.3	3.3				
4NAC3.4	3.4				
4NAC3.5	3.5				
4NAC3.6	3.6	15			☐
4NAC3.7	3.7				
4NAC3.8	3.8				
4NAC3.9	3.9				
4NAC4	4.0				
4NAC4.1	4.1	20	65	10	☐
4NAC4.2	4.2				
4NAC4.3	4.3				
4NAC4.4	4.4				
4NAC4.5	4.5				
4NAC4.6	4.6	25			☐
4NAC4.7	4.7				
4NAC4.8	4.8				
4NAC4.9	4.9				
4NAC5	5.0				
4NAC5.1	5.1	30	70	12	☐
4NAC5.2	5.2				
4NAC5.3	5.3				
4NAC5.4	5.4				
4NAC5.5	5.5				
4NAC5.6	5.6	35			☐
4NAC5.7	5.7				
4NAC5.8	5.8				
4NAC5.9	5.9				
4NAC6	6.0				
4NAC6.1	6.1	40	75	14	☐
4NAC6.2	6.2				
4NAC6.3	6.3				
4NAC6.4	6.4				
4NAC6.5	6.5				
4NAC6.6	6.6	45			☐
4NAC6.7	6.7				
4NAC6.8	6.8				
4NAC6.9	6.9				
4NAC7	7.0				
4NAC7.1	7.1	50	80	16	☐
4NAC7.2	7.2				
4NAC7.3	7.3				
4NAC7.4	7.4				
4NAC7.5	7.5				
4NAC7.6	7.6	55			☐
4NAC7.7	7.7				
4NAC7.8	7.8				
4NAC7.9	7.9				
4NAC8	8.0				

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4NAC8.1	8.1	25	75	10	☐
4NAC8.2	8.2				
4NAC8.3	8.3				☒
4NAC8.4	8.4				
4NAC8.5	8.5				☒
4NAC8.6	8.6				
4NAC8.7	8.7				☐
4NAC8.8	8.8				
4NAC8.9	8.9				☒
4NAC9	9.0				
4NAC9.1	9.1	30	80	12	☐
4NAC9.2	9.2				
4NAC9.3	9.3				☒
4NAC9.4	9.4				
4NAC9.5	9.5				☐
4NAC9.6	9.6				
4NAC9.7	9.7				☒
4NAC9.8	9.8				
4NAC9.9	9.9				☐
4NAC10	10.0				
4NAC10.1	10.1	35	90	16	☐
4NAC10.2	10.2				
4NAC10.3	10.3				☒
4NAC10.4	10.4				
4NAC10.5	10.5				☒
4NAC10.6	10.6				
4NAC10.7	10.7				☐
4NAC10.8	10.8				
4NAC10.9	10.9				☒
4NAC11	11.0				
4NAC11.1	11.1	40	100	20	☐
4NAC11.2	11.2				
4NAC11.3	11.3				☒
4NAC11.4	11.4				
4NAC11.5	11.5				☐
4NAC11.6	11.6				
4NAC11.7	11.7				☒
4NAC11.8	11.8				
4NAC11.9	11.9				☐
4NAC12	12.0				
4NAC12.1	12.1	45	110	25	☐
4NAC12.2	12.2				
4NAC12.3	12.3				☒
4NAC12.4	12.4				
4NAC12.5	12.5				☐
4NAC12.6	12.6				
4NAC12.7	12.7				☒
4NAC12.8	12.8				
4NAC12.9	12.9				☐
4NAC13	13.0				
4NAC13.1	13.1	50	120	30	☐
4NAC13.2	13.2				
4NAC13.3	13.3				☒
4NAC13.4	13.4				
4NAC13.5	13.5				☐
4NAC13.6	13.6				
4NAC13.7	13.7				☒
4NAC13.8	13.8				
4NAC13.9	13.9				☐
4NAC14	14.0				

新商品

← 上一页 Previous Page

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4NAC14.1	14.1	40	95	16	□
4NAC14.2	14.2				
4NAC14.3	14.3				
4NAC14.4	14.4				
4NAC14.5	14.5				
4NAC14.6	14.6				
4NAC14.7	14.7				
4NAC14.8	14.8				
4NAC14.9	14.9				
4NAC15	15.0				
4NAC15.1	15.1		105	20	●
4NAC15.2	15.2				
4NAC15.3	15.3				
4NAC15.4	15.4				
4NAC15.5	15.5				
4NAC15.6	15.6				
4NAC15.7	15.7				
4NAC15.8	15.8				
4NAC15.9	15.9				
4NAC16	16.0				
4NAC16.1	16.1		110	20	□
4NAC16.2	16.2				
4NAC16.3	16.3				
4NAC16.4	16.4				
4NAC16.5	16.5				
4NAC16.6	16.6				
4NAC16.7	16.7				
4NAC16.8	16.8				
4NAC16.9	16.9				
4NAC17	17.0				
4NAC17.1	17.1	45	110	20	●
4NAC17.2	17.2				
4NAC17.3	17.3				
4NAC17.4	17.4				
4NAC17.5	17.5				
4NAC17.6	17.6				
4NAC17.7	17.7				
4NAC17.8	17.8				
4NAC17.9	17.9				
4NAC18	18.0				
4NAC18.1	18.1	45	110	20	□
4NAC18.2	18.2				
4NAC18.3	18.3				
4NAC18.4	18.4				
4NAC18.5	18.5				
4NAC18.6	18.6				
4NAC18.7	18.7				
4NAC18.8	18.8				
4NAC18.9	18.9				
4NAC19	19.0				
4NAC19.1	19.1	45	110	20	●
4NAC19.2	19.2				
4NAC19.3	19.3				
4NAC19.4	19.4				
4NAC19.5	19.5				
4NAC19.6	19.6				
4NAC19.7	19.7				
4NAC19.8	19.8				
4NAC19.9	19.9				
4NAC20	20.0				

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

- 可用于从普通钢到不锈钢以及铝的泛用立铣刀。适用于侧面加工。

It's suitable for side milling of workpiece material from Steel and Stainless Steel to Aluminum.



LIST 6210

订货方式 商品编码

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4SE2.5	2.5	7	50	6	●
4SE3	3.0	9			
4SE3.5	3.5	12			
4SE4	4.0				●
4SE4.5	4.5	15	60	8	
4SE5	5.0				
4SE5.5	5.5				●
4SE6	6.0	20	65	10	
4SE6.5	6.5				
4SE7	7.0	25	75	10	●
4SE7.5	7.5				
4SE8	8.0				
4SE8.5	8.5	30	80	12	●
4SE9	9.0				
4SE9.5	9.5				
4SE10	10.0	35	90	16	●
4SE11	11.0				
4SE12	12.0				
4SE13	13.0	40	95	16	●
4SE14	14.0				
4SE15	15.0				
4SE16	16.0	45	105	20	●
4SE17	17.0				
4SE18	18.0				
4SE19	19.0	50	110	20	●
4SE20	20.0				
4SE20.5	20.5				
4SE21	21.0	55	120	25	●
4SE21.5	21.5				
4SE22	22.0				
4SE22.5	22.5	60	125	32	●
4SE23	23.0				
4SE23.5	23.5				
4SE24	24.0	65	145	32	●
4SE24.5	24.5				
4SE25	25.0				
4SE25.5	25.5				●
4SE26	26.0				
4SE27	27.0				
4SE28	28.0				●
4SE29	29.0				
4SE30	30.0				
4SE31	31.0				●
4SE32	32.0				
4SE33	33.0				
4SE34	34.0				●
4SE35	35.0				
4SE36	36.0				
4SE37	37.0				●
4SE38	38.0				
4SE39	39.0				
4SE40	40.0				●
4SE42	42.0				
4SE42 × 42					

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock	
4SE45	45.0	70	155	32	●	
4SE45 × 42			160	42		
4SE48	48.0		155	32		
4SE48 × 42			160	42		
4SE50	50.0		155	32		
4SE50 × 42			160	42		

外径 DC (mm)		允差 Tolerance (mm)
超过 Above	以下 Up to	
	10	+ 0.020 ~ 0
10	30	+ 0.025 ~ 0
30		+ 0.030 ~ 0

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

4RSE

高硬 4 刃标准柄铣刀

SUPER HARD End Mills Regular Shank Four Flutes

SL4SGE

SG-FAX 4 刃加长铣刀

SG-FAX End Mills Long Four Flutes



●泛用立铣刀。

适用于侧面加工

This is general end mill for side milling.

●适用于大面积的侧面加工、深位置的侧面加工。

This end mill is suitable for side milling of wide side surface and deep position.

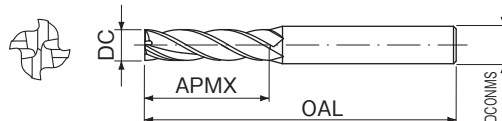

LIST 6202

切削条件 Cutting Condition ▶▶E-54

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4RSE4	4	12	45	6	●
4RSE5	5	15	50		
4RSE6	6				
4RSE7	7	20	60	8	
4RSE8	8				
4RSE9	9	25	70	10	
4RSE10	10				
4RSE13	13	35	85	12	
4RSE14	14				
4RSE17	17	40	95	16	
4RSE18	18				

LIST 7466P

切削条件 Cutting Condition ▶▶E-54

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
SL4SGE3	3	15	65	6	●
SL4SGE4	4	20	70	8	
SL4SGE5	5	25	75		
SL4SGE6	6				
SL4SGE7	7	35	95	10	
SL4SGE8	8				
SL4SGE9	9	45	110		
SL4SGE10	10				
SL4SGE11	11			55	
SL4SGE12	12				
SL4SGE13	13	65	125		
SL4SGE14	14				
SL4SGE15	15			75	
SL4SGE16	16				
SL4SGE17	17	90	145		
SL4SGE18	18				
SL4SGE19	19			180	
SL4SGE20	20				
SL4SGE21	21	75	165		
SL4SGE22	22				
SL4SGE23	23			90	
SL4SGE24	24				
SL4SGE25	25	90	180		
SL4SGE26	26				
SL4SGE27	27			90	
SL4SGE28	28				
SL4SGE29	29	90	180		
SL4SGE30	30				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	+ 0.020 ~ 0
10		+ 0.025 ~ 0


4AGEL

AG 4 刃加长铣刀

AG-mill Four Flutes Long

●适用于大面积的侧面加工、深位置的侧面加工。

This end mill is suitable for side milling of wide side surface and deep position.



LIST 6498

● 4AGEL

订货方式 商品编码

切削条件 Cutting Condition ▶ E-55

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4AGEL3	3	15	60	6	
4AGEL4	4	20		8	
4AGEL5	5	25	65	10	
4AGEL6	6	35	80	12	
4AGEL7	7	45	95	16	
4AGEL8	8	55	105	20	
4AGEL9	9	65	110	25	
4AGEL10	10	75	120	32	
4AGEL11	11	80	130		
4AGEL12	12	90	140		
4AGEL13	13	105	160		
4AGEL14	14	125	210		
4AGEL15	15				
4AGEL16	16				
4AGEL17	17				
4AGEL18	18				
4AGEL19	19				
4AGEL20	20				
4AGEL21	21				
4AGEL22	22				
4AGEL23	23				
4AGEL24	24				
4AGEL25	25				
4AGEL26	26				
4AGEL27	27				
4AGEL28	28				
4AGEL29	29				
4AGEL30	30				
4AGEL31	31				
4AGEL32	32				
4AGEL33	33				
4AGEL34	34				
4AGEL35	35				
4AGEL36	36				
4AGEL37	37				
4AGEL38	38				
4AGEL39	39				
4AGEL40	40				

● 4AGELPT

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
4AGELPT10	10	45	95	10	
4AGELPT12	12	55	105	12	
4AGELPT16	16	65	120	16	
4AGELPT20	20	75	140	20	
4AGELPT25	25	90	160	25	

外径 DC (mm)		公差 Tolerance (mm)	
超过 Above	以下 Up to	4AGEL	4AGELPT
	10	0 ~ -0.020	+0.020 ~ 0
10	30	0 ~ -0.025	+0.025 ~ 0
30		0 ~ -0.030	

SL4GE

G 4 刃加长铣刀


G End Mills Long Four Flutes

●泛用涂层立铣刀。

适用于大面积的侧面加工、深位置的侧面加工。

This is general coated end mill.

It's suitable for side milling of wide side surface and deep position.



LIST 6212P

订货方式 商品编码

切削条件 Cutting Condition ▶ E-55

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
SL4GE3	3	15	60	6	
SL4GE4	4	20		8	
SL4GE5	5	25	65	10	
SL4GE6	6	35	80	12	
SL4GE7	7	45	95	16	
SL4GE8	8	55	105	20	
SL4GE9	9	65	110	25	
SL4GE10	10	75	120	32	
SL4GE11	11	80	130		
SL4GE12	12	90	140		
SL4GE13	13	105	160		
SL4GE14	14	125	210		
SL4GE15	15				
SL4GE16	16				
SL4GE17	17				
SL4GE18	18				
SL4GE19	19				
SL4GE20	20				
SL4GE21	21				
SL4GE22	22				
SL4GE23	23				
SL4GE24	24				
SL4GE25	25				
SL4GE26	26				
SL4GE27	27				
SL4GE28	28				
SL4GE29	29				
SL4GE30	30				
SL4GE31	31				
SL4GE32	32				
SL4GE33	33				
SL4GE34	34				
SL4GE35	35				
SL4GE36	36				
SL4GE37	37				
SL4GE38	38				
SL4GE39	39				
SL4GE40	40				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	+0.020 ~ 0
10	30	+0.025 ~ 0
30		+0.030 ~ 0

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

SL4SE

高硬 4 刃加长铣刀


SUPER HARD End Mills Long Four Flutes

●泛用立铣刀。

适用于大面积的侧面加工、深位置的侧面加工。

This is general end mill.

It's suitable for side milling of wide side surface and deep position.



LIST 6212

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
SL4SE3	3	15	60	6	●
SL4SE4	4	20		8	
SL4SE5	5	25	65		
SL4SE6	6				
SL4SE7	7				
SL4SE8	8	35	80	10	
SL4SE9	9	45	95		
SL4SE10	10				
SL4SE11	11		105	12	
SL4SE12	12	55			
SL4SE13	13		110	16	
SL4SE14	14				
SL4SE15	15		120		
SL4SE16	16	65			
SL4SE17	17		130	20	
SL4SE18	18				
SL4SE19	19	75	140		
SL4SE20	20				
SL4SE21	21				
SL4SE22	22				
SL4SE23	23				
SL4SE24	24	90	160	25	
SL4SE25	25				
SL4SE26	26				
SL4SE27	27				
SL4SE28	28				
SL4SE29	29				
SL4SE30	30				
SL4SE31	31				
SL4SE32	32	105	190	32	
SL4SE33	33				
SL4SE34	34				
SL4SE35	35				
SL4SE36	36				
SL4SE37	37				
SL4SE38	38	125	210		
SL4SE39	39				
SL4SE40	40				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	+ 0.020 ~ 0
10	30	+ 0.025 ~ 0
30		+ 0.030 ~ 0

RSL4SE

高硬 4 刃标准柄加长铣刀


SUPER HARD End Mills Regular Shank Long Four Flutes

●泛用立铣刀。

适用于大面积的侧面加工、深位置的侧面加工。

This is general end mill.

It's suitable for side milling of wide side surface and deep position.



LIST 6206

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RSL4SE4	4	20	55	6	●
RSL4SE5	5	25	60		
RSL4SE6	6				
RSL4SE7	7	35	75	8	
RSL4SE8	8				
RSL4SE9	9	45	90	10	
RSL4SE10	10	55	105	12	
RSL4SE13	13				
RSL4SE14	14				
RSL4SE17	17	65	120	16	
RSL4SE18	18				

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	10	+ 0.020 ~ 0
10		+ 0.025 ~ 0




一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

RSL4SE 的外径在 13mm 以上的为小柄型。

- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。齿部为细齿距。

This end mill is suitable for high-feed rough milling, fine pitch nick is used.



LIST 7310P



订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGFRERS6	6	15	60	6	3	●
SGFRERS7	7	20	65	10		
SGFRERS8	8	25	75			
SGFRERS9	9					
SGFRERS10	10	30	80	12		
SGFRERS11	11					
SGFRERS12	12					
SGFRERS13	13					
SGFRERS14	14	35	90	16		
SGFRERS15	15					
SGFRERS16	16					
SGFRERS17	17	40	95	4		
SGFRERS18	18		105			
SGFRERS19	19					
SGFRERS20	20	45	110	20		
SGFRERS22	22					
SGFRERS24	24	50	120	25		
SGFRERS25	25					
SGFRERS28	28	55	125	5		
SGFRERS30	30		140			
SGFRERS32	32	60	145	32		
SGFRERS35	35					
SGFRERS40	40	65	150	42		
SGFRERS45	45					
SGFRERS50	50					

- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。齿部为细齿距。

This End Mill is suitable for high-feed rough milling, fine pitch nick is used.



LIST 7300P

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGFRE6	6	11	—	—	80	6	3	●
SGFRE7	7	17			90	8		
SGFRE8	8	22			100	10		
SGFRE9	9				26	110		
SGFRE10	10	32	125	16				
SGFRE11	11		38	140		20		
SGFRE12	12			45		160	25	
SGFRE13	13				48	180	32	
SGFRE14	14	53				200	42	
SGFRE15	15		57			220	42	
SGFRE15N	15			63		240	42	
SGFRE16	16				75	260	42	
SGFRE16N	16	88				280	42	
SGFRE17	17		90			300	42	
SGFRE18	18			95		320	42	
SGFRE19	19				100	340	42	
SGFRE20	20	110				360	42	
SGFRE20N	20		120			380	42	
SGFRE22	22			130		400	42	
SGFRE24	24				140	420	42	
SGFRE25	25	150				440	42	
SGFRE25N	25		160			460	42	
SGFRE28	28			170		480	42	
SGFRE30	30				180	500	42	
SGFRE32	32	190				520	42	
SGFRE35	35		200			540	42	
SGFRE40	40			220		560	42	
SGFRE45	45				240	580	42	
SGFRE50	50	260				600	42	
			280			620	42	
				300		640	42	
					320	660	42	
		340				680	42	
			360			700	42	
				380		720	42	
					400	740	42	
		420				760	42	
			440			780	42	
				460		800	42	
					480	820	42	
		500				840	42	
			520			860	42	
				540		880	42	
					560	900	42	
		580				920	42	
			600			940	42	
				620		960	42	
					640	980	42	
		660				1000	42	
			680			1020	42	
				700		1040	42	
					720	1060	42	
		740				1080	42	
			760			1100	42	
				780		1120	42	
					800	1140	42	
		820				1160	42	
			840			1180	42	
				860		1200	42	
					880	1220	42	
		900				1240	42	
			920			1260	42	
				940		1280	42	
					960	1300	42	
		980				1320	42	
			1000			1340	42	
				1020		1360	42	
					1040	1380	42	
		1060				1400	42	
			1080			1420	42	
				1100		1440	42	
					1120	1460	42	
		1140				1480	42	
			1160			1500	42	
				1180		1520	42	
					1200	1540	42	
		1220				1560	42	
			1240			1580	42	
				1260		1600	42	
					1280	1620	42	
		1300				1640	42	
			1320			1660	42	
				1340		1680	42	
					1360	1700	42	
		1380				1720	42	
			1400			1740	42	
				1420		1760	42	
					1440	1780	42	
		1460				1800	42	
			1480			1820	42	
				1500		1840	42	
					1520	1860	42	
		1540				1880	42	
			1560			1900	42	
				1580		1920	42	
					1600	1940	42	
		1620				1960	42	
			1640			1980	42	
				1660		2000	42	
					1680	2020	42	
		1700				2040	42	
			1720			2060	42	
				1740		2080	42	
					1760	2100	42	
		1780				2120	42	
			1800			2140	42	
				1820		2160	42	
					1840	2180	42	
		1860				2200	42	
			1880			2220	42	
				1900		2240	42	
					1920	2260	42	
		1940				2280	42	
			1960			2300	42	
				1980		2320	42	
					2000	2340	42	
		2020				2360	42	
			2040			2380	42	
				2060		2400	42	
					2080	2420	42	
		2100				2440	42	
			2120			2460	42	
				2140		2480	42	
					2160	2500	42	
		2180				2520	42	
			2200			2540	42	
				2220		2560	42	
					2240	2580	42	
		2260				2600	42	
			2280			2620	42	
				2300		2640	42	
					2320	2660	42	
		2340				2680	42	
			2360			2700	42	
				2380		2720	42	
					2400	2740	42	
		2420				2760	42	
			2440			2780	42	
				2460		2800	42	
					2480	2820	42	
		2500				2840	42	
			2520			2860	42	
				2540		2880	42	
					2560	2900	42	
		2580				2920	42	
			2600			2940	42	
				2620		2960	42	
					2640	2980	42	
		2660				3000	42	
			2680			3020	42	
				2700		3040	42	
					2720	3060	42	
		2740				3080	42	
			2760			3100	42	
				2780		3120	42	
					2800	3140	42	
		2820				3160	42	
			2840			3180	42	
				2860		3200	42	
					2880	3220	42	
		2900				3240	42	
			2920			3260	42	
				2940		3280	42	
					2960	3300	42	
		2980				3320	42	
			3000			3340	42	
				3020		3360	42	
					3040	3380	42	
		3060				3400	42	
			3080			3420	42	
				3100		3440	42	
					3120	3460	42	
		3140				3480	42	
			3160			3500	42	
				3180		3520	42	
					3200	3540	42	
		3220				3560	42	
			3240			3580	42	
				3260		3600	42	
					3280	3620	42	
		3300				3640	42	
			3320			3660	42	
				3340		3680	42	
					3360	3700	42	
		3380				3720	42	
			3400			3740	42	
				3420		3760	42	
					3440	3780	42	
		3460				3800	42	
			3480			3820	42	
				3500		3840	42	
					3520	3860	42	
		3540				3880	42	
			3560			3900	42	
				3580		3920	42	
					3600	3940	42	
		3620				3960	42	
			3640			3980	42	
				3660		4000	42	
					3680	4020	42	
		3700				4040	42	
			3720			4060	42	
				3740		4080	42	
					3760	4100	42	
		3780				4120	42	
			3800			4140	42	
				3820		4160	42	
					3840	4180	42	
		3860				4200	42	
			3880			4220	42	
				3900		4240	42	
					3920	4260	42	
		3940				4280	42	
			3960			4300	42	
				3980		4320	42	
					4000	4340	42	
		4020				4360	42	
			4040			4380	42	
				4060		4400	42	
					4080	4420	42	
		4100				4440	42	
			4120			4460	42	
				4140		4480	42	
					4160	4500	42	
		4180				4520	42	
			4200			4540	42	
				4220		4560	42	
					4240	4580	42	
		4260				4600	42	
			4280			4620	42	
				4300		4640	42	
					4320	4660	42	
		4340				4680	42	
			4360			4700	42	
				4380		4720	42	
					4400	4740	42	
		4420				4760	42	
			4440			4780	42	
				4460		4800	42	
					4480	4820	42	
		4500				4840	42	
			4520			4860	42	
				4540		4880	42	
					4560	4900	42	
		4580				4920	42	
			4600			4940	42	
				4620		4960	42	
					4640	4980	42	
		4660				5000	42	
			4680			5020	42	
				4700		5040	42	
					4720	5060	42	
		4740				5080	42	
			4760			5100	42	
				4780		5120	42	
					4800	5140	42	
		4820				5160	42	
			4840			5180	42	
				4860		5200	42	
					4880	5220	42	
		4900				5240	42	
			4920			5260	42	
				4940		5280	42	
					4960	5300	42	
		4980				5320	42	
			5000			5340	42	
				5020		5360	42	
					5040	5380	42	
		5060				5400	42	
			5080			5420	42	
				5100		5440	42	
					5120	5460	42	
		5140				5480	42	
			5160			5500	42	
				5180		5520	42	
					5200	5540	42	
		5220				5560	42	
			5240			5580	42	
				5260		5600	42	
					5280	5620	42	
		5300				5640	42	
			5320			5660	42	
				5340		5680	42	
					5360	5700	42	
		5380				5720	42	
			5400			5740	42	
				5420		5760	42	
					5440	5780	42	
		5460				5800	42	
			5480			5820	42	
				5500		5840	42	
					5520	5860	42	
		5540				5880	42	
			5560			5900	42	
				5580		5920	42	
					5600	5940	42	
		5620				5960	42	
			5640			5980	42	
				5660		6000	42	
					5680	6020	42	
		5700				6040	42	
			5720			6060	42	
				5740		6080	42	
					5760	6100	42	

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
◎	◎	◎	◎	○	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
×	◎	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
◎	◎	◎	◎	○	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
×	◎	○	○	○	○

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used -: 不推荐 Not recommended

SGFRERS 刃尖倒角宽为 外径在 8mm 以下的 : CHW0.5、9mm 以上的 : CHW1.0。外径公差 Tolerance of Mill Dia. : ± 0.1mm。
SGFRE 刃尖倒角宽为 外径在 8mm 以下的 : CHW0.5、9mm 以上的 : CHW1.0。外径公差 Tolerance of Mill Dia. : ± 0.1mm。未标注“颈长”的值的没有颈部退刀槽。刃部和柄部间的距离与柄直径相同。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具



技术资料
索引

- 可以对从普通钢到不锈钢以及铝，进行高速、高效率粗加工。齿部为细齿距。

This end mill is most suitable for high-speed rough milling, fine pitch nick is used.

- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。齿部为细齿距。

This End Mill is suitable for high-feed rough milling, fine pitch nick is used.

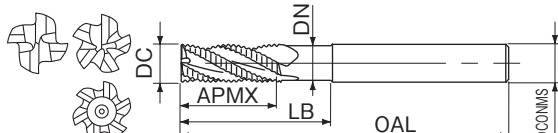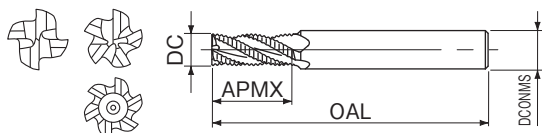

LIST 6484

订货方式 商品编码

切削条件 Cutting Condition E-56

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGRERS6	6	15	60	6	4	●
AGRERS7	7	20	65	7		
AGRERS8	8	25	75	8		
AGRERS9	9			9		
AGRERS10	10	30	80	10	4	●
AGRERS11	11			11		
AGRERS12	12			12		
AGRERS13	13			13		
AGRERS14	14	35	90	14	4	●
AGRERS15	15			15		
AGRERS16	16			16		
AGRERS17	17			17		
AGRERS18	18	40	105	18	4	●
AGRERS20	20			20		
AGRERS22	22			22		
AGRERS24	24			24		
AGRERS25	25	45	110	25	5	●
AGRERS28	28			28		
AGRERS30	30			30		
AGRERS32	32			32		
AGRERS35	35	55	125	35	6	●
AGRERS40	40			40		
AGRERS45	45			45		
AGRERS50	50			50		

LIST 6406

订货方式 商品编码

切削条件 Cutting Condition E-56

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock			
AGRES6	6	11	26	—	80	6	4	●			
AGRES7	7	17			90	8					
AGRES8	8	22			100	10					
AGRES9	9										
AGRES10	10	32	45	13.3	125	16	4	●			
AGRES11	11								—	—	
AGRES12	12								48	14.3	
AGRES13	13								38	60	18.0
AGRES14	14	—	—								
AGRES15	15	45	75	23.0	160	25	5	●			
AGRES16	16								—	—	
AGRES17	17								—	—	
AGRES18	18								53	96	29.5
AGRES20	20	38	60	18.0	140	20					
AGRES22	22						—	—			
AGRES24	24	63	—	—	200	42					
AGRES25	25						45	75	23.0	160	25
AGRES26	26										
AGRES28	28						75	—	—	220	—
AGRES30	30	53	96	29.5	180	32					
AGRES32	32										
AGRES34	34	75	—	—	220	—					

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	◎	○	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	◎	○	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

AGRERS 外径在 32mm 以上 (6 刃型) 的带中心孔。推荐用于普通钢、合金钢的粗加工。
 选购粗加工用圆角型铣刀，请参照 **AGRERS-R(E-45)**。外径公差 Tolerance of Mill Dia. : ± 0.1 mm
AGRES 推荐用于普通钢、合金钢的粗加工。外径公差 Tolerance of Mill Dia. : ± 0.1 mm
 未标注“颈长”的值的没有颈部退刀槽。刃部和柄部间的距离与柄直径相同。


- 可以对从普通钢到铝进行粗加工。齿部为大齿距。

This is general roughing end mill for most workpiece material, large pitch nick is used.

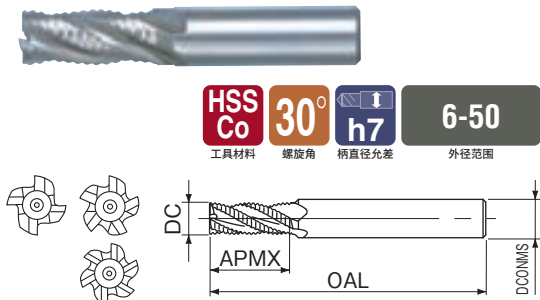

- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。齿部为细齿距。

This end mill is suitable for high-feed rough milling, fine pitch nick is used.

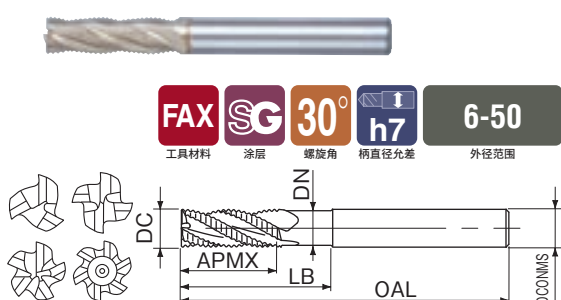

LIST 6302

切削条件 Cutting Condition ▶ E-57

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SRE6	6	15	60	6	4	●
SRE8	8	20	65	10		
SRE10	10	25	75	12		
SRE12	12	30	80	12		
SRE14	14	35	90	16		
SRE15	15		95			
SRE16	16	40	105	20		
SRE18	18		110			
SRE20	20	45	120	25		
SRE22	22		125			
SRE24	24	50	140	32	5	
SRE25	25		145			
SRE28	28	55	155	42	6	
SRE30	30		160			
SRE32	32	60	160	42	6	
SRE35	35		160			
SRE40	40	65	150	42	6	
SRE45	45	70	155	42	6	
SRE50	50	70	160	42	6	

LIST 7302P

切削条件 Cutting Condition ▶ E-57

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGFREM6	6	16	-	-	80	6	3	●
SGFREM8	8	25			90	8		
SGFREM10	10	32			100	10		
SGFREM12	12	40	53	13.3	110	12	4	●
SGFREM14	14				110	12		
SGFREM15	15	48	56	14.3	125	16	4	●
SGFREM15N	15				125	16		
SGFREM16	16	56	70	18.0	140	20	5	●
SGFREM16N	16				140	20		
SGFREM18	18	67	88	23.0	160	25	5	●
SGFREM20	20				160	25		
SGFREM20N	20	80	112	29.5	180	32	6	●
SGFREM22	22				180	32		
SGFREM24	24	95	-	-	200	42	6	●
SGFREM25	25				200	42		
SGFREM25N	25	112	-	-	220	42	6	●
SGFREM28	28				220	42		
SGFREM30	30	112	-	-	220	42	6	●
SGFREM32	32				220	42		
SGFREM35	35	112	-	-	220	42	6	●
SGFREM40	40				220	42		
SGFREM45	45	112	-	-	220	42	6	●
SGFREM50	50				220	42		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	—	—	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

SRE 是无涂层品。

SGFREM 刀尖倒角宽为 外径在 8mm 以下的 :CHW0.5、9mm 以上的 :CHW1.0。外径公差 Tolerance of Mill Dia.: ± 0.1mm。未标注“颈长”的值的没有颈部退刀槽。刃部和柄部间的距离与柄直径相同。

SGLREM

SG-FAX 粗铣刀大齿距中等刃长型

SG-FAX Roughing End Mills Large Pitch Medium

AGREM

AG 粗铣中等刃长型



AG-mill Roughing Medium

- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。齿部为大齿距。

This end mill is suitable for high-feed rough milling, large pitch nick is used.

- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。齿部为细齿距。

This end mill is most suitable for high-speed rough milling, fine pitch nick is used.

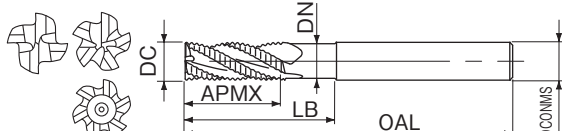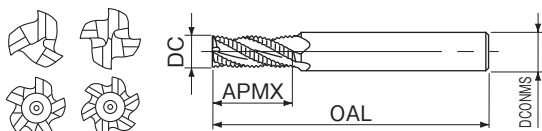

LIST 7314P 切削条件 Cutting Condition ●▶E-57 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGLREM6	6	16	80	6	3	●
SGLREM8	8	25	90	8		
SGLREM10	10	32	100	10		
SGLREM12	12	40	110	12	4	
SGLREM14	14					
SGLREM15	15	48	125	16		
SGLREM16	16					
SGLREM18	18					
SGLREM20	20	56	140	20		
SGLREM22	22					
SGLREM24	24					
SGLREM25	25					
SGLREM28	28	67	160	25		
SGLREM30	30					
SGLREM32	32	80	180	32	5	
SGLREM35	35					
SGLREM40	40					
SGLREM45	45	95	200	42	6	
SGLREM50	50					
		122	220			

LIST 6486 切削条件 Cutting Condition ●▶E-57 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock						
AGREM6	6	16	—	—	80	6	4							
AGREM8	8	25			90	8								
AGREM10	10	32			100	10								
AGREM12	12	40			110	12								
AGREM14	14		53	13.3	125	16								
AGREM15	15		—	—										
AGREM15N	15	—	—											
AGREM16	16	48	56	14.3	140	20	5							
AGREM16N	16		—	—										
AGREM18	18	56	70	18.0	160	25	6							
AGREM20	20		67	—					—	180	32			
AGREM20N	20			88					23.0			200	42	
AGREM22	22			—					—					220
AGREM24	24	80	—	—	200	42								
AGREM25	25		112	29.5				180	32					
AGREM25N	25	95	—	—	200	42								
AGREM28	28		112	—				—	220	42				
AGREM30	30	—		—	200	42								
AGREM32	32	—		—				220				42		
AGREM32N	32	95	—	—					200	42				
AGREM35	35		—	—	200	42								
AGREM40	40	112	—	—				220	42					
AGREM45	45		—	—	220	42								
AGREM50	50	112	—	—				220	42					

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	◎	○	○	○	○	—



◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

●可以对从普通钢到铝进行粗加工。齿部为大齿距。

This is general roughing end mill, large pitch nick is used.

●可以对从普通钢到不锈钢以及铝进行粗加工。齿部为细齿距。

This end mill is suitable for high-feed rough milling, fine pitch nick is used.

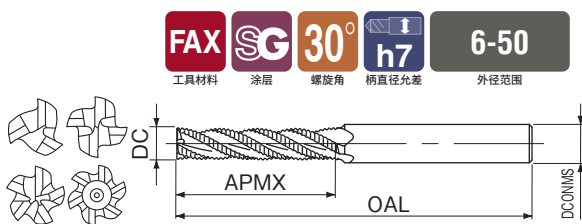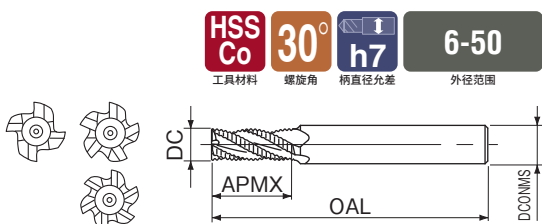

LIST 6304

切削条件 Cutting Condition ▶▶E-58

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
MRE6	6	20	60	6	4	●
MRE8	8	25	75	10		
MRE10	10	35	85	12		
MRE12	12	40	90			
MRE14	14	45	100	16		
MRE15	15					
MRE16	16	50	105	20		
MRE18	18		115			
MRE20	20	55	120	25		
MRE22	22	60				
MRE24	24	70	140	32	5	
MRE25	25					
MRE28	28	80	165	42	6	
MRE30	30					
MRE32	32	90	175	32	5	
MRE35	35	90	175			
MRE40	40	100	185			
MRE45	45	110	195	42	6	
MRE50	50	120	205			

LIST 7304P

切削条件 Cutting Condition ▶▶E-58

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGFREL6	6	26	80	6	3	●
SGFREL8	8	35	90	8		
SGFREL10	10	45	100	10		
SGFREL12	12	53	110	12	4	
SGFREL14	14					
SGFREL15	15	63	125	16		
SGFREL16	16					
SGFREL18	18					
SGFREL20	20	75	140	20	5	
SGFREL22	22					
SGFREL24	24	90	160	25		
SGFREL25	25					
SGFREL28	28	106	180	32	6	
SGFREL30	30					
SGFREL32	32	125	200	42		
SGFREL35	35					
SGFREL40	40	150	230	42		
SGFREL45	45					
SGFREL50	50	150	250	42		

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	—	—	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

MRE 是无涂层品。外径公差 Tolerance of Mill Dia. : ± 0.1mm。

SGFREL 刃尖倒角宽为 外径在 8mm 以下的 : CHW0.5、9mm 以上的 : CHW1.0。外径公差 Tolerance of Mill Dia. : ± 0.1mm。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

- 可以对从普通钢到不锈钢以及铝进行粗加工。齿部为细齿距。

This end mill is most suitable for high-speed rough milling, fine pitch nick is used.

- 可以对从普通钢到铝进行粗加工。齿部为大齿距。

This is general roughing end mill, large pitch nick is used.

新品



硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



LIST 6488

订货方式 商品编码

切削条件 Cutting Condition ●●E-58

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGREL6	6	26	80	6	4	●
AGREL8	8	35	90	8		
AGREL10	10	45	100	10		
AGREL12	12	53	110	12		
AGREL14	14					
AGREL15	15	63	125	16		
AGREL16	16					
AGREL18	18					
AGREL20	20	75	140	20		
AGREL22	22					
AGREL24	24	90	160	25		
AGREL25	25					
AGREL28	28	106	180	32		
AGREL30	30					
AGREL32	32	125	200	42		
AGREL35	35					
AGREL40	40	150	230	42		
AGREL45	45					
AGREL50	50	150	250			

LIST 6306

订货方式 商品编码

切削条件 Cutting Condition ●●E-59

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
LRE12	12	55	105	12	4	●
LRE14	14		110	16		
LRE15	15	65	120			
LRE16	16		130			
LRE18	18	75	140	20		
LRE20	20		160	25		
LRE22	22	90			190	
LRE24	24		115	200		
LRE25	25	125			210	
LRE28	28		130	230		
LRE30	30	140			250	
LRE32	32		42	6		
LRE35	35					
LRE40	40					
LRE45	45					
LRE50	50					

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	—	—	○	○	○	—


◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

SGFREX/SGFREU

SG-FAX 粗铣刀长柄 SX 型 / SLX 型
SG-FAX Roughing End Mills Long Shank SX Type/SLX Type

- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。齿部为细齿距。

This end mill is suitable for high-feed rough milling, fine pitch nick is used.

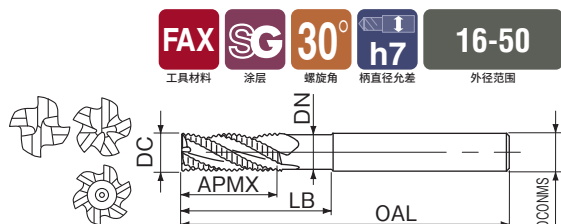

LIST 7306P

● SGFREX

切削条件 Cutting Condition ▶ E-59

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGFREX16	16	32	64	14.3	170	16	4	●
SGFREX20	20	38	80	18.0	195	20		
SGFREX20N	20	38	80	18.0	195	20		
SGFREX25	25	45	100	23.0	210	25		
SGFREX30	30	53	—	—	220	30	5	●
SGFREX35	35	63	—	—	235	35		
SGFREX40	40	75	—	—	250	40		
SGFREX50	50	—	—	—	280	50	6	●
SGFREX50	50	—	—	—	280	50	42	

LIST 7308P

● SGFREU

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGFREU16	16	32	72	14.3	200	16	4	●
SGFREU20	20	38	90	18.0	225	20		
SGFREU25	25	45	113	23.0	250	25		
SGFREU30	30	53	—	—	270	30		
SGFREU35	35	63	—	—	290	35	5	●
SGFREU40	40	75	—	—	310	40		
SGFREU50	50	—	—	—	350	50	6	
SGFREU50	50	—	—	—	350	50	42	●
SGFREU50	50	—	—	—	350	50	42	

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	○	○	○	○	—


○: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

AGREX/AGREU

AG 粗铣刀长柄 SX 型 / SLX 型
AG-mill Roughing Long Shank SX Type/SLX Type

- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。齿部为细齿距。

This end mill is suitable for high-feed rough milling, fine pitch nick is used.

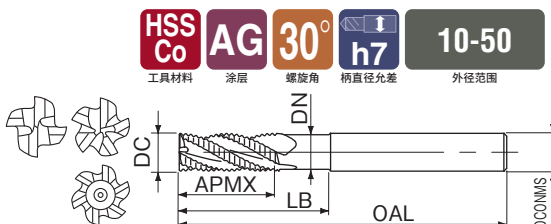

● AGREX

切削条件 Cutting Condition ▶ E-59

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGREX10	10	20	—	—	130	10	4	●
AGREX12	12	24	—	—	150	12		
AGREX16	16	32	64	14.3	170	16		
AGREX18	18	32	80	18.0	195	18		
AGREX20	20	38	—	—	210	20	5	□
AGREX20N	20	38	—	—	210	20		
AGREX22	22	45	100	23.0	220	22		
AGREX25	25	53	128	29.5	235	25	6	□
AGREX28	28	63	—	—	250	28		
AGREX30	30	75	—	—	270	30		
AGREX32	32	—	—	—	290	32		
AGREX35	35	—	—	—	310	35	42	□
AGREX40	40	—	—	—	330	40		
AGREX45	45	—	—	—	350	45	42	□
AGREX50	50	—	—	—	370	50		

● AGREU

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGREU10	10	20	—	—	150	10	4	●
AGREU12	12	24	—	—	175	12		
AGREU16	16	32	72	14.3	200	16		
AGREU18	18	32	90	18.0	225	18		
AGREU20	20	38	—	—	250	20	5	□
AGREU22	22	45	113	23.0	270	22		
AGREU25	25	53	144	29.5	290	25		
AGREU28	28	63	—	—	310	28	42	□
AGREU30	30	75	—	—	330	30		
AGREU32	32	—	—	—	350	32	42	□
AGREU35	35	—	—	—	370	35		
AGREU40	40	—	—	—	390	40	42	□
AGREU45	45	—	—	—	410	45		
AGREU50	50	—	—	—	430	50	42	□

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引



- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。适用于半精加工。

This end mill is suitable for high-feed rough milling and semi-finish milling.



- 可以对从普通钢到不锈钢以及铝，进行高效率粗加工。适用于半精加工。

This end mill is suitable for high-speed rough milling and semi-finish milling.



LIST 7366P

切削条件 Cutting Condition ●●E-60

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGHV3	3	9	50	6	4	●
SGHV4	4	12	60	8		
SGHV5	5	15				
SGHV6	6					
SGHV7	7	20	65	10		
SGHV8	8					
SGHV9	9	25	75	12		
SGHV10	10					
SGHV11	11	30	80	16		
SGHV12	12					
SGHV13	13	35	90	20		
SGHV14	14					
SGHV15	15	40	95	25		
SGHV16	16					
SGHV17	17	45	110	32		
SGHV18	18					
SGHV19	19	50	120	42		
SGHV20	20					
SGHV21	21	55	125	52		
SGHV22	22					
SGHV23	23	60	145	62		
SGHV24	24					
SGHV25	25	70	160	72		
SGHV26	26					
SGHV27	27	80	180	82		
SGHV28	28					
SGHV29	29	90	200	92		
SGHV30	30					
SGHV32	32	100	220	102		
SGHV35	35					
SGHV40	40	110	240	112		
SGHV45 × 32	45					
SGHV45 × 42	45	120	260	122		
SGHV50 × 32	50					
SGHV50 × 42	50					

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	+0.025 ~ 0
3	6	+0.030 ~ 0
6	10	+0.036 ~ 0
10	18	+0.043 ~ 0
18	30	+0.052 ~ 0
30		+0.062 ~ 0

LIST 6402

切削条件 Cutting Condition ●●E-60


订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGHV3	3	9	50	6	4	
AGHV4	4	12	60	8		
AGHV5	5	15				
AGHV6	6					
AGHV7	7	20	65	10		
AGHV8	8					
AGHV9	9	25	75	12		
AGHV10	10					
AGHV11	11	30	80	16		
AGHV12	12					
AGHV13	13	35	90	20		
AGHV14	14					
AGHV15	15	40	95	25		
AGHV16	16					
AGHV17	17	45	105	32		
AGHV18	18					
AGHV19	19	50	110	42		
AGHV20	20					
AGHV21	21	55	125	6		
AGHV22	22					
AGHV23	23	60	145	32		
AGHV24	24					
AGHV25	25	70	150	42		
AGHV26	26					
AGHV27	27	70	160	42		
AGHV28	28					
AGHV29	29	70	160	42		
AGHV30	30					
AGHV32	32	70	160	42		
AGHV35	35					
AGHV40	40	70	160	42		
AGHV45	45					
AGHV45 × 42	45	70	160	42		
AGHV50	50					
AGHV50 × 42	50	70	160	42		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	+0.025 ~ 0
3	6	+0.030 ~ 0
6	10	+0.036 ~ 0
10	18	+0.043 ~ 0
18	30	+0.052 ~ 0
30		+0.062 ~ 0

●可以对从普通钢到铝进行粗加工。
适用于半精加工。

This is general roughing end mills for grooving & side milling, and semi-finish milling.



新商品

LIST 6366

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
4HV3	3	9	50	6	4	●
4HV4	4	12	60	8		
4HV5	5	15				
4HV6	6		20	65		
4HV7	7					
4HV8	8	25	75	12		
4HV9	9					
4HV10	10	30	80	16		
4HV11	11					
4HV12	12	35	90	20		
4HV13	13					
4HV14	14	40	95	25		
4HV15	15					
4HV16	16	45	105	30		
4HV17	17					
4HV18	18	50	110	35		
4HV19	19					
4HV20	20	55	120	40		
4HV21	21					
4HV22	22	60	125	45		
4HV23	23					
4HV24	24	65	130	50		
4HV25	25					
4HV26	26	70	135	55		
4HV27	27					
4HV28	28	75	140	60		
6HV28	28					
4HV29	29	80	145	65		
6HV29	29					
4HV30	30	85	150	70		
6HV30	30					
4HV30 × 32	30	90	155	75		
6HV30 × 32	30					
6HV31	31	95	160	80		
6HV32	31					
6HV33	32	100	165	85		
6HV34	32					
6HV35	33	105	170	90		
6HV36	33					
6HV37	34	110	175	95		
6HV38	34					
6HV39	35	115	180	100		
6HV40	35					
6HV41	36	120	185	105		
6HV42	36					
6HV42 × 42	42	125	190	110		
6HV43	42					
6HV44	43	130	195	115		
6HV45	43					
6HV45 × 42	44	135	200	120		
6HV46	44					
6HV47	45	140	205	125		
6HV48	45					
6HV48 × 42	46	145	210	130		
6HV49	46					
6HV50	47	150	215	135		
6HV50 × 42	47					
6HV50	48	155	220	140		
6HV50 × 42	48					
6HV50	49	160	225	145		
6HV50 × 42	49					
6HV50	50	165	230	150		
6HV50 × 42	50					

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	+0.025 ~ 0
3	6	+0.030 ~ 0
6	10	+0.036 ~ 0
10	18	+0.043 ~ 0
18	30	+0.052 ~ 0
30		+0.062 ~ 0

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	—	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended




- 可以对从普通钢到不锈钢以及铝进行粗加工。适用于半精加工。

This long end mill is suitable for high-feed rough milling and semi-finish milling.

- 可以对从普通钢到不锈钢以及铝进行粗加工。适用于半精加工。

This end mill is suitable for high-speed rough milling and semi-finish milling.

新品

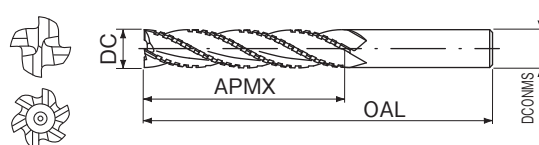

LIST 7368P

切削条件 Cutting Condition ●●E-61

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGLHV3	3	15	60	6	4	●
SGLHV4	4	20	65	8		
SGLHV5	5	25	80	10		
SGLHV6	6	35	95	12		
SGLHV7	7	45	105	16	4	●
SGLHV8	8	55	110	20		
SGLHV9	9	65	120	25		
SGLHV10	10	75	130	32		
SGLHV11	11	90	160	42	6	●
SGLHV12	12	105	190	42		
SGLHV13	13	125	210	42		
SGLHV14	14	145	230	42		
SGLHV15	15	105	190	32	6	●
SGLHV16	16	125	210	42		
SGLHV17	17	145	230	42		
SGLHV18	18	160	250	42		
SGLHV19	19	175	265	42	6	●
SGLHV20	20	190	280	42		
SGLHV21	21	205	295	42		
SGLHV22	22	220	310	42		
SGLHV23	23	235	325	42	6	●
SGLHV24	24	250	340	42		
SGLHV25	25	265	355	42		
SGLHV26	26	280	370	42		
SGLHV27	27	295	385	42	6	●
SGLHV28	28	310	400	42		
SGLHV29	29	325	415	42		
SGLHV30	30	340	430	42		
SGLHV31	31	355	445	42	6	●
SGLHV32	32	370	460	42		
SGLHV33	33	385	475	42		
SGLHV34	34	400	490	42		
SGLHV35	35	415	505	42	6	●
SGLHV36	36	430	520	42		
SGLHV37	37	445	535	42		
SGLHV38	38	460	550	42		
SGLHV39	39	475	565	42	6	●
SGLHV40	40	490	580	42		
SGLHV41	41	505	595	42		
SGLHV42	42	520	610	42		
SGLHV43	43	535	625	42	6	●
SGLHV44	44	550	640	42		
SGLHV45	45	565	655	42		
SGLHV46	46	580	670	42		
SGLHV47	47	595	685	42	6	●
SGLHV48	48	610	700	42		
SGLHV49	49	625	715	42		
SGLHV50	50	640	730	42		

LIST 6404

切削条件 Cutting Condition ●●E-61

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGLHV3	3	15	60	6	4	●
AGLHV4	4	20	65	8		
AGLHV5	5	25	80	10		
AGLHV6	6	35	95	12		
AGLHV7	7	45	105	16	4	●
AGLHV8	8	55	110	20		
AGLHV9	9	65	120	25		
AGLHV10	10	75	130	32		
AGLHV11	11	90	160	42	6	●
AGLHV12	12	105	190	42		
AGLHV13	13	125	210	42		
AGLHV14	14	145	230	42		
AGLHV15	15	105	190	32	6	●
AGLHV16	16	125	210	42		
AGLHV17	17	145	230	42		
AGLHV18	18	160	250	42		
AGLHV19	19	175	265	42	6	●
AGLHV20	20	190	280	42		
AGLHV21	21	205	295	42		
AGLHV22	22	220	310	42		
AGLHV23	23	235	325	42	6	●
AGLHV24	24	250	340	42		
AGLHV25	25	265	355	42		
AGLHV26	26	280	370	42		
AGLHV27	27	295	385	42	6	●
AGLHV28	28	310	400	42		
AGLHV29	29	325	415	42		
AGLHV30	30	340	430	42		
AGLHV31	31	355	445	42	6	●
AGLHV32	32	370	460	42		
AGLHV33	33	385	475	42		
AGLHV34	34	400	490	42		
AGLHV35	35	415	505	42	6	●
AGLHV36	36	430	520	42		
AGLHV37	37	445	535	42		
AGLHV38	38	460	550	42		
AGLHV39	39	475	565	42	6	●
AGLHV40	40	490	580	42		
AGLHV41	41	505	595	42		
AGLHV42	42	520	610	42		
AGLHV43	43	535	625	42	6	●
AGLHV44	44	550	640	42		
AGLHV45	45	565	655	42		
AGLHV46	46	580	670	42		
AGLHV47	47	595	685	42	6	●
AGLHV48	48	610	700	42		
AGLHV49	49	625	715	42		
AGLHV50	50	640	730	42		


外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	+0.025 ~ 0
3	6	+0.030 ~ 0
6	10	+0.036 ~ 0
10	18	+0.043 ~ 0
18	30	+0.052 ~ 0
30		+0.062 ~ 0

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	○	—	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended

- 可以对从普通钢到不锈钢以及铝进行粗加工。适用于半精加工。

This is general rough milling and semi-finish milling.

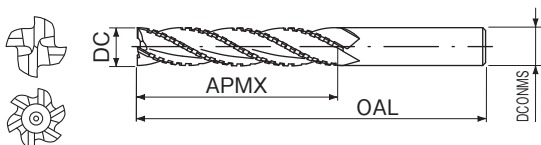

LIST 6368

切削条件 Cutting Condition ▶▶▶E-61

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SL4HV3	3	15	60	6	4	●
SL4HV4	4	20		8		
SL4HV5	5	25	65	10		
SL4HV6	6			12		
SL4HV7	7	35	80	16		
SL4HV8	8			20		
SL4HV9	9	45	95	25		
SL4HV10	10			32		
SL4HV11	11	55	105	42		
SL4HV12	12			42		
SL4HV13	13	65	120	42	6	●
SL4HV14	14			42		
SL4HV15	15	75	140	42		
SL4HV16	16			42		
SL4HV17	17	85	160	42		
SL4HV18	18			42		
SL4HV19	19	95	180	42		
SL4HV20	20			42		
SL4HV22	22	105	200	42		
SL4HV24	24			42		
SL4HV25	25	115	220	42	6	●
SL4HV28	28			42		
SL6HV28	28	90	160	42		
SL4HV30	30			42		
SL6HV30	30	105	190	42		
SL6HV32	32			42		
SL6HV35	35	125	210	42		
SL6HV40	40			42		
SL6HV45	45	145	230	42		
SL6HV45 × 42				42		
SL6HV50	50			42	6	●
SL6HV50 × 42				42		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
3	3	+0.025 ~ 0
6	6	+0.030 ~ 0
10	10	+0.036 ~ 0
18	18	+0.043 ~ 0
30	30	+0.052 ~ 0
		+0.062 ~ 0

- 可以对从普通钢到铝进行粗加工。采用了超长刃。

This extra long end mill is suited for rough milling and long side milling.

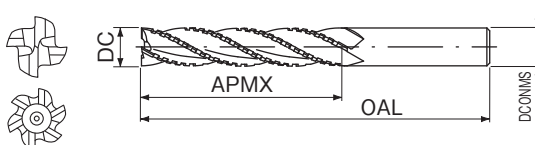

切削条件 Cutting Condition ▶▶▶E-62

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
SGELHV15 × 140	15	140	80	16	4	●
SGELHV18 × 145	18	145		20		
SGELHV20 × 165	20	165	100	25		
SGELHV22 × 165	22			32		
SGELHV24 × 220	24	220	150	32		
SGELHV25 × 220	25			32		
SGELHV28 × 220	28	235	200	42		
SGELHV30 × 235	30	285	200	42		
SGELHV30 × 285	30	285	200	42		
SGELHV32 × 235	32	235	150	42		
SGELHV32 × 285	32	285	200	42	6	□
SGELHV35 × 235	35	235	150	42		
SGELHV35 × 285	35	285	200	42		
SGELHV38 × 235	38	235	150	42		
SGELHV38 × 285	38	285	200	42		
SGELHV40 × 235	40	235	150	42		
SGELHV40 × 285	40	285	200	42		
SGELHV40 × 340	40	340	250	42		
SGELHV45 × 290	45	290	200	42		
SGELHV45 × 340	45	340	250	42		
SGELHV50 × 290	50	290	200	42	6	□
SGELHV50 × 340	50	340	250	42		
SGELHV50 × 390	50	390	300	42		

外径 DC (mm)		公差 Tolerance (mm)
超过 Above	以下 Up to	
	3	+0.025 ~ 0
3	6	+0.030 ~ 0
6	10	+0.036 ~ 0
10	18	+0.043 ~ 0
18	30	+0.052 ~ 0
30		+0.062 ~ 0

一般结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
○	○	○	○	—	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	—	—	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



- 可以对从普通钢到铝进行粗加工。采用了超长刃。
- This extra long end mill is suited for rough milling and long side milling.

- 可以对从普通钢到铝进行粗加工。采用了超长刃。
- This extra long end mill is suited for rough milling and long side milling.

新品



硬质合金钻头

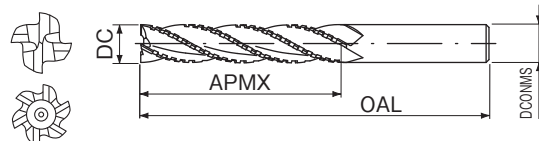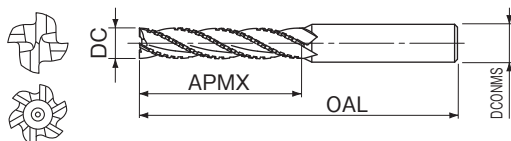

高速钢钻头

切削条件 Cutting Condition E-62

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	全长 OAL	刃长 APMX	柄径 DCONMS	刃数 CEDC	库存 Stock
AGELHV3	3	70	20	6	4	□
AGELHV4	4		25			
AGELHV5	5		30			
AGELHV6	6	85	40	8		
AGELHV7	7					
AGELHV8	8					
AGELHV9	9	105	55	10		
AGELHV10	10					
AGELHV11	11					
AGELHV12	12	120	65	12		
AGELHV13	13					
AGELHV14	14					
AGELHV15	15	140	80	16		
AGELHV16	16					
AGELHV18	18					
AGELHV20	20	165	100	20		
AGELHV22	22					
AGELHV24	24					
AGELHV25	25	220	150	25		
AGELHV28	28					
AGELHV30 × 235	30	235	200	32		
AGELHV30 × 285		285				
AGELHV32 × 235	32	235	200	32		
AGELHV32 × 285		285				
AGELHV35 × 235	35	235	200			
AGELHV35 × 285		285				
AGELHV38 × 235	38	235	200			
AGELHV38 × 285		285				
AGELHV40 × 235	40	235	200			
AGELHV40 × 285		285				
AGELHV40 × 340	40	340	250			
AGELHV45 × 290		290				
AGELHV45 × 340	45	340	250			
AGELHV50 × 290		290				
AGELHV50 × 340	50	340	250			
AGELHV50 × 390		390				

切削条件 Cutting Condition E-62

订货方式 商品编码

单位 (Unit) : mm


商品编码 Code	外径 DC	全长 OAL	刃长 APMX	柄径 DCONMS	刃数 CEDC	库存 Stock	
ELHV15 × 110	15	110	60	16	4	□	
ELHV18 × 115	18	115		20			
ELHV20 × 145	20	145					
ELHV20 × 165	22	165	100	25			
ELHV22 × 165		165					
ELHV24 × 170		170					
ELHV24 × 220	24	220	150	25			
ELHV25 × 170		170					
ELHV25 × 190		190					
ELHV25 × 220	25	220	150	25			
ELHV28 × 170		170					
ELHV28 × 220		220					
ELHV30 × 185	30	185	100	32	6	□	
ELHV30 × 205		205					
ELHV30 × 235		235					
ELHV30 × 285	30	285	200	32			
ELHV32 × 205		205					
ELHV32 × 235		235					
ELHV32 × 285	32	285	200	32			
ELHV34 × 205		205					
ELHV35 × 205		205					
ELHV35 × 235	35	235	150	32			
ELHV35 × 285		285					
ELHV38 × 205		205					
ELHV38 × 235	38	235	150	32			
ELHV38 × 285		285					
ELHV40 × 205		205					
ELHV40 × 235	40	235	150	32			
ELHV40 × 285		285					
ELHV40 × 335		335					
ELHV45 × 240	45	240	150	42	6	□	
ELHV45 × 290		290					
ELHV45 × 340		340					
ELHV48 × 240	48	240	150	42			
ELHV50 × 240		240					
ELHV50 × 290		290					
ELHV50 × 340	50	340	250	42			
ELHV55 × 240		240					
ELHV55 × 290		290					
ELHV55 × 340	55	340	250	42			
ELHV60 × 240		240					
ELHV60 × 290		290					
ELHV60 × 340	60	340	250	42			

AGRERS-R

AG 粗铣刀圆角型 AG-mill Roughing Radius

- 对从普通钢到不锈钢的 R 角和槽部，可进行高效率粗加工。

This end mill is suitable for high efficiency rough milling of corner R and slot milling from Steel to Stainless Steel.



LIST 6422

切削条件 Cutting Condition ▶ E-56

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆角半径 RE	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGRERS6R0.5	6	0.5	15	60	6	4	●
AGRERS6R1		1.0					
AGRERS8R0.5	8	0.5	20	65	10		
AGRERS8R1		1.0					
AGRERS10R1	1.0	25	75				
AGRERS10R1.5	1.5						
AGRERS10R2	2.0						
AGRERS12R1	12	1.0	30	80	12		
AGRERS12R1.5		1.5					
AGRERS12R2		2.0					
AGRERS16R2	16	2.0	40	95	16		
AGRERS16R2.5		2.5					
AGRERS16R3		3.0					
AGRERS16R4		4.0					
AGRERS20R2.5	20	2.5	45	110	20		
AGRERS20R3		3.0					
AGRERS20R4		4.0					
AGRERS25R2.5	25	2.5	50	120	25		
AGRERS25R3		3.0					
AGRERS25R4		4.0					



一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢	
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC	55~60HRC
◎	◎	◎	◎	○	×	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金	石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu	Graphite
×	◎	○	○	○	○	—

◎:优选 Excellent ○:适用 Good ×:不适用 Not Used —:不推荐 Not recommended


外径公差 Tolerance of Mill Dia. : ± 0.1mm.

AGREX-R

AG 粗铣刀长柄带圆角 SX 型 AG-mill Roughing Long Shank Radius SX Type

- 适用于从普通钢到不锈钢的深位置的 R 角加工。

This end mill is suitable for corner radius milling, from Steel to Stainless Steel.

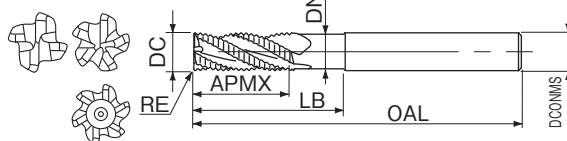

订货方式 商品编码

切削条件 Cutting Condition ▶ E-59

单位 (Unit) : mm

商品编码 Code	外径 DC	圆角半径 RE	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGREX10R2	10	2.0	20			130	10	4	□
AGREX10R2.5		2.5							
AGREX12R2	12	2.0				150	12		
AGREX12R2.5		2.5	24						
AGREX12R3	16	3.0							
AGREX16R2		2.0							
AGREX16R2.5	16	2.5							
AGREX16R3		3.0	32	64	14.3	170	16		
AGREX16R3.5	20	3.5							
AGREX16R4		4.0							
AGREX20R2	20	2.0							
AGREX20R2.5		2.5							
AGREX20R3	20	3.0	38	80	18.0	195	20		
AGREX20R3.5		3.5							
AGREX20R4	25	4.0							
AGREX20R5		5.0							
AGREX25R2	25	2.0							
AGREX25R2.5		2.5							
AGREX25R3	25	3.0							
AGREX25R3.5		3.5	100	23.0		210			
AGREX25R4	30	4.0							
AGREX25R5		5.0							
AGREX30R2	30	2.0							
AGREX30R2.5		2.5							
AGREX30R3	30	3.0				220			
AGREX30R3.5		3.5							
AGREX30R4	35	4.0							
AGREX30R5		5.0							
AGREX35R3	35	3.0							
AGREX35R3.5		3.5							
AGREX35R4	40	4.0	53			235			
AGREX35R5		5.0							
AGREX40R3	40	3.0							
AGREX40R3.5		3.5							
AGREX40R4	50	4.0	63			250			
AGREX40R5		5.0							
AGREX50R3	50	3.0							
AGREX50R3.5		3.5							
AGREX50R4	50	4.0	75			280	42		
AGREX50R5		5.0							
AGREX50R10	50	10.0							

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AGREU-R

AG 粗铣刀长柄带圆角 SLX 型

AG-mill Roughing Long Shank Radius SLX Type

2AGRE

AG 球头铣刀

AG-mill Ball


● 适用于从普通钢到不锈钢的深位置的 R 角加工。

This end mill is suitable for corner radius milling, from Steel to Stainless Steel.

● 可以对从普通钢到不锈钢以及铝进行粗加工。


This end mill is suited for profile milling of workpiece material from Steel and Stainless Steel to Aluminum.

新商品

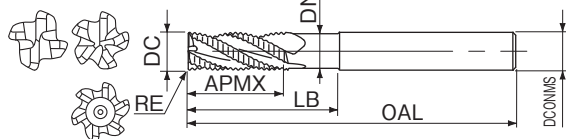

硬质合金钻头

高速钢钻头



切削条件 Cutting Condition ● E-59

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	外径 DC	圆弧半径 RE	刃长 APMX	颈长 LB	颈径 DN	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock
AGREU10R2	10	2.0	20			150	10		
AGREU10R2.5		2.5							
AGREU12R2	12	2.0				175	12		
AGREU12R2.5		2.5	24						
AGREU12R3		3.0							
AGREU16R2		2.0							
AGREU16R2.5		2.5							
AGREU16R3	16	3.0	32	72	14.3	200	16	4	
AGREU16R3.5		3.5							
AGREU16R4		4.0							
AGREU20R2		2.0							
AGREU20R2.5		2.5							
AGREU20R3	20	3.0	38	90	18	225	20		
AGREU20R3.5		3.5							
AGREU20R4		4.0							
AGREU20R5		5.0							
AGREU25R2		2.0							
AGREU25R2.5		2.5							
AGREU25R3	25	3.0		113	23	250			
AGREU25R3.5		3.5							
AGREU25R4		4.0							
AGREU25R5		5.0							
AGREU30R2		2.0	45				25	5	
AGREU30R2.5		2.5							
AGREU30R3	30	3.0				270			
AGREU30R3.5		3.5							
AGREU30R4		4.0							
AGREU30R5		5.0							
AGREU35R3		3.0							
AGREU35R3.5	35	3.5	53			290			
AGREU35R4		4.0							
AGREU35R5		5.0							
AGREU40R3		3.0					32		
AGREU40R3.5	40	3.5	63			310		6	
AGREU40R4		4.0							
AGREU40R5		5.0							
AGREU50R3		3.0							
AGREU50R3.5	50	3.5	75			350	42		
AGREU50R4		4.0							
AGREU50R5		5.0							
AGREU50R10		10.0							

LIST 6420

切削条件 Cutting Condition ● E-63

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
2AGRE0.5	0.5	1	2	55		
2AGRE1	1.0	2	4	60		
2AGRE1.5	1.5	3	6	70		
2AGRE2	2.0	4	8		6	
2AGRE2.5	2.5	5	10	80		
2AGRE3	3.0	6	12	90		
2AGRE3.5	3.5	7	14		8	
2AGRE4	4.0	8	16	100		
2AGRE4.5	4.5	9	18		10	
2AGRE5	5.0	10	20	110		
2AGRE5.5	5.5	11	22		12	
2AGRE6	6.0	12	24	120		
2AGRE6.5	6.5	13	26		16	
2AGRE7	7.0	14	28	140		
2AGRE7.5	7.5	15	30		20	
2AGRE8	8.0	16	32	150		
2AGRE9	9.0	18	36		25	
2AGRE10	10.0	20	40	160		
2AGRE12.5	12.5	25	50	180		

允差 Tolerance (mm)

外径 DC	RE
0 ~ 0.02	+ 0.02 ~ 0.01

一般 结构用钢	碳钢	合金钢	预硬钢	调质钢 模具钢	高硬度钢
SS400	S45C S50C	SCM SCR	NAK	30~45HRC	45~55HRC 55~60HRC
◎	◎	◎	◎	○	×
高硬度钢	不锈钢	钛合金 耐热合金	铸铁	铝合金	铜合金 石墨
60~66HRC	SUS304 SUS316	SUS420	FC FCD	Al AC/ADC	Cu Graphite
×	◎	○	○	○	—

◎: 优选 Excellent ○: 适用 Good ×: 不适用 Not Used —: 不推荐 Not recommended


RE

球头铣刀 2 刃型

Ball End Mills Two Flutes

●泛用球头立铣刀。

This is general ball end mill for profile milling.



LIST 6290

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球半径 RE	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	库存 Stock
RE0.75	0.75	1.5	3	55	6	●
RE1	1.00	2.0	4			
RE1.25	1.25	2.5	5			
RE1.5	1.50	3.0	6			
RE2	2.00	4.0	8	70		
RE2.5	2.50	5.0	10	80		
RE3	3.00	6.0	12	90		
RE3.5	3.50	7.0	14			
RE4	4.00	8.0	16	100	8	
RE4.5	4.50	9.0	18			
RE5	5.00	10.0	20		10	
RE5.5	5.50	11.0	22			
RE6	6.00	12.0	24	110	12	
RE6.5	6.50	13.0	26			
RE7	7.00	14.0	28			
RE7.5	7.50	15.0	30			
RE8	8.00	16.0	32			
RE10	10.00	20.0	40	160	20	
RE12.5	12.50	25.0	50	180	25	
RE15	15.00	30.0	60			
RE16	16.00	32.0		200	32	
RE20	20.00	40.0	65	220		

公差 Tolerance (mm)	
外径 DC	RE
0 ~ -0.02	+0.02 ~ -0.01


SGFRR

SG-FAX 粗铣刀球头型

SG-FAX Roughing Ball End Mills Fine Pitch

●球头部带齿，可进行高效率加工。

This end mill is suited for high-feed rough milling, and is used for profile milling.



仅限库存品

LIST 7320P

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	球头半径 RE	外径 DC	刃长 APMX	全长 OAL	柄径 DCONMS	刃数 CEDC	库存 Stock						
SGFRR5	5.0	10	20	110	10	4	○						
SGFRR6	6.0	12	24	120	12								
SGFRR7.5	7.5	15	30	150	16								
SGFRR8	8.0	16	32		20								
SGFRR10	10.0	20	40	160									
SGFRR12	12.0	24	50	180	25	6							
SGFRR12.5	12.5	25											
SGFRR15	15.0	30	55		32								
SGFRR16	16.0	32	60										
SGFRR17.5	17.5	35	210	42									
SGFRR20	20.0	40						65					
SGFRR22.5	22.5	45											
SGFRR25	25.0	50						75					

公差 Tolerance (mm)	
外径 DC	RE
±0.1	±0.02

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢立铣刀的基本切削条件

Standard Cutting Condition for HSS End Mills

2SGE
2MSGE

SG-FAX 2刃铣刀 SG-FAX End Mills Two Flutes

SG-FAX 2刃中等刃长铣刀 SG-FAX End Mills Medium Two Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	0.25DC 以下
2	6400	150	4800	110	4000	70	3200	45	7200	420	14000	720	
3	4200	160	3200	110	2700	70	2100	50	4800	440	9000	760	槽加工时 Grooving
5	2500	160	1900	110	1600	70	1300	50	2900	430	5400	740	
6	2100	160	1600	110	1300	70	1100	50	2400	440	4500	760	0.5DC 以下
8	1600	160	1200	110	1000	70	800	50	1800	440	3400	760	
10	1300	170	960	110	800	70	640	50	1400	450	2700	770	DC: 立铣刀外径 Dia. of Mill
12	1100	160	800	110	660	70	530	50	1200	440	2300	760	
15	850	160	640	110	530	70	420	50	960	440	1800	760	
20	640	150	480	100	400	65	320	45	720	410	1400	720	
25	510	120	380	80	320	50	250	35	570	320	1100	550	
30	420	95	320	65	270	40	210	30	480	250	900	440	
40	320	65	240	45	200	30	160	20	360	170	680	300	
50	250	35	190	20	160	15	130	10	290	90	540	140	

E-8, E-17 ◀尺寸表 Stocked Sized

2AGE
2AGEM

AG 2刃铣刀 AG-mill Two Flutes

AG 2刃中长铣刀 AG-mill Two Flutes Medium

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
2	7900	180	6400	140	4000	70	3200	45	7200	420	14000	720	槽加工时 Grooving
3	5300	200	4200	140	2700	70	2100	50	4800	440	9000	760	
5	3200	200	2500	140	1600	70	1300	50	2900	430	5400	740	
6	2600	200	2100	140	1300	70	1100	50	2400	440	4500	760	0.5DC 以下
8	2000	200	1600	140	1000	70	800	50	1800	440	3400	760	
10	1590	200	1270	140	800	70	640	50	1400	450	2700	770	
12	1330	200	1060	140	660	70	530	50	1200	440	2300	760	DC: 立铣刀外径 Dia. of Mill
15	1060	200	850	140	530	70	420	50	960	440	1800	760	
20	800	190	640	130	400	65	320	45	720	410	1400	720	
25	640	150	510	100	320	50	250	35	570	320	1100	550	
30	530	120	420	80	270	40	210	30	480	250	900	440	
40	400	80	320	60	200	30	160	20	360	170	680	300	
50	320	40	250	30	160	15	130	10	290	90	540	140	

E-10, E-18 ◀尺寸表 Stocked Sized

2SGE/2MSGE/2AGE/2AGEM

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

技术资料
索引

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

2GE 2MGE

G 2刃铣刀 G End Mills Standard Two Flutes

G 2刃中长铣刀 G End Mills Medium Two Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving  0.5DC 以下 DC: 立铣刀外径 Dia. of Mill
2	5600	130	4000	88	3200	54	6400	370	13000	680	
3	3700	140	2700	90	2100	58	4200	390	8500	720	
5	2200	140	1600	90	1300	55	2500	380	5100	700	
6	1900	140	1300	90	1100	57	2100	390	4200	710	
8	1400	140	1000	90	800	57	1600	390	3200	710	
10	1100	140	800	93	640	57	1300	400	2500	730	
12	930	140	660	92	530	57	1100	390	2100	720	
15	740	140	530	92	420	57	850	390	1700	720	
20	560	130	400	86	320	53	640	370	1300	670	
25	450	100	320	66	250	41	510	280	1000	520	
30	370	82	270	53	210	33	420	230	850	410	
40	280	56	200	36	160	23	320	150	640	280	
50	220	29	160	19	130	12	250	79	510	150	

E-12, E-18 ◀ ▶ 尺寸表 Stocked Sized

GHKEY/GKKEY/GLKEY

G 2刃键槽铣刀 G End Mills for Keyway

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
3	3700	70	2700	45	2100	29	4200	195	8500	360	
5	2200	70	1600	45	1300	27	2500	190	5100	350	
6	1900	70	1300	45	1100	28	2100	195	4200	355	
8	1400	70	1000	45	800	28	1600	195	3200	355	
10	1100	70	800	46	640	28	1300	200	2500	365	
12	930	70	660	46	530	28	1100	195	2100	360	
15	740	70	530	46	420	28	850	195	1700	360	
20	560	65	400	43	320	26	640	185	1300	335	

E-14 ◀ ▶ 尺寸表 Stocked Sized

2NAC

NATAC 2刃铣刀 NATAC End Mills Two Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 0.25DC 以下 1.5DC
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 0.5DC 以下 DC DC: 立铣刀外径 Dia. of Mill
2	4000	96	2800	62	2100	34	4800	280	9600	510	
3	2700	100	1900	63	1300	36	3200	290	6400	540	
5	1600	100	1100	63	800	34	1900	290	3800	520	
6	1300	100	930	63	660	35	1600	290	3200	530	
8	1000	100	700	63	500	35	1200	290	2400	530	
10	800	100	560	65	400	36	960	300	1900	550	
12	660	100	460	64	330	36	800	290	1600	540	
15	530	100	370	64	270	36	640	290	1300	540	
20	400	96	280	60	200	33	480	280	960	500	

E-15 ◀ ▶ 尺寸表 Stocked Sized

2GE/2MGE/GHKEY/GKKEY/GLKEY/2NAC

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢立铣刀的基本切削条件

Standard Cutting Condition for HSS End Mills

2DLCHE | DLC 高速钢铣刀 DLC-HSS mill

被削材 Work Material	铝材 A1070 Aluminum		铝合金 Si, Mg-Si 类 A4032, A6061 Aluminum Alloy		铝合金 Mg 类 A5052 Aluminum Alloy		铝合金 Zn-Mg 类 A7075 Aluminum Alloy		侧面加工时 Side Milling 
	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
新商品 硬质合金钻头	3	32000	800	5300	200	13000	400	27000	400
	5	19200	1000	3200	250	8000	500	16000	500
	6	16000	1000	2650	250	6500	500	13500	600
	8	12000	1000	2000	300	5000	600	10000	600
	10	9600	1200	1600	300	4000	600	8000	700
	12	8000	1200	1300	350	3300	700	6600	700
	16	6000	1200	1000	350	2500	700	5000	700
	20	4800	1200	800	350	2000	700	4000	500
									槽加工时 Grooving 

E-17 尺寸表 Stocked Sized

2DLCHE

- 1) 请采用湿式加工。
- 2) 加工 AC4、ADC12 等铸造铝材时，推荐采用硬质合金型的 DLC 铣刀。
- 3) 进行槽加工时，请将转速降低到 60%、进给速度降低到 40%。

- 1) Use in wet condition.
- 2) Recommend "DLC-mill for Aluminum" in cutting of Aluminum Alloy Casting (AC4, ADC12).
- 3) When grooving, reduce the rotation to 60%, and the feed to 40% of table values.

2SE 2RSE

高硬2刃铣刀 SUPER HARD End Mills Two Flutes

高硬2刃标准柄铣刀 SUPER HARD End Mills Regular Shank Two Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
2	4000	80	2800	51	2000	28	4800	230	9600	420	
3	2700	84	1900	53	1300	30	3200	240	6400	450	
5	1600	84	1100	53	800	30	1900	240	3800	450	
6	1300	84	930	53	660	30	1600	240	3200	450	
8	1000	84	700	53	500	30	1200	240	2400	450	
10	800	86	560	54	400	30	960	250	1900	450	
12	660	85	460	54	330	30	800	240	1600	450	
15	530	85	370	54	270	30	640	240	1300	450	
20	400	80	280	50	200	28	480	230	960	420	
25	320	61	220	38	160	21	380	180	760	320	
30	270	49	190	31	130	17	320	140	640	260	
40	200	34	140	21	100	12	240	96	480	180	
50	160	17	110	11	80	6	190	50	380	90	

E-19, E-20 尺寸表 Stocked Sized

2SE/2RSE/SL2GE

- 1) 采用干式加工 (推荐使用气吹) 时，请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时，请采用湿式加工。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.


有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables


1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

SL2SGE | SG-FAX 2刃加长刀铣刀 SG-FAX End Mills Long Two Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
3	4200	80	3200	55	2700	35	4800	220	9000	380	
5	2500	80	1900	55	1600	35	2900	220	5400	380	
6	2100	80	1600	55	1300	35	2400	220	4500	380	
8	1600	80	1200	55	1000	35	1800	220	3400	380	
10	1300	80	960	55	800	35	1400	220	2700	390	
12	1100	80	800	55	660	35	1200	220	2300	380	
15	850	80	640	55	530	35	960	220	1800	380	
20	640	75	480	50	400	30	720	210	1400	360	
25	510	60	380	40	320	25	570	160	1100	270	
30	420	45	320	30	270	20	480	130	900	220	

E-21 尺寸表 Stocked Sized

2AGEL | AG 2刃长柄铣刀 AG-mill Two Flutes Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
3	4200	80	3200	55	2700	35	2100	25	4800	220	9000	380	
5	2500	80	1900	55	1600	35	1300	25	2900	220	5400	380	
6	2100	80	1600	55	1300	35	1100	25	2400	220	4500	380	
8	1600	80	1200	55	1000	35	800	25	1800	220	3400	380	
10	1300	80	960	55	800	35	640	25	1400	220	2700	390	
12	1100	80	800	55	660	35	530	25	1200	220	2300	380	
15	850	80	640	55	530	35	420	25	960	220	1800	380	
20	640	75	480	50	400	30	320	25	720	210	1400	360	


E-21 尺寸表 Stocked Sized

SL2SGE/2AGEL

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

SL2GE | G 2刃加长铣刀 G End Mills Long Two Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
3	3700	71	2700	45	2100	29	4200	190	8500	360	
5	2200	69	1600	45	1300	28	2500	190	5100	360	
6	1900	71	1300	45	1100	28	2100	190	4200	360	
8	1400	71	1000	45	800	28	1600	190	3200	360	
10	1100	72	800	46	640	29	1300	200	2500	360	
12	930	71	660	46	530	29	1100	200	2100	360	
15	740	71	530	46	420	29	850	200	1700	360	
20	560	67	400	43	320	27	640	180	1300	340	
25	450	51	320	33	250	20	510	140	1000	260	
30	370	41	270	26	210	16	420	110	850	210	
40	280	28	200	18	160	11	320	77	640	140	

E-22 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢立铣刀的基本切削条件

Standard Cutting Condition for HSS End Mills

SL2SE
RSL2SE

高硬2刃加长铣刀 SUPER HARD End Mills Long Two Flutes

高硬2刃标准柄加长铣刀 SUPER HARD End Mills Regular Shank Long Two Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属	
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
							~200HB			
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	2700	42	1900	26	1300	15	3200	120	6400	220
5	1600	42	1100	26	800	15	1900	120	3800	220
6	1300	42	930	26	660	15	1600	120	3200	220
8	1000	42	700	26	500	15	1200	120	2400	220
10	800	43	560	27	400	15	960	120	1900	230
12	660	43	460	27	330	15	800	120	1600	220
15	530	42	370	27	270	15	640	120	1300	220
20	400	40	280	25	200	14	480	110	960	210
25	320	31	220	19	160	11	380	88	760	160
30	270	24	190	15	130	9	320	70	640	130
40	200	17	140	11	100	6	240	48	480	88

側面加工時
Side Milling

0.1DC
以下

80C

Dia. of Mill

DC: 立铣刀外径
Dia. of Mill


侧面加工时
Side Milling




DC: 立铣刀外径
Dia. of Mill

E-22, E-23 ◀ 尺寸表 Stocked Sized


3GE | G 3刃铣刀 G End Mills Standard Three Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
3	3700	150	2700	100	2100	62	4200	420	8500	780	
5	2200	150	1600	100	1300	60	2500	420	5100	750	
6	1900	150	1300	100	1100	61	2100	420	4200	770	
8	1400	150	1000	100	800	61	1600	420	3200	770	
10	1100	160	800	100	640	62	1300	430	2500	790	
12	930	150	660	100	530	62	1100	420	2100	780	
15	740	150	530	100	420	62	850	420	1700	780	
20	560	140	400	93	320	58	640	400	1300	730	
25	450	110	320	71	250	44	510	310	1000	560	
30	370	89	270	57	210	36	420	240	850	450	
40	280	61	200	39	160	24	320	170	640	310	

侧面加工时
Side Milling



槽加工时
Grooving




DC: 立铣刀外径
Dia. of Mill

E-23 ◀ 尺寸表 Stocked Sized


3NAC | NATAC 3刃铣刀 NATAC End Mills Three Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
2	4000	100	2800	67	2000	37	4800	300	9600	550	
3	2700	110	1900	69	1300	39	3200	320	6400	580	
5	1600	110	1100	69	800	38	1900	320	3800	580	
6	1300	110	930	69	660	38	1600	320	3200	580	
8	1000	110	700	69	500	38	1200	320	2400	580	
10	800	110	560	70	400	39	960	320	1900	580	
12	660	110	460	70	330	39	800	320	1600	580	
15	530	110	370	70	270	39	640	320	1300	580	
20	400	100	280	65	200	36	480	300	960	550	

侧面加工时
Side Milling



槽加工时
Grooving



DC: 立铣刀外径
Dia. of Mill

E-24 ◀ 尺寸表 Stocked Sized

SL2SE/REL2SE/3GE/3NAC/4GE

1) 采用干式加工 (推荐使用气吹) 时, 请分别将转数和进给速度降低到 70%。

2) 加工不锈钢时, 请采用湿式加工。

1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.

2) Use in wet condition in case of Stainless Steel.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。


Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

4SGE | SG-FAX 4刀铣刀 SG-FAX End Mills Four Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属	
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	4200	200	3200	140	2700	90	2100	60	4800	550	9000	950
5	2500	200	1900	140	1600	90	1300	60	2900	550	5400	920
6	2100	200	1600	140	1300	90	1100	60	1400	550	4500	950
8	1600	200	1200	140	1000	90	800	60	1800	550	3400	950
10	1300	210	960	140	800	90	640	60	1400	560	2700	970
12	1100	200	800	140	660	90	530	60	1200	550	2300	950
15	850	200	640	140	530	90	420	60	960	550	1800	950
20	640	190	480	130	400	85	320	55	720	520	1400	890
25	510	150	380	100	320	65	250	45	570	400	1100	690
30	420	120	320	80	270	50	210	35	480	320	900	550

侧面加工时
Side Milling



新商品


硬质合金钻头

高速钢钻头

4AGE | AG 4刀铣刀 AG-mill Four Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属	
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	5300	250	4200	180	2700	90	2100	60	4800	550	9000	950
5	3200	250	2500	180	1600	90	1300	60	2900	550	5400	920
6	2600	250	2100	180	1300	90	1100	60	1400	550	4500	950
8	2000	250	1600	180	1000	90	800	60	1800	550	3400	950
10	1590	250	1270	180	800	90	640	60	1400	560	2700	970
12	1330	250	1060	180	660	90	530	60	1200	550	2300	950
15	1060	250	850	180	530	90	420	60	960	550	1800	950
20	800	240	640	170	400	85	320	55	720	520	1400	890
25	640	190	510	130	320	65	250	45	570	400	1100	690
30	530	150	420	100	270	50	210	35	480	320	900	550

侧面加工时
Side Milling



丝锥

硬质合金立铣刀

高速
钢立铣刀

4SGE/4AGE


- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

4GE | G 4刀铣刀 G End Mills Standard Four Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属	
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	3700	180	2700	110	2100	72	4200	490	8500	900
5	2200	180	1600	110	1300	69	2500	490	5100	870
6	1900	180	1300	110	1100	71	2100	490	4200	890
8	1400	180	1000	110	800	71	1600	490	3200	890
10	1100	180	800	120	640	72	1300	500	2500	910
12	930	180	660	120	530	71	1100	490	2100	900
15	740	180	530	110	420	71	850	490	1700	900
20	560	170	400	110	320	67	640	460	1300	840
25	450	130	320	82	250	51	510	350	1000	650
30	370	100	270	66	210	41	420	280	850	520
40	280	70	200	45	160	28	320	190	640	350
50	220	36	160	23	130	14	250	100	510	180

侧面加工时
Side Milling



套装商品
其它

精密工具

技术资料
索引

高速钢立铣刀的基本切削条件

Standard Cutting Condition for HSS End Mills

4NAC
4SE
4RSE


NATAC 4刃铣刀 NATAC End Mills Four Flutes

高硬4刃铣刀 SUPER HARD End Mills Four Flutes

高硬4刃标准柄铣刀 SUPER HARD End Mills Regular Shank Four Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	側面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
3	2700	130	1900	79	1300	45	3200	360	6400	670	
5	1600	130	1100	79	800	44	1900	360	3800	650	
6	1300	130	930	79	660	44	1600	360	3200	670	
8	1000	130	700	79	500	44	1200	360	2400	670	
10	800	130	560	81	400	45	960	370	1900	680	
12	660	130	460	81	330	45	800	370	1600	670	
15	530	130	370	80	270	45	640	370	1300	670	
20	400	120	280	75	200	42	480	340	960	630	
25	320	92	220	58	160	32	380	260	760	480	
30	270	73	190	46	130	26	320	210	640	390	
40	200	50	140	32	100	18	240	140	480	270	
50	160	26	110	16	80	9	190	74	380	140	

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

E-27, E-29, E-30 ◀ 尺寸表 Stocked Sized

SL4SGE

SG-FAX 4刃加长铣刀 SG-FAX End Mills Long Four Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属	
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
							~ 200HB			
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	4200	110	3200	75	2700	45	4800	290	9000	510
5	2500	110	1900	75	1600	45	2900	290	5400	490
6	2100	110	1600	75	1300	45	2400	290	4500	500
8	1600	110	1200	75	1000	45	1800	290	3400	500
10	1300	110	960	75	800	45	1400	300	2700	510
12	1100	110	800	75	660	45	1200	290	2300	510
15	850	110	640	75	530	45	960	290	1800	510
20	640	100	480	70	400	45	720	280	1400	480
25	510	80	380	55	320	35	570	210	1100	370
30	420	65	320	40	270	25	480	170	900	290

侧面加工时
Side Milling

0.1DC
以下

8DC

↓

DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

E-30 ◀ 尺寸表 Stocked Sized

4NAC/4SE/4RSE/SL4GE/SL4SE/RSL4SE

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.

SL4SGE/4AGEL

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

4AGEL | AG 4刀加长铣刀 AG-mill Four Flutes Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属	
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
									~200HB			
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	4200	110	3200	75	2700	45	2100	33	4800	290	9000	510
5	2500	110	1900	75	1600	45	1300	33	2900	290	5400	490
6	2100	110	1600	75	1300	45	1100	33	2400	290	4500	500
8	1600	110	1200	75	1000	45	800	33	1800	290	3400	500
10	1300	110	960	75	800	45	640	33	1400	300	2700	510
12	1100	110	800	75	660	45	530	33	1200	290	2300	510
15	850	110	640	75	530	45	420	33	960	290	1800	510
20	640	100	480	70	400	45	320	30	720	280	1400	480
25	510	80	380	55	320	35	250	25	570	210	1100	370
30	420	65	320	40	270	25	210	20	480	170	900	290


侧面加工时
Side Milling

0.1DC
以下

3DC

DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

E-31 尺寸表 Stocked Sized

SL4GE | G 4刀加长铣刀 G End Mills Long Four Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属	
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
							~ 200HB			
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	3700	95	2700	60	2100	38	4200	260	8500	480
5	2200	95	1600	60	1300	38	2500	260	5100	460
6	1900	95	1300	60	1100	38	2100	260	4200	480
8	1400	95	1000	60	800	38	1600	260	3200	480
10	1100	96	800	62	640	38	1300	260	2500	480
12	930	95	660	61	530	38	1100	260	2100	480
15	740	95	530	61	420	38	850	260	1700	480
20	560	89	400	57	320	36	640	240	1300	450
25	450	68	320	44	250	27	510	190	1000	340
30	370	55	270	35	210	22	420	150	850	280
40	280	38	200	24	160	15	320	100	640	190

侧面加工时
Side Milling




0.1DC
以下

3DC

DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

E-31 尺寸表 Stocked Sized

SL4SE RSL4SE

高硬4刀加长铣刀 SUPER HARD End Mills Long Four Flutes

高硬4刀标准柄加长铣刀 SUPER HARD End Mills Regular Shank Long Four Flutes

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属	
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
							~200HB			
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
3	2700	76	1900	48	1300	27	3200	220	6400	400
5	1600	74	1100	48	800	27	1900	220	3800	400
6	1300	76	930	48	660	27	1600	220	3200	400
8	1000	75	700	48	500	27	1200	220	2400	400
10	800	77	560	49	400	27	960	220	1900	410
12	660	77	460	48	330	27	800	220	1600	400
15	530	76	370	48	270	27	640	220	1300	400
20	400	72	280	45	200	25	480	210	960	380
25	320	55	220	35	160	19	380	160	760	290
30	270	44	190	28	130	15	320	130	640	230
40	200	30	140	19	100	11	240	87	480	160


侧面加工时
Side Milling

0.1DC
以下

3DC

DC: 立铣刀外径
Dia. of Mill

侧面加工时
Side Milling



DC: 立铣刀外径
Dia. of Mill

E-32 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢立铣刀的基本切削条件

Standard Cutting Condition for HSS End Mills

SGFRERS
SGFRE

SG-FAX粗铣刀短刀型 SG-FAX Roughing End Mills Regular Length Short

SG-FAX粗铣刀短型 SG-FAX Roughing End Mills Short With Neck

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
6	2100	230	1600	150	1300	100	1100	70	2400	290	4500	1100	
8	1600	230	1200	150	1000	100	800	68	1800	280	3400	1100	
10	1300	230	960	160	800	100	640	70	1400	290	2700	1100	
12	1100	280	800	190	660	120	530	84	1200	340	2300	1300	
15	850	280	640	190	530	120	420	84	960	340	1800	1300	
20	640	260	480	180	400	110	320	78	720	340	1400	1300	
25	510	290	380	200	320	130	250	87	570	390	1100	1400	
30	420	260	320	180	270	110	210	78	480	360	900	1300	
40	320	170	240	110	200	74	160	51	360	230	680	840	
50	250	110	190	71	160	46	130	32	290	150	540	520	

E-33 尺寸表 Stocked Sized

AGRERS
AGRES
AGRERS-R

AG 粗铣刀标准型 AG-mill Roughing Regular Length Short

AG 粗铣刀短刀型 AG-mill Roughing Short

AG 粗铣刀圆角型 AG-mill Roughing Radius

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
6	2100	260	1600	180	1300	100	1100	75	2400	320	4500	1200	
8	1600	280	1200	190	1000	120	800	80	1800	340	3400	1300	
10	1300	280	960	190	800	120	640	80	1400	340	2700	1300	
12	1100	280	800	190	660	120	530	84	1200	340	2300	1300	
15	850	280	640	190	530	120	420	84	960	340	1800	1300	
20	640	260	480	180	400	110	320	78	720	340	1400	1300	
25	510	290	380	200	320	130	250	87	570	390	1100	1400	
30	420	260	320	180	270	110	210	78	480	360	900	1300	
40	320	170	240	110	200	74	160	51	360	230	680	840	
50	250	110	190	71	160	46	130	32	290	150	540	520	

E-34, E-45 尺寸表 Stocked Sized

SGFRERS/SGFRE/AGRERS/AGRES/AGRERS-R/SRE/SGFREM/SGLREM/AGREM

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

SRE | 高速钢粗铣刀短型 Roughing End Mills Short

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving
6	1300	130	930	79	660	44	1600	170	3200	670	
8	1000	130	700	79	500	44	1200	170	2400	660	
10	800	130	560	81	400	45	960	170	1900	680	
12	660	130	460	81	330	45	800	170	1600	670	
15	530	130	370	80	270	45	640	170	1300	670	
20	400	120	280	75	200	42	480	170	960	650	
25	320	110	220	72	160	40	380	160	760	630	
30	270	100	190	64	130	36	320	150	640	570	
40	200	67	140	42	100	23	240	98	480	370	
50	160	48	110	30	80	17	190	70	380	270	

0.5DC
以下

1.5DC

槽加工时
Grooving

DC
以下

DC: 立铣刀外径
Dia. of Mill

E-35 ◀ ▶ 尺寸表 Stocked Sized

SGFREM SGLREM

SG-FAX粗铣刀中等刃长型 SG-FAX Roughing End Mills Medium

SG-FAX粗铣刀大齿距中等刃长型 SG-FAX Roughing End Mills Large Pitch Medium

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
6	2100	160	1600	100	1300	68	1100	47	2400	190	4500	730	
8	1600	150	1200	100	1000	67	800	46	1800	190	3400	720	
10	1300	160	960	110	800	69	640	47	1400	200	2700	740	
12	1100	200	800	130	660	86	530	59	1200	240	2300	920	
15	850	200	640	130	530	86	420	59	960	240	1800	920	
20	640	180	480	120	400	81	320	55	720	240	1400	890	
25	510	190	380	130	320	85	250	58	570	260	1100	950	
30	420	170	320	120	270	76	210	52	480	240	900	860	
40	320	110	240	76	200	49	160	34	360	150	680	560	
50	250	71	190	48	160	31	130	21	290	100	540	350	

E-35, E-36 ◀ ▶ 尺寸表 Stocked Sized

AGREM

AG粗铣中等刃长型 AG-mill Roughing Medium

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving  DC: 立铣刀外径 Dia. of Mill
6	2100	180	1600	120	1300	75	1100	50	2400	220	4500	800	
8	1600	200	1200	130	1000	80	800	55	1800	240	3400	900	
10	1300	200	960	130	800	80	640	59	1400	240	2700	900	
12	1100	200	800	130	660	86	530	59	1200	240	2300	920	
15	850	200	640	130	530	86	420	59	960	240	1800	920	
20	640	180	480	120	400	81	320	55	720	240	1400	890	
25	510	190	380	130	320	85	250	58	570	260	1100	950	
30	420	170	320	120	270	76	210	52	480	240	900	860	
40	320	110	240	76	200	49	160	34	360	150	680	560	
50	250	71	190	48	160	31	130	21	290	100	540	350	

E-36 ◀ ▶ 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢立铣刀的基本切削条件

Standard Cutting Condition for HSS End Mills

MRE | 粗铣刀中等刃长型 Roughing End Mills Medium

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
6	1300	100	930	63	660	35	1600	130	3200	530	
8	1000	100	700	63	500	35	1200	130	2400	530	
10	800	100	560	65	400	36	960	140	1900	550	
12	660	100	460	64	330	36	800	130	1600	540	
15	530	100	370	64	270	36	640	130	1300	540	
20	400	96	280	60	200	33	480	130	960	520	
25	320	91	220	57	160	32	380	130	760	500	
30	270	82	190	52	130	29	320	120	640	460	
40	200	53	140	33	100	18	240	77	480	300	
50	160	37	110	23	80	13	190	54	380	200	

E-37 尺寸表 Stocked Sized

SGFREL | SG-FAX粗铣刀加长刃型

SG-FAX Roughing End Mills Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
6	2100	120	1600	82	1300	53	2400	150	4500	570	
8	1600	120	1200	81	1000	53	1800	150	3400	560	
10	1300	120	960	84	800	54	1400	150	2700	580	
12	1100	150	800	100	660	65	1200	180	2300	700	
15	850	150	640	100	530	66	960	180	1800	700	
20	640	140	480	95	400	61	720	180	1400	670	
25	510	150	380	98	320	64	570	200	1100	710	
30	420	130	320	88	270	57	480	180	900	650	
40	320	85	240	57	200	37	360	120	680	420	
50	250	53	190	36	160	23	290	73	540	260	

E-37 尺寸表 Stocked Sized

AGREL | AG粗铣刀长刃型 AG-mill Roughing Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
6	2100	130	1600	90	1300	60	2400	170	4500	650	
8	1600	150	1200	100	1000	65	1800	180	3400	700	
10	1300	150	960	100	800	65	1400	180	2700	700	
12	1100	150	800	100	660	65	1200	180	2300	700	
15	850	150	640	100	530	66	960	180	1800	700	
20	640	140	480	95	400	61	720	180	1400	670	
25	510	150	380	98	320	64	570	200	1100	710	
30	420	130	320	88	270	57	480	180	900	650	
40	320	85	240	57	200	37	360	120	680	420	
50	250	53	190	36	160	23	290	73	540	260	

E-38 尺寸表 Stocked Sized

MRE/SGFREL/AGREL

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

LRE | 粗铣刀加长刃型 Roughing End Mills Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
6	1300	76	930	48	660	27	1600	100	3200	400	
8	1000	75	700	47	500	26	1200	100	2400	400	
10	800	77	560	49	400	27	960	100	1900	410	
12	660	77	460	48	330	27	800	100	1600	400	
15	530	76	370	48	270	27	640	100	1300	400	
20	400	72	280	45	200	25	480	100	960	390	
25	320	68	220	43	160	24	380	98	760	380	
30	270	61	190	39	130	21	320	90	640	340	
40	200	39	140	25	100	14	240	57	480	220	
50	160	28	110	18	80	10	190	41	380	160	

E-38 ◀ ▶ 尺寸表 Stocked Sized

SGFREX/SGFREU | SG-FAX粗铣刀长柄SX型, SLX型

SG-FAX Roughing End Mills Long Shank SX Type, SLX Type

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	1.5DC~2DC 0.1DC DC: 立铣刀外径 Dia. of Mill
16	800	130	600	90	500	58	400	40	900	170	1700	620	
20	640	130	480	86	400	56	320	38	720	170	1400	610	
25	510	150	380	98	320	64	250	44	570	200	1100	710	
30	420	130	320	88	270	57	210	39	480	180	900	650	
35	360	120	270	79	230	51	180	35	410	160	770	580	
40	320	85	240	57	200	37	160	25	360	120	680	420	
50	250	53	190	36	160	23	130	16	290	73	540	260	

E-39 ◀ ▶ 尺寸表 Stocked Sized

AGREX/AGREU

AG粗铣刀长柄SX型, SLX型

AG-mill Roughing Long Shank SX Type, SLX Type

AGREX-R/AGREU-R

AG粗铣刀长柄带圆角SX型, SLX型

AG-mill Roughing Long Shank Radius SX Type, SLX Type

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	1.5DC~2DC 0.1DC DC: 立铣刀外径 Dia. of Mill
16	800	130	600	90	500	58	400	40	900	170	1700	620	
20	640	130	480	86	400	56	320	38	720	170	1400	610	
25	510	150	380	98	320	64	250	44	570	200	1100	710	
30	420	130	320	88	270	57	210	39	480	180	900	650	
35	360	120	270	79	230	51	180	35	410	160	770	580	
40	320	85	240	57	200	37	160	25	360	120	680	420	
50	250	53	190	36	160	23	130	16	290	73	540	260	

E-39, E-45, E-46 ◀ ▶ 尺寸表 Stocked Sized

LRE/SGFREX/SGFREU/AGREX/AGREU/AGREX-R/AGREU-R

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套裝商品
其它

精密工具

技术资料
索引

高速钢立铣刀的基本切削条件

Standard Cutting Condition for HSS End Mills

SGHV | SG-FAX重切铣刀 SG-FAX HEAVY End Mills

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
3	4200	240	3200	160	2700	110	2100	74	4800	660	9000	1100	
5	2500	240	1900	160	1600	110	1300	71	2900	640	5400	1100	
6	2100	240	1600	160	1300	110	1100	74	2400	660	4500	1100	
8	1600	240	1200	160	1000	110	800	72	1800	660	3400	1100	
10	1300	250	960	170	800	110	640	74	1400	670	2700	1200	
12	1100	240	800	170	660	110	530	74	1200	660	2300	1100	
15	850	240	640	170	530	110	420	74	960	660	1800	1100	
20	640	230	480	150	400	100	320	69	720	620	1400	1100	
25	510	180	380	120	320	77	250	53	570	480	1100	820	
30	420	190	320	130	270	82	210	56	480	510	900	880	
40	320	130	240	87	200	56	160	39	360	350	680	600	
50	250	66	190	45	160	29	130	20	290	180	540	310	DC: 立铣刀外径 Dia. of Mill

E-40 尺寸表 Stocked Sized

AGHV | AG 重切铣刀 AG-mill HEAVY

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
									~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving 
3	5000	290	3800	190	3200	130	2500	90	5800	770	10800	1320	
5	3000	290	2300	190	1900	130	1600	90	3500	770	6500	1320	
6	2500	290	1900	190	1600	130	1300	90	2900	790	5400	1320	
8	1900	290	1400	190	1200	130	1000	90	2200	790	4100	1320	
10	1500	300	1200	200	1000	130	800	90	1700	800	3200	1320	
12	1250	290	1000	200	800	130	600	90	1400	790	2800	1320	
15	1000	290	800	200	600	130	500	90	1200	790	2200	1320	
20	750	260	600	180	500	120	400	80	900	740	1700	1320	
25	600	220	500	150	400	90	300	60	700	580	1300	980	
30	500	200	400	120	300	80	250	50	600	510	1100	860	DC: 立铣刀外径 Dia. of Mill

E-40 尺寸表 Stocked Sized

HV | 重切削 HEAVY End Mills

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling 
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	槽加工时 Grooving  DC: 立铣刀外径 Dia. of Mill
3	2700	150	1900	95	1300	54	3200	440	6400	810	
5	1600	150	1100	95	800	52	1900	430	3800	780	
6	1300	150	930	95	660	53	1600	440	3200	800	
8	1000	150	700	95	500	53	1200	440	2400	800	
10	800	150	560	97	400	54	960	450	1900	820	
12	660	150	460	97	330	54	800	440	1600	810	
15	530	150	370	96	270	54	640	440	1300	810	
20	400	140	280	90	200	50	480	410	960	760	
25	320	110	220	69	160	38	380	320	760	580	
30	270	120	190	74	130	41	320	340	640	620	
40	200	80	140	51	100	28	240	230	480	420	
50	160	41	110	26	80	14	190	120	380	220	

E-41 尺寸表 Stocked Sized

SGHV/AGHV/HV/SGLHV/AGLHV

- 1) 采用干式加工 (推荐使用气吹) 时, 请将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

有关切削条件的注意事项

1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables


1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

SGLHV | SG-FAX重切铣刀长刃型 SG-FAX HEAVY End Mills Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	
3	4200	150	3200	100	2700	66	4800	400	9000	700	
5	2500	150	1900	100	1600	63	2900	390	5400	700	
6	2100	150	1600	100	1300	65	2400	400	4500	700	
8	1600	150	1200	100	1000	65	1800	400	3400	700	
10	1300	150	960	100	800	66	1400	410	2700	700	
12	1100	150	800	100	660	66	1200	400	2300	700	
15	850	150	640	100	530	66	960	400	1800	700	
20	640	140	480	95	400	61	720	380	1400	700	
25	510	110	380	73	320	47	570	290	1100	500	
30	420	120	320	79	270	51	480	320	900	550	
40	320	80	240	54	200	35	360	220	680	380	
50	250	41	190	28	160	18	290	110	540	190	


E-42 ◀ ▶ 尺寸表 Stocked Sized

AGLHV | AG铣刀重切长刃型 AG-mill HEAVY Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
3	5000	180	3800	120	3200	80	5800	470	10800	840	
5	3000	180	2300	120	1900	80	3500	470	6500	840	
6	2500	180	1900	120	1600	80	2900	480	5400	840	
8	1900	180	1400	120	1200	80	2200	480	4100	840	
10	1500	180	1200	120	1000	80	1700	490	3200	840	
12	1250	180	1000	120	800	80	1400	480	2800	840	
15	1000	180	800	120	600	80	1200	480	2200	800	
20	750	160	600	110	500	70	900	460	1700	700	
25	600	140	500	100	400	60	700	350	1300	600	
30	500	120	400	90	300	60	600	300	1100	560	

E-42 ◀ ▶ 尺寸表 Stocked Sized

SLHV | 重切削 长刃型 HEAVY End Mills Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling  DC: 立铣刀外径 Dia. of Mill
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
	外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	
3	2700	93	1900	58	1300	33	3200	270	6400	490	
5	1600	91	1100	57	800	32	1900	270	3800	490	
6	1300	93	930	58	660	32	1600	270	3200	490	
8	1000	93	700	58	500	32	1200	270	2400	490	
10	800	95	560	60	400	33	960	270	1900	500	
12	660	94	460	59	330	33	800	270	1600	490	
15	530	93	370	59	270	33	640	270	1300	490	
20	400	88	280	55	200	31	480	250	960	460	
25	320	67	220	42	160	23	380	190	760	350	
30	270	73	190	46	130	26	320	210	640	390	
40	200	50	140	32	100	18	240	140	480	270	
50	160	26	110	16	80	9	190	74	380	140	

E-43 ◀ ▶ 尺寸表 Stocked Sized

SLHV

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转速和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速钢立铣刀的基本切削条件

Standard Cutting Condition for HSS End Mills

SGELHV | SG-FAX重切铣刀加长刃型 SG-FAX HEAVY End Mills Extra Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
15	850	95	640	64	530	42	960	260	1800	400	
20	640	89	480	60	400	39	720	240	1400	400	
25	510	68	380	46	320	30	570	180	1100	320	
30	420	78	320	53	270	34	480	210	900	370	
40	320	54	240	36	200	24	360	140	680	250	
50	250	28	190	19	160	12	290	74	540	130	

E-43 尺寸表 Stocked Sized

AGELHV | AG铣刀重切加长刃型 AG-mill HEAVY Extra Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
3	5000	110	3800	75	3200	50	5800	300	10800	500	
5	3000	110	2300	75	1900	50	3500	300	6500	500	
6	2500	110	1900	75	1600	50	2900	300	5400	500	
8	1900	110	1400	75	1200	50	2200	300	4100	500	
10	1500	110	1200	75	1000	50	1700	300	3200	500	
12	1250	110	1000	75	800	50	1400	300	2800	500	
15	1000	110	800	75	600	50	1200	300	2200	500	
20	750	100	600	70	500	45	900	290	1700	450	
25	600	90	500	65	400	40	700	230	1300	400	
30	500	80	400	60	300	40	600	200	1100	370	
40	370	67	300	43	240	28	400	175	800	300	
50	300	34	240	23	190	15	350	90	650	150	

E-44 尺寸表 Stocked Sized

ELHV | 重切削 加长刃型 HEAVY End Mills Extra Long

被削材 Work Material	一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		铸铁 FC, FCD		铝合金 铜合金 有色金属		侧面加工时 Side Milling
	Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
							~ 200HB				
外径 Dia. of Mill (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	 DC: 立铣刀外径 Dia. of Mill
15	530	59	370	37	270	21	640	170	1300	310	
20	400	56	280	35	200	19	480	160	960	290	
25	320	43	220	27	160	15	380	120	760	230	
30	270	49	190	31	130	17	320	140	640	260	
40	200	34	140	21	100	12	240	96	480	180	
50	160	17	110	11	80	6	190	50	380	91	
60	130	10	90	6	66	4	160	29	320	53	

E-44 尺寸表 Stocked Sized

SGELHV/AGELHV

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转数和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。
- 3) 对于耐热合金、钛合金, 推荐使用非水溶性切削油剂。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.
- 3) Recommend use of non-water soluble cutting fluid to Heat Resistant Alloy, Titanium Alloy.

ELHV

- 1) 采用干式加工 (推荐使用气吹) 时, 请分别将转数和进给速度降低到 70%。
- 2) 加工不锈钢时, 请采用湿式加工。

- 1) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 2) Use in wet condition in case of Stainless Steel.

2AGRE

- 1) 已设定好 a_p 、 P_f , 以便使精加工的 h 值达到 0.01mm。
- 2) 采用干式加工 (推荐使用气吹) 时, 请分别将转数和进给速度降低到 70%。

- 1) Depth of cut (a_p & P_f) is calculated to be 0.01mm (=h) in finishing process.
- 2) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.

RE

- 1) 已设定好 a_p 、 P_f , 以便使精加工的 h 值达到 0.01mm。
- 2) 采用干式加工 (推荐使用气吹) 时, 请分别将转数和进给速度降低到 70%。
- 3) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。

- 1) Depth of cut (a_p & P_f) is calculated to be 0.01mm (=h) in finishing process.
- 2) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 3) Adjust cutting condition when unusual vibration, different sound occur by cutting.

SGFRR

- 1) 进行侧面加工时请乘以表中的进给系数。
- 2) 采用干式加工 (推荐使用气吹) 时, 请分别将转数和进给速度降低到 70%。
- 3) 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。

- 1) If used in side milling, reduce feed by coefficient.
- 2) In dry process (recommend air blow), reduce the rotation and feed to 70% of table values.
- 3) Adjust cutting condition when unusual vibration, different sound occur by cutting.

有关切削条件的注意事项


1. 请将产品目录中所记载的基准切削条件表内的数值作为新的加工作业开始时的大致标准。
2. 因工件和加工设备的关系出现振动和异常声响时, 请根据情况变更切削条件。
3. 您使用的加工设备的最高转速未达到基准切削条件时, 请以其最高转速进行加工。此时, 请按相同比例降低进给速度。

Attention on using the cutting condition tables

1. Utilize the standard cutting condition shown in the catalogs just as the general guide, when starting operation.
2. Adjust cutting condition when unusual vibration, different sound occur by cutting.
3. When using low speed machines, use the maximum speed and adjust the feed rate.

2AGRE | AG 球头铣刀 AG-mill Ball

球头半径 Ball Radius (mm)		被削材 Work Material		一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属			
				Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal			
		切削量 Depth of cut		转速 Rotation (min ⁻¹)		进给速度 Feed (mm/min)		转速 Rotation (min ⁻¹)		进给速度 Feed (mm/min)		转速 Rotation (min ⁻¹)		进给速度 Feed (mm/min)		~ 200HB	
																转速 Rotation (min ⁻¹)	
		ap	Pf														
粗加工 Roughing	RE 1	0.8	0.8	7200	120	4800	74	4000	66	3200	42	7200	140	14000	410		
	RE 2	1.6	1.6	3600	140	2400	82	2000	75	1600	45	3600	150	6800	460		
	RE 3	2.4	2.4	2400	150	1600	88	1300	78	1100	50	2400	160	4500	480		
	RE 5	4	4	1400	150	960	95	800	86	640	51	1400	170	2700	510		
	RE 8	6.4	6.4	900	150	600	93	500	87	400	52	900	170	1700	510		
	RE10	8	8	720	150	480	91	400	86	320	51	720	170	1400	510		
	RE12.5	10	10	570	140	380	81	320	76	250	43	570	160	1100	490		
精加工 Finishing	RE 1	0.2	0.3	12000	600	8000	360	6600	260	5300	160	12000	630	23000	1400		
	RE 2	0.2	0.4	8200	660	5500	400	4600	290	3700	180	8200	690	16000	1500		
	RE 3	0.5	0.5	4300	470	2900	290	2400	210	1900	130	4300	500	8200	1100		
	RE 5	0.5	0.6	3300	590	2200	360	1800	260	1500	160	3300	620	6200	1300		
	RE 8	0.5	0.8	2600	730	1700	430	1400	310	1100	190	2600	760	4900	1600		
	RE10	0.5	0.9	2300	780	1500	460	1300	350	1000	210	2300	820	4300	1800		
	RE12.5	0.5	1	2000	840	1400	530	1100	370	910	230	2000	880	3900	2000		



DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

E-46 尺寸表 Stocked Sized

RE | 球头铣刀2刃型 Ball End Mills Two Flutes


球头半径 Ball Radius (mm)		被削材 Work Material		一般结构用钢 SS 碳钢 S-C	合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属		
				Structural Steel Carbon Steel	Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal		
		切削量 Depth of cut ap Pf										~ 200HB			
				转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
粗加工 Roughing	RE 1	0.8	0.8	4000	57	2800	36	2000	27	1600	18	4400	70	9600	240
	RE 2	1.6	1.6	2000	64	1400	40	1000	31	800	19	2200	78	4800	270
	RE 3	2.4	2.4	1300	68	930	43	660	33	530	21	1500	82	3200	280
	RE 5	4	4	800	71	560	46	400	36	320	21	880	86	1900	300
	RE 8	6.4	6.4	500	71	350	45	250	36	200	21	550	86	1200	300
	RE10	8	8	400	71	280	44	200	36	160	21	440	86	960	300
	RE12.5	10	10	320	63	220	39	160	32	130	18	350	83	760	290
精加工 Finishing	RE15	12	12	270	46	190	29	130	27	110	15	290	56	640	200
	RE 1	0.2	0.3	6600	330	4600	210	3300	130	2700	81	7300	380	16000	1000
	RE 2	0.2	0.4	4600	370	3200	230	2300	150	1800	86	5000	420	11000	1100
	RE 3	0.5	0.5	2400	260	1700	170	1200	110	960	63	2600	300	5800	800
	RE 5	0.5	0.6	1800	320	1300	210	900	130	730	79	2000	380	4400	1000
	RE 8	0.5	0.8	1400	390	1000	250	700	160	570	96	1600	470	3400	1100
	RE10	0.5	0.9	1300	440	890	270	600	160	510	100	1400	500	3100	1300
	RE12.5	0.5	1	1100	460	800	300	600	200	450	110	1300	570	2700	1400
	RE15	0.5	1.1	1000	500	730	330	500	200	410	120	1100	580	2500	1500

ap

PF

h

DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius



DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

E-47 尺寸表 Stocked Sized

SGFRR | SG-FAX粗铣刀球头型 SG-FAX Roughing Ball End Mills Fine Pitch

球头半径 Ball Radius (mm)		被削材 Work Material		一般结构用钢 SS 碳钢 S-C		合金钢 SCM 调质钢 NAK, HPM		模具钢 SKD 不锈钢 SUS		耐热合金 钛合金		铸铁 FC, FCD		铝合金 铜合金 有色金属	
				Structural Steel Carbon Steel		Alloy Steel Heat Treated Steel		Mold Steel Stainless Steel		Heat Resistant Alloy Titanium Alloy		Cast Iron		Aluminum Alloy Copper Alloy Non-Ferrous Metal	
		切削量 Depth of cut		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	~ 200HB		转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)
												ap	Pf		
曲面加工 Curved Surface Milling	RE 5	4	4	1300	260	950	160	800	150	650	86	1450	280	2750	830
	RE 6	4.8	4.8	1100	260	800	160	680	150	540	86	1200	280	2300	830
	RE 8	6.4	6.4	800	260	600	160	500	150	400	86	900	280	1700	830
	RE10	8	8	650	260	480	160	400	150	320	86	720	280	1350	830
	RE12.5	10	10	520	230	380	140	320	130	250	77	580	250	1100	740
	RE15	12	12	420	180	320	110	270	100	220	60	480	200	920	580
	RE16	12.8	12.8	400	240	300	140	250	130	200	76	450	250	850	740
	RE20	16	16	320	190	240	120	200	110	160	63	360	200	680	620
RE25	20	20	250	160	190	90	160	86	130	50	290	170	550	500	
侧面加工 Side Milling	切削量 Depth of cut	ap		1.5DC											
	进给系数	Feed Coefficient		0.5DC											
				0.5				0.4		0.45		0.6		0.75	

DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius



DC: 立铣刀外径
Dia. of Mill
RE: 球头半径
Ball Radius

E-47 尺寸表 Stocked Sized

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



切割工具

Metal Cutting Saw Series

商品一览 Product List	F-2
使用注意事项 Attention on Safety	F-3
选定基准 Selection Chart	F-4
尺寸表 Size List	F-6
切削条件 Cutting Condition	F-13
金属带锯条适用机械 Applicable Machines	F-14

品名
Product Name

页
Page

卧式锯床用金属带锯条

Metal Band Saw Blades for Cut Off Machine

锯条 PM 型 TORNADO PM	F-6
尖型锯条 TORNADO SWORD	F-7
锯条 FAX 型 TORNADO FAX	F-7
锯条尖齿 G 型 TORNADO G SWORD	F-7
锯条 G-FAX 型 TORNADO G-FAX	F-7
锯条 PM-H 型 TORNADO PM-H	F-8
锯条尖齿 H 型 TORNADO SWORD-H	F-8
锯条 PM CNC 型 TORNADO PM CNC	F-8
锯条尖齿 CNC 型 TORNADO SWORD CNC	F-8
锯条尖齿 MD 型 TORNADO SWORD-MD	F-9
锯条 PM-K 型 TORNADO PM-K	F-9
锯条 PM-K-WT 型 TORNADO PM-K-WT	F-9
锯条 PM-KS 型 TORNADO PM-KS	F-9
锯条 PM-KS-WT 型 TORNADO PM-KS-WT	F-9
锯条 PM-WT 型 TORNADO PM-WT	F-9

立式锯床用金属带锯条

Metal Band Saw Blades for Contour Machine

双金属 MV Bi-Metal MV	F-10
双金属 PM Bi-Metal PM	F-10

便携式机器用金属带锯条

Metal Band Saw Blades for Portable Machine

双金属 Bi-Metal	F-11
-----------------	------

手工锯片

Hand Hack Saw Blades

手工锯片 Hand Hack Saw Blades	F-12
双金属手工锯片 PM 型 BI-METAL Hand Hack Saw Blades PM	F-12
手用高速钢锯条 HSS Hand Hack Saw Blades	F-12

新品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具




技术资料
索引

**警告** Warning

■ 使用前请务必阅读以下内容

Read this "Attention on safety"

- 带锯条具有危险性。展开带锯条时有被弹伤的危险，请小心。
A band saw blades is dangerous. Be fully careful because it has danger when a saw edge is untied and spread.
- 在进行带锯条的解开、安装、拆卸作业等时请使用皮手套。
Use leather gloves in the installation and the removal of the band saw blades.
- 在更换带锯条时请务必切断机械的主电源。
Be sure to cut the main power supply of the machine when you replace a band saw blades.
- 请切实固定住被削材。
Fix work materials firmly.
- 严禁用手触碰转动中的带锯条。
Never touch a band saw blades during the rotation.
- 请在仔细阅读所用机械的使用说明书后正确使用。
Read the instruction manual of the machine, and use it properly.
- 请充分进行磨合运转。
Recommend running-in a band saw blades to achieve the full life.
- 请注入足够的适合被削材的切削油剂后再使用。
Use the cutting fluid fully which is suitable for work material.
- 使用后的带锯条请小心处理。
Be fully careful of the disposal of the band saw blades which has been used.



新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引


各被削材の帶鋸條选定表 Selection Chart according to Work Materials

	异形材 Deformed Material	实心材 Solid Material						
	结构钢 Shaped Steel	有色金属 Non-Ferrous Metal	一般钢 Structural Steel			难削材、高硬度钢 Difficult-to-Cut Material Hardened Steel		
	H 型钢、轻量型钢 管材类、柱形材料	铝合金钢	结构用钢 SS,SC,SM	碳钢 SC	合金钢 SCr,SCM	工具钢 预硬钢 SKS,NAK Tool Steel Pre-Hardened Steel	模具用钢 高速钢 不锈钢	耐热钢 铬镍铁合金 钛
	H-Shaped Steel Light Gauge Steel Pipe, Column	Aluminum Alloy	Structural Steel	Carbon Steel	Alloy Steel	High Speed Steel Stainless Steel	Mold Steel Heat Resistant Steel Inconel, Titanium	
刃材钢种 Kind of blade steel	PM							
				提升耐磨性 (长寿命化) Improved wear resistance (Longer life)		尖齿		
						FAX	尖齿 G 型 G-FAX	
特殊用途 Special use blade shape	K, KS	耐崩损 Chipping resistance						
		H 对应高速切削 High speed cutting					高品位切削 High quality cutting	MD

WT 齿形分齿 WT type set

- 将带锯条的锯身插入到大型型钢中时，请使用 WT 齿形。
(标准是 H 型钢 600 以上)

In case of large self-stressing material, band saw may be jammed by its stress. We recommend "WT type band saw blade" to avoid this jamming.



标准 Standard

WT 齿形 WT Type

支持 CNC 机 CNC machine correspondence

- 通过对锯身实施特殊表面处理加工，提高疲劳寿命

Significantly improved fatigue life with special surface coating in body part.

用途

Work Materials

- 机械结构用碳钢 Structural Steel
- 合金钢 Alloy Steel
- 不锈钢 Stainless Steel
- 耐热钢 Heat Resistant Steel
- 工具钢 Tool Steel

适用机械

Applicable Machines

HFA-300CNC、400CNC、500CNC
SGA410CNC、SGA8010CNC、SGA8513CNC等

	标记 Mark	说 明 Descriptions	标记 Mark	说 明 Descriptions
说明	 涂层	TiCN 系复合多层涂层品，耐溶性、耐磨性和耐热性能优良。 TiCN multi-layer Coat	 工具材料	使用了含钴高速钢。 Cobalt HSS
	 工具材料	使用了高级粉末高速钢。 High Grade Powder HSS	 工具材料	使用了 HSS（高速钢）。 High Speed Steels
	 工具材料	使用了高合金高速钢。 High Alloy HSS	 工具材料	使用了合金工具钢。 Alloy Tool Steels
	 工具材料	使用了高效能含钴高速钢。 High Grade Cobalt HSS	 双金属	刃部和锯身焊接了不同材料的双金属结构。 Bi-Metal construction

库存标记

- 记号：标准库存品。
△记号：定制品。
无记号：不制作。

Stocking marks

- : Stocked items
△ : Manufactured upon request
No mark : Not manufactured

齿数的选定 Selection of Teeth

●实心材 Solid Material

最大切削长 Size of material (mm)	齿距 Pitch															
	0.75/1	1/1.5	(1.25) 1/2	(1.5/2)	(2) 2/3	(3) 3/4	(4) 4/6	6 5/7	8 6/10	10 8/12	12	14	18			
~ 4																
~ 10																
~ 20																
~ 40																
~ 60																
~ 100																
~ 150																
~ 200																
~ 300																
~ 400																
~ 600																
~ 800																
800 ~																


适用机械 Applicable Machines	卧式锯床 For Cut Off Machine															
	旋转式锯床 For Rotary Machine															
	立式锯床 For Contour Machine															

注：进行切削长度 100mm 以下的整束切削时，请选择比该齿距大一号的齿数。


note) Bundle cutting, please select the size that one pitch is large when cutting length is equal to or less than 100mm.

●异形材 Deformed Material

H 形钢 H-Shaped Steel



轻量型钢 Light Gauge Steel



管材 Tubing



尺寸 Size of Material(mm)				适用齿数 TPI	尺寸 Size of Material(mm)			适用齿数 TPI	t D	适用齿数 TPI						
H	B	t ₁	t ₂		L	A	t			20	40	60	80	120	160	200
300	150	6	9	5/7	65	30	1.6	14	2	14	14	14	14	14	14	14
400	200	8	13	3/4, 4/6	75	45	1.6	12	4	14	14	12	12	8/12	8/12	6/10
500	200	10	16	3/4	100	50	2.0	8/12	6		8/12	8/12	6/10	6/10	5/7	5/7
600	200	11	17	3/4	125	50	3.2	8/12	8			6/10	6/10	5/7	5/7	4/6
700	300	13	24	3/4	150	65	3.2	6/10	10				5/7	5/7	4/6	4/6
800	300	14	26	2/3, 3/4	200	75	4.0	6/10	12					4/6	4/6	4/6
900	300	16	28	2/3	250	75	4.5	5/7								

注：切型钢等异形材时，必须保持两枚齿在被削材中。

note) Please select pitch so that teeth of simultaneous cutting becomes than two teeth.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

锯条 PM 型

TORNADO PM

●从实心材到异形材, 适用于多种形状, 使用范围较广。

Applicable from Solid Material to Deformed Material.



切削条件 Cutting Condition ▶▶▶ F-13

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
※ BPV27504-6	2750	27	0.95	4/6	●
※ BPV27505-7	2750	27	0.95	5/7	●
※ BPV27506-10	2750	27	0.95	6/10	●
※ BPV27508-12	2750	27	0.95	8/12	●
BPV35052-3	3505	27	0.95	2/3	●
BPV35053-4	3505	27	0.95	3/4	●
BPV35054-6	3505	27	0.95	4/6	●
BP35053	3505	27	0.95	3	●
BP35054	3505	27	0.95	4	●
BPV36602-3	3660	27	0.95	2/3	●
BPV36603-4	3660	27	0.95	3/4	●
BPV36604-6	3660	27	0.95	4/6	●
BP36603	3660	27	0.95	3	●
BP36604	3660	27	0.95	4	●
※ BPV37504-6	3750	27	0.95	4/6	●
※ BPV37505-7	3750	27	0.95	5/7	●
※ BPV37506-10	3750	27	0.95	6/10	●
※ BPV37508-12	3750	27	0.95	8/12	●
BPWV35052-3	3505	34	1.07	2/3	●
BPWV35053-4	3505	34	1.07	3/4	●
BPWV35054-6	3505	34	1.07	4/6	●
BPWV36604-6	3660	34	1.07	4/6	●
BPWV41152-3	4115	34	1.07	2/3	●
BPWV41153-4	4115	34	1.07	3/4	●
BPWV41154-6	4115	34	1.07	4/6	●
BPW41152	4115	34	1.07	2	●
BPW41153	4115	34	1.07	3	●
BPW41154	4115	34	1.07	4	●
BPWV42102-3	4210	34	1.07	2/3	●
BPWV42103-4	4210	34	1.07	3/4	●
BPWV42104-6	4210	34	1.07	4/6	●
BPWV45702-3	4570	34	1.07	2/3	●
BPWV45703-4	4570	34	1.07	3/4	●
BPWV45704-6	4570	34	1.07	4/6	●
BPW45702	4570	34	1.07	2	●
BPW45703	4570	34	1.07	3	●
BPW45704	4570	34	1.07	4	●
BPWV48803-4	4880	34	1.07	3/4	●
BPQV45702-3	4570	41	1.30	2/3	●
BPQV46702-3	4670	41	1.30	2/3	●
BPQV46703-4	4670	41	1.30	3/4	●
BPQV46704-6	4670	41	1.30	4/6	●
BPQV47202-3	4720	41	1.30	2/3	●
BPQV47203-4	4720	41	1.30	3/4	●
BPQV48802-3	4880	41	1.30	2/3	●
BPQV48803-4	4880	41	1.30	3/4	●
BPQ48802	4880	41	1.30	2	●
BPQ48803	4880	41	1.30	3	●
BPQV50402-3	5040	41	1.30	2/3	●
BPQV50403-4	5040	41	1.30	3/4	●
BPQV50404-6	5040	41	1.30	4/6	●
BPQV53002-3	5300	41	1.30	2/3	●
BPQV53003-4	5300	41	1.30	3/4	●
BPQV53004-6	5300	41	1.30	4/6	●

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
BPQ53002	5300	41	1.30	2	●
BPQ53003	5300	41	1.30	3	●
BPQV54502-3	5450	41	1.30	2/3	●
BPQV54503-4	5450	41	1.30	3/4	●
BPQV54504-6	5450	41	1.30	4/6	●

订货方式 型 全长 宽度 刃数

单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock							
				刃数 TPI							
				0.75/1	1/1.5	1/2	1.5/2	2/3	3/4	4/6	5/7
BPV	请指定	27	0.95					△	△	△	△
BPWV		27	1.07						△	△	
		34	1.07					△	△		
BPQV	请指定	41	1.30					△	△	△	
		54	1.30					△	△		
		54	1.60		△	△	△	△	△	△	
BPVHV	请指定	67	1.60	△	△	△	△	△	△		
		80	1.60	△							

订货方式 型 全长 宽度 刃数

单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock			
				刃数 TPI			
				2	3	4	6
BP	请指定	27	0.95		△	△	△
BPW		34	1.07	△	△	△	
BPQ		41	1.30	△	△		

卧式锯床用金属带锯条的包装数量

Packed Quantity

宽度 Width	全长 OAL	数量 Pcs.
27	2750	5
27	3505 ~ 3660	5
27	3750	5
34	3660 ~ 5334	5
41	4570 ~ 6095	5
41	6650	2
54	6500 ~ 8300	2
67	8800 ~ 13365	1

带※记号的是和旋转式锯床用金属带锯条“锯条PM型”相同的产品。

尖型锯条

TORNADO SWORD

- 适用于 SUS、SKD 的难削实心材、一般钢的切割。
It is suitable for Difficult-to-Cut Solid Material and Structural Steel.



切削条件 Cutting Condition ▶▶ F-13

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
BXV35053-4	3505	27	0.95	3/4	●
BXV35054-6	3505	27	0.95	4/6	●
BXV36603-4	3660	27	0.95	3/4	●
BXV36604-6	3660	27	0.95	4/6	●
BXWV41152-3	4115	34	1.07	2/3	●
BXWV41153-4	4115	34	1.07	3/4	●
BXWV45702-3	4570	34	1.07	2/3	●
BXWV45703-4	4570	34	1.07	3/4	●
BXQV48802-3	4880	41	1.30	2/3	●
BXQV48803-4	4880	41	1.30	3/4	●
BXQV50402-3	5040	41	1.30	2/3	●
BXQV50403-4	5040	41	1.30	3/4	●
BXQV53002-3	5300	41	1.30	2/3	●
BXQV53003-4	5300	41	1.30	3/4	●
BXQV54502-3	5450	41	1.30	2/3	●
BXQV54503-4	5450	41	1.30	3/4	●

订货方式 型 全长 宽度 刃数

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock							
				刃数 TPI							
				0.75/1	1/1.5	1/2	1.5/2	2/3	3/4	4/6	
BXV	请指定	27	0.95						△	△	
BXWV		34	1.07					△	△		
BXQV		41	1.30					△	△		
BXHV		54	1.60		△	△	△				
		67	1.60	△	△	△	△				

锯条尖齿 G 型

TORNADO G SWORD

- 可在高硬度钢、难削异形材等的切割中实现长寿命。
It shows long life when cutting Hardened Steel and Difficult-to-Cut Deformed Material.



切削条件 Cutting Condition ▶▶ F-13

订货方式 型 全长 宽度 刃数 单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock	
				刃数 TPI	
				2/3	3/4
BXG	请指定	27	0.95		△
		34	1.07	△	△
		41	1.30	△	△
		54	1.60	△	
		67	1.60	△	

锯条 FAX 型

TORNADO FAX

- 可在难削材、难削异形材等的切割中发挥威力。
It is suitable for efficient cutting of Difficult-to-Cut Material and Difficult-to-Cut Deformed Material.



切削条件 Cutting Condition ▶▶ F-13

订货方式 型 全长 宽度 刃数 单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock		
				刃数 TPI		
				1/2	2/3	3/4
BFV	请指定	27	0.95		△	△
BFWV		27	1.07		△	△
		34	1.07		△	△
BFQV		41	1.30		△	△
BFHV		54	1.60	△	△	
		67	1.60	△	△	

锯条 G-FAX 型

TORNADO G-FAX

- 可在高硬度钢、难削异形材等的切割中实现长寿命。
It shows long life when cutting Hardened Steel and Difficult-to-Cut Deformed Material.



切削条件 Cutting Condition ▶▶ F-13

订货方式 型 全长 宽度 刃数 单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock	
				刃数 TPI	
				2/3	3/4
BGV	请指定	27	0.95		△
BGWV		34	1.07	△	△
BGQV		41	1.30	△	△
BGHV		54	1.60	△	
		67	1.60	△	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

锯条 PM-H 型 TORNADO PM-H

●锋利尖锐的齿形可实现高速切削。

Possible high speed cutting by sharp tooth design.



切削条件 Cutting Condition ▶▶ F-13

订货方式 型 全长 宽度 刃数 单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock	
				刃数 TPI	
				2/3H	3/4H
BPH	请指定	27	0.95		△
		34	1.07	△	△
		41	1.30	△	△
		54	1.30	△	
		54	1.60	△	
		67	1.60	△	

锯条尖齿 H 型 TORNADO SWORD-H

●锋利尖锐的齿形可实现高速切削。

Possible high speed cutting by sharp tooth design.



切削条件 Cutting Condition ▶▶ F-13

订货方式 型 全长 宽度 刃数 单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock	
				刃数 TPI	
				2/3H	3/4H
BXH	请指定	27	0.95		△
		34	1.07	△	△
		41	1.30	△	△
		54	1.30	△	
		54	1.60	△	
		67	1.60	△	

锯条 PM CNC 型 TORNADO PM CNC

●支持 CNC 机，适用于一般钢。

●锋利尖锐的齿形可实现高速切削。

Applicable for CNC. For Structural Steel.
Possible high speed cutting by sharp tooth design.



切削条件 Cutting Condition ▶▶ F-13

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
BPCN44602-3H	4460	34	1.07	2/3H	●
BPCN44603-4H	4460	34	1.07	3/4H	●
BPCN49952-3H	4995	41	1.30	2/3H	●
BPCN49953-4H	4995	41	1.30	3/4H	●
BPCN58152-3H	5815	54	1.30	2/3H	●

锯条尖齿 CNC 型 TORNADO SWORD CNC

●支持 CNC 机，适用于模具钢等难削材。

●锋利尖锐的齿形可实现高速切削。

Applicable for CNC. Applicable to Difficult-to-Cut Material such as Mold Steel.
Possible high speed cutting by sharp tooth design.



切削条件 Cutting Condition ▶▶ F-13

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
BXCN44602-3H	4460	34	1.07	2/3H	●
BXCN44603-4H	4460	34	1.07	3/4H	●
BXCN49952-3H	4995	41	1.30	2/3H	●
BXCN49953-4H	4995	41	1.30	3/4H	●
BXCN58152-3H	5815	54	1.30	2/3H	●

锯条尖齿 MD 型

TORNADO SWORD-MD

●切削阻力小，切削面性状良好。

Possible on a smooth cutting surface, and a small cutting resistance.



切削条件 Cutting Condition ▶▶ F-13

订货方式 型 全长 宽度 刃数 单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock			
				刃数 TPI			
				1/1.5MD	1.5/2MD	2/3MD	3/4MD
BXMD	请指定	27	0.95			△	△
		34	1.07			△	△
		41	1.30		△	△	△
		54	1.60	△	△	△	△
		67	1.60	△	△	△	△

锯条 PM-KS 型

TORNADO PM-KS

锯条 PM-KS-WT 型

TORNADO PM-KS-WT

- 可高速、低振动、低噪音切削大型 H 形钢 (H900)。
- 采用具有优良耐冲击性、抗卷刃的锯齿形状

Large H-Shaped Steel (H900) can be cut at high speed, low vibration, and low noise.
Adopted a blade shape with excellent impact resistance and strong blade in nick.



切削条件 Cutting Condition ▶▶ F-13

订货方式 型 全长 宽度 刃数 单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock	
				刃数 TPI	
				标准锯路型	WT 锯路型
PMKS	请指定	41	1.3	△	△
		54	1.3	△	△
		54	1.6	△	△
		67	1.6	△	△
		67	1.6	△	△

锯条 PM-K 型

TORNADO PM-K

●提升了齿尖强度的变齿距齿形。

适用于型钢和小直径材料的整束切割。

This band saw blade having variable teeth pitch and strong teeth form is suitable for cutting of Shaped Steel and bundles.

锯条 PM-K-WT 型

TORNADO PM-K-WT

●切割残余应力工件的 WT 齿形

适用于切割大型型钢。
(标准是 H 型钢 600 以上)

WT Type band saw blade.
It is suitable for cutting of large Shaped Steel.



切削条件 Cutting Condition ▶▶ F-13

订货方式 型 全长 宽度 刃数 单位 (Unit) : mm

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock					
				刃数 TPI					
				标准锯路型			WT 锯路型		
BPK	请指定	27	0.95			△			
		34	1.07		△				
		41	1.30		△				△
		54	1.30	△	△		△	△	
		54	1.60	△	△		△	△	
		67	1.60	△	△		△	△	

锯条 PM-WT 型

TORNADO PM-WT

●切割残余应力工件的 WT 齿形

WT Type band saw blade.



切削条件 Cutting Condition ▶▶ F-13

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
BPWT50403-4	5040	41	1.3	3/4	●
BPWT54503-4	5450	41	1.3	3/4	●
BPWT57903-4	5790	41	1.3	3/4	●

订货方式 型 全长 宽度 刃数

型 Type	全长 OAL	宽度 Width	厚度 Thickness	库存 Stock	
				刃数 TPI	
				2/3	3/4
BPWT	请指定	41	1.3	△	△
		54	1.6	△	△
		67	1.6	△	△

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

双金属 MV

Bi-Metal MV

- 在一般钢和 SUS、SKD 等难削材的高速高效切割中，泛用性较高的带锯条。

It is very general band saw blades, and it have high speed, high efficiency ability for Structural Steel, SUS and SKD.



双金属 PM

Bi-Metal PM

- 适用于 SUS、SKD 等难削材的自动切割。

It is suitable for automatic cutting of Difficult-to-Cut Material such as SUS, SKD.



订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
BM58	16m	5	0.65	8	△
BM510	16m	5	0.65	10	●
BM512	16m	5	0.65	12	●
BM514	16m	5	0.65	14	●
BM518	16m	5	0.65	18	●
BM68	16m	6	0.65	8	△
BM610	16m	6	0.65	10	●
BM612	16m	6	0.65	12	●
BM614	16m	6	0.65	14	●
BM618	16m	6	0.65	18	●
BM88	16m	8	0.65	8	△
BM810	16m	8	0.65	10	●
BM812	16m	8	0.65	12	●
BM814	16m	8	0.65	14	●
BM818	16m	8	0.65	18	●
BM108	16m	10	0.65	8	●
BM1010	16m	10	0.65	10	●
BM1012	16m	10	0.65	12	●
BM1014	16m	10	0.65	14	●
BM1018	16m	10	0.65	18	●
BM138	16m	13	0.65	8	●
BM1310	16m	13	0.65	10	●
BM1312	16m	13	0.65	12	△
BM1314	16m	13	0.65	14	●
BM1318	16m	13	0.65	18	△

※ 30m 规格的支持订单生产。
OAL 30m is made to order.

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
AC58	30m	5	0.9	8	●
AC510	30m	5	0.9	10	●
AC512	30m	5	0.9	12	●
AC514	30m	5	0.9	14	●
AC518	30m	5	0.9	18	△
AC66	30m	6	0.9	6	●
AC68	30m	6	0.9	8	●
AC610	30m	6	0.9	10	●
AC612	30m	6	0.9	12	●
AC614	30m	6	0.9	14	●
AC618	30m	6	0.9	18	△
AC86	30m	8	0.9	6	●
AC88	30m	8	0.9	8	●
AC810	30m	8	0.9	10	●
AC812	30m	8	0.9	12	●
AC814	30m	8	0.9	14	●
AC818	30m	8	0.9	18	△
AC106	30m	10	0.9	6	●
AC108	30m	10	0.9	8	●
AC1010	30m	10	0.9	10	●
AC1012	30m	10	0.9	12	●
AC1014	30m	10	0.9	14	●
AC1018	30m	10	0.9	18	△
AC136	30m	13	0.9	6	●
AC138	30m	13	0.9	8	●
AC1310	30m	13	0.9	10	●
AC1312	30m	13	0.9	12	●
AC1314	30m	13	0.9	14	●
AC1318	30m	13	0.9	18	△

新品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

●高速高效、泛用性较高的带锯条。

It is very general band saw blades, and it have high speed, high efficiency ability.



订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	全长 OAL	宽度 Width	厚度 Thickness	刃数 TPI	库存 Stock
PB177014	1770	13	0.65	14	●
PB177018	1770	13	0.65	18	●
PB184014	1840	13	0.65	14	●
PB184018	1840	13	0.65	18	●
PB181814	1818	16	0.65	14	●
PB181818	1818	16	0.65	18	●

包装数量为 5 支装。
5 per package.

齿数的选定

Selection of Teeth


被削材形状 Material shape	最大切削长 Size of material (mm)	刃 数 TPI					
		6	8	10	12	14	18
实心材料 Solids	~ 4						
	~ 10						
	~ 20						
	~ 40						
	~ 80						
	80 ~						

宽度的选定

Selection of Width

圆弧切削和带锯条宽度的选定

Selection of wavy cutting and width

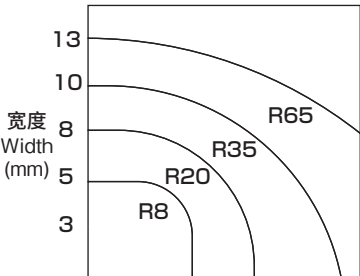

可切削的最小R
Minimum radii

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

手工锯片

Hand Hack Saw Blades

- 从 PVC 管到铁、不锈钢，一般都可使用的泛用品。

General blade for Vinyl Chloride Pipe, Steel, Stainless Steel.



订货方式 TH 长度 刃数

单位 (Unit) : mm / 1 毛重 (Gross)

长度 OAL	刃数 TPI	宽度 Width	厚度 Thickness	库存 Stock
250	14	12	0.64	●
250	18	12	0.64	●
250	24	12	0.64	●
250	32	12	0.64	●
300	14	12	0.64	●
300	18	12	0.64	●
300	24	12	0.64	●
300	32	12	0.64	●

手用高速钢锯条

HSS Hand Hack Saw Blades

- 使用高速钢，耐磨耗、长寿命的高级品。

High grade blade which can get a long tool life by using HSS.



订货方式 HH 长度 刃数

单位 (Unit) : mm / 片 (Pc)

长度 OAL	刃数 TPI	宽度 Width	厚度 Thickness	库存 Stock
250	14	12	0.64	●
250	18	12	0.64	●
250	24	12	0.64	●
250	32	12	0.64	●
300	14	12	0.64	●
300	18	12	0.64	●
300	24	12	0.64	●
300	32	12	0.64	●

双金属手工锯片 PM 型

BI-METAL Hand Hack Saw Blades PM

- 刃部使用高级高速钢，适合用于高效切割。

BI-Metal construction with PM-HSS.



订货方式 BH 长度 刃数

单位 (Unit) : mm / 片 (Pc)


长度 OAL	刃数 TPI	宽度 Width	厚度 Thickness	库存 Stock
250	18	13.1	0.64	●
250	24	13.1	0.64	●

○手工锯片齿数的选定

切割材料的硬度		切割材料的厚度或直径		
		2.5mm以下	2.5~5mm	5mm以上
硬		刃数		
硬	不锈钢、合金钢	32	32	24
稍硬	一般钢	32	24	18
柔软	铝、铜、聚氯乙烯	24	18	14
山形钢·轨道钢		14~24		
薄铁板、薄铁管、小直径合金钢		32		

选择齿数排列稀疏的类型		选择齿数排列密集的类型	
好			
差			

○手工锯片的长度



切削条件

Cutting Condition

尺寸 Band dimension(mm)			27 × 0.95	34 × 1.07	41 × 1.30	54 × 1.60	67/80 × 1.60
切削长度 Work length (mm)			200	250	300	500	600
被削材质 Work materials	条件 Condition						
结构用钢 Structural Steel	SS * * * SM * * * STKM * * *	切削速度 Cutting speed(m/min)	70 ~ 80	60 ~ 70	50 ~ 60	45 ~ 50	40 ~ 50
		切削率 Cutting rate(cm ² /min)	50 ~ 60			50 ~ 60	
快削钢、渗碳钢 Case-hardening Steel, Automatic Steel	S * * C SUM * * * SNCM * * *	切削速度 Cutting speed(m/min)	65 ~ 80	55 ~ 70	50 ~ 65	40 ~ 55	40 ~ 55
		切削率 Cutting rate(cm ² /min)	45 ~ 55			45 ~ 55	
合金钢 Alloy Steel	SCr * * * SCM * * *	切削速度 Cutting speed(m/min)	55 ~ 70	50 ~ 65	45 ~ 60	40 ~ 55	40 ~ 55
		切削率 Cutting rate(cm ² /min)	40 ~ 50			40 ~ 50	
轴承钢、弹簧钢、工具钢、调质钢 Bearing Steel, Spring Steel, Tool Steel, Heat Treated Steel	SUJ * * * SUP * * * SKS * * * NAK * * *	切削速度 Cutting speed(m/min)	40 ~ 55	40 ~ 55	35 ~ 50	30 ~ 45	30 ~ 45
		切削率 Cutting rate(cm ² /min)	30 ~ 40			25 ~ 35	
模具钢、高速度工具钢 Mold Steel, High Speed Steel	SKD * * SKH * *	切削速度 Cutting speed(m/min)	35 ~ 45	30 ~ 45	25 ~ 40	25 ~ 40	20 ~ 35
		切削率 Cutting rate(cm ² /min)	20 ~ 30			20 ~ 30	
不锈钢、耐热钢 Stainless Steel, Heat Resistant Steel	SUS * * * SUH * * * SKT * * *	切削速度 Cutting speed(m/min)	30 ~ 45	30 ~ 45	25 ~ 40	25 ~ 40	20 ~ 35
		切削率 Cutting rate(cm ² /min)	20 ~ 30			20 ~ 30	
耐热合金 Heat Resistant Alloy	Inconel Hastelloy Waspaloy	切削速度 Cutting speed(m/min)	20 ~ 27	15 ~ 20	12 ~ 18	8 ~ 15	8 ~ 15
		切削率 Cutting rate(cm ² /min)	7 ~ 20			5 ~ 15	
铝合金、铝铸件 Aluminum Alloy, Aluminum Cast Alloy	A * * * * AC * * ADC * *	切削速度 Cutting speed(m/min)	80 ~ 150 (500 ~ 2000)	80 ~ 150 (500 ~ 2000)	80 ~ 150 (500 ~ 2000)	60 ~ 80	60 ~ 80
		切削率 Cutting rate(cm ² /min)	70 ~ 1500			70 ~ 1500	
铜合金 Copper Alloy	C * * * *	切削速度 Cutting speed(m/min)	60 ~ 90 (100 ~ 150)	60 ~ 90 (100 ~ 150)	60 ~ 90 (100 ~ 150)	40 ~ 60	40 ~ 60
		切削率 Cutting rate(cm ² /min)	40 ~ 50			30 ~ 40	
碳石墨 Graphitic carbon		切削速度 Cutting speed(m/min)	70 ~ 90 (200 ~ 500)	70 ~ 90 (200 ~ 500)	70 ~ 90 (200 ~ 500)	50 ~ 70	50 ~ 70
		切削率 Cutting rate(cm ² /min)	45 ~ 60			40 ~ 50	
结构钢 Shaped Steel		切削速度 Cutting speed(m/min)	50 ~ 80	50 ~ 80	50 ~ 80	45 ~ 65	45 ~ 65
		切削率 Cutting rate(cm ² /min)	40 ~ 70			30 ~ 50	

1. 本表的数值为参考值。请根据被削材、带锯条种类、带锯床选择最佳的切割条件。

2. 带锯条的磨合运转

- 1) 请将切削条件中的速度设定为比标准速度慢约 20%。
- 2) 请将切入量设定为比标准少约 30%。
- 3) 磨合切削时间以标准寿命的 5% 或标准切削率的约 100 倍的切割面积为标准。

3. () 内为立式锯床的推荐值。

1. The cutting condition shown in table is just as the general guide. Adjust cutting condition according to work material, types of saw, cutting machine.

2. Running-in the band saw blades

- 1) The cutting speed should be used with 80% of table value.
- 2) The depth of cut should be reduced by 30%.
- 3) Running in cutting time is 5% of standard life, or approximately 100 times the cut area of standard cut rate, as a guide.

3. The values of () is for vertical machines.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

金属带锯条适用机械

Applicable Machines

尺寸 Band dimensions			机械生产商和适用机械 Manufacture/type of machine							
全长 OAL (mm)	宽度 Width (mm)	厚度 Thickness (mm)	天田 AMADA	大东精机 DAITO	卡斯托 KASTO	NiCOTECH NiCOTECH	津根精机 TSUNE	合济 EVERISING	日立工机 HITACHI	樋口制作所 HIGUCHI
2750	27	0.95		L2700 FTR230		SSH260DM			CB22F/A	
2910					functional A					
3180					verto A2			EA-1012A		
3505			HA250 HFA250	GA III 260 LTA2630		NCC250H/S SCH25PC/FA		S250HA		
3660			CR225 CR300	H330 S330						HSB300A
3730				LTA2640						
3750									CB32FA/FB	
3820								S300HA		
3830					SBA260AU sba A2					
4115								S-4633SA		
3505	34	1.07	VM420 UB4090	GA260W Ga III 260W		SCH25PC	TC260A2 TC3028G	S-250HB		
3660				UGA260						
3820								S-300HB		
3885			HK400 HKA400			SSP400D				
3920								H-260HB		
4030				ST3540 H3545						
4115			HA300 HFA300	SA360B GA320	SBA260 SSB260	SCH33PC/FA				
4120				S360B GA III 330			TB4-260G TB4-262GN			
4420						SSU450APC		H-360HA/HB		
4460			HFA300CNC							
4570	41	1.30	HA400 HFA400 VM1000	ST4060 GA400 GA III 410		SCH40PC/FA /SA		S400HA/HB		
4900								S-6235HA S-6240SA		
4930					A3x4 HBA340AU PBA450A ssbA2					
5334										
4115		0.95	PCSAW330							
4570		1.30		UGA330 GA400W, GA III 410W				S-400HB		
4623					PBA320 PBA460U					
4670			H450 VM1200 VM2500 CTB400					S-460HB VB04515/25		
4715										
4720							TC405A TC410			
4880			H550E/ II			SCP55SA/ II		H-5550 H-330	CB40F	
4995			HFA400CNC							
5030				ST4560 ST/ST II 4565						
5040			H650H/HD	ST4560 ST4565		NCC650H/HD SSH650D				
5220							TB4-430 TB4-432CNC			
5300	54	1.30	HA500 HFA500 HT650 DYNASAW430	GA III 510		SCH50PC/FA				
5334					HBA360AU PBA450U					
5420							TB4-500GN			
5450			HK650	ST4070 ST5070 ST5570	vertical			H-460HA/HB H-7050		
5700					A4x5					
5790			H750HD			SSH750D NCC750H				
5890				ST II 5080						
6095				GA6070	PBA520 PBA620U					
6300					HBA420AU					
6650			HK800 HKA800			SSP800A.-D				
6830	54	1.30			tecA3·A4 tecU3·U4					
6860				GTA5080CNC						
7200								HW450/650 II		
5175				YGA430						
5280					BBS360/660					
5580								EP-330S		

尺寸 Band dimensions			机械生产商和适用机械 Manufacture/type of machine							
全长 OAL (mm)	宽度 Width (mm)	厚度 Thickness (mm)	天田 AMADA	大东精机 DAITO	卡斯特 KASTO	NICOTECH NICOTECH	津根精机 TSUNE	合济 EVERISING	日立工机 HITACHI	樋口制作所 HIGUCHI
5800	54	1.30			HBP480					
5815			HFA500CNC	SGA410CNC						
5830			VM3800							
5890			HK700 HK700CNC HKB6050/CNC							
5920			DYNASAW530							
6100			PCSAW430					E-430 NC460HB		
6200								H650HA/HB VB070715/25 H-560HA		
6600										
6650			HK800 HKA800			SSP800A/D				
6705				GA660						
6800								H-7056		
7239					HBA520AU-U					
7600			H600 H700	ST6070 ST6090 GA6090				H8070 H7065HA		
7675					tecA5 tecU5					
8000			H900 H950HD	V2020 S7080		SSH900D		H-700HANC H-8276V/T		
8300			H750(D) H800 H900HD	ST8010 GA8010	PBA660 PBA800U			HW500/900 II		
8555					tecA5X10 tecU5X10					
8800				GT7010CNC V2210 GT II 8010CNC				H-1010 H8276		
8890					PBA800 PBA800U					
9300				S7010P						
9600								HW700/1100		
10200			VM4000							
6670	67	1.60	HFA530 HFA530CNC PCSAW530					E-530		
7000				SGA530CNC						
7320					tecA5 tecU5					
7675										
8300			PCSAW700 PCSAW720					VBS1013 NC-700HA		
8550			HK1000 HK1000 II							
8720								H-800HANC		
8800			H1080 HK1000/CNC			SSP1200D		H-1070HANC H-1010		
8840				S1010 S1011-K						
9014				SGA8010CNC						
9195					tecA7 tecU7					
9385					HBA660/ 1060AU-U HBA800/ 1060AU-U					
9710				SGA II 8010CNC						
9900				GT6013CNC						
10670				SGA8513CNC ST8015						
11800			H1300							
8500	80	1.60						E-830		
9195					tecA7					
10000								VBS1316		
10260					BSB1260/ 1560 hba A8-U8X10					
11100			H1000 II					H-1100V/T H-1100HANC		
11430					HBA1060/ 1260U-CNC KASTO hba A10-U10X12					
12230					HBA1060/ 1660U HBA1060/ 1660UCNC					
12300			H1300 II					H-1300		
13000								H-1613		
13360					PBA1060 PBA1260					
15500			H1600 II					H-1616		
15900								H-1816		
16500								H-2116		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

套装商品／其它

DIY Products/Other Products

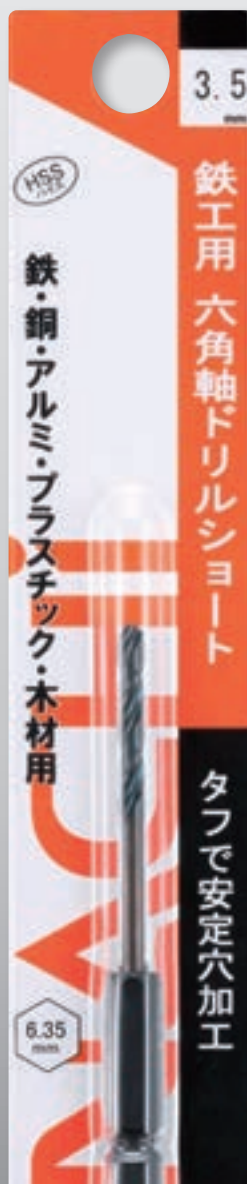

商品一覧／选定表
Product List/Selection Chart

G-2

尺寸表
Size List

G-4

钻头的选定表
Drills Selection Chart

	页 Page	商品编码 Code	品名 Product Name	特 长 Features	
新商品	G-4	SDXJP	铁加工用钻头（带横刃） Drills for Steel (thinning)	切入性出众，可用于多种用途的泛用钻头 Excellent biting performance General purpose drill used in a wide variety of applications	
	G-5	5SDXJP	铁加工用钻头（带横刃）5 支装 Drills for Steel (thinning) 5 per package		
硬质合金钻头	G-6	SDP	铁加工用钻头 Drills for Steel	可用于从铁材到木材的多种用途的泛用钻头 General purpose drill widely applicable from metal to wood	
	G-7	5MSPA	铁加工用钻头 5 支装 Drills for Steel 5 per package		
高速钢钻头	G-7	LSDP	铁加工用长钻头 Long Drills for Steel	用于普通钻头无法深入的深孔和深位置的钻孔 Suitable for deep hole drilling or drilling in a deep position	
	G-8	COSP	不锈钢加工用钻头 Drills for Stainless Steel	使用含钴高速钢，适用于于不锈钢等难削材 Cobalt HSS is used as metal, suitable for Difficult-to-Cut Material such as Stainless Steel	
丝锥	G-9	GSDP	G 涂层钻头 G Coated Drills	以 TiN 涂层实现 10 倍寿命和 2 倍效率 Tool life of 10 times & efficiency of 2 times due to TiN Coating	
	G-10	NOSP	电气加工用钻头 Noss Drills	能以小柄实现大孔钻孔 Big Drilling with small shank	
硬质合金立铣刀	G-10	6SDPS	铁加工用六角短钻头 Hexagonal Shank Short Drills for Steel	强韧的材质，可稳定进行孔加工 It is very tough, so stable drilling	
	G-11	6SDP	铁加工用六角钻 Hexagonal Shank Drills for Steel	可在充电螺丝起子上轻松安装、拆卸 One touch attachment/detachment to an electric screw driver	
高速钢立铣刀	G-11	6SD3P	铁加工用六角钻 3 支装 Hexagonal Shank Drills for Steel 3 per package		
	G-12	6LSDP	铁加工用六角长钻头 Long Reach Hexagonal Shank Drills for Steel	可在充电螺丝起子上轻松安装、拆卸 One touch attachment/detachment to an electric screw driver	
精密工具	G-12	6SUSSDP	不锈钢加工用六角钻头 Hexagonal Shank Drills for Stainless Steel	使用含钴高速钢，适用于于不锈钢等难削材 Cobalt HSS is used as metal, suitable for Difficult-to-Cut Material such as Stainless Steel	
	G-13	6SDSP	薄板加工用六角钻 Spurt 钻头 Spurt Drill, with Hexagonal Shank, is for thin sheets	切入性优良的薄板用六角钻头 Hexagonal shank drills with good bite for thin sheets	
其它	G-14	SET10	铁加工用钻头 10 支装 Drills for Steel (10 Sizes Pack)	可用于从铁材到木材的多种用途的泛用钻头 General purpose drill widely applicable from metal to wood	
	G-14	COSET10	不锈钢加工用钻头 10 支装 Drills for Stainless Steel (10 Sizes Pack)	使用含钴高速钢，适用于于不锈钢等难削材 Cobalt HSS is used as metal, suitable for Difficult-to-Cut Material such as Stainless Steel	
高速钢立铣刀	G-14	GSDSET10	G 涂层钻头 10 支装 G Coated Drills (10 Sizes Pack)	以 TiN 涂层实现 10 倍寿命和 2 倍效率 Tool life of 10 times & efficiency of 2 times due to TiN Coating	
	G-15	DIYSET5	电钻用钻头 5 支装 Drills for Power Drill (5 Sizes Pack)		
切割工具	G-15	DIYSET7	电钻用钻头 7 支装 Drills for Power Drill (7 Sizes Pack)	不易滑动，少许力量就能钻孔 Not Slippery and with small shank	
	G-15	DIYSET13	电钻用钻头 13 支装 Drills for Power Drill (13 Sizes Pack)		
其它	G-16	SET19	铁加工用钻头 19 支装 Drills for Steel (19 Sizes Pack)		
	G-16	SET25	铁加工用钻头 25 支装 Drills for Steel (25 Sizes Pack)	可用于从铁材到木材的多种用途的泛用钻头 General purpose drill widely applicable from metal to wood	
其它	G-16	SET50	铁加工用钻头 50 支装 Drills for Steel (50 Sizes Pack)		
	G-16	COSET19	不锈钢加工用钻头 19 支装 Drills for Stainless Steel (19 Sizes Pack)	使用含钴高速钢，适用于于不锈钢等难削材 Cobalt HSS is used as metal, suitable for Difficult-to-Cut Material such as Stainless Steel	

手工锯片的选定表
Hand Saw Blades Selection Chart

	页 Page	商品编码 Code	品名 Product Name	特 长 Features	
新商品	G-17	SHP25024	一般铁材用手工锯片 24 齿 2 片装 Hand Saw Blades for Steel (24TPI) 2 per package	可用于从塑料到一般铁材的泛用品	
	G-17	SHP25032	薄板、管材用手工锯片 32 齿 2 片装 Hand Saw Blades for Thin Steel Plates and Tubing (32TPI) 2 per package	用于薄铁板以及不锈钢、铝管的切割	
硬质合金钻头	G-17	THX25024	一般铁材用带柄手工锯片 24 齿 2 片装 Hand Saw Blades with grip for Steel (24TPI) 2per package	用于切割锯架难以进入的部位	
	G-17	SHP25018	铝、铜用手工锯片 18 齿 2 片装 Hand Saw Blades for Nonferrous Metals (18TPI) 2 per package	用于切割铝、铜等轻金属或厚板	
丝锥	G-17	HHP25024	铁材、不锈钢用用手高速钢锯条 24 齿 2 片装 HSS Hand Saw Blades for Steel and Stainless Steel (24TPI) 2per package	从塑料到不锈钢，都能发挥出色的切割性能	
	G-17	BHP25024	钢铁、不锈钢用双金属手工锯片 24 齿 2 片装 BI-METAL Hand Saw Blades for Steel and Stainless Steel (24TPI) 2per package	刃部采用高级高速钢，本体采用不易折断的钢材，适合于双金属结构的不锈钢	

◎：优选 Excellent ○：适用 Good —：不推荐 Not recommended

	被削材 Work material							
	软钢 Mild Steel	硬钢 Hard Steel	铸铁 Cast Iron	不锈钢 Stainless Steel	铝材 Aluminum	铜 Copper	塑料 Plastics	木材 Wood
	◎	—	○	○	○	○	○	○
	◎	—	○	○	○	○	○	○
	◎	—	○	—	○	○	○	○
	◎	—	○	—	○	○	○	○
	◎	○	—	○	○	○	○	○
	—	○	○	◎	—	—	—	—
	—	◎	○	◎	○	○	—	—
	○	—	○	—	○	○	○	○
	◎	—	○	—	○	○	○	○
	◎	—	○	—	○	○	○	○
	◎	—	○	—	○	○	○	○
	○	—	○	◎	○	○	○	○
	◎	—	○	○	○	○	○	○
	◎	—	○	—	○	○	○	○
	—	○	○	◎	—	—	—	—
	—	◎	○	◎	○	○	—	—
	◎	—	○	—	○	○	○	○
	◎	—	○	—	○	○	○	○
	◎	—	○	—	○	○	○	○
	◎	—	○	—	○	○	○	○
	◎	—	○	—	○	○	○	○
	—	○	○	◎	—	—	—	—

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

●本钻头是用途较广的泛用钻头。

This drill is applied for general purpose.

单位 (Unit) : mm



X形横刃

订货方式 商品编码

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
SDXJP1.0	1.0	18	40	0.3	140118	
SDXJP1.1	1.1	20	42		140125	
SDXJP1.2	1.2				140132	
SDXJP1.3	1.3	22	45	0.4	140149	
SDXJP1.4	1.4	23	48		140156	
SDXJP1.5	1.5				140163	
SDXJP1.6	1.6	25	50	0.5	140170	
SDXJP1.7	1.7				140187	
SDXJP1.8	1.8	28	52		140194	
SDXJP1.9	1.9				140200	
SDXJP2.0	2.0	29	55	0.6	140217	
SDXJP2.1	2.1				140224	
SDXJP2.2	2.2	33	58		140231	
SDXJP2.3	2.3	37	64	0.7	140248	
SDXJP2.4	2.4	35	61		140255	
SDXJP2.5	2.5				140262	
SDXJP2.6	2.6	39	67	0.8	140279	
SDXJP2.7	2.7				140286	
SDXJP2.8	2.8	42	71		140293	
SDXJP2.9	2.9				140309	
SDXJP3.0	3.0			0.9	140316	
SDXJP3.1	3.1				140323	
SDXJP3.2	3.2				140330	
SDXJP3.3	3.3	45	73	1.0	140347	
SDXJP3.4	3.4				140354	
SDXJP3.5	3.5				140361	
SDXJP3.6	3.6	48	76	1.1	140378	
SDXJP3.7	3.7				140385	
SDXJP3.8	3.8				140392	
SDXJP3.9	3.9	51	79		140408	
SDXJP4.0	4.0			1.2	140415	
SDXJP4.1	4.1	54	83		140422	
SDXJP4.2	4.2				140439	
SDXJP4.3	4.3			1.3	140446	
SDXJP4.4	4.4				140453	
SDXJP4.5	4.5	56	86		140460	
SDXJP4.6	4.6			1.4	140477	
SDXJP4.7	4.7	59	89		140484	
SDXJP4.8	4.8				140491	
SDXJP4.9	4.9				140507	
SDXJP5.0	5.0	62	92	1.5	140514	
SDXJP5.1	5.1				140521	
SDXJP5.2	5.2				140538	
SDXJP5.3	5.3	64	95	1.6	140545	
SDXJP5.4	5.4				140552	
SDXJP5.5	5.5				140569	
SDXJP5.6	5.6			1.7	140576	
SDXJP5.7	5.7	67	98		140583	
SDXJP5.8	5.8				140590	

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
SDXJP5.9	5.9	67	98		140606	
SDXJP6.0	6.0			1.8	140613	
SDXJP6.1	6.1	70	102		140620	
SDXJP6.2	6.2			1.9	140637	
SDXJP6.3	6.3				140644	
SDXJP6.4	6.4				140651	
SDXJP6.5	6.5			2.0	140668	
SDXJP6.6	6.6	73	105		140675	
SDXJP6.7	6.7				140682	
SDXJP6.8	6.8				140699	
SDXJP6.9	6.9			2.1	140705	
SDXJP7.0	7.0				140712	
SDXJP7.1	7.1				140729	
SDXJP7.2	7.2	75	108	2.2	140736	
SDXJP7.3	7.3				140743	
SDXJP7.4	7.4				140750	
SDXJP7.5	7.5	78	111		140767	
SDXJP7.6	7.6			2.3	140774	
SDXJP7.7	7.7				140781	
SDXJP7.8	7.8				140798	
SDXJP7.9	7.9	81	114	2.4	140804	
SDXJP8.0	8.0				140811	
SDXJP8.1	8.1				140828	
SDXJP8.2	8.2	84	117	2.5	140835	
SDXJP8.3	8.3				140842	
SDXJP8.4	8.4				140859	
SDXJP8.5	8.5	87	121	2.6	140866	
SDXJP8.6	8.6				140873	
SDXJP8.7	8.7				140880	
SDXJP8.8	8.8				140897	
SDXJP8.9	8.9	89	124	2.7	140903	
SDXJP9.0	9.0				140910	
SDXJP9.1	9.1				140927	
SDXJP9.2	9.2			2.8	140934	
SDXJP9.3	9.3	92	127		140941	
SDXJP9.4	9.4				140958	
SDXJP9.5	9.5				140965	
SDXJP9.6	9.6			2.9	140972	
SDXJP9.7	9.7				140989	
SDXJP9.8	9.8	95	130		140996	
SDXJP9.9	9.9				141009	
SDXJP10.0	10.0			3.0	141016	
SDXJP10.1	10.1				141023	
SDXJP10.2	10.2				141030	
SDXJP10.3	10.3	98	133	3.1	141047	
SDXJP10.4	10.4				141078	
SDXJP10.5	10.5				141054	
SDXJP10.6	10.6	100	137	3.2	141061	
SDXJP10.7	10.7				141085	
SDXJP10.8	10.8				141092	
SDXJP10.9	10.9	103	140	3.3	141108	
SDXJP11.0	11.0				141115	
SDXJP11.1	11.1				141122	
SDXJP11.2	11.2				141139	
SDXJP11.3	11.3			3.4	141146	
SDXJP11.4	11.4	106	143		141153	
SDXJP11.5	11.5				141160	
SDXJP11.6	11.6				141177	
SDXJP11.7	11.7			3.5	141184	
SDXJP11.8	11.8	109	146		141191	
SDXJP11.9	11.9				141207	
SDXJP12.0	12.0			3.6	141214	
SDXJP12.1	12.1				141221	
SDXJP12.2	12.2	111	149		141238	
SDXJP12.3	12.3			3.7	141245	
SDXJP12.4	12.4				141252	
SDXJP12.5	12.5				141269	
SDXJP12.6	12.6			3.8	141276	
SDXJP12.7	12.7				141283	
SDXJP12.8	12.8	114	152		141290	
SDXJP12.9	12.9			3.9	141306	
SDXJP13.0	13.0				141313	

直径 1.0 ~ 4.0mm 的商品为 2 支装。
Diameter 1.0 ~ 4.0mm product has 2 per package.


5SDXJP

铁加工用钻头（带横刃）5 支装

Drills for Steel (thinning) 5 per package



●本钻头是用途较广的泛用钻头。
This drill is applied for general purpose.

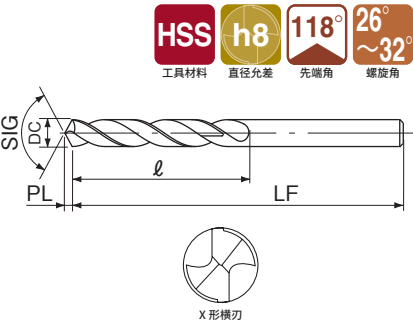

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
5SDXJP1.0	1.0	18	40	0.3	141320	●
5SDXJP1.2	1.2	20	42	0.4	141337	
5SDXJP1.5	1.5	23	48	0.5	141344	
5SDXJP1.8	1.8	28	52		141351	
5SDXJP2.0	2.0	29	55	0.6	141368	
5SDXJP2.2	2.2	33	58	0.7	141375	
5SDXJP2.5	2.5	35	61	0.8	141382	
5SDXJP2.8	2.8	39	67		141399	
5SDXJP3.0	3.0	42	71	0.9	141405	
5SDXJP3.2	3.2			1.0	141412	
5SDXJP3.3	3.3	45	73		141429	
5SDXJP3.5	3.5		1.1	141436		
5SDXJP3.8	3.8	48		76	141443	
5SDXJP4.0	4.0	54	83	1.2	141450	
5SDXJP4.2	4.2			1.3	141467	
5SDXJP4.5	4.5	56	86	1.4	141474	
5SDXJP4.8	4.8	59	89		141481	
5SDXJP5.0	5.0	62	92	1.5	141498	
5SDXJP5.5	5.5	64	95	1.7	141504	
5SDXJP6.0	6.0	70	102	1.8	141511	

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

●本钻头是用途较广的泛用钻头。

This drill is applied for general purpose.

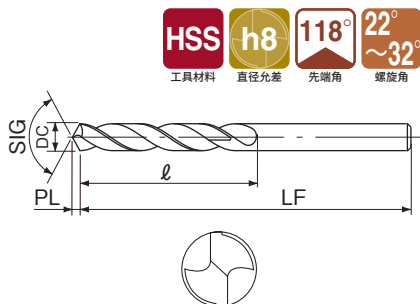

单位 (Unit) : mm

订货方式			商品编码			
商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
SDP0.2	0.2	3.0	19	0.1	046069	
SDP0.3	0.3	3.5	20		046076	
SDP0.4	0.4	5.5	24		046083	
SDP0.5	0.5	7.5	30	0.2	046090	
SDP0.6	0.6	8.5			046106	
SDP0.7	0.7	10.0	32	0.3	046113	
SDP0.8	0.8	11.0	34		046120	
SDP0.9	0.9	13.0	36		046137	
SDP1.0	1.0	18.0	40	0.4	046144	
SDP1.1	1.1	20.0	42		046151	
SDP1.2	1.2				046168	
SDP1.3	1.3	22.0	45	0.5	046175	
SDP1.4	1.4	23.0	48		046182	
SDP1.5	1.5				046199	
SDP1.6	1.6	25.0	50	0.6	046205	
SDP1.7	1.7				046212	
SDP1.8	1.8	28.0	52	0.7	046229	
SDP1.9	1.9				046236	
SDP2.0	2.0	29.0	55	0.8	046243	
SDP2.1	2.1				046250	
SDP2.2	2.2	33.0	58	0.9	046267	
SDP2.3	2.3				046274	
SDP2.4	2.4	35.0	61	1.0	046281	
SDP2.5	2.5				046298	
SDP2.6	2.6	37.0	64	1.1	046304	
SDP2.7	2.7				046311	
SDP2.8	2.8	39.0	67	1.2	046328	
SDP2.9	2.9				046335	
SDP3.0	3.0	42.0	71	1.3	046342	
SDP3.1	3.1				046359	
SDP3.2	3.2	45.0	73	1.4	046366	
SDP3.3	3.3				046373	
SDP3.4	3.4	48.0	76	1.5	046380	
SDP3.5	3.5				046397	
SDP3.6	3.6	51.0	79	1.6	046403	
SDP3.7	3.7				046410	
SDP3.8	3.8	54.0	83	1.7	046427	
SDP3.9	3.9				046434	
SDP4.0	4.0	56.0	86	1.8	046441	
SDP4.1	4.1				046458	
SDP4.2	4.2	59.0	89	1.9	046465	
SDP4.3	4.3				046472	
SDP4.4	4.4	62.0	92	2.0	046489	
SDP4.5	4.5				046496	
SDP4.6	4.6	64.0	95	2.1	046502	
SDP4.7	4.7				046519	
SDP4.8	4.8	66.0	97	2.2	046526	
SDP4.9	4.9				046533	
SDP5.0	5.0	68.0	99	2.3	046540	
SDP5.1	5.1				046557	
SDP5.2	5.2	70.0	101	2.4	046564	
SDP5.3	5.3				046571	
SDP5.4	5.4	72.0	103	2.5	046588	
SDP5.5	5.5				046595	

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock	
SDP5.5	5.5	64.0	95	1.7	046595		
SDP5.6	5.6	67.0	98		046601		
SDP5.7	5.7				046618		
SDP5.8	5.8	70.0	102	1.8	046625		
SDP5.9	5.9				046632		
SDP6.0	6.0				046649		
SDP6.1	6.1	73.0	105	1.9	046656		
SDP6.2	6.2				046663		
SDP6.3	6.3				046670		
SDP6.4	6.4	75.0	108	2.0	046687		
SDP6.5	6.5				046694		
SDP6.6	6.6				046700		
SDP6.7	6.7	78.0	111	2.1	046717		
SDP6.8	6.8				046724		
SDP6.9	6.9				046731		
SDP7.0	7.0	81.0	114	2.2	046748		
SDP7.1	7.1				046755		
SDP7.2	7.2				046762		
SDP7.3	7.3	84.0	117	2.3	046779		
SDP7.4	7.4				046786		
SDP7.5	7.5				046793		
SDP7.6	7.6	87.0	121	2.4	046809		
SDP7.7	7.7				046816		
SDP7.8	7.8				046823		
SDP7.9	7.9	89.0	124	2.5	046830		
SDP8.0	8.0				046847		
SDP8.1	8.1				046854		
SDP8.2	8.2	92.0	127	2.6	046861		
SDP8.3	8.3				046878		
SDP8.4	8.4				046885		
SDP8.5	8.5	95.0	130	2.7	046892		
SDP8.6	8.6				046908		
SDP8.7	8.7				046915		
SDP8.8	8.8	98.0	133	2.8	046922		
SDP8.9	8.9				046939		
SDP9.0	9.0				046946		
SDP9.1	9.1	100.0	137	2.9	046953		
SDP9.2	9.2				046960		
SDP9.3	9.3				046977		
SDP9.4	9.4	103.0	140	3.0	046984		
SDP9.5	9.5				046991		
SDP9.6	9.6				047004		
SDP9.7	9.7	106.0	143	3.1	047011		
SDP9.8	9.8				047028		
SDP9.9	9.9				047035		
SDP10.0	10.0	109.0	146	3.2	047042		
SDP10.1	10.1				047059		
SDP10.2	10.2				047066		
SDP10.3	10.3	110.0	149	3.3	047073		
SDP10.4	10.4				047080		
SDP10.5	10.5				047097		
SDP10.6	10.6	113.0	152	3.4	047103		
SDP10.7	10.7				047110		
SDP10.8	10.8				047127		
SDP10.9	10.9	116.0	155	3.5	047134		
SDP11.0	11.0				047141		
SDP11.1	11.1				047158		
SDP11.2	11.2	119.0	158	3.6	047165		
SDP11.3	11.3				047172		
SDP11.4	11.4				047189		
SDP11.5	11.5	122.0	161	3.7	047196		
SDP11.6	11.6				047202		
SDP11.7	11.7				047219		
SDP11.8	11.8	125.0	164	3.8	047226		
SDP11.9	11.9				047233		
SDP12.0	12.0				047240		
SDP12.1	12.1	128.0	167	3.9	047257		
SDP12.2	12.2				047264		
SDP12.3	12.3				047271		
SDP12.4	12.4	131.0	170	4.0	047288		
SDP12.5	12.5				047295		
SDP12.6	12.6				047301		
SDP12.7	12.7	134.0	173	4.1	047318		
SDP12.8	12.8				047325		
SDP12.9	12.9				047332		
SDP13.0	13.0	137.0	176	4.2	047349		
SDP13.1	13.1				047356		
SDP13.2	13.2				047363		

直径 0.2 ~ 4.0mm 的商品为 2 支装。

Diameter 0.2 ~ 4.0mm product has 2 per package.


5MSPA

铁加工用钻头 5 支装

Drills for Steel 5 per package



- 本钻头是用途较广的泛用钻头。
This drill is applied for general purpose.

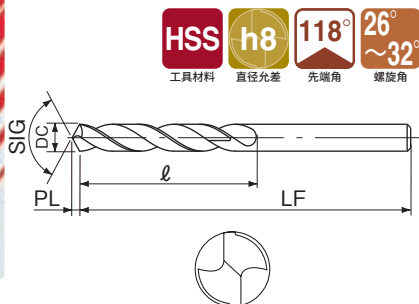

HSS **h8** **118°** **26°~32°**
工具材料 直径公差 先端角 螺旋角

订货方式 商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
5MSPA1.0	1.0	18	40	0.3	111071	
5MSPA1.2	1.2	20	42	0.4	111088	
5MSPA1.3	1.3	22	45		111095	
5MSPA1.5	1.5	23	48	0.5	111101	
5MSPA1.8	1.8	28	52		111118	
5MSPA2.0	2.0	29	55	0.6	111125	
5MSPA2.2	2.2	33	58	0.7	111132	
5MSPA2.5	2.5	35	61		111149	
5MSPA2.8	2.8	39	67	0.8	111156	
5MSPA3.0	3.0	42	71	0.9	111163	
5MSPA3.2	3.2				111170	
5MSPA3.3	3.3			1.0	111187	
5MSPA3.4	3.4	45	73		122374	
5MSPA3.5	3.5				111194	
5MSPA3.6	3.6			1.1	122381	
5MSPA3.7	3.7	48	76		122398	
5MSPA3.8	3.8				111200	
5MSPA4.0	4.0	54	83	1.2	111217	
5MSPA4.2	4.2			1.3	122404	
5MSPA4.5	4.5	56	86	1.4	122411	
5MSPA4.8	4.8	59	89		122428	
5MSPA5.0	5.0	62	92	1.5	122435	
5MSPA5.2	5.2	64	95	1.6	123425	
5MSPA5.5	5.5			1.7	122442	
5MSPA5.8	5.8	67	98		123432	
5MSPA6.0	6.0	70	102	1.8	122459	
5MSPA6.5	6.5	73	105	2.0	112466	


LSDP

铁加工用长钻头

Long Drills for Steel



- 本钻头是用途较广的泛用长钻头。
This is general HSS long drills for deep holes.

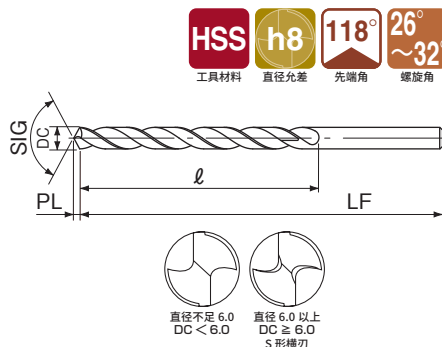

HSS **h8** **118°** **26°~32°**
工具材料 直径公差 先端角 螺旋角

订货方式 商品编码


单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
LSDP2.0 × 100	2.0	40	100	0.6	121025	
LSDP2.0 × 150	2.0	60	150		121346	
LSDP2.5 × 100	2.5	50	100		121032	
LSDP2.5 × 150	2.5	60	150	0.8	121353	
LSDP2.8 × 150	2.8	75	150		127836	
LSDP3.0 × 100	3.0	50	100	0.9	121049	
LSDP3.0 × 150	3.0				121056	
LSDP3.2 × 150	3.2			1.0	121063	
LSDP3.3 × 150	3.3	75	150		121070	
LSDP3.5 × 150	3.5				121087	
LSDP3.5 × 200	3.5	100	200	1.1	121094	
LSDP3.7 × 150	3.7				121100	
LSDP3.8 × 150	3.8	75	150		121117	
LSDP4.0 × 150	4.0			1.2	121124	
LSDP4.0 × 200	4.0	100	200		121131	
LSDP4.2 × 150	4.2	75	150	1.3	121148	
LSDP4.2 × 200	4.2	100	200		121155	
LSDP4.5 × 150	4.5	75	150		121162	
LSDP4.5 × 200	4.5	100	200	1.4	121179	
LSDP4.8 × 150	4.8	75	150		127843	
LSDP5.0 × 150	5.0				121186	
LSDP5.0 × 200	5.0	100	200	1.5	121193	
LSDP5.0 × 250	5.0	120	250		121209	
LSDP5.5 × 150	5.5		150	1.7	128918	
LSDP5.5 × 200	5.5	100	200		121216	
LSDP6.0 × 150	6.0		150		121223	
LSDP6.0 × 200	6.0	100	200	1.8	121230	
LSDP6.0 × 250	6.0	120	250		121247	
LSDP6.5 × 200	6.5	100	200	2.0	121254	
LSDP7.0 × 200	7.0			2.1	121261	
LSDP7.0 × 250	7.0	120	250		121278	
LSDP8.0 × 200	8.0	100	200	2.4	121285	
LSDP8.0 × 250	8.0	120	250		121292	
LSDP9.0 × 200	9.0	100	200	2.7	121308	
LSDP9.0 × 250	9.0	120	250		121315	
LSDP10.0 × 200	10.0	100	200	3.0	121322	
LSDP10.0 × 250	10.0	120	250		121339	



●本钻头是可用于从普通钢到不锈钢的泛用含钴钻头。

This is general cobalt HSS drills.

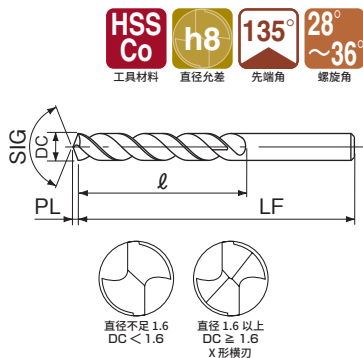

单位 (Unit) : mm

订货方式 商品编码


商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
COSP1.0	1.0	10.0	40	0.2	047868	
COSP1.1	1.1	11.0	42		047875	
COSP1.2	1.2	13.0			101706	
COSP1.3	1.3		45	0.3	047882	
COSP1.4	1.4	14.5	047899			
COSP1.5	1.5		047905			
COSP1.6	1.6	16.0	50	0.4	047912	
COSP1.7	1.7		047929			
COSP1.8	1.8	17.5	52		047936	
COSP1.9	1.9		55	047943		
COSP2.0	2.0	20.0		58	047950	
COSP2.1	2.1		047967			
COSP2.2	2.2	23.0	61		047974	
COSP2.3	2.3			047981		
COSP2.4	2.4	24.5	64	0.5	047998	
COSP2.5	2.5				048001	
COSP2.6	2.6	26.0	67		048018	
COSP2.7	2.7			048025		
COSP2.8	2.8	27.0	71	0.6	048032	
COSP2.9	2.9				048049	
COSP3.0	3.0	29.5	73		048056	
COSP3.1	3.1			76	048063	
COSP3.2	3.2	31.5			0.7	048070
COSP3.3	3.3		048087			
COSP3.4	3.4	33.5	79	048094		
COSP3.5	3.5			048100		
COSP3.6	3.6	36.0	83	048117		
COSP3.7	3.7			048124		
COSP3.8	3.8	38.0	86	048131		
COSP3.9	3.9			048148		
COSP4.0	4.0	40.0		89	048155	
COSP4.1	4.1		048162			
COSP4.2	4.2	42.0	92	048179		
COSP4.3	4.3			048186		
COSP4.4	4.4	44.0		95	048193	
COSP4.5	4.5		048209			
COSP4.6	4.6	46.0	98		048216	
COSP4.7	4.7			048223		
COSP4.8	4.8	48.0	1.0	048230		
COSP4.9	4.9			048247		
COSP5.0	5.0	50.0		101	048254	
COSP5.1	5.1		104		048261	
COSP5.2	5.2	107		048278		
COSP5.3	5.3		110	1.1	048285	
COSP5.4	5.4	048292				
COSP5.5	5.5	113	048308			
COSP5.6	5.6		116	048315		
COSP5.7	5.7	119		048322		
COSP5.8	5.8		122	048339		
COSP5.9	5.9	048346				

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
COSP6.0	6.0	49.0	102	1.2	048353	
COSP6.1	6.1			1.3	048360	
COSP6.2	6.2				048377	
COSP6.3	6.3	51.0	105	1.4	048384	
COSP6.4	6.4				048391	
COSP6.5	6.5			1.5	048407	
COSP6.6	6.6	53.0	108		048414	
COSP6.7	6.7		1.6	048421		
COSP6.8	6.8			048438		
COSP6.9	6.9	55.0	111	1.7		048445
COSP7.0	7.0				048452	
COSP7.1	7.1			1.8	048469	
COSP7.2	7.2	57.0	114		048476	
COSP7.3	7.3		1.9	048483		
COSP7.4	7.4		2.0	048490		
COSP7.5	7.5	59.0		117		048506
COSP7.6	7.6		2.1	048513		
COSP7.7	7.7		61.0	121		048520
COSP7.8	7.8	048537				
COSP7.9	7.9	63.0		124	2.2	048544
COSP8.0	8.0		048551			
COSP8.1	8.1		2.3		048568	
COSP8.2	8.2	65.0		127		
COSP8.3	8.3		048582			
COSP8.4	8.4		2.4	048599		
COSP8.5	8.5	67.0		130		048605
COSP8.6	8.6		048612			
COSP8.7	8.7		2.5	048629		
COSP8.8	8.8	69.0		133		048636
COSP8.9	8.9		048643			
COSP9.0	9.0		2.6	048650		
COSP9.1	9.1	71.0		137		048667
COSP9.2	9.2		048674			
COSP9.3	9.3		2.7	048681		
COSP9.4	9.4	73.0		140		048698
COSP9.5	9.5		048704			
COSP9.6	9.6		2.8	048711		
COSP9.7	9.7	75.0		143		048728
COSP9.8	9.8		048735			
COSP9.9	9.9		2.9	048742		
COSP10.0	10.0	77.0		146		048759
COSP10.1	10.1		3.0	048766		
COSP10.2	10.2			79.0	149	
COSP10.3	10.3	048780				
COSP10.4	10.4	3.1	048797			
COSP10.5	10.5		81.0	152		048803
COSP10.6	10.6	048810				
COSP10.7	10.7	3.2		048827		
COSP10.8	10.8		83.0	155		048834
COSP10.9	10.9	048841				
COSP11.0	11.0	3.3		048858		
COSP11.1	11.1		85.0	158		048865
COSP11.2	11.2	048872				
COSP11.3	11.3	3.4		048889		
COSP11.4	11.4		87.0	161		048896
COSP11.5	11.5	048902				
COSP11.6	11.6	3.5		048919		
COSP11.7	11.7		89.0	164		048926
COSP11.8	11.8	048933				
COSP11.9	11.9	3.6		048940		
COSP12.0	12.0		91.0	167		048957
COSP12.1	12.1	048964				
COSP12.2	12.2	3.7		048971		
COSP12.3	12.3		93.0	170		048988
COSP12.4	12.4	048995				
COSP12.5	12.5	3.8		049008		
COSP12.6	12.6		95.0	173		049015
COSP12.7	12.7	049022				
COSP12.8	12.8	3.9		049039		
COSP12.9	12.9		97.0	176		049046
COSP13.0	13.0	4.0		049053		



●本钻头是可用于从普通钢到不锈钢以及铝的泛用涂层钻头。

This is general coated drills having jobbers length.

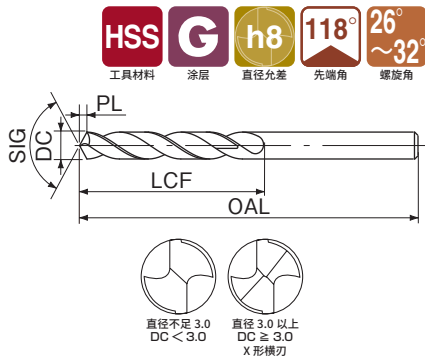

订货方式 商品编码

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	JAN 代码 4991893	库存 Stock
GSDP1.0	1.0	12	34	0.3	101942	
GSDP1.5	1.5	18	40		101768	
GSDP1.8	1.8	22	46	0.5	127829	
GSDP2.0	2.0				101775	
GSDP2.1	2.1	24	49	0.6	108026	
GSDP2.2	2.2				108033	
GSDP2.3	2.3	27	53		108040	
GSDP2.4	2.4			0.7	108057	
GSDP2.5	2.5	30	57		101782	
GSDP2.6	2.6				108064	
GSDP2.7	2.7			0.8	108071	
GSDP2.8	2.8	33	61		101799	
GSDP2.9	2.9				111651	
GSDP3.0	3.0			0.9	101805	
GSDP3.1	3.1				108088	
GSDP3.2	3.2	36	65		101812	
GSDP3.3	3.3			1.0	108095	
GSDP3.4	3.4				108101	
GSDP3.5	3.5	39	70		101829	
GSDP3.6	3.6			1.1	108118	
GSDP3.7	3.7				108125	
GSDP3.8	3.8				101836	
GSDP3.9	3.9	43	75		111668	
GSDP4.0	4.0			1.2	101843	
GSDP4.1	4.1				108132	
GSDP4.2	4.2				101850	
GSDP4.3	4.3			1.3	108149	
GSDP4.4	4.4	47	80		108156	
GSDP4.5	4.5				101867	
GSDP4.6	4.6			1.4	108163	
GSDP4.7	4.7				108170	
GSDP4.8	4.8				101874	
GSDP4.9	4.9	52	86		111675	
GSDP5.0	5.0			1.5	101881	
GSDP5.1	5.1				108187	
GSDP5.2	5.2				108194	
GSDP5.3	5.3			1.6	108200	
GSDP5.4	5.4				108217	
GSDP5.5	5.5				101898	
GSDP5.6	5.6	57	93		108224	
GSDP5.7	5.7			1.7	108231	
GSDP5.8	5.8				108248	
GSDP5.9	5.9				111682	
GSDP6.0	6.0			1.8	101904	
GSDP6.5	6.5	63	101	2.0	101959	
GSDP7.0	7.0	69	109	2.1	101911	
GSDP7.5	7.5			2.3	108255	
GSDP8.0	8.0	75	117	2.4	101928	
GSDP8.5	8.5			2.6	108262	

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 LCF	全长 OAL	先端 PL	JAN 代码 4991893	库存 Stock
GSDP9.0	9.0			2.7	108279	
GSDP9.5	9.5	81	125	2.9	108347	
GSDP10.0	10.0			3.0	101935	
GSDP10.5	10.5			3.2	108286	
GSDP11.0	11.0	87	133	3.3	108293	
GSDP11.5	11.5			3.5	108309	
GSDP12.0	12.0			3.6	108316	
GSDP12.5	12.5	94	142	3.8	108323	
GSDP13.0	13.0			3.9	108330	
		101	151			

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引




●该钻头是可方便地在电动钻、钻床上使用的钻头。

This drill is easy to use with electric drills and drill presses.

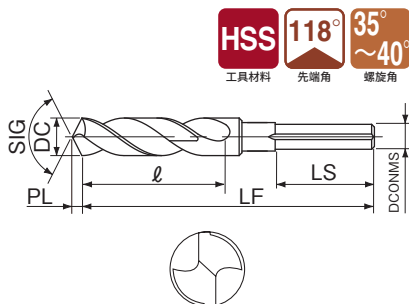

●强韧的材质，可稳定进行孔加工
It is very tough, so stable drilling.

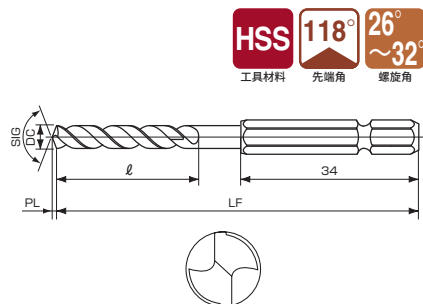

● NOSP-4 订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	JAN 代码 4991893	库存 Stock
NOSP7.0-4	7.0	35	75	6.5	25	2.1	047356	●
NOSP7.5-4	7.5					2.3	047363	
NOSP8.0-4	8.0					2.4	047370	
NOSP8.5-4	8.5					2.6	047387	
NOSP9.0-4	9.0					2.7	047394	
NOSP9.5-4	9.5	48	95	6.5	30	2.9	047400	●
NOSP10.0-4	10.0					3.0	047417	
NOSP10.5-4	10.5					3.2	047424	
NOSP11.0-4	11.0					3.3	047431	
NOSP11.5-4	11.5					3.5	047448	
NOSP12.0-4	12.0					3.6	047455	●
NOSP12.5-4	12.5					3.8	047462	
NOSP13.0-4	13.0					3.9	047479	

● NOSP-8

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	JAN 代码 4991893	库存 Stock
NOSP10.5-8	10.5	65	120	9.5	35	3.2	047486	●
NOSP11.0-8	11.0					3.3	047493	
NOSP11.5-8	11.5					3.5	047509	
NOSP12.0-8	12.0					3.6	047516	
NOSP12.5-8	12.5					3.8	047523	
NOSP13.0-8	13.0					3.9	047530	
NOSP13.5-8	13.5					4.1	047547	
NOSP14.0-8	14.0					4.2	047554	
NOSP14.5-8	14.5					4.4	047561	
NOSP15.0-8	15.0					4.5	047578	
NOSP15.5-8	15.5					4.7	047585	●
NOSP16.0-8	16.0					4.8	047592	

● NOSP-2

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	柄径 DCONMS	柄长 LS	先端 PL	JAN 代码 4991893	库存 Stock
NOSP13.5-2	13.5	74	134	12.65	40	4.1	047608	●
NOSP14.0-2	14.0					4.2	047615	
NOSP14.5-2	14.5					4.4	047622	
NOSP15.0-2	15.0					4.5	047639	
NOSP15.5-2	15.5					4.7	047646	
NOSP16.0-2	16.0					4.8	047653	
NOSP16.5-2	16.5					5.0	047660	
NOSP17.0-2	17.0					5.1	047677	
NOSP17.5-2	17.5					5.3	047684	
NOSP18.0-2	18.0					5.4	047691	
NOSP18.5-2	18.5					5.6	047707	
NOSP19.0-2	19.0					5.7	047714	
NOSP19.5-2	19.5					5.9	047721	
NOSP20.0-2	20.0					6.0	047738	
NOSP20.5-2	20.5					6.2	047745	
NOSP21.0-2	21.0					6.3	047752	
NOSP21.5-2	21.5					6.5	047769	
NOSP22.0-2	22.0					6.6	047776	

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	先端 PL	JAN 代码 4991893	库存 Stock
6SDPS2.0	2.0	16	68	0.6	142693	
6SDPS2.1	2.1				142709	
6SDPS2.2	2.2				142716	
6SDPS2.3	2.3	18		0.7	142723	
6SDPS2.4	2.4				142730	
6SDPS2.5	2.5				142747	
6SDPS2.6	2.6	20	75	0.8	142754	
6SDPS2.7	2.7				142761	
6SDPS2.8	2.8				142778	
6SDPS2.9	2.9	22		0.9	142785	
6SDPS3.0	3.0				142792	
6SDPS3.1	3.1				142808	
6SDPS3.2	3.2	24	75	1.0	142815	
6SDPS3.3	3.3				142822	
6SDPS3.4	3.4				142839	
6SDPS3.5	3.5	26		1.1	142846	
6SDPS3.6	3.6				142853	
6SDPS3.7	3.7				142860	
6SDPS3.8	3.8	29	84	1.2	142877	
6SDPS3.9	3.9				142884	
6SDPS4.0	4.0				142891	
6SDPS4.1	4.1	32		1.3	142907	
6SDPS4.2	4.2				142914	
6SDPS4.3	4.3				142921	
6SDPS4.4	4.4	35	84	1.4	142938	
6SDPS4.5	4.5				142945	
6SDPS4.6	4.6				142952	
6SDPS4.7	4.7	38		1.5	142969	
6SDPS4.8	4.8				142976	
6SDPS4.9	4.9				142983	
6SDPS5.0	5.0	38	84	1.6	142990	
6SDPS5.2	5.2				143003	
6SDPS5.5	5.5				1.7	
6SDPS6.0	6.0			1.8	143027	

6SDP


铁加工用六角钻

Hexagonal Shank Drills for Steel



●该钻头是可用于多种用途的泛用型钻头。

This is a general use drill for a wide variety of applications.

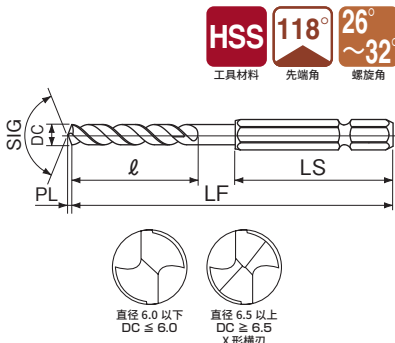

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	柄长 LS	先端 PL	JAN 代码 4991893	库存 Stock
6SDP1.0	1.0	12	69	45	0.3	139884	●
6SDP1.2	1.2	16	73		0.4	139891	
6SDP1.5	1.5	18	75		0.5	139907	
6SDP1.6	1.6	20	76			139914	
6SDP1.8	1.8	22				139921	
6SDP2.0	2.0	24	79		0.6	121360	
6SDP2.1	2.1				121377		
6SDP2.2	2.2				121384		
6SDP2.3	2.3	27	83		0.7	121391	
6SDP2.4	2.4					121407	
6SDP2.5	2.5					30	
6SDP2.6	2.6	121421					
6SDP2.7	2.7	33	91		0.9		
6SDP2.8	2.8					121445	
6SDP2.9	2.9					121452	
6SDP3.0	3.0	36	95		1.0	121469	
6SDP3.1	3.1					121476	
6SDP3.2	3.2					121483	
6SDP3.3	3.3	39	100		1.1	121490	
6SDP3.4	3.4					121506	
6SDP3.5	3.5					43	
6SDP3.6	3.6	121520					
6SDP3.7	3.7	121537					
6SDP3.8	3.8	47	110		1.3	121544	
6SDP3.9	3.9					121551	
6SDP4.0	4.0					52	
6SDP4.1	4.1	121575					
6SDP4.2	4.2	121582					
6SDP4.3	4.3	57	123		1.5	121599	
6SDP4.4	4.4					121605	
6SDP4.5	4.5					50	
6SDP4.6	4.6	121629					
6SDP4.7	4.7	121636					
6SDP4.8	4.8	55	130		1.7	121643	
6SDP4.9	4.9					121650	
6SDP5.0	5.0					121667	
6SDP5.2	5.2	60	135		1.8	121674	
6SDP5.5	5.5					121681	
6SDP6.0	6.0					121698	
6SDP6.5	6.5	65	140		2.0	139600	
6SDP7.0	7.0					139617	
6SDP7.5	7.5					139624	
6SDP8.0	8.0	70	145		2.3	139631	
6SDP8.5	8.5					139648	
6SDP9.0	9.0					139655	
6SDP9.5	9.5	75	150		2.6	139662	
6SDP10.0	10.0					139679	
6SDP10.5	10.5					139686	
6SDP11.0	11.0	80	155		2.9	139693	
6SDP11.5	11.5					139709	
6SDP12.0	12.0					139716	
6SDP12.5	12.5	85	160		3.2	139723	
6SDP13.0	13.0					139730	

6SD3P


铁加工用六角钻 3 支装

Hexagonal Shank Drills for Steel 3 per package




●该钻头是可用于多种用途的泛用型钻头。

This is a general use drill for a wide variety of applications.

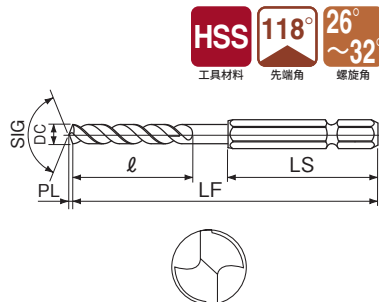

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	柄长 LS	先端 PL	JAN 代码 4991893	库存 Stock
6SD3P2.0	2.0	24	79	45	0.6	139983	●
6SD3P2.5	2.5	30	87		0.8	139990	
6SD3P2.8	2.8	33	91			140002	
6SD3P3.0	3.0					140019	
6SD3P3.2	3.2	36	95		1.0	140026	
6SD3P3.3	3.3					140033	
6SD3P3.5	3.5	39	100		1.1	140040	
6SD3P3.8	3.8	43	105			140057	
6SD3P4.0	4.0					140064	
6SD3P4.2	4.2	47	110		1.3	140071	
6SD3P4.5	4.5					140088	
6SD3P5.0	5.0	52	116		1.5	140095	
6SD3P6.0	6.0	57	123		1.8	140101	



六角柄

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


6LSDP

铁加工用六角长钻头

Long Reach Hexagonal Shank Drills for Steel

- 适用于深位置钻孔。

Perfect for drilling deep holes.

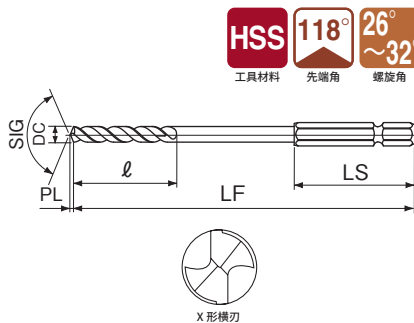

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 l	全长 LF	柄长 LS	先端 PL	JAN 代码 4991893	库存 Stock
6LSDP2.0	2.0	24	180	42	0.6	141726	●
6LSDP2.5	2.5	30			0.8	141733	
6LSDP2.8	2.8	33			0.9	141801	
6LSDP3.0	3.0	36			1.0	141740	
6LSDP3.2	3.2	36			1.0	141818	
6LSDP3.5	3.5	39			1.1	141757	
6LSDP3.8	3.8	43			1.2	141825	
6LSDP4.0	4.0	43			1.2	141764	
6LSDP4.2	4.2	47			1.3	141832	
6LSDP4.5	4.5	47			1.4	141771	
6LSDP5.0	5.0	52			1.5	141788	
6LSDP5.5	5.5	57			1.7	141849	
6LSDP6.0	6.0				1.8	141795	

6SUSSDP


不锈钢加工用六角钻头

Hexagonal Shank Drills for Stainless Steel

- 使用含钴高速钢，并带有 X 形横刃。

锋利且切入性优良，适用于不锈钢。

It uses cobalt high-speed steel and its X-type thinning gives it good bite so it is perfect for Stainless Steel.

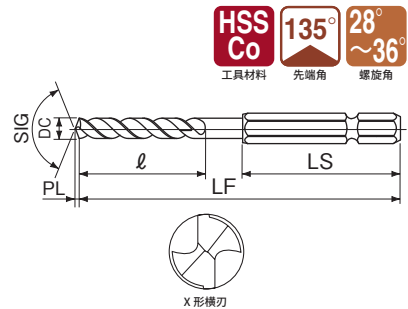

订货方式

商品编码

单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 l	全长 LF	柄长 LS	先端 PL	JAN 代码 4991893	库存 Stock
6SUSSDP2.0	2.0	20	85	45	0.4	128505	●
6SUSSDP2.1	2.1					128512	
6SUSSDP2.2	2.2	23	88			128529	
6SUSSDP2.3	2.3				0.5	128536	
6SUSSDP2.4	2.4					128543	
6SUSSDP2.5	2.5	24	91			128550	
6SUSSDP2.6	2.6					128567	
6SUSSDP2.7	2.7	26	94			128574	
6SUSSDP2.8	2.8	27	97		0.6	128581	
6SUSSDP2.9	2.9					128598	
6SUSSDP3.0	3.0	29	101			128604	
6SUSSDP3.1	3.1					128611	
6SUSSDP3.2	3.2			45		128628	●
6SUSSDP3.3	3.3	31	103		0.7	128635	
6SUSSDP3.4	3.4					128642	
6SUSSDP3.5	3.5					128659	
6SUSSDP3.6	3.6	33	106			128666	
6SUSSDP3.7	3.7				0.8	128673	
6SUSSDP3.8	3.8	36	109			128680	
6SUSSDP3.9	3.9					128697	
6SUSSDP4.0	4.0					128703	
6SUSSDP4.1	4.1	38	113		0.9	128710	
6SUSSDP4.2	4.2					128727	
6SUSSDP4.3	4.3					128734	
6SUSSDP4.4	4.4			52	1.0	128741	●
6SUSSDP4.5	4.5	39	116			128758	
6SUSSDP4.6	4.6					128765	
6SUSSDP4.7	4.7	41	119			128772	
6SUSSDP4.8	4.8					128789	
6SUSSDP4.9	4.9					128796	
6SUSSDP5.0	5.0	52	116		1.1	128802	
6SUSSDP5.2	5.2					139563	
6SUSSDP5.5	5.5					139570	
6SUSSDP5.8	5.8	57	123		1.2	139587	
6SUSSDP6.0	6.0					139594	



新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它



精密工具

技术资料
索引



●切入性优良的薄板用六角钻头

Hexagonal shank drills with good bite for thin sheets.

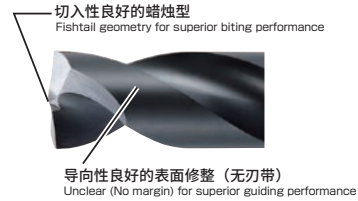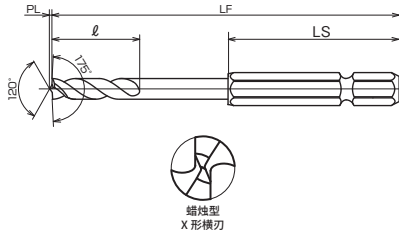

订货方式 商品编码 单位 (Unit) : mm

商品编码 Code	直径 DC	槽长 ℓ	全长 LF	柄长 LS	先端 PL	JAN 代码 4991893	库存 Stock		
6SDSP2.0	2.0	14	73	45	0.3	142273			
6SDSP2.1	2.1					142280			
6SDSP2.2	2.2					142297			
6SDSP2.3	2.3					142303			
6SDSP2.4	2.4					142310			
6SDSP2.5	2.5	18	79			142327			
6SDSP2.6	2.6					142334			
6SDSP2.7	2.7					142341			
6SDSP2.8	2.8					142358			
6SDSP2.9	2.9					142365			
6SDSP3.0	3.0	20	82		0.4	142372			
6SDSP3.1	3.1					142389			
6SDSP3.2	3.2					142396			
6SDSP3.3	3.3					142402			
6SDSP3.4	3.4					142419			
6SDSP3.5	3.5	22	82			142426			
6SDSP3.6	3.6					142433			
6SDSP3.7	3.7					142440			
6SDSP3.8	3.8					142457			
6SDSP3.9	3.9					142464			
6SDSP4.0	4.0	24	88		0.5	142471			
6SDSP4.1	4.1					142488			
6SDSP4.2	4.2					142495			
6SDSP4.3	4.3					142501			
6SDSP4.4	4.4					142518			
6SDSP4.5	4.5	26	92			142525			
6SDSP4.6	4.6					142532			
6SDSP4.7	4.7					142549			
6SDSP4.8	4.8					142556			
6SDSP4.9	4.9					142563			
6SDSP5.0	5.0	28	95		32	142570			
6SDSP5.2	5.2					142587			
6SDSP5.5	5.5					142594			
6SDSP6.0	6.0					142600			
6SDSP6.5	6.5	35				95		32	142617
6SDSP7.0	7.0								142624
6SDSP7.5	7.5								142631
6SDSP8.0	8.0								142648
6SDSP8.5	8.5								142655
6SDSP9.0	9.0			32	0.8	142662			
6SDSP9.5	9.5					142679			
6SDSP10.0	10.0				0.9	142686			


●即使用于薄板也不会产生毛刺

No burrs on thin plates



●在目标位置钻出接近圆形的孔

Hole close to true circle at the target position

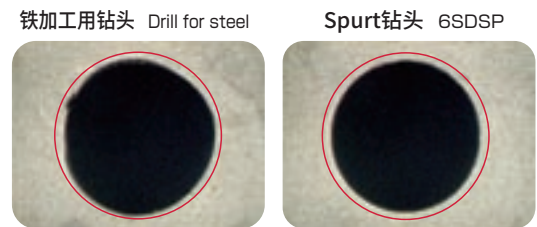

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

钻头 套装品

Drill Set
●钻头套装品为标准库存品。
Drill Set is Stocked items.

铁加工用钻头 10 支装

Drills for Steel (10 Sizes Pack)

订货方式
SET10





JAN 代码
4991893051315
套装内含数量
10 支装套装
套装内容
φ2.0~φ6.0 (1mm 进位)
φ2.5、φ3.2、φ3.5、
φ4.5、φ4.8

全长、槽长请参照 SD(B-55)。

G 涂层钻头 10 支装

G Coated Drills (10 Sizes Pack)

订货方式
GSDSET10

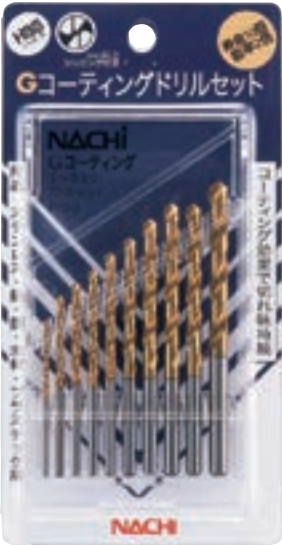

JAN 代码
4991893051278
套装内含数量
10 支装套装
套装内容
φ2.0~φ6.0 (1mm 进位)
φ2.5、φ3.2、φ3.5、
φ4.5、φ4.8

全长、槽长请参照 GSD(B-48)。

不锈钢加工用钻头 10 支装

Drills for Stainless Steel (10 Sizes Pack)

订货方式
COSET10



JAN 代码
4991893051261
套装内含数量
10 支装套装
套装内容
φ2.0~φ6.0 (1mm 进位)
φ2.5、φ3.2、φ3.5、
φ4.5、φ4.8

全长、槽长请参照 COSD(B-54)。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

电钻用钻头 5 支装

Drills for Power Drill (5 Sizes Pack)

订货方式
DIYSET5




JAN 代码
4991893111040
套装内含数量
5 支装套装
套装内容
φ2.0 ~ φ6.0 1.0 进位

电钻用钻头 13 支装

Drills for Power Drill (13 Sizes Pack)

订货方式
DIYSET13

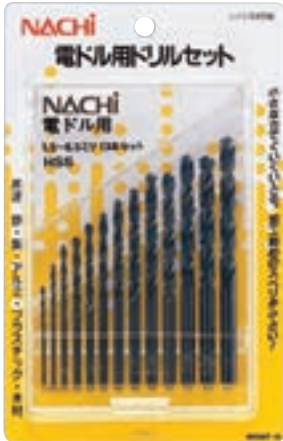

JAN 代码
4991893111064
套装内含数量
13 支装套装
套装内容
φ1.5 ~ φ6.5 0.5 进位 φ3.2, φ4.8

电钻用钻头 7 支装

Drills for Power Drill (7 Sizes Pack)

订货方式
DIYSET7



JAN 代码
4991893111057
套装内含数量
7 支装套装
套装内容
φ2.0 ~ φ6.0 1.0 进位 φ3.5, φ4.5

尺寸 (DIYSET5、DIYSET7、DIYSET13)

直径	槽长	全长
1.5	18	40
2.0	24	49
2.5	30	57
3.0	33	61
3.2	36	65
3.5	39	70
4.0	43	75
4.5	47	80
4.8	52	86
5.0	52	86
5.5	57	93
6.0	57	93
6.5	63	101

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

钻头 套装品

Drill Set

●钻头套装品为标准库存品。


Drill Set is Stocked items.

铁加工用钻头 19 支装

Drills for Steel (19 Sizes Pack)

订货方式

SET19



JAN 代码
4991893051322
套装内含数量
19 支装套装
套装内容
φ1.0 ~ φ10.0 0.5 进位

钻头的全长、槽长请参照 SD(B-55)。

铁加工用钻头 50 支装

Drills for Steel (50 Sizes Pack)

订货方式

SET50



JAN 代码
4991893051346
套装内含数量
50 支装套装
套装内容
φ1.1 ~ φ6.0 0.1 进位

钻头的全长、槽长请参照 SD(B-55)。

铁加工用钻头 25 支装

Drills for Steel (25 Sizes Pack)

订货方式

SET25



JAN 代码
4991893051339
套装内含数量
25 支装套装
套装内容
φ1.0 ~ φ13.0 0.5 进位


钻头的全长、槽长请参照 SD(B-55)。

不锈钢加工用钻头 19 支装

Drills for Stainless Steel (19 Sizes Pack)

订货方式

COSET19



直径不足 1.6
DC < 1.6

直径 1.6 以上
DC ≥ 1.6
X 形横刃



JAN 代码
4991893051254
套装内含数量
19 支装套装
套装内容
φ1.0 ~ φ10.0 0.5 进位

钻头的全长、槽长请参照 COSD(B-54)。

一般铁材用手工锯片
24 齿 2 片装

Hand Saw Blades for Steel (24TPI)
2 per package

订货方式
SHP25024



JAN 代码
4991893101737

薄板、管材用手工锯片
32 齿 2 片装

Hand Saw Blades for Thin Steel Plates and
Tubing (32TPI) 2 per package

订货方式
SHP25032



JAN 代码
4991893101751

一般铁材用带柄手工锯片
24 齿 2 片装

Hand Saw Blades with grip for Steel (24TPI)
2per package

订货方式
THX25024



JAN 代码
4991893000092

铝、铜用手工锯片
18 齿 2 片装

Hand Saw Blades for Nonferrous Metals
(18TPI) 2 per package

订货方式
SHP25018



JAN 代码
4991893101713

铁材、不锈钢用手工高速钢锯条
24 齿 2 片装

HSS Hand Saw Blades for Steel and
Stainless Steel (24TPI) 2per package

订货方式
HHP25024



JAN 代码
4991893000184

钢铁、不锈钢用双金属手工锯片
24 齿 2 片装

BI-METAL Hand Saw Blades for Steel and
Stainless Steel (24TPI) 2per package

订货方式
BHP25024



JAN 代码
4991893000276

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

DGE13X

简易钻头研磨机 简太君

Drill Grinder Plain type KANTA KUN

- 操作简单，可快速完成研磨。根据本公司实验室测试再研磨时间仅 1 分钟左右。
- 圆锥形的后面和 X 形横刃一次装夹就能完成研磨。

Easy operation and short operating time.
Conical flank with X thinning.



钻头装夹



对准钻尖位置



研磨钻尖、横刃



研磨后的钻尖

●本体 订货方式 DGE13X

项目 Items	规格 Specification
规格 Type	DGE13X
适用钻头 Applicable Drills	高速钢 HSS Drills
适用钻头直径 Drill Diameter	3 ~ 13mm
先端角 Point Angle	118°
砂轮 Grinding Wheel	CBN 电镀砂轮 #325 砂轮外径 54mm
电源 AC Power	100V 50/60Hz
转速 Rotation	12,000min ⁻¹
宽度 × 纵深 Width × Depth	350mm × 190mm
高度 Height	312mm
重量 Weight	17kg

●砂轮 订货方式 EGB

项目 Items	商品编码 Code
CBN 电镀砂轮 CBN Electrodeposited Wheel	EGB

CBN 电镀砂轮是本体的标准配件，附带有钻尖用和横刃用 2 个。

切削油（水溶性切削液）

Cutting Oil



● ENN（乳胶型）

订货方式 ENN 容量

· 非氟性切削油剂。耐腐蚀性出色，不粘腻，切削液的带出量少，经济实惠。

使用设备

加工中心、NC 车床、NC 铣床、其它

适用的被削材

一般结构用钢、碳钢、合金钢、不锈钢、铸铁、铝合金、铜合金

使用方法

稀释倍率 10～30 倍

请在原液中加水后搅拌。

外观

原液：淡褐色透明 30 倍稀释：略微呈白色的乳化状

	容量（ℓ）
小桶	18
大桶	200

● SRN（可溶型）

订货方式 SRN 容量

· 润滑性和清洗性出色，在使用带锯床切割时可发挥优良性能。

使用设备

带锯床、NC 车床、钻床

适用的被削材

一般结构用钢、碳钢、合金钢、不锈钢、铸铁、非铁合金（加工铝合金时，请预先进行变色测试）

使用方法

稀释倍率 10～30 倍

外观

原液：绿色透明 30 倍稀释：淡绿色基本透明

	容量（ℓ）
小桶	18
大桶	200

废弃注意事项

自行适当处理，或委托经都道府县知事批准的废弃物处理企业处理。不含氯化合物。

NACHI 切削油 选定表					
	钻头 丝锥 立铣刀	带锯条	车 削	研 磨	
难削材 不锈钢 等	ENN	ENN			SXN
特殊钢 SKD、 SK 等					
钢铁类 S45C、 S50C 等		SRN SXN	SXN SRN		SRN
铸铁 FCD、 FC 等	SRN SXN				
有色金属 铝合金、 铜合金 等	ENN	ENN		ENN	ENN
	润滑性	冷却性	清洗性	耐腐蚀性	
ENN	○	—	—	—	
SRN	—	○	○	—	
SXN	—	○	○	○	

● SXN（可溶型）

订货方式 SXN 容量

· 这是一种成型的水溶性泛用切削、研磨液。切削性、耐腐蚀性出色。在水质偏硬地区也能顺利使用。

使用设备

NC 车床、加工中心、带锯床、平面磨床、圆筒磨床、内圆磨床

适用的被削材

一般结构用钢、碳钢、合金钢、不锈钢、铸铁、非铁合金（加工铝合金时，请预先进行变色测试）

使用方法

切削：稀释倍率 10～30 倍

研磨：稀释倍率 30～50 倍

外观

原液：绿色透明 30 倍稀释：淡绿色基本透明

	容量（ℓ）
小桶	18
大桶	200

成型型是指以合成油代替矿物油作为润滑剂使用的类型。优点在于可自由设计摩擦面油膜的形成，缺点是在废液处理中会受到限制。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引



精密工具

Precision Tools

新技术介绍（齿轮切削工具） Technical Introduction (Gear Cutting Tools)	H-2
新技术介绍（拉刀） Technical Introduction (Broaches)	H-8
滚刀 Hobs	H-13
插齿刀 Gear Shaper Cutters	H-15
剃齿刀 Shaving Cutters	H-15
搓齿板 Forming Racks	H-18
硬齿面珩磨 Hard Gear Honing	H-19
其他齿轮切削工具 Other Types of Gear Cutting Tools	H-19
内齿拉刀 Internal Broaches	H-20
平面拉刀 Surface Broaches	H-24

FMH-SV

- 通过分析切削原理和磨损产生的新品质材料,在超高速的情况下实现超效率的加工
(提升生产率,延长高效加工领域中的滚刀寿命)
- 耐高温特性和耐磨性出色的滚刀专用新材料,为滚刀材料“FMH系列”追加新种类
新材料名:FMH-SV
SV【Special Value:特别的价值、性质】
 - 可在高速加工中发挥性能
 - 配合使用Hyper DuAl SP涂层滚刀,可使切削速度达到V=300m/min以上,并实现长寿命化
- 凭借发挥材料特性的工具设计技术和加工技术,实现接近硬质合金工具的加工领域



滚刀加工评价 (切削速度 400m/min) (前刀面有涂层) Comparison of Hobbing at High Speed of 400 m/min (Coating on Cutting Face)


参数 加工条件		: m2.4, PA14° 30', 3条, 沟槽数 12 : V=400 (m/min), f=1.7 (mm/rev), 干式加工, 被削材 SCM420H	
FMH-SV	切削长度 125m		VB 0.08mm
	切削长度 150m		VB 0.16mm
FMH	切削长度 125m		VB 0.26mm
	切削长度 150m		异常磨损 VB 2.64mm

抑制月牙洼磨损的加剧

滚刀材质的功能比较 Feature Comparison of the Hob Material

	FMH-VX	FMH	FMH2	FMH-SV	FAX38	FAX55
耐热性	◎	◎	◎	◎◎	△	○
耐磨性	○	◎	○	◎	△	○
韧性	○	○	◎	○	○	△
安全性	○	◎	◎	◎	△	△
加工用途	湿式 & 干式	湿式 & 干式	湿式 & 干式	干式	湿式	湿式

- 新材料 FMH-SV 具备良好的耐热性
- 适合于高速干式加工的材料特性

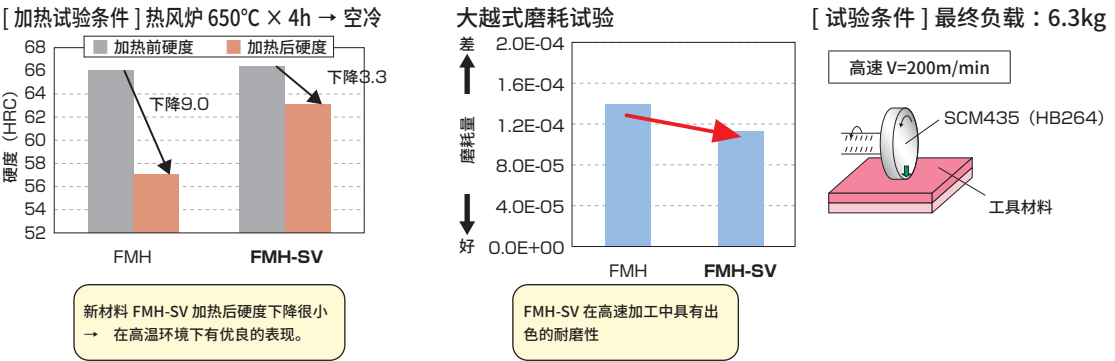

滚刀系列

Solid Hobs Series

- 凭借膜的成分设计和成膜过程的优化,改善滚刀加工所必需的膜特性
- 针对不同用途,准备了4种涂层
Hyper DuAl SP涂层滚刀 Hyper DuAl GP涂层滚刀
DuAl EX涂层滚刀 DuAl VX涂层滚刀
- 凭借与具备出色耐热冲击性、抗崩刃性、耐磨性的滚刀专用新溶解高速钢(FMH材质)的组合,发挥有效性能
- Greatly improved coating quality needed for hobbing by optimizing deposition process and design of components of coatings.
- 4 coatings are available depending on the application.
Hyper DuAl SP Hob Hyper DuAl GP Hob
DuAl EX Hob DuAl VX Hob
- Combination of superior thermal shock resistance, chipping resistance, and wear resistance of new HSS-Co material (from FMH) gives outstanding performance.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


套装商品
其它

精密工具

技术资料
索引

按适合用途进行选择	Selection Chart
-----------	-----------------

针对不同用途的 4 种涂层 4 coatings available to support various applications

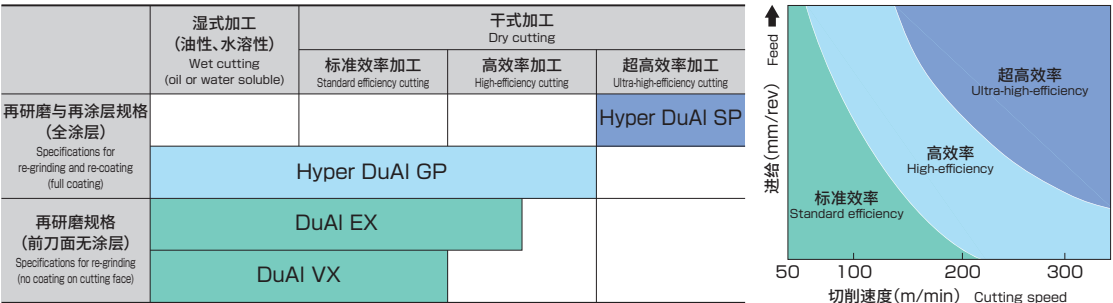

涂层性能比较	Comparison of Coating Performance
--------	-----------------------------------

	DuAl VX (再研磨规格) (For regrind only)	DuAl EX (再研磨规格) (For regrind only)	Hyper DuAl GP (再涂层规格) (For regrind and re-coating)	Hyper DuAl SP (再涂层规格) (For regrind and re-coating)
耐磨性 Wear resistance	○	◎	◎	◎
韧性 Toughness	○	○	◎	◎
耐热性 Heat resistance	△	○	◎	◎
粘合性 Adhesion	◎	◎	◎	◎
加工用途 Applications	湿式 & 干式 Wet & Dry	湿式 & 干式 Wet & Dry	泛用加工湿式 & 干式 General purpose wet and dry	高效率干式 High-Speed dry 难削材加工 Difficult-to-Cut Material cutting
硬度 Hardness	2300 ~ 2500	2300 ~ 2500	2400 ~ 2600	2500 ~ 2700
氧化温度 Oxidation temp.	850℃	950℃	1100℃	1150℃

Hyper DuAl SP 涂层滚刀（再研磨涂层规格）

Hyper DuAl SP (For regrinding and recoating)

- 切削速度300m/min以上的超高效率加工和难削材加工的性能得到提升
- 即使在较为苛刻的条件下也能发挥优良性能
- Dramatically increase the performance for high-efficiency cutting with over 300m/min and Difficult-to-Cut Material cutting.
- Achieve great performance with tough condition.



超高速切削加工事例	Examples of Ultra-high-speed Cutting		
	DuAl EX	Hyper DuAl	Hyper DuAl SP
磨损形态 Shape of wear			
切削长度 Cutting length	25m	43m	130m
寿命比 Life ratio	1	1.7	5.2

测试的加工条件 Hob test condition

工件参数 Workpiece specifications	m2.5×PA16°×NT54、SCM420H
滚刀参数 Hob specifications	φ95×NT12×3TH, FMH 材料, 前刀面有涂层 Material is FMH, coating on cutting face
切削条件 Cutting condition	V=300m/min、f=3.0mm/rev, 顺铣, 干式加工, 无窜刀 Climbing, dry cutting, no shift

是 DuAl EX 寿命的 5 倍以上
Operating life extended 5x over conventional product.

难削材加工事例	Example for Difficult-to-Cut Material	
	某通用滚刀（干式加工用涂层） General Hobs (Coating for dry cutting)	Hyper DuAl SP
磨损形态 Shape of wear		
最大磨损量 Maximum amount of wear	0.36mm	0.06mm

测试的加工条件 Hob test condition

工件参数 Workpiece specifications	m2×PA15°×NT79、S45C (HB 280)
滚刀参数 Hob specifications	φ70×NT12×3TH, 前刀面有涂层 coating on cutting face
切削条件 Cutting condition	V=110/160m/min、f=3.0/2.6mm/rev, 顺铣, 干式加工, 加工数 800 个 Climbing, dry cutting, number of cuts is 800


高硬度钢也能发挥性能
Excellent performance even with Hardened Steel.

Hyper DuAl SP 和 GP 的使用区分

- Hyper DuAl SP : 对月牙洼磨损早期恶化型发挥性能
 - Hyper DuAl GP : 对月牙洼和后刀面磨损、磨损偏差发挥性能
- How to use for Hyper DuAl SP and GP
Hyper DuAl SP : Improves performance against cratering and premature
Hyper DuAl GP : Improves performance against cratering and secondary flank wear

<例> 针对工件硬度的使用区分

<Example> How to use depending on hardness or workpiece

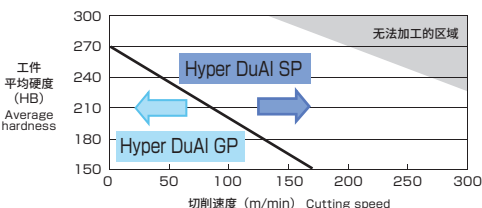

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Hyper DuAl GP 镀层滚刀 (再研磨涂层规格)

Hyper DuAl GP (For regrinding and recoating)

- 无论是干式加工还是湿式加工一般皆可使用
- 一般情况下, 不受切削方法、工件材质等加工环境的限制
- Can be used for both dry and wet cutting.
- Suitable in any condition with a wide range of materials and cutting methods.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

高速湿式加工事例

Example of High-speed Wet Cutting

	DuAl EX	Hyper DuAl GP
磨损形态 Shape of wear	 VB 0.22mm	 VB 0.17mm
切削长度 Cutting length	225m	450m
寿命比 Life ratio	1	2



测试的加工条件 Hob test condition

工件参数 Workpiece specifications	m2.5×PA15°×NT40、SCM420H
滚刀参数 Hob specifications	φ95×NT12×3TH, FMH 材料, 前刀面有涂层 Material is FMH, coating on cutting face
切削条件 Cutting condition	V=150m/min、f=2.2mm/rev, 顺铣, 湿式加工, 无窜刀 Climbing, wet cutting, no shift

在湿式加工中也能发挥性能
Delivers the performance even with wet cutting

Hyper DuAl GP 和 Hyper DuAl SP 的性能比较 (前刀面有涂层)

Comparison of Performance of Hyper DuAl GP and Hyper DuAl SP (coating on cutting face)

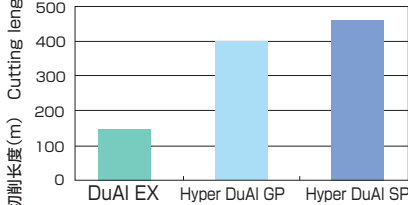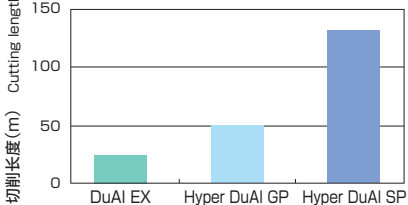切削条件 Cutting condition	切削速度 Cutting speed	160m/min		250m/min		
	进给量 Feed amount	2.6mm/rev 同向切削 Climb (47T)		3mm/rev 同向切削 Climb (54T)		
	最大切屑厚度 Maximum chip thickness	0.4mm		0.4mm		
	切削油剂 Cutting fluid	干式 Dry		干式 Dry		
切削长度 Cutting length	GP和SP没有显著的性能差 Same performance between GP and SP 			GP和SP之间存在显著的性能差 Great performance of GP with high speed condition 		
	Hyper DuAl GP			Hyper DuAl SP		
	V = 160m/min		V = 250m/min	V = 160m/min		V = 250m/min
与 DuAl EX 的比	2.6		2	3.1		5.2

- Hyper DuAl GP : 在一般加工条件下, 具备 DuAl EX 2.6 倍的长寿命
 - Hyper DuAl SP : 即使在苛刻的条件下也能发挥优良性能 (与 DuAl EX 的比可从 3.1 倍提升至 5.2 倍)
- Hyper DuAl GP : 2.6 × tool life compared to DuAl EX under conventional cutting condition
Hyper DuAl SP : Performance better in tougher condition (From 3.1 × → 5.2 × compared to DuAl EX)

旋刮刀（滚插刀）
Skiving Cutter

Table with 2 columns: 旋刮（滚插）加工的机械原理, Mechanism of SKIVING process

在工件与刀具之间创造交叉角让其产生滑动，从而进行创成加工的加工方法
Apply crossed axes angle to workpiece and cutter, gear generating machining by sliding



Table with 2 columns: 旋刮（滚插）加工的特征, Characteristics of SKIVING process


齿轮加工法的特征比较
Comparison of characteristics of gear processing method

Table comparing characteristics of Hobbing, Broaching, Gear Shaper machining, and Skiving across categories: Processing accuracy, Initial investment, Running cost, and Workpiece suitability.

Legend for comparison symbols: ◎: Excellent, ○: Good, △: Worse, ×: Not Used

Comparison of three gear processing methods: 滚齿加工 (Hobbing), 拉齿加工 (Broaching), and 插齿加工 (Gear Shaper machining), detailing their production types, advantages, and limitations.

Table with 2 columns: 旋刮（滚插）加工的适用范围, Usage of SKIVING process

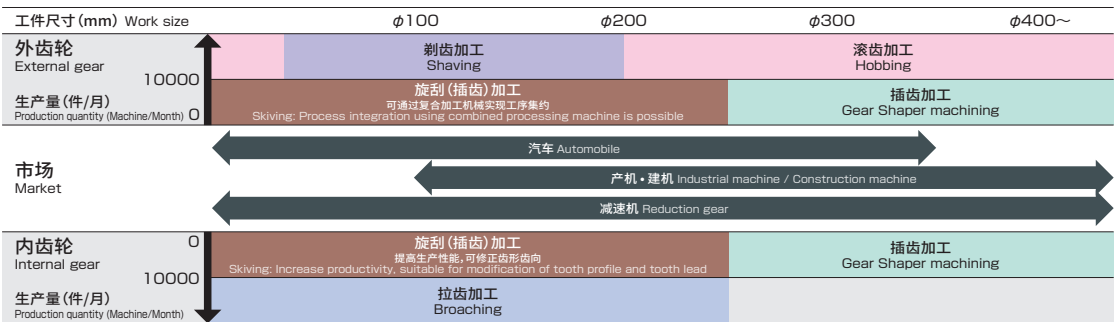

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品 其它

精密工具

技术资料 索引

旋刮刀（滚插刀）的阵容

SKIVING cutter lineup

根据切削模拟采用合适的设计
Optimum cutter design by cutting simulation

对象工件形状 Target work shape

外齿轮
External gear

内齿轮
Internal gear

- 使用设备 Machine
- 复合加工机 (车削、加工中心)
 - 旋刮 (滚插) 加工专用机
 - Combined processing machine (Turning machine, machining center)
 - Special machine for skiving processing



适用于多种工件、适用设备
Suitable for various work and equipment

适合旋刮（滚插）加工的特殊处理材料

Optimal material specialized for skiving process

	FAX55	FAP2	FAXG1
耐磨损性 Wear resistance	○	◎	◎ ⁺
耐热特性 Heat resistance property	○	○	◎
韧性 Toughness	○	◎	△
成本 Cost	○	△	△
备注 Note	便宜的 Cheap	面向难切削材料 for difficult to machine material	面向一般材料 for general material

◎：优 ○：良好 / 适中 △：一般 ◎：Excellent ○：Good △：Worse

适合旋刮（滚插）加工的表面处理

Optimal surface treatment of skiving process

前刀面无涂层
Without coating on cutting face

前刀面有涂层
With coating on cutting face

0.5mm

切削刃回转
Cutter rotation


切削刃回转
Cutter rotation

前刀面无涂层的情况下易发生磨损
再研磨后需要重新涂层
By cutter which is without coating on face, wear progressed early and requiring re-coating every after re-grinding



旋刮（滚插）加工事例 内齿轮的加工精度

Processing Example by SKIVING CUTTER (Processing accuracy of Internal Gear)

齿形 加工时间：90 (s) 齿形误差：7μm (新 JIS-6 级)
Profile Time: 90(s)/Tooth Profile Error: 7μm/New JIS 6 grade

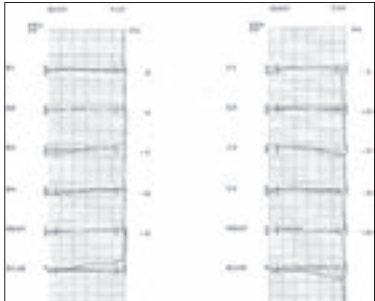

齿线 鼓形加工
Thread Helix Crowning

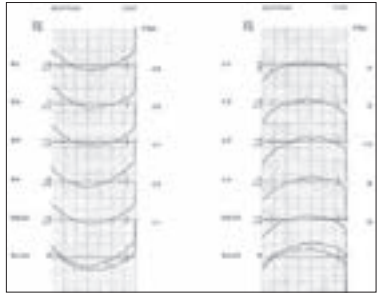

工件参数 (内齿轮) Work specifications (Internal gear)		刀具规格 Cutter specifications		加工条件 Cutting condition	
MxPA	m1.5xPA20°	齿数 No. of teeth	30	刀具转速 Cutter rotation	1600/1600rpm
齿数 No. of teeth	内 70	螺旋角 Helix angle	SPUR	打滑速度 Sliding speed	148/148m/min
螺旋角 Helix angle	20° RH	材质 Work material	FAX55	进给量 Feed amount	0.05/0.05mm/rev
材质 Work material	SCM420	涂层 Coating	Hyper DuAl GP 前刀面有涂层 With coating on cutting face	切削油剂 Cutting fluid	油性 Oiliness
齿宽 Tooth width	25mm			交叉角 Crossed axes angle	20°

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品

其它

精密工具

技术资料索引

DuAl GX 涂层拉刀

DuAl GX Coated Broach

- 通过分析切削原理, 查明磨损产生的过程, 为使用水溶性切削油剂进行拉刀加工优化涂层



- GX【Generation eXceed】
- 针对使用水溶性切削油剂的加工进行设计
- 注重凝结、刃尖磨损、刮擦磨损对策
- 采用具有出色润滑性和粘合性的涂层

- Analyze the cutting mechanism and clarify the wear growth process. Optimized coating for broaching in water soluble cutting fluid.
- DuAl GX(Generation eXceed)
- Great performance with water soluble cutting fluid.
- Good at adhesive wear, corner wear, scratch wear.
- Better improved lubricity and adhesive coat.



加工事例

Applications

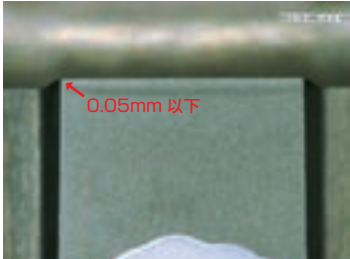DuAl EX	DuAl GX
加工 7,000 个	加工 10,000 个
	

不仅能增加加工数（1.4 倍）、延长使用寿命，还能减少磨损

参数 : m1×PA30°×NT24
冷却剂 : 水溶性切削油剂 被削材 : SCM420

多种涂层的推荐使用领域 Recommended area of various coating

	切削油剂	非水溶性	水溶性 (雾状)
	被削材	快削材	难削材
高效能 高精度			DuAl GX
		DuAl EX	
通用 低成本		TiN	
		氮化	

拉刀用表面处理的性能比较 Comparison of performance of surface treatment for broach

	氮化	TiN	DuAl EX	DuAl GX
耐磨性	△	○	◎	◎
膜韧性	-	○	○	◎
耐热性	-	△	○	○
耐粘性	△	○	○	◎
稳定性	-	◎	○	◎
加工用途	非水溶性	非水溶性 & 水溶性	非水溶性 & 水溶性	水溶性
被削材	未处理材	未处理材	未处理材 & 难削材	未处理材 & 难削材
膜成分	-	TiN 类	TiAl 类	AlCr 类
硬度	-	2300 ~ 2500	2300 ~ 2500	2400 ~ 2600

◆镀层膜的特长

- ・ 提高拉刀加工所必需的膜特性的专用涂层膜
 - ・ 在多种加工条件下，都能发挥出色稳定性的涂层膜
- 根据磨损形态，选定适合涂层 → 为工具费的削减做贡献

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

超硬拉刀加工

Hard Broaches

● 高硬度钢的高精度加工

该技术可有效消除硬度50 ~ 60HRC的加工品的热处理形变问题, 因此, 有望实现过去难以做到的异形孔的精加工, 同时, 也将实现零部件的高精度化和稳定化。

● 高效率加工

使用组合式超硬拉刀和超硬拉床, 将以60m/min的切削速度进行高速加工。实际切削加工时间不足1秒

● MQL加工

一般加工条件下, 使用极少量的雾状冷却液, 有利于环境, 且无需清洗工件、无需进行切屑脱油处理和废液处理

- Highly precise broaching of the Hardened Steel(50-60HRC).
- Sectional carbide broach and hard broaching machine are used, and a high speed broaching in cutting speed 60m/min. Practical cutting time is less than for one second.
- Environment-Friendly with MQL system. No need for work piece washing out and dealing with waste fluid.





加工用途	Applications
------	--------------

汽车的齿轮零部件等的渐开线花键孔的齿面、CVT 球槽、多种异形孔等的大直径和齿面精加工
Involute spline hole (gear part for autos), CVT ball groove, various variant holes

特长	Features
----	----------

齿面比较

Comparison of finished teeth

	超硬加工前 Before	超硬加工后 After
Appearance 外观		
Squareness 垂直度		
Profile 齿形		
Lead 齿向		



超硬拉刀
Hard Broach



加工示例
Sample




HW-5008

加工参数
齿数: 24
齿直角模数: 1
齿直角压力角: 45°
基准分度圆直径: 24.000
基圆直径: 16.971
大径: 25.46
小直径: 23.76

Work
No. of teeth
Normal Module
Normal Pressure Angle
Pitch Dia.
Dia.
Major Dia.
Minor Dia.

跨棒距 Between pin Dia.

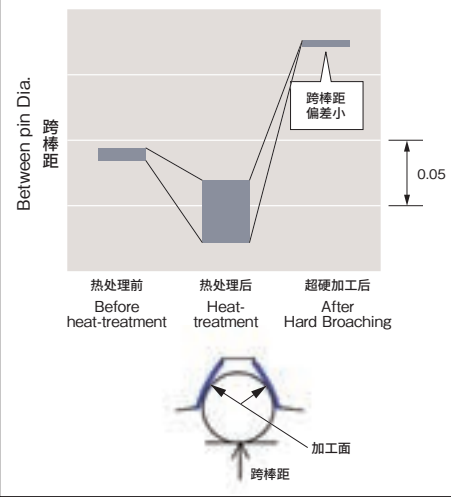

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

DuAl EX 涂层拉刀

DuAl EX broach

- 利用特别针对拉刀开发的DuAl EX涂层, 稳定加工精度, 提升耐磨性
- 无论是使用水溶性切削油剂还是非水溶性切削油剂一般都能确保长寿命
- 在MQL加工中也能发挥稳定的加工性能
- Cutting accuracy is more consistent and wear resistance is improved with DuAl EX Coat the perfect coating for broach work
- Long life with both water soluble and non-water soluble cutting fluids
- Stable and reliable performance under MQL broaching




加工用途	Applications
------	--------------

变速器、转向器等零部件加工
Making parts for transmissions, steering systems, etc.



性能和加工示例	Performance
---------	-------------

非水溶性切削油剂 Non-water soluble cutting fluid

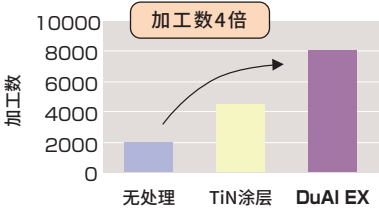


加工数 8,100 个后 (加工长 324m) 的侧面磨损



DuAl EX 涂层拉刀

被削材	SCM20
工件参数	m1×PA30°×NT40 大径：43.5 小径：40
切削长度	40mm
切削油剂	非水溶性切削油剂

水溶性切削油剂 Water soluble cutting fluid

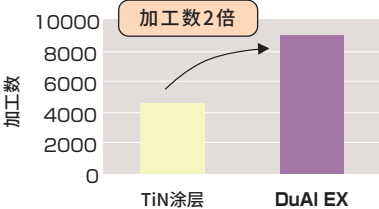

加工数 9,000 个后 (加工长 180m) 的侧面磨损



DuAl EX 涂层拉刀

被削材	SCr420
工件参数	m1×PA37.5°×NT25 大径：27 小径：25
切削长度	20mm
切削油剂	水溶性切削油剂

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

螺旋槽式螺旋拉刀

Off-normal Gullet Helical Broach

- 考虑螺旋角、切削阻力、切削量等因素,采用以稳定状态切削刃槽的螺旋角。
- 在齿面精加工刃的齿根部进行切削刃设计,对齿面和小径同时精加工切削。此切削方法可以实现加工以工件小径为基准,对刃槽的跳动要求在0.03mm以下的高精度齿圈。
- Off-normal Gullet Helical Broach is the best broach to ensure accuracy of internal helical gears.
- A cutting edge is provided on the tooth bottom of the tooth surface finishing edge to simultaneously machine the tooth surface and small-diameter portion. The cutting method enables high-precision gear machining with a runout of 0.03 mm.

一体式
Solid type



组合式
Assembly type



加工用途	Applications
------	--------------

自动变速机内齿轮的加工
Internal Helical gears of Automatic Transmission

特点	Features
----	----------

齿向精度的比较
Comparison of Lead Error



刀具齿根部切削刃设计
Provide cutting edges on the bottom of the teeth



内齿轮
Internal helical gear

切削方式 Cutting method	小径加工后再齿面精加工的切削方式 Tooth surface finish cutting method after inner diameter machining	齿面・小径同时精加工的切削方式 inner diameter, simultaneous tooth surface cutting method
切削方式图 Cutting method diagram	①粗齿形 Rough tooth profile ②倒角 semi-topping ③精加工齿形 Finish tooth profile ④齿顶圆直径 Inner diameter	①粗齿形 Rough tooth profile ②倒角 semi-topping ③精加工齿形 Finish tooth profile + 齿顶圆直径 Inner diameter
加工工件 齿槽的跳动 Runout of tooth groove of workpiece after broaching	以小径为基准的齿槽的跳动 72 μm Runout of tooth groove based on inner diameter	以小径为基准的齿槽的跳动 23 μm Runout of tooth groove based on inner diameter

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

微小模数工件加工用拉刀


Micro Module Broaching

- 适合微小模数的高精度加工
- 也支持齿高2.25m的标准齿轮的加工
- Best for highly accuracy broaching of a micro module
- Apply to a standard gear of whole depth 2.25m



加工用途	Applications
------	--------------

对应减速机的行星齿轮等紧凑化的零部件
Compactification of planetary gear

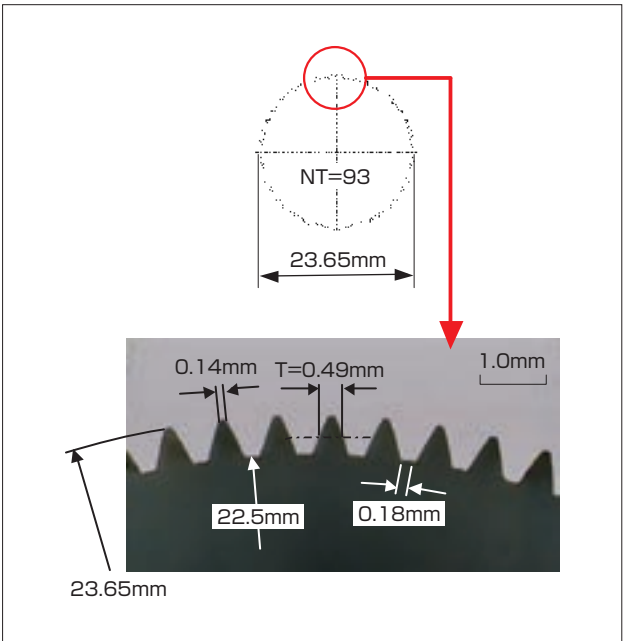

NBV-3-6 MNC

齿形精度 Profile error		齿向精度 Lead error	
左 Left	右 Right	左 Left	右 Right

切削条件 Cutting condition					
机械 Machine	立式 NBM 5008	切削油剂 Cutting Fluid	雾状 (UNICUT JINEN) Mist		
被削材 Work	SCM 435	拉刀全长 Broach Length	900mm (刃长 290mm)		
切削速度 Cutting speed	3m/min	切削负载 Pulling Load	8.8KN (0.9Ton)		

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

齿轮加工用滚刀

Solid Gear Hobs Standard Dimensions

加工齿轮的滚刀。

本公司可根据您的需要，制作多种尺寸。

This hob is used for gear cutting.

NACHI can also manufacture various sizes of solid hobs.



新商品

小型齿轮加工用滚刀


Fine Pitch Gear Hobs Standard Dimensions

加工精密仪器、钟表等的小型齿轮的滚刀。

齿形可分为不切顶和切顶两种。

This hob is used to manufacture of small gears such as watch.

There are two types of Non-Topping and Topping.

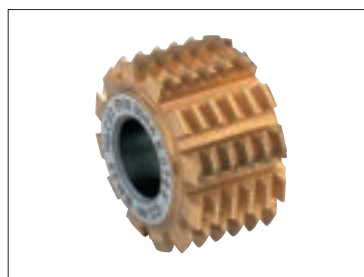

硬质合金钻头


高速钢钻头

矩形花键滚刀

Parallel Side Spline Hobs Standard Dimensions

加工矩形花键轴的滚刀

This hob is used to manufacture parallel side spline.

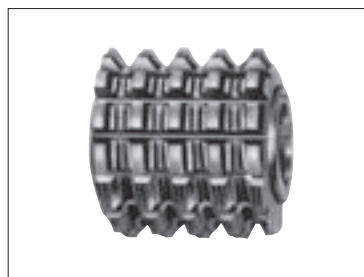

丝锥

硬质合金立铣刀


链轮滚刀

Roller Chain Sprocket Hobs Standard Dimensions

加工链轮轮毂的滚刀。

针对链轮轮毂的基准齿形的规定有 JIS B 1802、ANSI B29.1、ASA B29.1、DIN 8196、BS 228 等。

This hob is used to manufacture sprocket wheels according to ANSI B29.1, ASA B29.1, DIN 8196, JIS B 1802, BS 228.

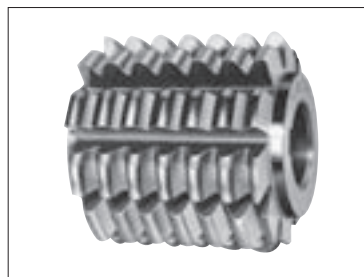

高速钢立铣刀

切削工具

小直径带柄滚刀

Small Diameter Hobs with Multi-Gashes

可进行高效率（滚刀高速转动）的加工，提升生产率。多槽设计还可帮助抑制滚刀的磨耗

This type of hob can endure super high-speed cutting and increase productivity. Other way multi-gashes cab reduce hob's wear.



套装商品
其它

精密工具

技术资料
索引

超硬滚刀

Solid Carbide Hobs

可用高刚性的高速滚刀机床进行高速滚刀加工。

本公司制作齿轮用滚刀、旋刮滚刀等多种超硬滚刀。

Carbide hobs can cut at high speed, which is significant improvement in gear productivity. NACHI can manufacture various solid carbide hobs like Gear hobs, Skiving hob.



超硬滚刀加工

Hard Hobbing

- 可用于淬火后的齿轮 (60HRC) 的精加工
- 适合难以研磨的轴、小模数的高精度加工
- 凭借双层涂层和硬质合金母材实现长寿命

- Hobbing of hardened gear is possible
- Suitable for high accuracy gear hobbing of the shaft and small module which was difficult in grinding
- Achieved longer tool life by Dual coat and hard metal

加工示例

Work Piece



加工前 Before



加工后 After

加工精度

Accuracy

	超硬加工前 Before Hard Hobbing	超硬加工后 After Hard Hobbing		超硬加工前 Before Hard Hobbing	超硬加工后 After Hard Hobbing
齿形 Profiles Error			齿向误差 Lead Error		

被削工件 Workpiece		滚刀参数 Hob Specifications		切削条件 Cutting Condition	
模数 Module	2	外径 Outside Dia.	50mm	切削速度 Cutting Speed	8.0mm/rev
齿数 Number of Teeth	6	全长 Overall Length	100	进给速度 Feed	0.6mm/rev
压力角 Pressure Angle	20°	头数 Threads	1	切削方法 Cutting Method	同向切削 Climb Cutting
齿宽 Tooth Width	28mm	沟槽数 Flutes	12	冷却剂 Coolant	—
材质 Material	SCM420(60HRC) 渗碳				

蜗轮滚刀

Worm Gear Hobs

用于蜗轮的齿轮切削的滚刀。

仅制作带孔的类型。

This type of hob is used to cut worm wheels.
Produce it only for a bore type.



特殊齿形滚刀

Special Form Hobs

本公司也可根据您的需要, 制作同步皮带轮用滚刀、摆线齿形等特殊齿形的滚刀

NACHI can also manufacture a various types of hobs such as hobs for timing belt pulley, hobs for cycloid tooth profile, ratchet-type form, hobs for gear chamfering and other special tooth profile hobs on request.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

圆盘型插齿刀 I 型

Disk Type Shaper Cutters Type I

平齿轮加工用插齿刀。

This type of cutter is used in cutting spur gears or splines.

圆盘型插齿刀 II 型

Disk Type Shaper Cutters Type II

加工斜齿轮的插齿刀。

This type of cutter is used in cutting helical gears.

碗型插齿刀

Deep Counterbore Type Shaper Cutters

用于加工内齿轮、阶梯齿轮的刀具。

This type of cutter is used in cutting internal gears or shoulder gears.

柄式插齿刀

Shank Type Shaper Cutters

用于加工小直径内齿轮、花键孔的刀具。

This type of cutter is used in cutting internal gears of small diameter and spline holes.

剃齿刀

Shaving Cutters

剃齿刀是刀具的齿槽中有多个锯齿形沟槽的齿轮齿面精加工用工具。

Shaving cutter is the gear cutting tool that have many serrated grooves at the tooth flanks.




剃齿前加工面

Before Shaving



剃齿后加工面

After Shaving

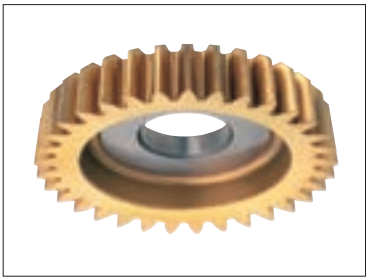

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


高性能剃齿刀

High Performance Shaving Cutter


- 根据工件特性, 选定适合的齿距, 从而改善工件加工数和锋利度
细齿距: 增加有效齿数, 提高加工数
粗齿距: 增强切入性, 提升锋利度
- 采用新钢种作为剃齿刀材料, 从而实现长寿命
- Select the optimum serration pitch according to the characteristics of the work to improve the number of steps in work process and finish.
Fine pitch: Improved work process by increasing number of effective teeth
Coarse pitch: Improved bite to increase cutting power of teeth
- Used new steel shaving cutter material to produce a long service life




高性能剃齿刀
High Performance Shaving Cutter



细齿距剃齿刀
Fine pitch serration shaving cutter



粗齿距剃齿刀
Coarse pitch serration shaving cutter

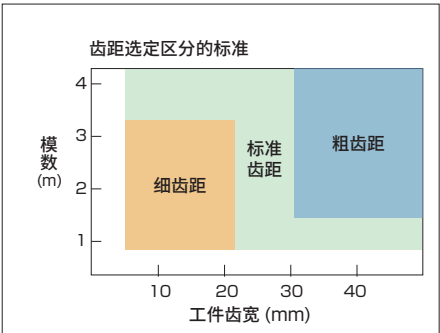

粗齿距加工事例
Example of coarse pitch serration

传统齿距刀具			
右	刀具	刀具	左
工件	刀具	刀具	工件


被削工件
M2.2 × PA17.5° × NT38 × HA32° LH
× 齿宽 30

通过变更齿距提升加工精度

粗齿距刀具			
右	刀具	刀具	左
工件	刀具	刀具	工件

细齿距加工事例
Example of fine pitch serration

	齿形 Profile	齿向 Lead
第5pcs		
第4000pcs		

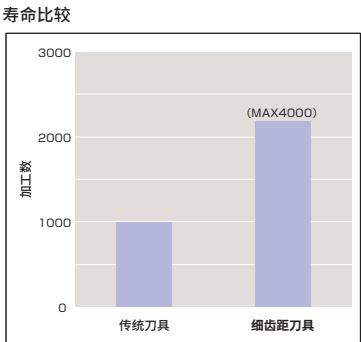

被削工件
M1.8 × PA17° × NT52 × HA31° LH
齿宽 20

新品

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

内齿轮剃齿精加工

Internal Gear Shaving

- 可自由的对难以加工的内齿轮齿形进行修正
- 可修正无法通过拉刀加工实现的鼓齿形状
- 为齿轮噪声的减少做贡献
- Can revise tooth profile of a difficult internal gear according to the aim
- Realize the crowning revision that is impossible by Broaching
- Reduces a gear noise.

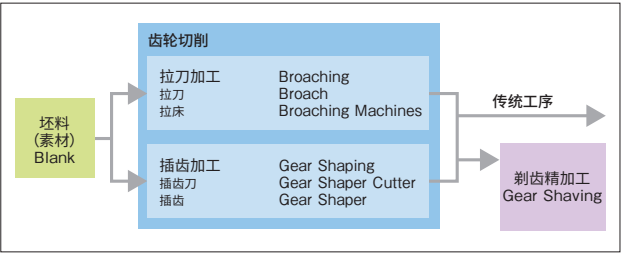


加工用途	Applications
------	--------------

汽车 A/T 用行星齿轮
Planetary ring gear for automobile A/T

性能	Performance
----	-------------

剃齿加工后的齿形和齿向精度
Finished accuracy after Shaving

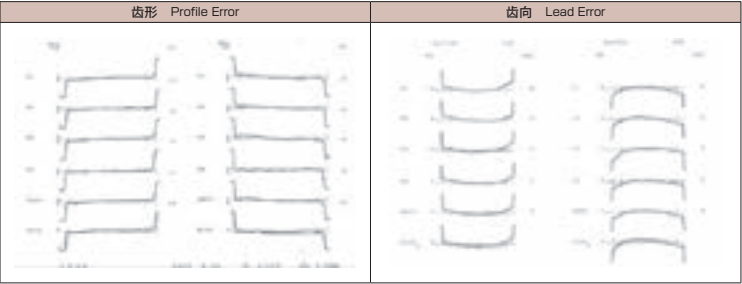

被削工件 Workpiece		
模数	Module	1.23
齿数	Number of Teeth	85
齿宽	Tooth Width	22mm
螺旋角	Helix Angle	20° R


切削条件 Cutting Condition		
工件转速	Work Rotation	500min ⁻¹
工件进给	Work Feed	100mm/min
加工时间 Cycle Time		
不到 3 分钟 Little less than 3minutes		



内齿轮剃齿精加工 Internal Gear Shaving



样品 Sample

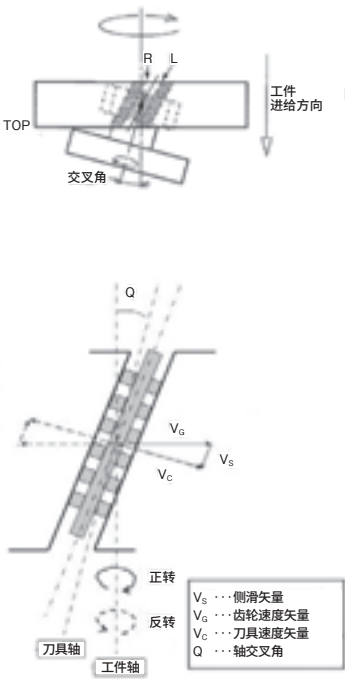

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

搓齿板

Forming Racks

搓齿板是上下（左右）一套使用的，具有如下特长。

- 可在数秒内完成加工，效率远高于滚刀加工。
- 相比使用传统的滚轮式滚压加工，加工精度更高。

Forming Racks are used in pairs to roll the teeth into the workpiece, and have next features.

- Rolling is generally completed in a few seconds and is a far more efficient than hobbing.
- This method can achieve better accuracy than cylindrical dies rolling.



加工实例 Example Workpieces

使用搓齿板的搓齿加工被较多用于渐开线花键、渐开线细齿、螺纹、蜗杆等的量产加工。

Forming Rack is for large volume production of parts with involute spline, involute serration, thread, worm and others.



花键 + 螺纹
Spline + Thread



蜗杆螺纹
Worm Screw



油槽（螺旋角 0°）
Oil Groove



少齿数齿轮
Number of The Small Teeth Gear



油槽（螺旋角 30°）+ 花键
Oil Groove + Spline



蜗杆
Worm

Hyper Shot 搓齿板

Hyper Shot Forming Rack

- 通过特殊表面处理提升耐磨性和润滑性，从而实现MQL加工
- 无论是传统的油性还是MQL加工，一般都能确保长寿命
- Special surface treatment improves in wear resistance and lubrication, and realize MQL roll forming.
- Longer tool life in both condition of conventional oil coolant and MQL roll forming.

采用特殊的表面改质处理 发挥优良的性能

Excellent performance by epoch-making
surface modifying technology

- 利用传统的 SN 处理和 Hyper Shot 的相乘效果，使硬度和韧性得到提升
- 考虑到搓齿加工的机理采用了表面改质处理和新设计方式，实现长寿命化
- Greatly improved hardness and toughness by synergy effects of SN treatment and Hyper Shot.
- The surface modifying technology and new design method considering the mechanism of rolling process achieve longer tool life.




Hyper Shot 搓齿板
Hyper Shot Forming Rack




PFM-915X
可进行 MQL 加工的高精度 NC 搓齿机的换刀作业
可轻松完成
利用 NC 刀座装置（选配件），可用同一套搓齿刀
加工齿数不同的花键

High-precision NC roll forming machine can do MQL
work Change-out procedure is easy
NC rack holder (option) makes it possible to work
splines with different number of teeth on same rack

磨损试验结果

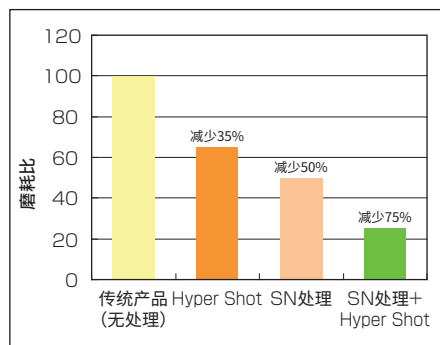

基于代用试验的磨损比较

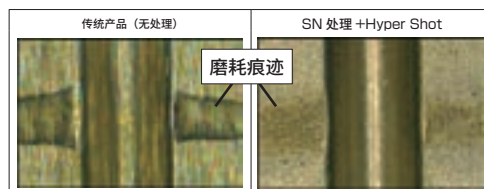

Hyper Shot

相比传统搓齿刀：寿命延长至1.5倍以上

SN处理+Hyper Shot

相比传统搓齿刀：寿命延长至4倍以上

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

硬齿面珩磨

Hard Gear Honing

该加工方法是与被加工齿轮轴形成交叉轴角、由内齿形砂轮驱动被加工齿轮进行的类似于内齿剃齿加工的一种方式，利用横向滑动力，对淬火后的齿轮的齿面以 $10 \sim 30\mu\text{m}$ /单边的加工余量进行精加工。

This process, similar to internal shaving, lightly finishes the tooth flank on hardened gear using an internal honing wheel.




修整齿轮
Dress-gear



加工前工件
Before



加工后工件
After

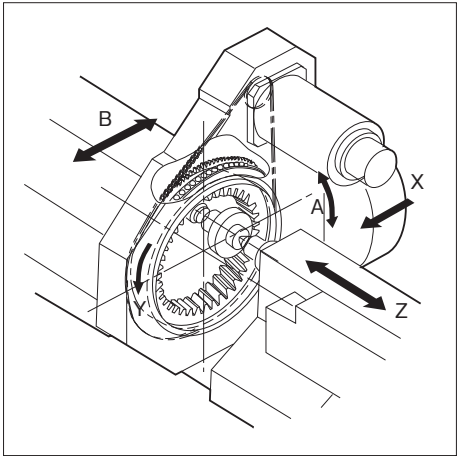

挤压轮

Gear Rolling Dies

和剃齿刀一样，用滚刀或插齿刀加工后的齿轮，用其对齿面进行滚压精加工。Similar to shaving cutter used after hobbed or shaped, Rolling Dies are used to finish gears.

倒棱刀

Deburring Cutters

在短时间内对齿轮切削加工后的齿轮齿面端面边缘进行倒角加工的工具。

This tool is used to create chamfer on the gear hobbed or shaped.


挤轮

Rolling Tool

能高效加工出防止同步器衬套齿面上齿轮松脱的倒锥形的工具。通常在拉刀加工后进行这一加工。

与作为工件的内花键咬合，同时沿半径方向挤压，从而滚压形成齿线锥面。This tool efficiently forms a reverse lead taper on synchronizer sleeve of transmission. This process is done after broaching or shaping of the part.

This tool forms a reverse lead taper by pushing into the radial direction of work while rolling.

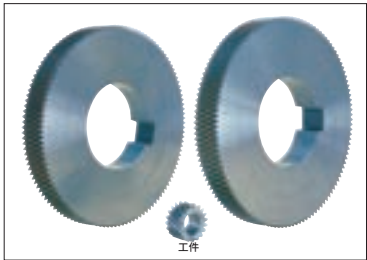

新商品

硬质合金钻头


高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

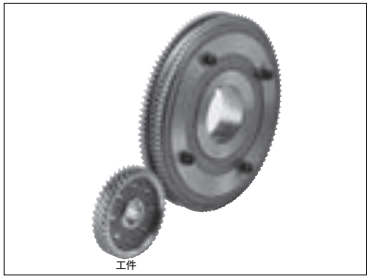

挤轮 Rolling Tool



工件 Work Piece

套装商品
其它

精密工具

技术资料
索引


内齿拉刀加工

内齿拉刀可将被削物的内侧精加工成所需的形状。通常，被削物上有事先钻开的底孔，将内齿拉刀插入该孔就可进行加工。




As for the internal broach, shape of indispensability can finish the inside of the cover crops. A lower hole is opened to the cover crops beforehand and usually machines it through an internal broach in this hole.

Internal Broaching

内齿拉刀加工 Internal Broaching Process

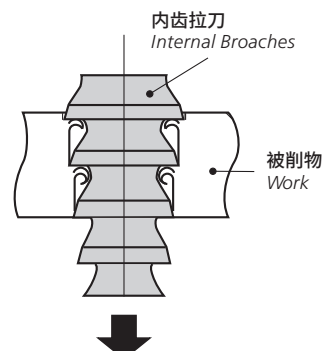

内齿拉刀的加工示例 Work piece sample

圆拉刀 Round Broach					特殊花键拉刀 Special Spline Broach				
									
方拉刀 Square Broach					山形细齿拉刀 Serration Broach				
									
矩形花键拉刀 Parallel Side Spline Broach									
									
特殊形状拉刀 Special Shape Broach									
									
 									

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

圆拉刀

Round Broaches

圆拉刀是对圆孔进行高精度精加工的拉刀。
还有提高精加工面精度的抛光拉刀。

Round broaches are finishing broaches used for highly precise round holes. There is burnishing broach to improve surface finish.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

渐开线花键拉刀

Involute Spline Broaches

用于汽车产业领域中多类渐开线花键孔的量产中。还有带前圆拉齿、后圆拉齿和交错圆拉齿的拉刀，用于提高花键和内径的偏心精度。

Involute Spline Broaches are used in automotive mass-production. There are three types of broaches with round teeth at the front, round teeth at the end and alternating spline and round teeth to decrease the eccentricity on the minor and major diameter of a spline.



带前圆拉齿
Round teeth at the front



带后圆拉齿
Round teeth at the end




交错圆拉齿
Alternating spline and round teeth

矩形花键拉刀

Parallel Side Spline Broaches

矩形花键被用于卡车零部件、机械零部件的量产加工中。和渐开线花键拉刀一样，有带圆拉齿的拉刀。

In track part or machine part production, Parallel Side Broaches are mainly used. There are broaches with round teeth as well as Involute Spline Broaches.



带后圆拉齿
Round teeth at the end

推刀

Push Broaches

拉刀加工一般是通过拉拔方式进行的，在切削量少的精加工中，多使用推刀。

Broaching is generally done by pulling, but in cases where the cutting stock is small, Push Broaches will be used.



复杂形状花键拉刀

Complicated Formed Spline Broaches

用于加工复杂形状工件的拉刀。

本公司制作外拉刀等能高精度地加工多种形状的拉刀。

Various complicated formed broaches can be manufactured such as Outer Rotor Spline Broach and others.



组合式拉刀

Built-up Broaches

这是装配了多个拉刀后使用的拉刀，多在一体式拉刀难以加工或为提升精度时使用。

This broach is assembled of some broaches and used instead of solid broach to obtain more tool life and more accuracy of workpiece.




大直径拉刀

Large Diameter Broaches

本公司还能制作外径 300mm、重量 500kg 以上的大型拉刀。另外，也制作渐开线齿轮用的高精度套式拉刀。

NACHI can manufacture broaches with an outside diameter of 300mm and a weight of 500kg, and precise shell-type broaches for internal gears.

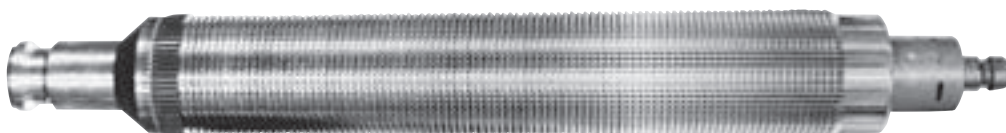

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

大直径螺旋拉刀

Helical Broaches


在汽车的自动变速器等中较多使用的内齿轮螺旋齿轮几乎都是用这种螺旋拉刀加工的。这种拉刀是外径渐续式切削、精加工是采用齿厚方式切削的可加工高精度的齿轮。

All of internal helical gears of automotive AT are fabricated by this helical broaches. This assembly broach design has a front roughing section and a removable floating shell-type finishing section with full involute teeth in rear section.

精刀套组合式
Assembly type



精刀一体式
Solid type

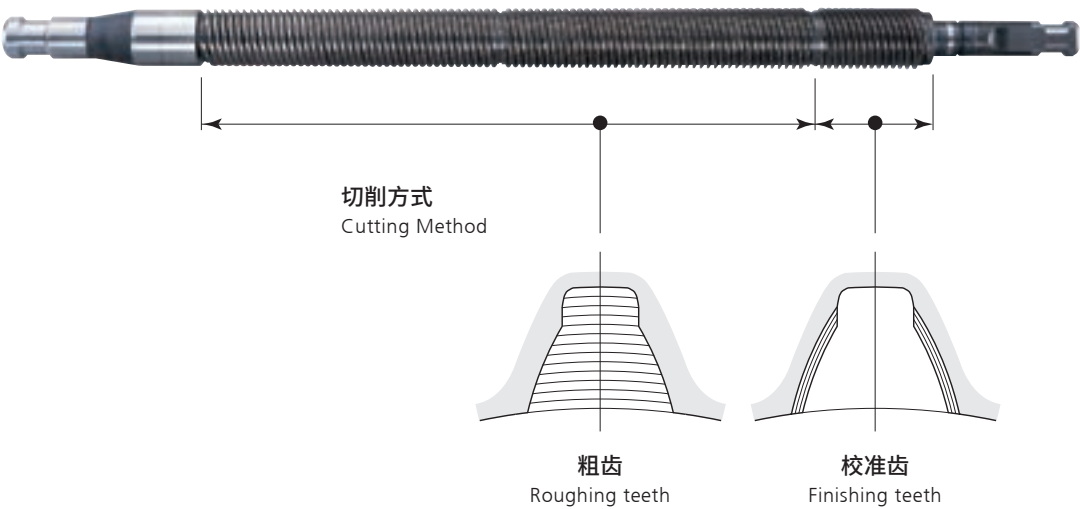

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


平面拉刀加工

平面拉刀可将被削物的表面精加工成所需的形状。粗加工和精加工可同时进行，因此相比铣刀加工，具有生产率高的特长。



Used to remove metal from an external surface to produce a flat or contoured surface. It is more economical than milling cutter because of broaches allows roughing and finishing operation be continued.

Surface Broaching

利用平面拉刀的加工 Surface Broaching Process

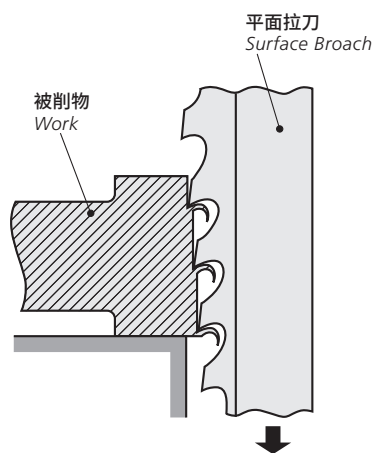

平面拉刀的加工示例 Workpiece Sample

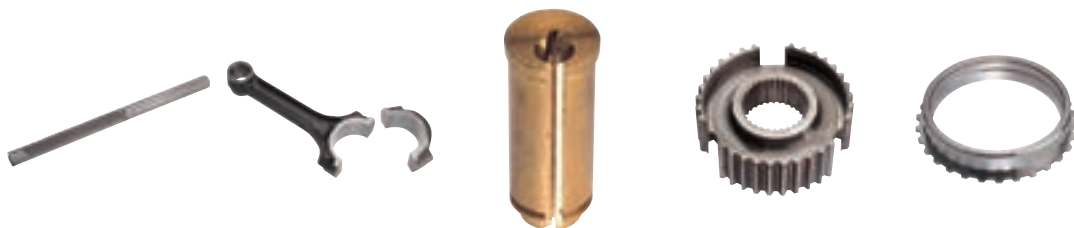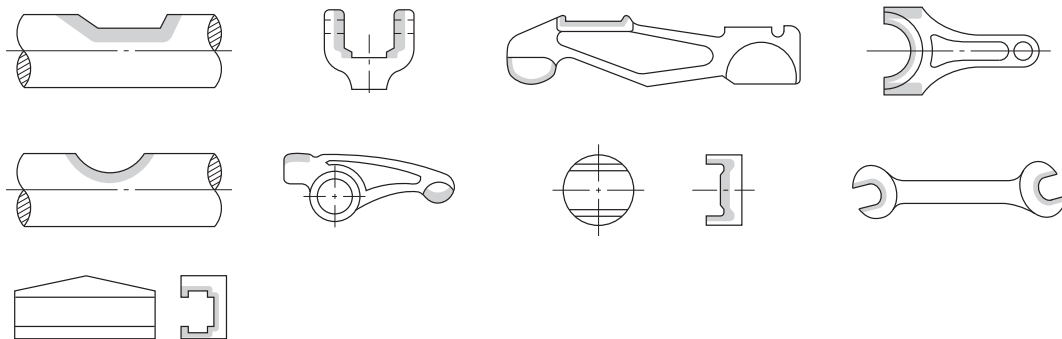

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

压缩机叶片槽拉刀

Compressor Vane Slot Broaches

旋转式压缩机叶片槽的精度要求十分严格，因此在制作时，本公司将采用科学设计，并且确保具备高精度。

具体采用超硬整体拉刀作为精加工拉刀。

Because the accuracy of rotary compressor vane slot is extremely high, these broaches are designed specially and manufactured precisely.

A finishing broach is made of solid carbide to ensure workpiece accuracy and tool life. through an internal broach in this hole.



连杆加工用拉刀

Connecting Rod Broaches

用于加工发动机零部件之一的连杆和连杆盖的拉刀。本公司配套设计和制作拉刀和拉刀座。

This is a broach to cut connecting rod and cap which is main part of engines. NACHI can design and manufacture broaches and also broach holders.



连杆和连杆盖
Connecting Rod & Cap

盘式制动器加工用拉刀

Disc Brake Broaches

用于加工扭矩构件的拉刀。

也可用于加工垫片的滑动槽面。

These are broaches cutting torque member on a disc-brake part. They use it for broaching in slide groove of a pad.



NSL-T Series



扭矩构件
Torque member

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

圣诞树拉刀

Fir Tree Type Broaches

用于航空机、船舶、发电设备及其它设备中的涡轮盘叶片槽加工的拉刀。其沟槽形状复杂，且要求具备高精度。另外，被削材质几乎都是难削材耐热合金。

本公司可制作满足上述多种条件的高精度圣诞树拉刀。



These broaches are suitable for turbine rotor disk blade groove broaching of aircraft, ships and generators. Turbine rotors discs have a number of grooves in a Fir tree shapes which require high accuracy and their material is usually very hard to cut.

NACHI can manufacture highly precise Fir tree type broaches.




圣诞树拉刀的切削方式

Fir Tree Type Broach Cutting Method

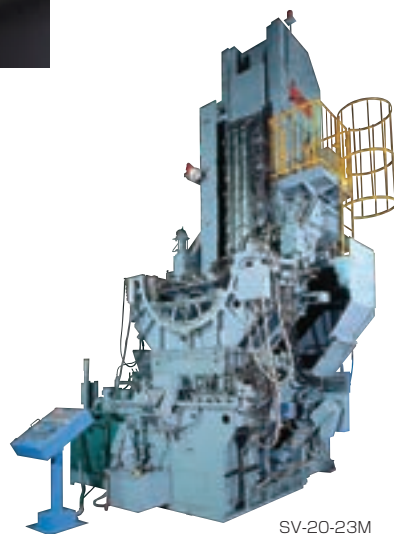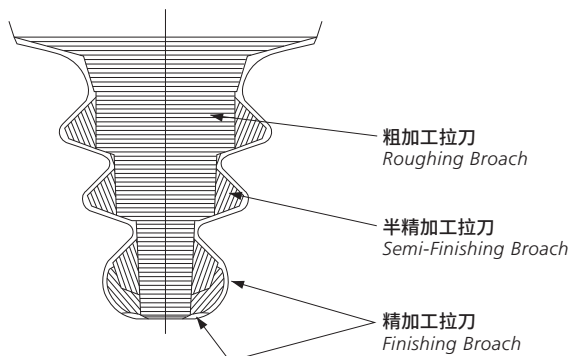

喷气发动机

Turbo fan engine

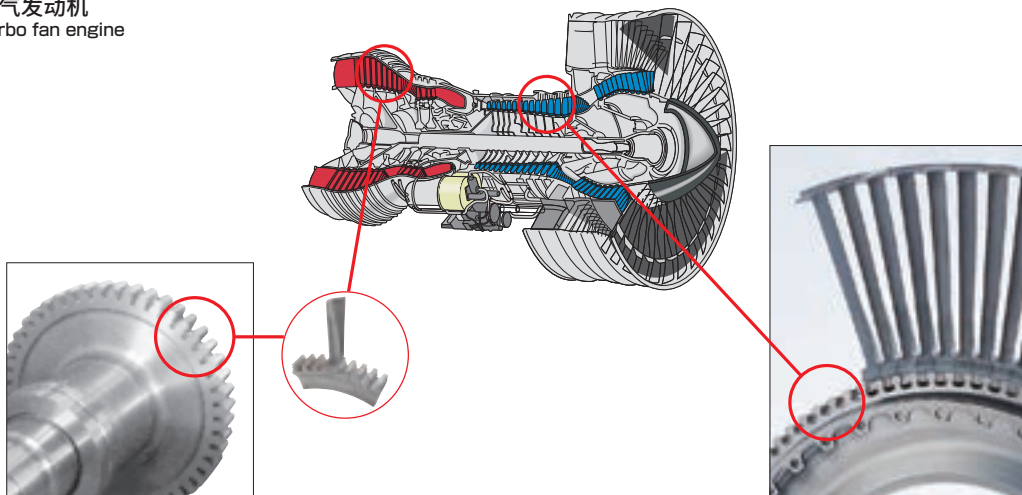

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

转向器齿条拉刀

Steering Rack Broaches

用于加工汽车的转向器齿条的拉刀。本公司可根据不同齿厚、外形修整方式、组合式等方面的要求，提供采用了科学设计的拉刀。

This is used in broaching of automobile steering rack.

NACHI can manufacture broaches such as variable tooth thickness type, form relief type and inserted blade type.



转向器齿条

Steering Rack Bar



转向器齿条拉刀

Steering Rack Broaches



TSL-7.5-15

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

筒式拉刀

Pot Broaches

用于加工工件外周的沟槽或特殊形状的拉刀。

有环型和棒型两种，本公司可提供符合工件精度的拉刀。本公司也设计制作拉刀座。

Pot Broach cuts external shapes such as involute splines teeth, slots and cam surface. There are two types of Stick Type and Ring Type.

NACHI can also manufacture broach holder called as "POT".



拉刀和组装好的拉刀座

Broaches and Assembled Holder



EV-10-8

技术资料

Technical Documents

涂层 Coating

NACHI 涂层介绍 NACHI Coating Technology.....	I-2
--	-----

钻头 Drills

钻头各部分名称 Drill Nomenclature	I-4
后面形状和横刃修磨 Shape of Relief and Shape of Thinning.....	I-5
钻头各部分形状及其作用 Drills Factor and Their Work	I-6
钻头的性能因素及其评价 Performance Factors and Evaluations	I-7
标准钻头基本切削条件 Standard Cutting Condition for Drills.....	I-8
钻头切削条件换算 Drill Cutting Conditional Conversions.....	I-9
直柄钻头的柄直径 Shank Diameter of Straight Shank Drills.....	I-10
深孔加工方法 Recommended Usage for Deep Hole Drill.....	I-11
平头钻适用对比 Comparison of FLAT Drill's Application.....	I-12
AQUA EX 通用 VF 钻刀片和钻杆的选定指南 Guide to Selecting Holders and Inserts for AQUA Drills EX VF.....	I-13
切削条件和工具的寿命 Cutting Condition and Tool Life	I-14
切削油剂的渗透性 Osmosis of Cutting Oil.....	I-15
进给量和切屑 Feed Rate and Chips.....	I-16
钻头的槽长 Drill Flute Length.....	I-17
钻头的故障排除 Drill Trouble-Shooting.....	I-18
钻头损伤 Drill Failures	I-20
钻头的切屑 Chip Type of Drill.....	I-21
超硬钻头的再研磨 Re-grinding of Carbide Drill.....	I-22
AQUA 钻头 NWDX 型 使用注意事项 Operating Precautions for AQUA Drills NWDX.....	I-23

丝锥 Taps

丝锥的各部分名称 Tap Nomenclature.....	I-24
丝锥的故障排除 Tap Trouble-Shooting.....	I-25
丝锥的种类和选定 Types and Selection of Taps	I-26

立铣刀 End Mills

立铣刀各部分的名称 End Mill Nomenclature	I-28
立铣刀的形状和特长 End Mill Teeth Form and the Features	I-29
立铣刀的加工特性 Applications.....	I-30
耐崩型 / 残留高度 Gash Land/Cusp Height.....	I-31
立铣刀的选定 Selection of End Mills.....	I-32
立铣刀的基本切削条件 Standard Cutting Condition for End Mills	I-33
立铣刀的故障排除 End Mill Trouble-Shooting.....	I-34
切削条件和加工面精度 Cutting Condition and Machined Surface.....	I-35
立铣刀的损耗 End Mill Wear.....	I-36
立铣刀的抗弯曲应力 End Mill Bending Stress.....	I-37
直筒夹的磨损及切削方向 Wear of Collet/Hand of Cut.....	I-38

切割工具 Metal Cutting Saws

金属带锯条 Metal Band Saw Blades.....	I-39
工件的装夹方法 Clamp Method According to Work Shape.....	I-40
切割工具的故障排除 Metal Band Saw Blade Trouble-Shooting.....	I-41

精密工具 Precision Tools

齿轮加工方法和加工工具 Latest Gear Processing and Cutting Tools.....	I-42
滚刀 Hob	I-43
插齿刀 Gear Shaper Cutter	I-44
剃齿刀 Shaving Cutters	I-45
搓齿板 Forming Rack	I-46

其它 Others

削平型柄形状和钻头冷却方式 Dimension of Flatted Cylindrical Shank / Type of Oil Hole Drills.....	I-47
莫氏锥柄 Morse Taper Shank	I-48
标准公差及适用范围 Bases of Tolerances, Deviations and Fits.....	I-49
各种加工方法的面粗度参考范围 Roughness Range by Processing	I-50
硬度换算表 Hardness Exchange Table.....	I-51
被削材的金属特性 Characteristics of Various Metals	I-52
模具用钢一览表 Die & Mold Material Comparison Table.....	I-54

REVO-D 涂层

REVO-D coating

是一种适用于硬质合金钻头的 AlCrN 系和 AlTiN 系多层涂层。也是一种耐热性、耐磨损性、润滑性均得到提高的高速切削用涂层。
Super multi-layer coating of AlCrN and AlTiN that applied to carbide drills. This coating for ultra-high speed cutting with improved oxidation resistance, wear resistance and lubricity.

REVO-M 涂层

REVO-M coating

是一种适用于硬质合金铣刀的 AlCrXN 系涂层。也是一种耐热性、耐磨损性、润滑性均得到提高的高速切削用涂层。
AlCrXN coating that applied to carbide end-mills. This coating for ultra-high speed cutting with improved thermal shock resistance, wear resistance and adhesion resistance.

AQUA EX 涂层

AQUA EX coating

是一种适用于硬质合金钻头的 AlCrTiN 系 + 润滑膜的复合多层涂层。也是一种耐热性、耐磨性、润滑性均得到提高的超高速切削用涂层。

Multilayered AlCrTiN and lubrication coatings used on carbide drills. This coating has better heat and wear resistance with improved lubricity for ultra-fast drilling.

AQUA 涂层

AQUA coating

是一种适用于硬质合金钻头的 TiAlN 系 + 润滑膜的复合多层涂层。也是一种耐热性、耐磨性、润滑性均得到提高的超高速切削用涂层。
Multilayered TiAlN and lubrication coatings used on carbide drills. This coating has better heat and wear resistance with improved lubricity for ultra-fast drilling.

GSX II 涂层

GSX II coating

是一种适用于硬质合金立铣刀的 AlCrN 系复合多层涂层。也是一种耐氧化性、耐热性、耐磨性均得到提高的高硬度材、耐热合金材切削用涂层。
The AlCrN multilayer coating used for carbide end mills. Coating for milling Hardened Steel and Heat Resistant Alloy has oxidation resistance and greater heat and wear resistance.

GSX 涂层








GSX coating

是一种适用于硬质合金立铣刀的 AlCrN 系复合多层涂层。也是一种耐氧化性、耐热性、耐磨性均得到提高的高速、高硬度钢切削用涂层。
The AlCrN multilayer coating used for carbide end mills. Coating for drilling Hardened Steel at high speeds has oxidation resistance and greater heat and wear resistance.

ZT 涂层

ZT Coating

是一种适用于挤压丝锥的 AlTiN 系涂层。也是一种耐磨损性、平滑化和高韧性的适用于滚轧加工用涂层。
The AlTiN coating used for forming tap. This coating for component rolling with improved wear resistance, smoothness, and toughness.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

AG 涂层

AG coating

是一种适用于高速钢钻头、立铣刀的 AlCrN 系涂层。涂层的耐热性、耐磨性均得到提高。

The AlCrN coating used for HSS drills and end mills. This coating has better heat and wear resistance.

SG 涂层

SG coating

是一种适用于高速钢钻头、立铣刀的 TiCN 系涂层。涂层的耐磨性得到提高。

The TiCN coating used for HSS drills and end mills. This coating has better wear resistance.

G 涂层

G coating

是一种适用于高速钢钻头、立铣刀的 TiN 系涂层。与工具母材的贴合性优良的泛用涂层。

The TiN coating used for HSS drills and end mills. This is a general-purpose coating with superior adhesion on tool steel.

DLC 涂层

DLC coating

DLC 涂层是具备与金刚石同等级摩擦特性的润滑膜。对有色金属的耐粘性非常出色。

DLC coating has the same friction properties and lubricity as Diamond coating. It has great weld-resistance on Non-Ferrous Metal.

金钻石涂层







Diamond coating

物质中最硬的金刚石膜。耐粘性、耐磨性出色，适用于有色金属、石墨等。Great weld-resistance and wear resistance, for Non-Ferrous Metal, graphite, etc with a diamond layer, the hardest substance.

晶体金刚石涂层

Crystal Diamond coat

物质中最硬的金刚石膜。耐粘性、耐磨性出色，适用于有色金属、石墨，特别是 CFRP 等。Great weld-resistance and wear resistance, for Non-Ferrous Metal, graphite, CFRP etc with a diamond layer, the hardest substance.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具



技术资料
索引

钻头各部分名称


Drill Nomenclature

各部分名称


Nomenclature

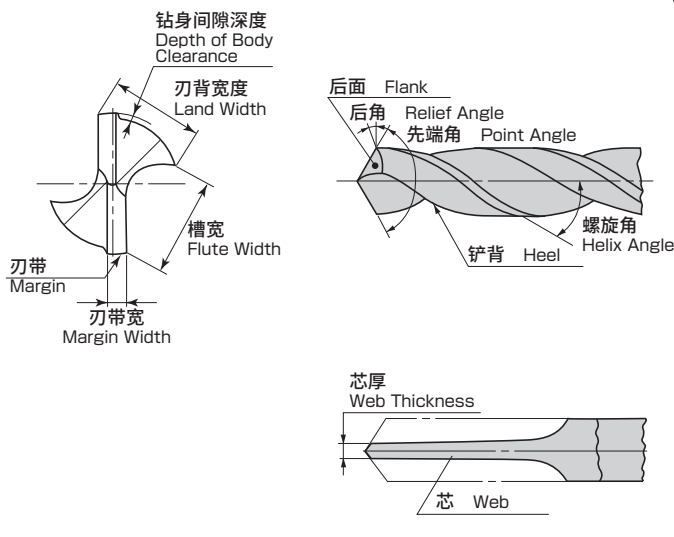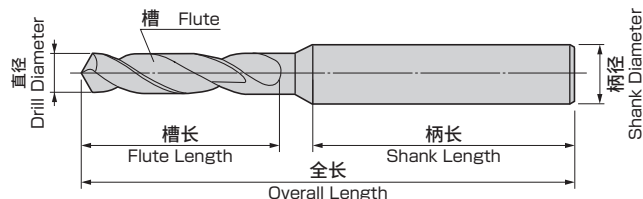


直柄
Straight Shank




立铣刀柄
End Mill Shank



侧锁柄
Straight Shank with Flat



带扁尾直柄
Straight Shank with Tang drive



莫氏锥柄
Morse Taper Shank



钻头各部的切削刃切削状态和切削轴向力



State of Cutting edge and Cutting Thrust

钻头的前刀角越靠近外周部越大。且切削速度也是越靠近外周部越快。相反，中心部（横刃部）切削速度为零，较大的负前刀角会导致被削材发生塑性变形。

The drill's front angle becomes more pronounced as it approaches the periphery. The cutting speed also increases towards the periphery. On the other hand, the drill's core (chisel) has a cutting speed of zero while its front angle under goes great stress as it drills into the work material.

下图为没有实施横刃修磨的钻头和实施X形横刃修磨后的钻头的轴向负载的比较。没有实施横刃修磨的钻头在横刃部会产生较大的轴向负载。横刃部的长度越长，轴向负载越大。实施横刃修磨、缩短横刃部长度后，这一轴向负载可基本消除。横刃修磨可以解决因振动产生的崩口、毛刺以及钻孔精度等问题，因此十分重要。

The diagram below shows a comparison of the thrust load on a non-thinned drill and an X-shape thinned drill. A large thrust load is born by the chisel of the non-thinned drill. This load increases in relation to the length of the chisel. When thinning is done, the chisel is shortened which almost eliminates this thrust load. Thinning is very important because it solves such problems as chipping and burring caused by vibration and improves hole accuracy.

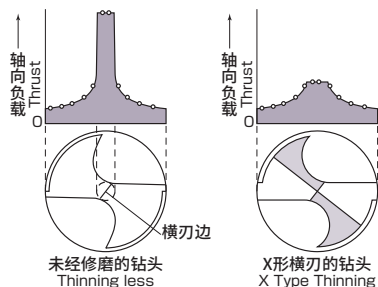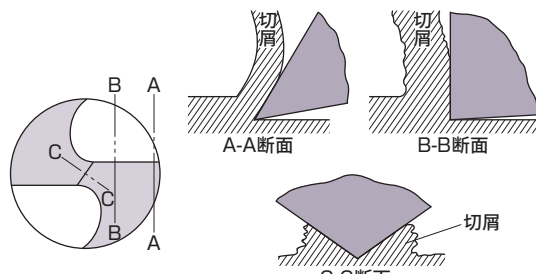

后面形状和横刃修磨

Shape of Flank and Shape of Thinning



■ 后面形状

Shape of relief

形 状 Shape	特 长 Features	用 途 Application
圆锥研磨 Conical 	· 最一般的研磨方法。 · 为了将后面研磨成圆锥面，从外围向中心部靠近，增大后角。 · The most normal grinding method. · The flank angle becomes greater as to it approaches to the center from corner because of grinding the lip conically.	一般用途 General Purpose
平面研磨 Flat 	· 将后面研磨成平面。 · 易于研磨。 · Grind the flank plainly. · Easy grinding.	主要用于小直径钻头 and 超硬钻头 For small drills and carbide drills.
3 倾角形 Three-rake 	· 没有横刃部，因此向心性良好，孔的扩大也不明显。 · 需要特殊磨床。 · Having good centrality because of no chisel edge. · Less enlargement of holes. · Need special grinder.	用于孔精度和定位精度良好的钻孔 For drilling of high accurate hole and positioning.
螺旋极点 Spiral Point 	后面是螺旋面，将横刃边加工成 S 形，向心性良好，加工精度良好。 Flank spirally ground makes as S-shaped chisel edge, and brings good centrality and high accuracy.	用于高精度钻孔 For drilling high accurate holes.
径向唇形 Radial-lip 	· 加工精度和形成面的粗糙度良好。 · 通孔，毛刺小。 · 需要专用磨床。 · Get good accuracy and surface roughness by this point. · Less burr in through holes. · Need special grinder.	· 用于铸铁、轻合金 · 用于钢铁板 · For Cast Iron, light alloy and steel plate
蜡烛型 Fishtail 	断面为蜡烛形状，向心性良好，拔出时的冲击力小。 Bring good centrality and less shock when penetrated. Less burr when penetrated	用于薄板钻孔 For thin steel plates

■ 横刃修磨

Shape of thinning

形 状 Shape	特 长 Features	用 途 Application
S 形 S-Type 	易于进行横刃修磨。 Very Easy to make thinning.	· 一般用途 · 用于钢、铸铁、有色金属等 · General purpose · For Steel, Cast Iron, Non-Ferrous Metal.
X 形 X-Type 	· 轴向负载大幅减少。 · 切入性良好。 · 对芯厚厚的钻头有效。 · Reduce thrust force substantially. · Advantage when entering. · This type of thinning is very efficient for thick web.	· 用于深孔加工 · 用于被削性差的时效硬化性材料 · For drilling deep hole · Material of low machinability and of machining hardenability.
XS 形 XS-Type 	· 比 X 形容易研磨。 · 轴向负载大幅减少。 · 切入性良好。 · Easier grinding than X-type. · Reduce thrust force substantially. · Advantage when entering.	用于深孔加工 For deep holes
V 字形 Notch-Type 	在芯厚比较大的时候有效。 Effective for thick web.	· 用于重切削 · 用于轨道切削或高锰钢切削 · For heavy duty · For rail and high-manganese steel.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

钻头各部分形状及其作用

Drills Factor and Their Work

特 性 Characteristic	钻头各部分形状 Drills Factor	切削阻力 Cutting resistance		切屑 排出性 Tip removal	出口的 毛 刺 Burr	工具寿命 Tool life	加工精度 Accuracy	加工效率 Efficiency	备 注 Remark
		轴向力 Thrust	扭矩 Torque						
螺旋角 Helix Angle	大 High 小 Low	小 Small 大 Big	小 Small 大 Big	好 Good 差 Bad	小 Small 大 Big				通常，对软钢增大扭转角，对硬而脆的材料减小扭转角。 High helix angle is adopted for soft materials, and for brittle materials, low helix is adopted.
先端角 Point Angle	大 Big 小 Small	大 Big 小 Small	小 Small 大 Big		大 Big 小 Small	好 Good 差 Bad	差 Bad 好 Good	好 Good 差 Bad	一般用途为 118°，用于硬质被削材和高速切削时，增大到 135°。 For general purpose, 118° point angle is adopted. For hard material, or high-speed cutting, 135° is designed.
芯 厚 Web Thickness	厚 Thick 薄 Thin	大 Big 小 Small	大 Big 小 Small	差 Bad 好 Good	差 Bad 好 Good		好 Good 差 Bad	好 Good 差 Bad	若增加芯厚，钻头刚性也会增加，但轴向力会增加。为了减少轴向力，而进行横刃修磨。 To increase the drill web thickness, the rigidity should be bigger. But thrust is also increased. To decrease thrust, the thinning is treated.
后角 Clearance Angle	大 Big 小 Small	小 Small 大 Big			小 Small 大 Big	好 Good 差 Bad			对硬质材料减小后角，对软质材料增大后角。 For hard material, small clearance angle is taken, for soft material, large clearance angle is taken.
全长 Overall Length	长 Long 短 Short					差 Bad 好 Good	差 Bad 好 Good	差 Bad 好 Good	缩短钻头长度就是增加钻头刚性，高性能钻头的长度一般都设定得比较短。 Shortening drill length is equal to increase drill rigidity. So high-performance drill is designed to be short length.

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具


技术资料
索引

钻头的性能因素及其评价

Performance Factors and Evaluations


钻头的性能因素

Drill performance factors

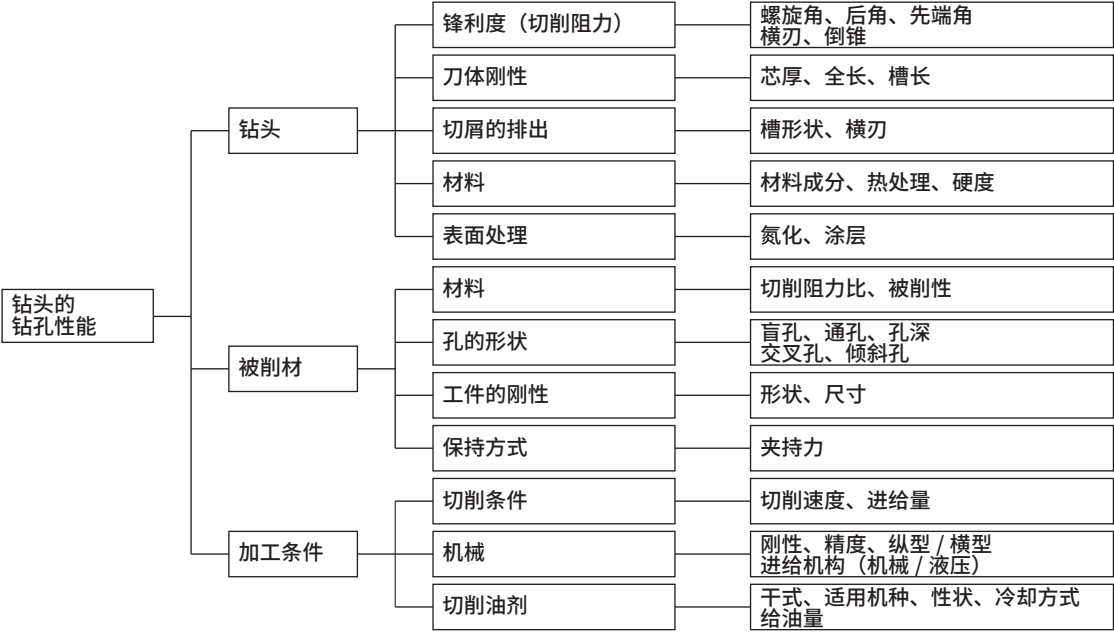

钻头的性能评价

Drill evaluations

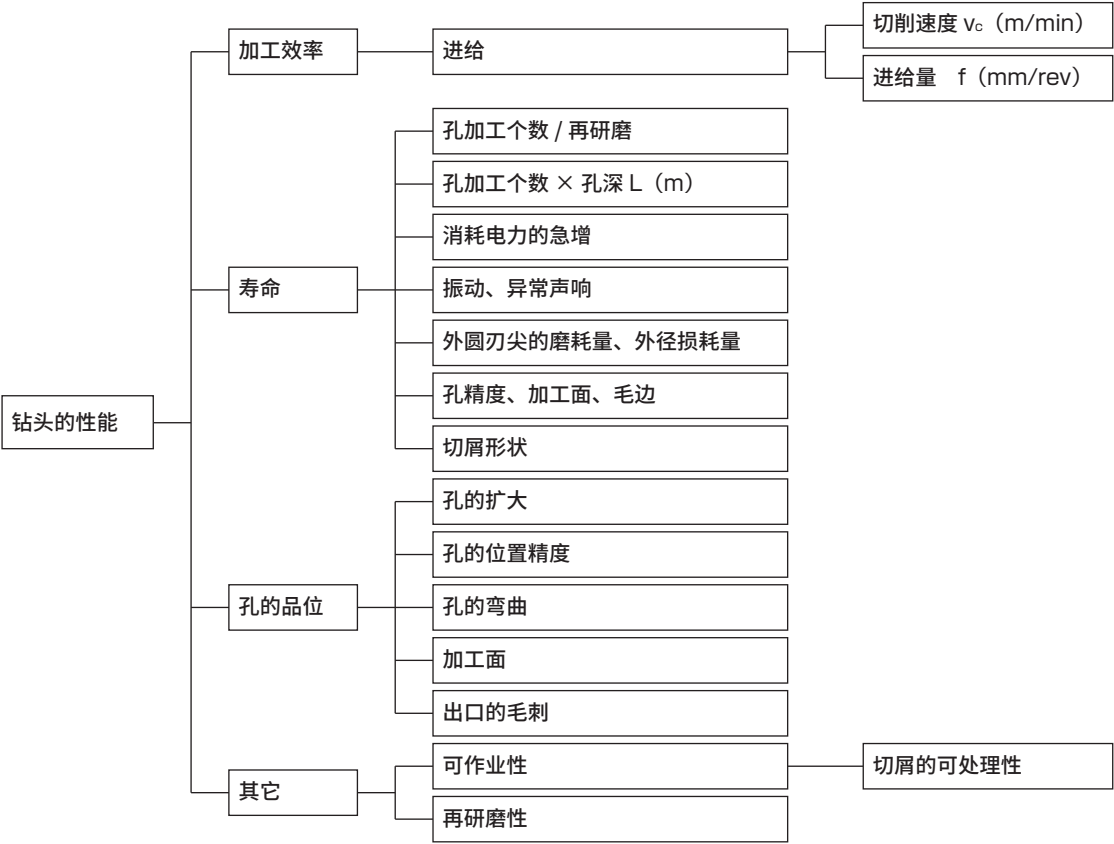

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

标准钻头基本切削条件

Standard Cutting Condition for Drills

■ 计算步骤

Calculation method

1. 转速 $n = \frac{318 \times v_c}{D_c}$ (min⁻¹)

v_c : 切削速度 (m / min)、 D_c : 钻头直径 (mm)
但干式切削时, v_c 应为表中数值的 70 ~ 80%

2. 进给速度 $v_f = G \times T \times C \times n$ (mm / min)

G : 进给系数、 T : 钻头系数
 C : 装夹系数、 n : 转速 (min⁻¹)

注) 使用大直径钻头时, 必须考虑机械主轴马达的输出。
<参考>

净切削功率 P_m (KW)

$P_m = \frac{v_c \times D_c \times f \times K}{24490}$ (KW)

v_c : 切削速度 (m/min)

D_c : 钻头直径 (mm)

f : 1 次转动的进给 (mm/rev)

K : 切削阻力比 (Kg/mm²)

— S50C	: 250
— FC250	: 120
— Al	: 80

表 3 钻头系数 (T)

钻头类型		系数
高速钢钻头	直柄钻头	1.2
	锥柄钻头	
	含钴直柄钻头	
	含钴锥柄钻头	
	长钻头	1.0
	锥柄长钻头	
涂层钻头	G 涂层 短刀型、SG-ESS	1.8
	G 涂层 标准钻头、SG-ES	1.5
	G 涂层 长钻头、AG 强力长钻头	1.1
	UG 强力钻头	1.3
	AG-SUS 钻头	1.5
	SG-FAX 油孔钻	1.3
	DLC 高速钢钻头	1.3
硬质合金系列	AQUA 钻头短刀型、白金钻头短刀型	1.5
	AQUA 钻头标准型、白金钻头	1.3
	AQUA 3 刃钻	1.7
	AQUA 钻头 高硬型	0.5
	AQUA 喷雾油孔钻头 (3D 用)	1.3
	“ (5D 用)	1.1
	“ (7D 用)	0.9
	DLC 钻头	1.5

表 1 切削速度 (v_c)

被削材	硬度 (HB)	切削速度 v_c (m / min)				
		高速钢系列		硬质合金系列		
		高速钢	涂层	白金	AQUA (DLC)	
一般结构用钢 SS400	~ 180	15 ~ 25	25 ~ 40	50 ~ 80	80 ~ 120	
碳钢 S45C、S50C	~ 230	15 ~ 25	20 ~ 30	40 ~ 70	70 ~ 100	
合金钢、调质钢 SCM、NAK	~ 280	10 ~ 20	15 ~ 25	40 ~ 60	60 ~ 80	
模具钢、预硬钢 SKD、NAK、HPM	~ 320	8 ~ 15	10 ~ 25	30 ~ 50	50 ~ 70	
耐热合金、钛合金	~ 375	3 ~ 10	5 ~ 15	20 ~ 30	30 ~ 40	
高硬度钢	40HRC ~	~ 5	~ 8	~ 15	~ 20	
不锈钢 SUS	~ 180	5 ~ 12	10 ~ 20	—	—	
铸铁 FC、FCD	~ 200	20 ~ 30	25 ~ 40	40 ~ 60	60 ~ 100	
铝、铝合金 AC、ADC		30 ~ 50	35 ~ 70	50 ~ 100	(80 ~ 200)	
铜合金、黄铜 Cu		20 ~ 40	30 ~ 50	40 ~ 70	(50 ~ 80)	

表 4 装夹系数 (C)

钻头类型	系数
钻头夹	1.0
锥形套	1.1
筒夹	1.2

表 2 进给系数 (G)

被削材	钻头直径 (mm) 所对应的进给系数 (G)												
	$\phi 2$	$\phi 4$	$\phi 6$	$\phi 8$	$\phi 10$	$\phi 12$	$\phi 15$	$\phi 20$	$\phi 25$	$\phi 30$	$\phi 35$	$\phi 40$	$\phi 50$
一般结构用钢 SS400	0.048	0.080	0.108	0.133	0.156	0.178	0.209	0.256	0.301	0.344	0.384	0.422	0.496
碳钢 S45C、S50C	0.044	0.073	0.098	0.121	0.142	0.162	0.190	0.233	0.274	0.313	0.349	0.384	0.451
合金钢、调质钢 SCM、NAK	0.040	0.066	0.088	0.109	0.128	0.146	0.171	0.210	0.247	0.282	0.314	0.346	0.406
模具钢、预硬钢 SKD、NAK、HPM	0.031	0.051	0.069	0.085	0.099	0.113	0.133	0.163	0.192	0.219	0.244	0.269	0.316
耐热合金、钛合金	0.031	0.051	0.069	0.085	0.099	0.113	0.133	0.163	0.192	0.219	0.244	0.269	0.316
高硬度钢	0.026	0.044	0.059	0.073	0.085	0.097	0.114	0.140	0.164	0.188	0.209	0.230	0.271
不锈钢 SUS	0.035	0.058	0.078	0.097	0.114	0.130	0.152	0.186	0.219	0.250	0.279	0.307	0.361
铸铁 FC、FCD	0.106	0.175	0.235	0.290	0.341	0.389	0.456	0.559	0.658	0.751	0.838	0.922	1.082
铝、铝合金 AC、ADC	0.057	0.095	0.127	0.157	0.185	0.211	0.247	0.303	0.356	0.407	0.454	0.499	0.586
铜合金、黄铜 Cu	0.066	0.110	0.147	0.182	0.213	0.243	0.285	0.350	0.411	0.470	0.524	0.576	0.677

假设为普通钻头时的基本切削条件。请配合参考个别的基本切削条件。

钻头切削条件换算

Drill Cutting Conditional Conversions

根据切削速度 v_c 求得转速 n
Convert cutting speed into rotation

$$n = \frac{1000 \times v_c}{3.14 \times D_c} \text{ (min}^{-1}\text{)} \quad (1)$$

根据转速 n 求得切削速度 v_c
Convert rotation into cutting speed

$$v_c = \frac{3.14 \times D_c \times n}{1000} \text{ (m/min)} \quad (2)$$

根据进给量 f 求得进给速度 v_f
Convert feed rate/rev. into feed/min

$$v_f = f \times n \text{ (mm/min)} \quad (3)$$

根据进给速度 v_f 求得进给量 f
Convert feed/min into feed rate/rev.

$$f = \frac{v_f}{n} \text{ (mm/rev)} \quad (4)$$

根据产品目录中的基本切削条件表计算中间尺寸的切削条件的方法
Conversion method of intermediate drill size

	求得的 中间尺寸	产品目录中记 载的近似尺寸
钻头直径 D_c	D_1	D_2
转速 n	N_1	N_2
进给速度 v_f	F_1	F_2
切削速度 v_c	(v_2)	v_2
进给量 f	(f_2)	f_2

1. 公式 (2) 中, 将 N_2 代入 n , 将 D_2 代入 D_c , 求得切削速度 v_2
2. 公式 (4) 中, 将 F_2 代入 v_f , 将 N_2 代入 n , 求得进给量 f_2
3. 公式 (1) 中, 将 v_2 代入 v_c , 将 D_1 代入 D_c , 求得转速 N_1
4. 公式 (3) 中, 将 f_2 代入 f , 将 N_1 代入 n , 求得进给速度 F_1

计算事例

AGESS | AG-ESS 钻头

被削材 Work Material	一般结构用钢 碳钢		合金钢 调质钢
	SS440 S50C Structural Steel Carbon Steel		SCM440 J Alloy Steel Heat treat
	~ 200HB		20 ~ 250HB
直径 Drill Dia. (mm)	转速 Rotation (min ⁻¹)	进给速度 Feed (mm/min)	转速 Rotation (min ⁻¹)
1	12000	320	9000
2	7200	430	5600
3	4800	500	3700
5	2900	450	2200
8	1800	430	1400
10	1400	400	1100
12	1200	360	930
16	900	310	700
20	720	290	560

求得 AGESS 钻头 6.0mm 的基本切削条件。
假设被削材为碳钢 S50C。
根据基本切削条件表中最接近的直径 5.0mm 换算。



	求得的 中间尺寸	产品目录中记 载的近似尺寸
钻头直径 D_c	6	5
转速 n	公式 (1)	2900
进给速度 v_f	公式 (3)	450
切削速度 v_c		公式 (2)
进给量 f		公式 (4)

1. 公式 (2) 中 $v_2 = 3.14 \times 5 \times 2900 \div 1000 \div 45.5$
2. 公式 (4) 中 $f_2 = 450 \div 2900 = 0.155$
3. 公式 (1) 中 $N_1 = 1000 \times 45.5 \div 3.14 \div 6 \div 2400$
4. 公式 (3) 中 $F_1 = 0.155 \times 2400 = 372$
直径 6.0mm 的基本切削条件为
转速 2400min⁻¹ 进给速度 370mm/min

产品目录中的基本切削条件是假定对该工具而言最佳的加工条件下的切削条件, 并非使用推荐条件。
请根据使用的机械、夹头、工具突出长度、被削材形状、被削材夹持状况、冷却剂的使用这些加工条件环境, 调整切削条件。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直柄钻头的柄直径

Shank Diameter of Straight Shank Drills

钻头柄的种类

钻头直径和柄直径相同的钻头为直柄钻头。与此相对，柄直径与钻头直径不同的钻头或柄直径有规定的钻头，一般被称为立铣刀柄钻头。

直柄钻头例



立铣刀柄钻头例



柄直径的管理

直柄钻头的柄直径如下图所示，一般加工得略小于钻头直径。但我们未对柄直径进行直接管理，因此无法具体规定。它是根据倒锥、倒锥范围等次要因素决定的。

利用直筒夹使用钻头时，实际的柄直径可能会造成问题，因此，下面记载了求得推定值的方法。


柄直径的概算方法（大致标准）

柄径
= 钻头直径 - 倒锥范围长 × 倒锥

计算例

项目	计算基准值	计算值
钻头直径	10	9.988（作为直径允差的中间值）
槽长	200	180（作为槽长的 90%）
倒锥	0.04 ~ 0.1/100	0.07/100（作为中间值）

= 9.988 - 180 × 0.07/100
= 9.862

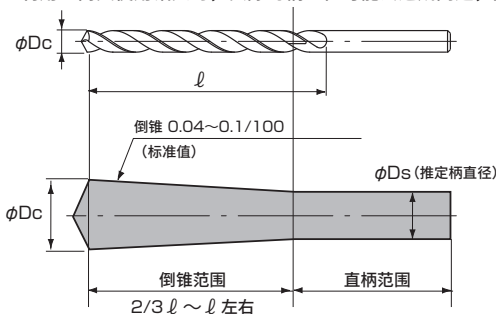


倒锥和倒锥范围

标准的直柄钻头、直柄长钻头为 0.04 ~ 0.1/100 左右。
短型涂层钻头、超硬钻头等中，有些钻头具备前数值的约 1.5 ~ 2 倍的较大倒锥。
倒锥范围是根据针对全长的与槽长的平衡，以及槽长的绝对值决定的，因此无法确定为固定的比率。

直柄钻头的振动

直柄钻头的振动在 JIS 标准中有具体规定。
但其公差值比预想的大。
对开孔精度和孔位置精度有要求时，推荐使用立铣刀柄的钻头。

振动的测定方法



将钻头的柄完全固定于 V 型块上，使千分表接触到外圆刃尖的刃带部（固定位置），读取其刻度。
接着，转动钻头 180°，同样读取千分表上的刻度。求得两次读取的数值的差，作为测定值。

普通级（直柄钻头）振动的公差值

振动 = 0.03 + 0.01 L/Dc

Dc: 钻头的直径
L: 钻头的全长

摘自 B4313-2008

钻头的振动公差值比较

单位: mm

直径	全长	普通级	精密级
2.0	55	0.30	0.02
3.0	71	0.27	0.02
6.0	102	0.20	0.03
10.0	130	0.16	0.04
13.0	168	0.16	0.05

关于 JIS 标准中规定的振动公差，我们用本公司 SD（直柄钻头）的尺寸进行了计算。普通级为直柄钻头，为进行比较，还展示了精密级（立铣刀柄钻头时）的公差值。

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引


深孔加工方法

Recommended Usage for Deep Hole Drill

1. 导向孔加工 (AQUA EX 油孔引导钻) Guide hole drilling(AQDEXOHPLT)

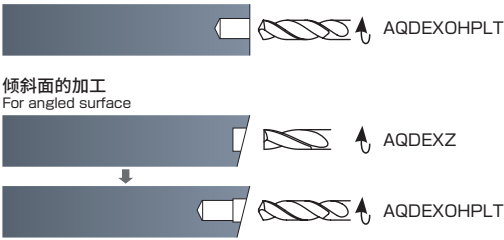

倾斜面的加工
For angled surface



请预先加工导向孔。孔深为 $2 \sim 3D_c$ 。
导向孔加工推荐使用 AQUA EX 油孔引导钻。
请选择直径比深孔钻头大 0.03mm 的钻头。
* 直径不足 3.0mm 时, 导向孔深度为 $1 \sim 2D_c$ 。
请选择直径比深孔钻头大 0.015mm 的钻头。
加工部为倾斜面或异形时, 请预先用 AQUA EX 平头钻将加工部加工为平坦面。
We recommend pre-drilling of guide holes. Depth is 2 to $3 \times D_c$.
We recommend the AQDEXOHPLT for guide hole drilling.
Select one with a diameter 0.03mm larger than the deep hole drill when using AQDEXOHPLT.
* When using a drill with a diameter of less than 3.0mm , Depth is 1 to $2 \times D_c$.
Select one with a diameter 0.015mm larger than the deep hole drill when using AQDEXOHPLT.
If the part is canted or misshapen, use the AQDEXZ to make a flat surface before use.

2. 深孔加工 (插入导向孔) Deep hole drilling (Insert it in a guide hole)



将钻头低速插入导向孔, 距离导向孔底部 $2 \sim 3\text{mm}$ 。
(转速 500min^{-1} 、进给速度 1000mm/min 左右)
* 直径不足 3.0mm 时, 以低速将钻头插入导向孔,
距离导向孔底部 $0.5 \sim 1.0\text{mm}$ 。
(转速 500min^{-1} 、进给速度 300mm/min 左右)
Penetrate into the guide hole at low speed until 2 to 3mm from the bottom of the guide hole.
(About, Rotation 500min^{-1} , Feed 1000mm/min)
* When using a drill with a diameter of less than 3.0mm , penetrate into the guide hole at low speed until 0.5 to 1.0mm from the bottom of the guide hole.
(About, Rotation 500min^{-1} , Feed 300mm/min)

3. 深孔加工 Deep hole drilling




请以通常的转速、进给速度开始加工。
Start drilling at normal speed and feed.

4. 深孔加工 (完成) Deep hole drilling (Completion)




倾斜面的通孔
Penetration on angled surface



使用通孔时, 当贯通部为倾斜面或异形时, 钻头拔出时的冲击力会增大, 因此, 请降低进给速度。(以通常进给速度的 $1/2$ 以下大致标准)
For through holes, drill at normal feed until penetration.
Before penetration through, lower the feed. To prevent drill from breaking.

5. 深孔加工 (返回) Deep hole drilling (Back)

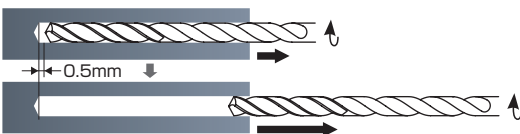


加工结束后, 请降低转速, 拔出钻头。
使用盲孔时, 请拔出 0.5mm 左右后再降低转速。
(转速 500min^{-1} 、进给速度 2000mm/min 左右)
* 直径不足 3.0mm 时, 请拔出 $0.5 \sim 1.0\text{mm}$ 左右后再降低转速。
After drilling is complete, decrease speed and pull the drill back through the hole.
The case of blind hole, to decrease speed after pull the drill until 0.5mm .
(About, Rotation 500min^{-1} , Feed 2000mm/min)
* When using drill with a diameter of less than 3.0mm , the case of blind hole, to decrease speed after pull the drill until $0.5 \sim 1.0\text{mm}$.

小直径深孔钻头的使用注意事项

1. 切削油的使用
 - 为防止切削油中的杂质堵塞油孔, 请使用经细网眼过滤器过滤后的切削液。
 - 推荐使用孔眼 $5\mu\text{m}$ 以下的过滤器。
 - 切削油推荐使用水溶性切削油剂。
2. 切削油的给油压
 - 使用水溶性切削油剂时的给油压请设定为 1.5MPa 以上。
 - 给油压设定得越高, 加工越稳定。
 - 使用非水溶性切削油剂时, 请在更高压的领域中调整给油压。
3. 工具的使用
 - 利用 ATC 更换工具时, 为抑制冲击, 建议降低 ATC 速度。

Precautions of using small deep hole drills

1. Handling of coolant
 - Use coolants suitable for fine filter to prevent from chip packing.
We recommend $5 \mu\text{m}$ or less for filter mesh.
 - We recommend water-soluble coolants.
2. Hydraulic pressure of coolant
 - Hydraulic pressure of coolant shall be 1.5MPa or more when using water-soluble coolants.
 - Higher hydraulic pressure of coolant enables stable
 - Adjust hydraulic pressure in higher pressure area in using water-soluble coolants.
3. Handling of tools
 - We recommend to reduce cutting speed of ATC for shock absorbing at the change of ATC.



给油压 1.5MPa 以上

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引




平头钻适用对比

Comparison of FLAT Drill's Application

	传统钻头 Conventional drill	立铣刀 End mill	平头钻 FLAT drill	
容削槽 Chip pocket 芯厚 Web thickness				立铣刀是横向进给的，因此芯厚较大，容削槽较小。 与钻头相同芯厚的平头钻，具有和钻头一样的容削槽。
外周形状 Peripheral shape	无外周切削刃 	有外周切削刃 	无外周切削刃 刃带为圆筒的一部分	横向施力时，立铣刀有切削刃，会切削工件，而平头钻有刃带，不会被卡住，加工稳定。立铣刀加工不稳定，会导致刃尖缺损、加工面被划伤。
先端角 Point angle	135°等 	有凹角，约 183° 加工面凸起	180° 	立铣刀被设想为横向进给，因此底刃上带有凹角用于退刀。在后工序中插入钻头时，中心部会被挤压，因此钻头的切入性会变差。
倾斜面 沉孔加工 Inclined surface counterboring				从切削刃的直角方向施力。对倾斜面进行钻头加工时，会对横向施加分力，导致滑动。平头钻难以横向滑动。
内部毛刺 Burr at the exit				
加工条件 (进给比率) Cutting condition (Feed rate)				容削槽较小的立铣刀，切屑难以处理，进给量难以提高。

AQUA EX 通用 VF 钻刀片和钻杆的选定指南

Guide to Selecting Holders and Inserts for AQUA Drills EX VF

使用刀片 Insert	TVF		TVFZ	TVFZ+TVF	
使用钻杆 Holder	AGDEXVF1.5D AGDEXVF3D AGDEXVF5D	AGDEXVF1.5D ▼ AGDEXVF8D	AGDEXVF1.5D	AGDEXVF1.5D ▼ AGDEXVF3D AGDEXVF5D AGDEXVF8D	AGDEXVF3D AGDEXVF5D AGDEXVF8D
加工内容 Application	5D以下的孔加工 Holes drilled up to 5D	超过5D的孔加工 Holes drilled over 5D	1.5D以下的 孔底磨平加工/倾斜面加工 Holes drilled up to 1.5D, flat bottom, inclined surface	超过1.5D的 倾斜面加工 Holes drilled over 1.5D, inclined surface	超过1.5D的 孔底磨平加工、通孔加工 Holes drilled over 1.5D, flat bottom, through hole
	 孔深1.5D~5D的孔加工 Drilling a hole with a depth of 1.5D~5D	 导向孔加工1D~2D Drilling guide holes, 1D to 2D  孔深3D~8D的孔加工 Drilling a hole with a depth of 3D~8D	 孔底磨平加工 Drilling flat bottoms  倾斜面 Inclined surface  沉孔 Counter boring  无毛刺 No burrs 通孔加工 Drilling through	 导向孔加工 Drilling guide holes  孔深3D~8D的孔加工 Drilling a hole with a depth of 3D~8D	 孔深3D~8D的孔加工 Drilling a hole with a depth of 3D~8D  孔底加工 Drilling bottom of hole  无毛刺 No burrs 通孔加工 Drilling through *AGDEXVF3D/5D/8D，仅在加工 孔底或加工通孔时可使用TVFZ。 It is possible to drill the bottom of the hole or a through hole by using a combination of TVFZ and AGDEXVF3D/5D/8D *使用AGDEXVF8D时，必须先加工导向孔。 When using AGDEXVF8D, pre-drilling of guide holes

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

切削条件和工具的寿命

Cutting Condition and Tool Life

■ 切削条件和工具的寿命

Cutting condition and tool life

进给量与切削力矩和轴向力直接关联。


过大的进给量会导致切削力矩、轴向力和切削温度上升，降低钻头寿命，但进给量过度降低也会降低钻头寿命。若进给量变小，会导致切削阻力比急增、背向力增加、加工硬化、单位加工长度的切刃磨损长度增大等问题。

根据钻头特性、被削材的被削性和钻孔深度等，可确定最佳值。

Feed rate has a direct relationship to cutting torque and thrust.

If the feed rate is too high, cutting torque, thrust, and cutting temperature increase reducing tool life, but lowering the feed rate too much also shortens tool life. As the feed rate falls the specific cutting force grows rapidly, radial force increases, work solidifies, and the amount the cutting edge abrades along the length of the work increases.

The optimum values vary according to the characteristics of the drill, qualities of the work material, and the depth of the hole being drilled.

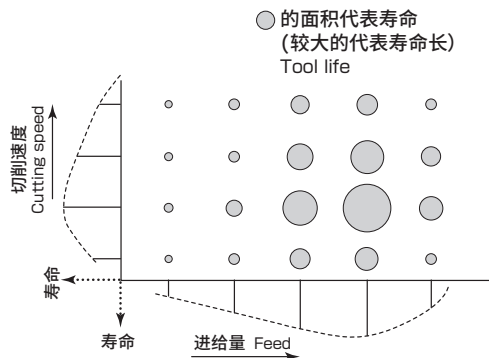

■ 切削热的扩散



Diffusion of cutting heat

钻尖产生的切削热会转移到切屑、工具、被削物上。切削热的扩散速度会因为切屑的排出速度（切屑的排出性）、工具直径、被削物的体积等变化。

被削物的导热性较低的材料，如 SUS304 等，切削点的热扩散性较低，因此，钻尖的切削热会升高，需要降低切削速度进行加工，而被削物体积较小时，相比体积较大时，切削热的转移、扩散较为缓慢，钻尖的温度也可能会升高。切削油剂的给油量和冷却方式会影响工具的寿命。

The heat generated at the drill's tip during cutting is passed to the chips, the drill, and the work material. The rate at which this heat spreads varies according to the speed chips are ejected (ejectability), the diameter of the drill, and the volume of the work material.

If the work material has a low thermal conductivity, such as SUS304, the heat of the drill tip increases as it cuts because of the low thermal diffusion at the cutting point. The life of the tool is dependent on how much cutting fluid is used and how it is applied.

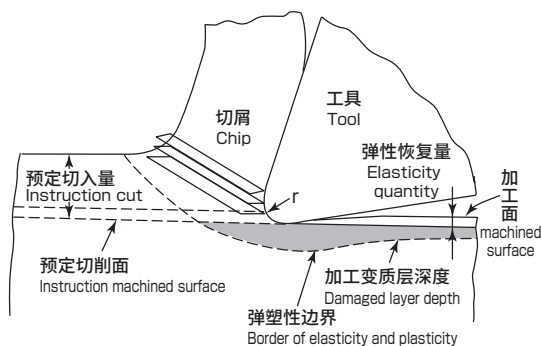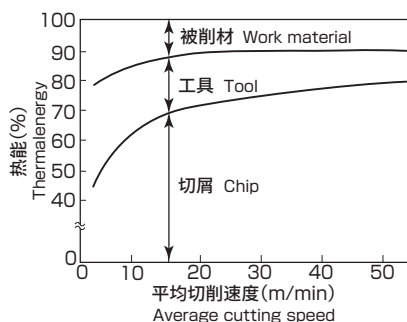

给钢钻孔时的切削热的分布


Cutting heat distribution in Steel drilling

■ 钻尖温度

Cutting edge temperature


若钻尖温度因切削热而升高，会导致工具硬度下降，加剧工具磨损。到达加工点的切削油剂不足时，切削速度会下降。

As the heat from cutting raises the temperature of the drill's tip, it becomes softer and tool wear increases. If sufficient cutting fluid cannot be delivered to the cutting point, the cutting speed should be reduced.

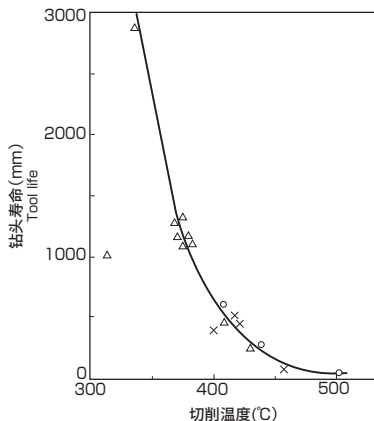

切削状态模型

Cutting condition model

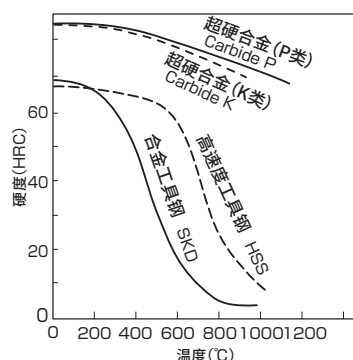

切削温度和钻头寿命

Cutting temperature and tool life


切削油剂的渗透性

Osmosis of Cutting Fluid

切削条件和切削油剂

Cutting condition and cutting fluid

	切削油剂的渗透性 Osmosis	
	好 Good	差 Not good
钻孔深度 Drilling depth	浅 Shallow	深 Deep
转速 Rotation	低 Low	高 High
加工方法 Direction	纵型 Vertical	横型 Horizontal

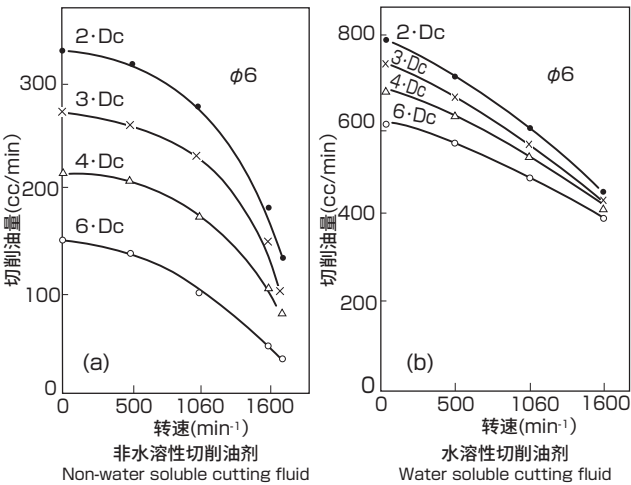

切削油剂的比较

Comparison of cutting fluid

油剂 Oil	用途 Uses	特长 Features
非水溶性 Non-water soluble	使用油孔钻的内部给油加工 容易将切削油剂送至加工点的浅孔加工 Internal lubrication for oil hole drills Shallow holes where cutting fluid can easily reach the cutting point	对加工点的润滑作用强，降低切削阻力 降低切削热 High lubrication at cutting point, reduces transitional resistance Reduces heat from cutting
水溶性 Water soluble	工具 : 高速切削用的超硬钻头或涂层钻头 钻头直径 : 转速较高的极小直径钻头 被削材 : 熔点较低的铝等有色金属 孔深 : 会因排出的切屑导致渗透性变差的深孔加工 Tool : High-speed cutting carbide drills and coated drills Drill diameter : Super thin drills drilling at high speeds Work materials: Non-Ferrous Metal such as low-melting point Aluminum Hole depth : Holes where penetration is poor due to ejected chips	粘度低、渗透性高 冷却性出色 Viscosity is low, penetration is high, cooling is superior

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

进给量和切屑

Feed Rate and Chips

受进给量影响的切入状态的变化例

Examples of changes in lead-in condition due to feed rate

低速进给时，切入时横刃的滑动导致产生多角形（3角形）。

以下示例中，适当进给量为 0.24mm/rev 以上

When the feed rate is low at lead-in, the chisel slips causing multi-sided shapes (3 sides).

In the following examples, the optimum feed rate is 0.24 mm/rev or higher.

过低的进给量

会降低钻孔的加工精度

钻头 : $\phi 13 \times 100 \times 195 \times \text{MT1}$

被削材 : SCM420 145HB

切削速度 : 23m/min



0.1mm/rev



0.16mm/rev



0.2mm/rev



0.24mm/rev



0.3mm/rev

钻头的切削条件和切屑状态

Cutting condition and chip shapes


我们比较了进给量导致的切屑形态的变化。

若进给量低，会产生长切屑并飞溅出来，导致切削处理性变差。

若进给量高，会产生厚切屑，可能导致切削刃出现崩口。在以下示例中，采用了 0.18mm/rev (2%Dc) 的进给量，切屑断开成适当大小，加工稳定。

We compared the change in chip shape caused by variations in the rate of feed.

A low feed rate produces long chips that twist around making chip removal difficult. But a high feed rate produces thick chips that may chip the cutting edge of the drill. The following examples show that 0.18 mm/rev (2% Dc) produces moderately broken up chips and consistent drilling.



使用的钻头 : GSD9.0

切削条件 : 切削速度 15m/min


干式

立式加工中心

工件 : S50C (180HB)



0.045mm/rev
(0.5%Dc)



0.09mm/rev
(1%Dc)



0.18mm/rev
(2%Dc)



0.27mm/rev
(3%Dc)

定心钻头的适当大小

Appropriate Hole Size in the Centering Drill

定心钻头的大小应略大于钻头的横刃长，不应过大。

过大的定心钻的外圆附近就会接触到工件，可能破坏切入时的稳定性。

The centering hole should be slightly larger than the length of the drill's chisel, but not too large.

If the centering hole is too large, the outer edge of the drill may contact the work piece and compromise stability during lead-in.

不需要定心的钻头

短型的钻头 AGESS 或 SGEISS、GSS 等，新品时，钻尖为高精度的特殊形状，因此，只要加工面平滑且不是倾斜面，就可省略定心使用。

Drills that do not need centering holes

When short type drills such as the AGESS, SGEISS, and GSS are new, the special shape of the cutting edge provides good accuracy. This makes centering unnecessary if the work surface is smooth and not angled.



AGESS → B-24

SGEISS → B-8

GSS → B-46


钻头的槽长

Drill Flute Length

钻头的槽长

Flute Length

- A: 孔深 (通孔时=工件厚度)
B: 拔出时的余量 (盲孔时= 0)
C: ①再研磨量 HSS = 10 ~ 30mm
超硬 = 5 ~ 15mm (Dc = 5 ~ 20mm)
②槽切削+切屑排出余量
铝 = 1.5 ~ 2 × Dc
钢 = 1.5 × Dc
铸铁 = 0.5 × Dc

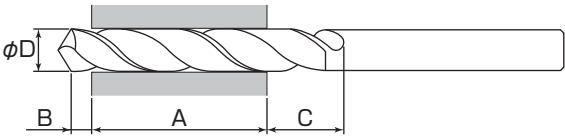

钻头槽长和工具寿命

Relation Between Flute Length and Tool Life

钻头的槽长对刚性有显著影响。槽长较长则钻头的刚性会变弱，钻头的变动会变得明显，导致非常不稳定的切削状态。最终，产生异常切削、异常磨损，寿命缩短，加工孔的精度变差。


针对加工孔，槽长应尽可能短。

The length of a drill's flutes has a big effect on its stiffness.


The longer a drill's flutes the lower its rigidity, so torque causes extreme warping which makes drilling very inconsistent.

This in turn leads to abnormal cuts, abnormal wear, reduced tool life, and poor drilling accuracy.

Keeping flutes as short as possible will produce the best holes.

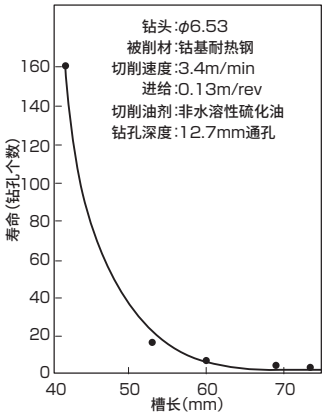

槽长不同导致的切削力矩的变化





槽长和寿命

被削物硬度的偏差和工具寿命

Work materials hardness and tool life

被削材存在硬度公差。在公差范围内，即使硬度变化也不会影响工具寿命。也存在最佳切削速度和进给速度。

There are hardness tolerances for work materials. Even if there are variations in the hardness within the tolerances it will influence tool life. There are also optimum cutting speeds and feed rates.



进给速度、被削材硬度和寿命

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

钻头的故障排除

Drill Trouble-Shooting

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

项目	故障	原因	对策
加工精度	孔径的扩大	钻头安装时的振动	检查柄损伤、衬套、夹头
		主轴的振动	检查主轴
		先端角不对称 唇形高度高 横刃边偏心	适当进行再研磨
	孔径偏差大	刃带部的磨耗	适当进行再研磨
		进给高	降低进给
		切削油剂供给不足	增加切削油剂的排出量
	孔的位置精度不良	钻头切入时的振动	实施切入性优良的横刃修磨和钻尖抛光 将槽长、突出长度控制在最小限度 进行定心
		钻头的安装不良	检查柄损伤、衬套、夹头
		主轴的振动	检查主轴
	孔的真圆度、圆柱度不良	横刃边偏心 唇形高度高 后角大	适当进行再研磨
		钻头的振动	检查柄损伤 检查衬套、夹头 使用钻套 进行定心
		钻头刚性不良	将槽长、突出长度控制在最小限度
		进给过低	提高进给
	孔的弯曲、倾斜	孔的弯曲、倾斜 横刃边偏心 唇形高度高 先端角小 钻尖磨耗加剧	适当进行再研磨
		钻头的振动	检查柄损伤、衬套、夹头 使用车床（加工物转动）
		钻头的刚性不良	将槽长、突出长度控制在最小限度
		倾斜面的加工	使用钻套 追加沉孔加工
钻头损伤	外圆异常磨耗	切削条件不适用	降低切削速度 采用分级进给的加工方式
		切削油剂供给不足	增加切削油剂的排出量
		切削油剂不适用	选定适当的油剂
		钻尖形状不适用	通过再研磨形成适当的后角和横刃形状
		钻头形状尺寸不适用	将槽长、突出长度控制在最小限度
		再研磨时期延迟	在适当的时期再研磨
		钻头材料不适用	使用材料耐磨性高、有涂层的钻头
	钻头折断	切削条件不适用	降低进给
		刃带部的磨耗	降低切削速度 适当进行再研磨
		切入不良	将槽长、突出长度控制在最小限度 适当进行横刃修磨 使用钻套
		切屑堵塞	采用分级进给的加工方式 提高进给 选定适当的钻头形状 使用带油孔的钻头
	外圆刃尖缺损	进给过高	降低进给 不用液压进给，采用机械进给
		到达钻尖的切削油剂不足	增加切削油剂的排出量

项目	故障	原因	对策
钻头损伤	外圆刃尖缺损	被削材的表面较硬	清除垢、砂痕等异常部 调整切削条件、钻头材料
		钻头材料不适用	使用适当的钻头材料
	钻头纵向开裂、 横刃边损伤	进给过高	降低进给
		后角小	适当进行再研磨 实施适当的横刃修磨
	切削刃崩口	钻头的刚性不足	将槽长、突出长度控制在最小限度 使用通孔时，降低拔出时的进给 使用钻套
		机械类的刚性不足	修正驱动类的晃动 使用高刚性的主轴、夹头
		钻头材料不适用	提高钻头材料的韧性
	刃带崩口	钻套尺寸大	使用适当的钻套
		钻头材料不适用	使用适当的钻头材料
	钻尖、刃带的粘结	切削油剂供给不足	增加切削油剂的排出量 使用带油孔的钻头
		切削油剂不适用	选定适当的油剂
		切屑排出性差	选定适当的钻头
		钻尖的磨耗	适当进行再研磨
	扁尾的破损	柄损伤	清除损伤、垃圾、毛边
		衬套的损伤、磨耗	更换套
其它	切屑卷入	切屑较长	提高进给
		切屑堆积	增加切削油剂的排出量
	发生颤动、振动	后角较大	适当进行再研磨
		钻头刚性不足	将槽长、突出长度控制在最小限度
		钻头固定工具的刚性不足	提高装夹刚性

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

钻头损伤
Drill Failures

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀





高速钢立铣刀


切削工具

套装商品
其它

精密工具

技术资料
索引

钻头损伤 Drill failures	
正常钻孔 Normal drilling	 外圆刃尖磨耗 Outer corner wear  外圆磨耗 Margin wear  切削刃磨耗 Major cutting edge  后面磨耗 Flank wear  横刃边磨耗 Chisel edge wear  前刀面磨耗 Face wear
被削材硬度不均 Uneven hardness distribution on the work material 进给量大 Feed rate too high 颤动、振动大 Ranout or vibration too large	 崩口 Chipping  外圆刃尖破损 Corner fracture  横刃边破损 Chisel edge fracture
切削速度过快 Cutting speed too high 切削油剂给油不足 Not enough coolant	 外圆刃尖磨耗 Corner wear  熔融 Melting  月牙洼磨耗 Crater wear
磨耗加剧导致切削刃破损 Excessive wear 切屑堵塞 Chip packing 刃带和孔内部的粘结 A margin and work material melted	钻头折断 Breakage

切屑形态 Chip type	
①圆锥螺旋形切屑 	圆锥螺旋形切屑是钻头加工中的基本形状。常见于硬度较低的铁类材料的加工中。数卷后折断时，排出性较好。初期从横刃进入到刀尖部进入为止，会产生较长的切屑，但不会造成问题。若进给量大，则容易断开。 Round spiral chips are the basic shape of chips produced by drilling. This shape is commonly seen when drilling soft iron materials. This shape of chip ejects comparatively well as it tends to break off after several turns. While comparatively long chips are ejected from the first cut of the chisel until the corner enters, this presents no problems. As the feed increases the chips break up more easily.
②长齿形切屑 	长齿形切屑不会卷曲，而是直着排出，因此会附着在钻头槽上阻挡后续的切屑，或者即使排出，也会缠绕到钻头、夹头上，从而导致加工孔精度不良或钻头折断。伴随钻头的磨损，可能从圆锥螺旋形变成长齿形。 Chips with a long pitch do not curl and are ejected straight sticking in the drill's flutes and impeding the ejection of subsequent chips. Then, as they are ejected they wrap around the drill and chuck which may reduce drilling accuracy and damage drill bits. As a drill wears out, the shape of the chips tends to change from a round spiral to a long-pitch shape.
③扇形切屑 	扇形切屑是在进给较大或加工快削钢时产生的，是排出性良好的形状。 Fan-shaped chips occur when the feed is high or when free cutting steel and they eject very well.
④过渡折断形切屑 	过渡折断形切屑是最初卷曲成圆锥螺旋形的切屑受加工孔内部的约束时，由于被削材延展性不足，所以从根部开始断裂的切屑，是在进给稍大时产生的。断裂时，由于阻力的变动会产生振动，一般情况下不是理想的切屑形状。 Transitional breaking chips start out as a round spiral shape but break off at the base because the non-elastic work material is confined by the sides of the hole. They occur when the feed is fairly high. Basically this shape is undesirable because of vibration caused by the change in resistance when they fracture.
⑤Z字形切屑 	Z字形切屑容易在进给较小时产生，产生的切屑呈折叠状，是容易造成堵塞的形状。 Zig-zag chips often occur when the feed is low and are likely to cause jams because the chips tend to fold as they are generated.
⑥针形切屑 	针形切屑容易在加工较脆的被削材时产生，排出性好，但在进行朝下的加工时，切屑容易堵塞，必须注意。 Needle chips are likely to occur when the work material is brittle. They eject well but care needs to be taken when drilling upwards because the chips are dense and jam easily.
⑦粉末状切屑 	粉末状切屑是铸铁加工中产生的切屑，若切削油剂量少，有可能凝固在钻头槽中，必须注意。另外，粉末状切屑也可能导致切削油剂劣化。 Powder chips occur when drilling Cast Iron. Care needs to be taken because the chips may solidify in the drill's flutes if too little cutting fluid is used. This type of chip may also degrade the cutting fluid.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

超硬钻头的再研磨

Re-grinding of Carbide Drill




1. 切削刃的确认 Check

- ①确认切削刃的摩擦和损伤状态
- ②切削刃有明显缺损等时，请用 GC 磨石等研磨清除到这一部分为止的切削刃

2. 后面的研磨 Regrinding


- ①请使用钻头磨床或万能工具磨床研磨后面，使先端角达到 140°，并如图 2 所示加工出 8 ~ 12°的第二后角
- ②将钻头再倾斜 10°后固定，将与 20°的第三后角间的棱线对准钻头中心后研磨

直径	5mm 以下	13mm 以下	20mm 以下
第二后角	12°	10°	8°

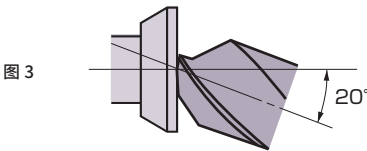

3. 横刃修磨 Thinning

- ①横刃修磨请按照 X 形横刃修磨的要点进行。
如图 4 所示，请将钻头倾斜 40° ~ 45°后研磨钻头，使第三后角部保留 0.05 ~ 0.1mm。此时，请注意不要切削到钻头中心，并使横刃保留 0.1mm 所有。
- ②请转动钻头 10° ~ 15°进行研磨，保留 105° ~ 110°的容削槽部。

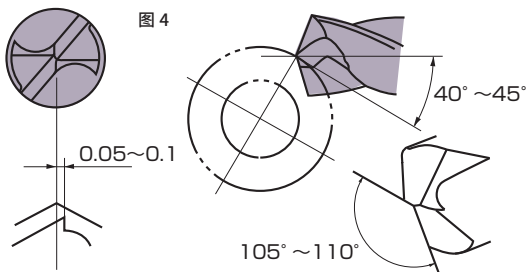


4. 珩磨 Honing

- ①请将切削刃和横刃切削刃的交点处磨圆成 R 角。
- ②请对整个切削刃的全周进行均匀的珩磨。

单位 :mm

直径	Dc	R
超过	以下	
	5	0.3 ~ 0.7
5	9	0.5 ~ 1.3
9	13	0.9 ~ 1.7
13	18	1.5 ~ 2.3
18	20	1.9 ~ 2.7



至此，再研磨完成。请确认以下要点

- 唇形高度是否在 0.02mm 以内
- 有无未研磨的切削刃损伤
- 是否进行了适当的珩磨
- 研磨毛刺等是否被清除

5. 再研磨磨石 Regrind wheel

再研磨部位	磨石的种类	粒度
第二后面、第三后面	金刚石杯形磨石	200 ~ 270
横刃部	金刚石平行磨石	200 ~ 270
带 R 角	粗加工用 金刚石锉刀	400 ~ 600
切削刃珩磨	精加工用 手工抛光石	600 ~ 800

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它


精密工具

技术资料
索引

AQUA 钻头 NWDX 型 使用注意事项


Operating Precautions for AQUA Drills NWDX

■ 车床加工要点




- 钻头的安装
 - 安装钻头时请使外圆刃与机械的 X 轴平行。(图 1)
 - 请在夹头端面和钻头的法兰端面紧密贴合的状态下拧紧螺栓。
- 加工直径的调整
 - 可通过移动机械的 X 轴调整。
 - 关于调整方向, 请向 X 轴的正方向(内径扩大方向)调整。若向负方向(内径缩小方向)调整, 夹头可能干涉(摩擦到)加工的孔, 因此不推荐。(图 1)
 - 不同的钻头直径下, 最大调整(偏移)量不同, 因此, 请参照 A-140 ~ A-142 夹头尺寸表“半径方向偏移量(最大)”。
- 其他注意事项
 - 在车床上安装钻头时, 钻头被设计为中心刃的芯高比主轴中心低 0.15 ~ 0.2mm 左右。
 - 若主轴中心偏移明显、中心刃的芯高于主轴中心, 会造成中心刃缺损, 请注意。
 - 进行外径加工或内径镗加工时, 请设定切入量在钻头直径的 1/5 以下(最大在 5mm 以下)。(例: 钻头直径为 $\phi 20\text{mm}$ 时, 切入量在 4mm 以下)
 - 用车床进行贯通加工时, 可能会有贯通时生成的圆盘状切屑(图 2)飞溅的现象。设备上没有遮罩时, 为防止危险, 请安装遮罩等。

■ 设备功率值的大致标准

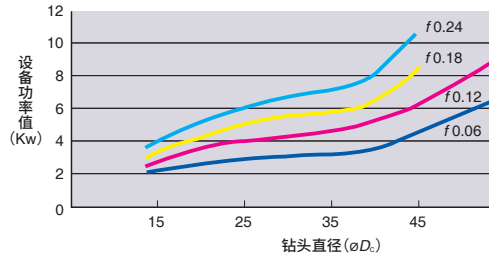

- 〈 注意事项 〉
- 设备功率值会因为被削材、切削速度等变动, 因此请将它们作为参考值使用。
 - 切削条件(参考值)
被削材: S 50 C (230HB) 切削速度: $V_c = 150 \text{ m/min}$

■ 切削油排出量的大致标准

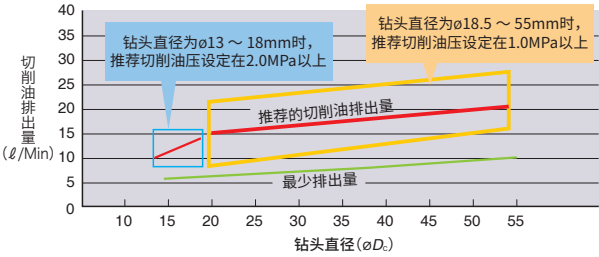

- 〈 注意事项 〉
- 切削油排出量是左右钻头性能的要因之一。尤其对于切屑的排出性和润滑性有重要影响。
 - 越是小直径钻头, 越推荐设定较高的切削油压。(φ18.0mm 以下)
 - 普通的 CNC 机械, 可调整切削油压和切削油排出量。
 - 本表为方针, 必须根据机械、切削油、工件增加排出量。

■ 刀片装拆时的注意点

- 在安装刀片前, 请利用气冷措施等清除刀片座上的垃圾等。
 - 使用螺丝扳手时, 请将螺丝的轴对准螺丝扳手的轴, 然后按压。若螺丝扳手的轴弯曲, 可能会出现刀片夹装不紧、螺丝扳手的前端、螺丝的梅花孔部变形的情况, 请注意。
 - 在安装刀片时, 请注意防止刀片座面和钻头胴部间产生缝隙。
- ※ 中心刃的外侧面有缝隙, 但装夹面在内侧和后侧, 因此不会影响使用。

■ 故障排除

问题状况	现 象	原 因	对 策
加工孔径的变动明显	加工孔径大于目标值	· 切削阻力大, 导致孔径扩大 · 孔径的调整不良	· 为降低切削阻力, 请降低进给速度。 · 使用车床时, 请沿 X 轴的方向调整。
	加工孔径小于目标值	· 切削阻力小, 导致孔径缩小 · 孔径的调整不良	· 为增大切削阻力、增加孔径扩大量, 请提升进给速度。 · 使用车床时, 请沿 X 轴的方向调整。
	孔入口处和深处的孔径差大	· 切屑堵塞	· 为改善铁屑处理性, 请提升进给速度。 · 使用“L 型”的铁屑处理用断屑器。
加工孔面粗糙	从孔的入口到深处的加工面粗糙	· 切屑阻力大, 导致加工面粗糙	· 为降低切削阻力, 请降低进给速度。
	孔深处的加工面变粗糙	· 切屑堵塞导致加工面粗糙	· 为改善铁屑处理性, 请提升进给速度。 · 使用“L 型”的铁屑处理用断屑器。
刀片缺损	中心刃(中心部)缺损	· 芯高调整不良 · 刀片强度不足	· 请调整芯高。 · 使用车床时, 请将钻头转动 180°后安装。 · 使用“H 型”刀头强化型断屑器。
	外圆铁屑刃缺陷	· 刀片强度不足	· 为降低切削阻力, 请降低进给速度。 · 使用“H 型”刀头强化型断屑器。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

丝锥的各部分名称

Tap Nomenclature

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀



高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

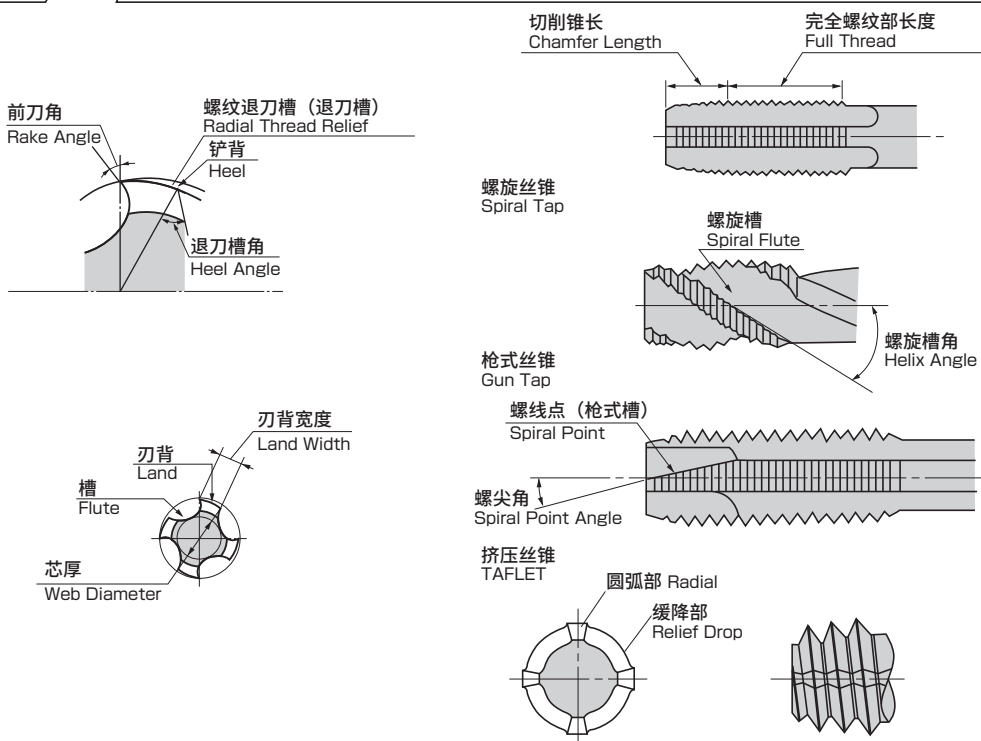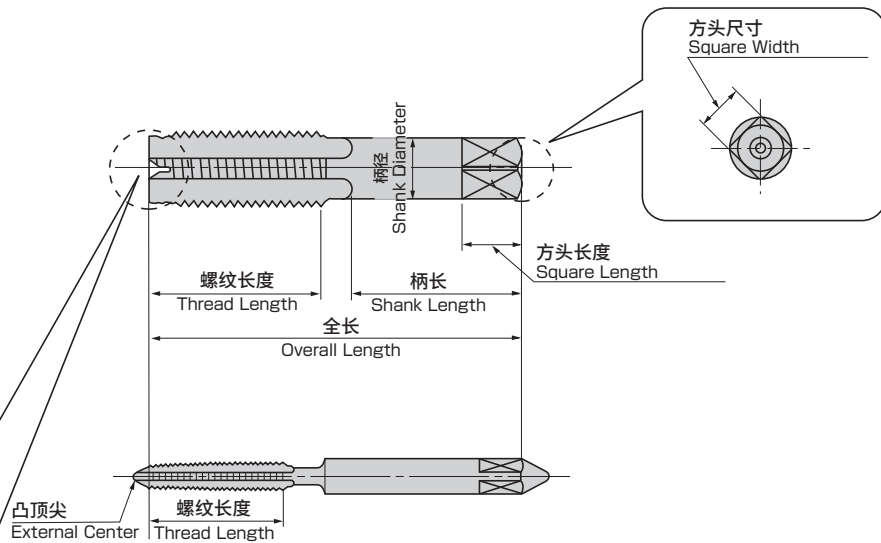

丝锥的故障排除

Tap Trouble-Shooting

项目	故障	原因	对策
加工精度	内螺纹扩大	过度切割	缩小螺纹退刀槽或增加刃带部 设定为适当的切入部后角 缩小前刀角
		进给不均匀	适当使用合适的丝锥夹头 机械进给
		粘结	增加切入牙数 实施表面处理 降低切削速度 使用抗粘结性好的油剂
		切削不平衡	提升各切削刃的分割精度 适当使用合适的丝锥夹头 对底孔入口进行倒角加工
	内螺纹缩小	锋利度下降	增加螺纹退刀槽或扩大退刀槽 设定为适当的切入部后角 加快再研磨的周期
	内螺纹表面粗糙、挖蚀	粘结	扩大前刀角 增加螺纹退刀槽或扩大退刀槽 实施表面处理 降低切削速度 修改切削油剂的种类、冷却方法、更换时期
		切屑堵塞	枪式丝锥、螺旋丝锥的选定 扩大底孔直径
		使用条件	使用浮动夹头 扩大与底孔间的偏心度、倾斜度
	颤动	过度切割	缩小螺纹退刀槽或增加刃带部 缩小前刀角
		使用条件	减少轴心的振动 降低切削速度
丝锥的损伤	异常磨损	丝锥的选定	使用材料耐磨性高、有涂层的丝锥
		切削油剂	选定适当的油剂
		使用条件	降低切削速度
		底孔	扩大底孔直径 防止底孔的加工硬化
	折断	切屑堵塞	使用枪式丝锥、螺旋丝锥、挤压丝锥 尽可能加深盲孔的底孔深度
		切削扭矩过大	修正底孔的倾斜，使其与芯对齐 增加螺纹退刀槽或扩大退刀槽 缩短再研磨的周期 使用切入部长的丝锥
		使用条件	消除进给不均匀的情况 降低切削速度 使用带扭矩调整机构的夹头 彻底清除底孔加工的切屑
	发生缺损	丝锥的选定	防止刃部厚度过薄（再研磨） 设定为适当的切入部后角 改变工具材质 降低硬度
		切屑堵塞	使用枪式丝锥、螺旋丝锥、挤压丝锥 尽可能加深盲孔的底孔深度
		切削扭矩过大	修正底孔的倾斜，使其与芯对齐 增加螺纹退刀槽或扩大退刀槽 缩短再研磨的周期 使用切入部长的丝锥 使用抗粘结性好的切削油剂

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具



套装商品
其它



精密工具

技术资料
索引

丝锥的种类和选定

Types and Selection of Taps

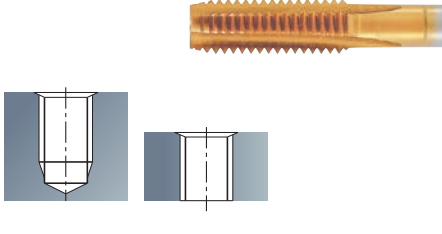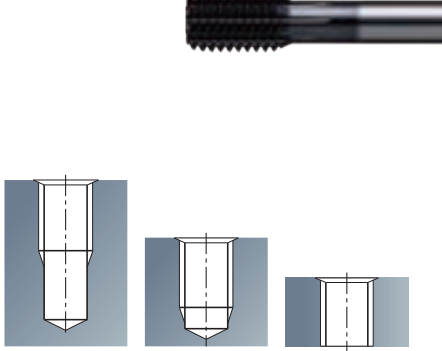丝锥的种类 Types of taps		特长 Characteristics	
切削丝锥 Cut thread taps	螺旋丝锥 Spiral Taps	- 容易切入，锋利。 - 切屑可从加工面上方排出，不会残留在槽内。 - 以线圈状连续排出。 - 需注意切屑缠绕导致的故障。 - 内螺纹有效直径容易扩大。 - 刀头强度变弱。  - Good bite and a fine edge - Chips are ejected towards the work surface so are not left in groove - Coils of chips are ejected continuously - Be careful of coils of chips getting tangled and causing trouble - Easy to enlarge nominal diameter of female thread - Cutting edge strength is low	
	螺尖丝锥（枪式丝锥） Point Taps (Gun Taps)	- 切屑朝丝锥推进方向被挤压出来。 - 不会因切屑缠绕导致故障。 - 内螺纹精度稳定。 - 丝锥的折断强度高。 - 适用于高速攻丝。 - 不可用于盲孔。  - Chips are pushed out in the direction of the taps advancement - Coils of chips do not get tangled and cause trouble - Accuracy of female threads is consistent - Taps have high breakage strength - Effective for high-speed tapping - Cannot be used for blind holes	
	手用丝锥 Hand Taps	- 刀头强度高，不易出现崩口。 - 切屑容易被切割，但排出性差。 - 易于再研磨。 - 切屑堆积在槽内，容易发生堵塞。  - Very strong cutting edge, hard to chip - Easily breaks up chips, but ejectability is low - Re-sharpening is easy - Chips tend to get stuck in grooves	
挤压丝锥 Thread forming taps	挤压丝锥 Forming Tap	- 切屑不易被排出。 - 内螺纹精度稳定。 - 丝锥的折断强度高。 - 可进行高速攻丝。 - 底孔管理存在难度。 - 无法再研磨。  - Chips are not ejected - Accuracy of female threads is consistent - Taps have high breakage strength - High-speed tapping is possible - Difficult to manage thread holes - Regrinding is not possible	

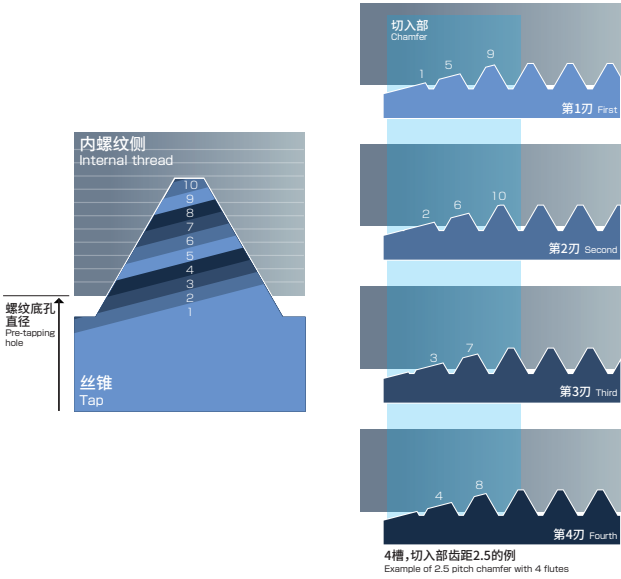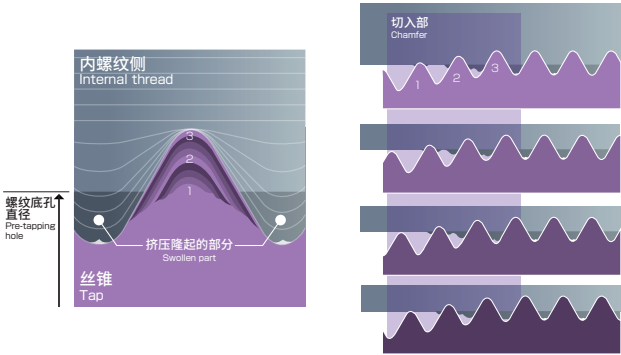	用途 Applications	成形机构 Forming process
	■盲孔 ■切屑以线圈状排出的被削材 ■ Blind holes ■ Work materials whose chips are ejected in coils	 4槽, 切入部齿距2.5的例 Example of 2.5 pitch chamfer with 4 flutes
	■通孔 ■切屑以线圈状排出的被削材 ■ Through holes ■ Work materials whose chips are ejected in coils	
	■盲孔、通孔 ■切屑容易被切割的被削材和高硬度钢 ■ Blind holes/through holes ■ Hardened Steel and materials whose chips break up easily	
	■盲孔、通孔 ■延展性良好的被削材 ■ Blind holes/through holes ■ Material that has good malleability	

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

立铣刀各部分的名称

End Mill Nomenclature

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀







高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

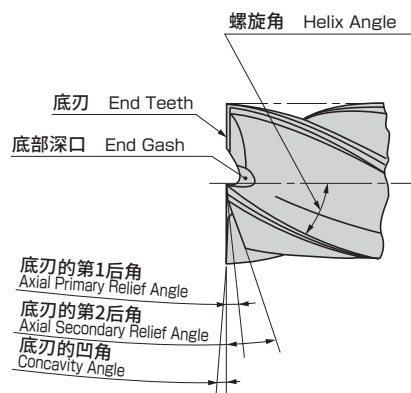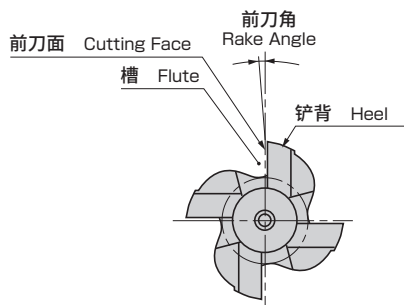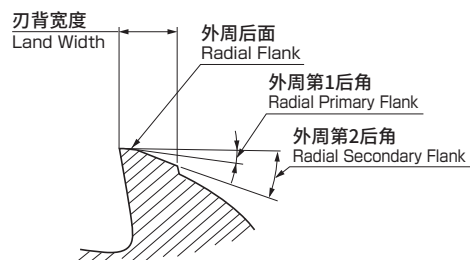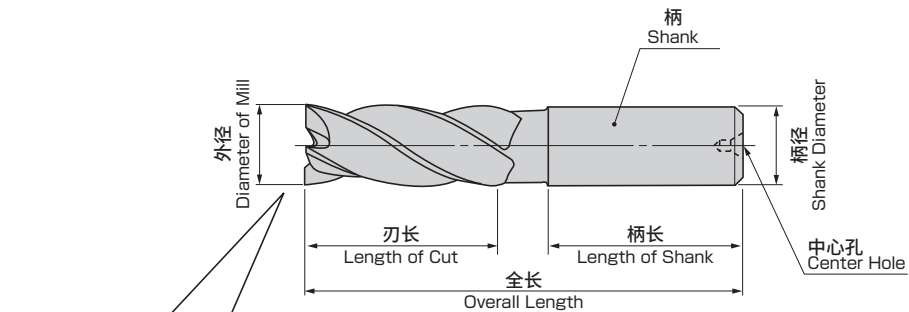


立铣刀的形状和特长

End Mill Teeth Form and the Features

外圆刃的形状和特长

The peripheral teeth and the features

型 Type	形 状 Form	特 长 Features
普通刀刃 Square type		• 用途较广的刀刃，可用于槽加工、侧面加工、段差加工等。 • 可用于粗加工、半精加工、精加工中的任意一种。 • Used for general purpose, that is slotting, side milling, etc. • Used for every cutting. That is rough cut, semi-finish cut and finish cut.
锥形刀刃 Tapered type		• 用于加工脱模坡度和嵌入部。 • 用普通刀刃加工后，用于锥度加工中。 • Used for milling of draft angle of die components. • The peripheral teeth is taper.
梳齿铣刀 Roughing type		• 刀刃为波浪型，切屑可被分割成细小碎片，切削阻力小，适用于粗加工。 • 加工面粗糙，不适用于精加工。 • Suitable for rough milling, because of the small cutting resistance, and small cutting chips by the wavy type nicks. • Do not use for finish milling because of too much roughness.
重切削 HEAVY type		切削阻力大于粗铣刀刃，但小于普通刀刃，适用于半精加工以及加工面精度要求不高的零部件的精加工。 The cutting resistance is larger than roughing end mill, but smaller than square teeth end mill. Suitable for semi-finish milling and the parts which not required accurate tolerance.

底刃的形状和特长

The end teeth type and the feature

型 Type	形 状 Form	特 长 Features
带中心孔 (方形) Square type with center hole		• 泛用形状，可用于槽加工、侧面加工、段差加工等。 • 不能用于纵向切削。 • Used for general purpose, that is slotting, side milling, etc. • Cannot be used for plunge feed.
中心切齿 (方形) Square type without center hole		• 泛用形状，可用于槽加工、侧面加工、肩面加工等。 • 不能用于纵向切削，齿数较多时会导致切屑排出性差，因此一般使用 2 枚刀刃或 3 枚刀刃。 • Used for general purpose, that is slotting, side milling, etc. • Can be used for plunge feed. 2 Flutes is better than multi flutes for plunge cut.
球头型 Ball		• 用于模具的曲面加工（仿形铣削、周期进给加工）。 • 中心部的容削槽较小，锋利度逊色于其他形状的刀片。 • Used for contour milling or copy milling of die components. • The center of teeth does not have better cutting performance because of too small chip pocket and cutting speed.
圆角型 Corner radius		• 带刃尖倒角，可用于模具或机械零部件的角 R 加工。 • 由于本身具有刚性，因此可高效进行周期进给加工。 • Suitable for radius shape milling for corner of die components or machine parts. • Suitable for high-speed contour milling because of its rigidity.

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具







套装商品
其它

精密工具

技术资料
索引

立铣刀的加工特性

Applications



新品	槽加工 Grooving			
硬质合金钻头	侧面加工 Side Milling			
高速钢钻头	角 R 加工 Radius shape milling			
丝锥	深铣加工 Deep side milling			
硬质合金立铣刀	曲面加工 Contour milling			
高速钢立铣刀	沉孔加工 Countersink milling			
切削工具				
套装商品				
其它				
精密工具				
技术资料 索引				
方头立铣刀 Square end mills		圆角立铣刀 Radius end mills		球头立铣刀 Ball end mills
				锥形立铣刀 Taper end mills
				锥形球头立铣刀 Taper ball end mills

耐崩型 / 残留高度


GashLand/Cusp Height

尖锐拐角和耐崩型

Sharp corner and gash land

刀头形状 Type	刀头详情 Form	特 长 Features
锋利型 Sharp corner		刀头锋利，因此加工精度好，适用于精加工。 抗拉齿性不良。
耐崩型 Gash land		齿角大，刀头强度增加。 抗拉齿性好 加工角部保留着锥形部，因此不适用于精加工。

尖锐拐角和耐崩型是根据硬质合金立铣刀的用途和规格区分出来的，在高速钢立铣刀中，常见的是尖锐拐角型。




新商品

硬质合金钻头

高速钢钻头

耐崩型刀头详情 Gashland cutting edge view



在设置了耐崩型的范围中，带有锥角。
右图中，在耐崩型宽度“A”之间，刀头刀尖处出现了“B”的外径下降量。
“B”的下降量会因耐崩型的宽度、外周后角、螺旋角而变化。

GSX MILL 的耐崩型的角残留例		
单位：mm		
Dc	k	m
3	0.1	0.015
10	0.3	0.040
20	0.4	0.050

理论上的加工后残留（大致标准）



丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具


球头立铣刀的残留高度

Cusp height in ball end mill

$$h = Pf^2 / 8RE$$

h = 残留高度
Pf = 周期进给
RE = 球头半径

例
Pf = 0.15mm
RE = 3mm
$$h = 0.15^2 / (8 \times 3) = 0.0009\text{mm}$$

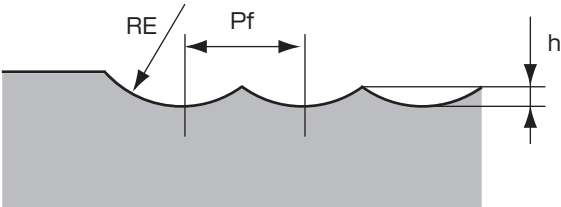

套装商品
其它

精密工具

技术资料
索引

立铣刀的选定

Selection of End Mills

齿数选择的大致标准

Selection of flutes

条件 Functions	特性项目 Characteristics	刃数 No. of Flutes	
		2 刃型 2 Flutes	4 刃型 4 Flutes
强度 Strength	扭转刚性 Twist rigidity	○	◎
	弯曲刚性 Bending rigidity	○	◎
加工面精度 Surface roughness	粗糙度 Roughness	○	◎
	波浪纹 Undulation	○	◎
	倾斜 Inclination	○	◎
寿命 Tool life S50C ~ SKD11 200HB ~ 320HB	每刃进给恒定 Feed constant (mm/tooth)	磨损 Wear	○
		折断 Breakage	○
	各效率进给恒定 Feed constant (mm/min)	磨损 Wear	○
		折断 Breakage	○
切屑处理性 Chip Disposal	切屑堵塞 Chip jam	◎	○
	切屑排出性 Chip removal	◎	○
再研磨 Re-sharpening	外周 Outer diameter	◎	○
	底刃研磨 End teeth	◎	○
形状修正 Form modify	球形、锥形 Ball nose, Taper form	◎	○

◎ : 优 Excellent ○ : 良 Good

条件 Functions	特性项目 Characteristics	刃数 No. of Flutes	
		2 刃型 2 Flutes	4 刃型 4 Flutes
开孔 Drilling	沉孔 Counter boring	◎	○
	加工面粗糙度 Surface roughness	◎	○
	孔的扩大 Enlargement of hole	◎	○
切削量 Cutting range	精加工切削 Finishing	○	◎
	轻切削 Light duty	○	◎
	重切削 Heavy duty	○	◎
槽加工 Grooving	切屑的排出 Chip removal	◎	○
	槽的扩大、偏心 Enlarge, eccentricity	◎	○
	键槽切削 Keyway grooving	◎	○
侧面切削 Side milling	加工面精度 Milling accuracy	○	◎
	颤动、振动 Chattering, vibration	◎	○
被削材质 Work materials	合金钢 Alloy Steel	○	◎
	铸铁 Cast Iron	○	◎
	有色金属 Non-Ferrous Metal	◎	○
	难削材 Difficult-to-Cut Material	○	◎

螺旋角的选定

Selection of Helix Angle

螺旋角的区分 Helix Angle	切削阻力 Cutting resistance			加工面精度 Surface accuracy			工具寿命 Tool life			再研磨 Re-sharpening	
	扭矩 Torque	弯曲 Bending	轴向力 Thrust	粗糙度 Roughness	波浪纹 Undulation	倾斜 Inclination	后面 Flank	外径 Out of Dia.	折断 Breakage	外周 Outer dia.	底刃 End teeth
低螺旋角 (15°) Low Helix	○	○	◎	○	◎	◎	○	△	○	◎	◎
标准螺旋角 (30°) Standard Helix	◎	◎	○	◎	○	○	◎	○	◎	◎	◎
高螺旋角 (50°) High Helix	◎	◎	△	◎	△	○	○	◎	○	○	○

◎ : 优 Excellent ○ : 良 Good △ : 可 Fair

螺旋角和加工面精度


Helix angle and surface roughness

根据立铣刀的螺旋角、切削量，比较包括粗糙度和波浪纹在内的加工面精度的结果。

众所周知，加大螺旋角可改善粗糙度，但也会使波浪纹和倾斜增加，所以，不能说加工面精度会因此而改善。

This is an evaluation of the surface roughness, a combination of roughness and undulation, with an end mill's helix angle and the cutting depth.

We understand that roughness improves as the helix angle is increased, but we cannot say that surface accuracy improves as the helix angle increase.

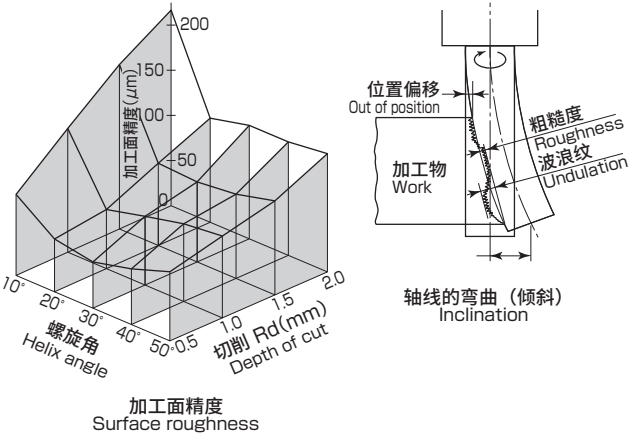

立铣刀的基本切削条件

Standard Cutting Condition for End Mills


■ 计算步骤

Calculation method

1. 转速 $n = \frac{318 \times v_c}{D_c}$ (min^{-1})
但干式切削时, v_c 应为表中数值的 70 ~ 80%。
(v_c 为切削速度)

2. 进给速度 $v_f = \frac{v_c \times D_c \times G \times E}{a_p \times a_e}$ (mm/min)
但切削深度 a_p 、 a_e 的乘积根据 D 基准在 $0.2D_c^2$ 以下时,
请按照乘积为 $0.2D_c^2$ 的 a_p 、 a_e 进行计算。

3. 精加工切削时, 应将进给速度 v_f 降低至 1/2
4. 本条件表假设以主轴马达输出 7.5KW 的立式铣床为基础。



新商品

硬质合金钻头

表 1 切削速度 (v_c)

被削材	硬度 (HB)	切削速度 v_c (m / min)						
		高速钢系列			硬质合金系列			
		无处理	G 系列	SG、AG 系列	X's 铣刀	X's 铣刀 GEO 型 GS 铣刀	DLC 铣刀	
一般结构用钢 SS400	~ 180	25 ~ 30	35 ~ 45	40 ~ 50	70 ~ 90	80 ~ 120	—	
碳钢 S45C、S50C	~ 230	20 ~ 30	30 ~ 40	35 ~ 45	60 ~ 80	80 ~ 100	—	
合金钢、调质钢 SCM、NAK、HPM	~ 280 (40HRC)	15 ~ 20	20 ~ 30	25 ~ 35	50 ~ 70	70 ~ 90	—	
模具钢、预硬钢 SKD、SKH	~ 320	10 ~ 15	15 ~ 25	20 ~ 30	40 ~ 50	50 ~ 60	—	
耐热合金、钛合金	~ 380	8 ~ 12	15 ~ 20	15 ~ 25	30 ~ 40	40 ~ 50	—	
高硬度钢	40HRC ~	~ 5	~ 10	~ 15	~ 25	~ 30	—	
不锈钢 SUS	~ 180	10 ~ 15	15 ~ 25	20 ~ 25	40 ~ 50	50 ~ 60	—	
铸铁 FC、FCD	~ 200	25 ~ 35	35 ~ 45	40 ~ 50	60 ~ 80	70 ~ 100	—	
铝、铝合金 Al、AC、ADC		50 ~ 70	70 ~ 90	80 ~ 90	80 ~ 120	100 ~ 150	100 ~ 200	
铜合金、黄铜 Cu		40 ~ 60	60 ~ 80	70 ~ 80	80 ~ 100	100 ~ 120	80 ~ 150	

高速钢钻头

丝锥

硬质合金立铣刀

表 2 进给系数 (G)

被削材	立铣刀直径 D_c (mm) 所对应的进给系数 G																
	$\phi 1$	$\phi 2$	$\phi 3$	$\phi 5$	$\phi 6$	$\phi 8$	$\phi 10$	$\phi 12$	$\phi 15$	$\phi 18$	$\phi 20$	$\phi 25$	$\phi 30$	$\phi 35$	$\phi 40$	$\phi 45$	$\phi 50$
一般结构用钢 SS400	1.5	2.6	4.2	6.0	8.4	11.0	14.2	16.8	21.0	25.2	26.3	25.2	24.2	23.7	22.1	17.4	14.2
碳钢 S45C、S50C	1.4	2.4	3.8	6.2	7.6	10.0	12.9	15.3	19.1	22.9	23.9	22.9	22.0	21.5	20.1	15.8	12.9
合金钢、调质钢 SCM、NAK、HPM	1.3	2.2	3.4	5.6	6.8	9.0	11.6	13.8	17.2	20.6	21.5	20.6	19.8	19.4	18.1	14.2	11.6
模具钢、预硬钢 SKD、SKH	1.0	1.7	2.7	4.3	5.3	7.0	9.0	10.7	13.4	16.0	16.7	16.0	15.4	15.1	14.1	11.1	9.0
耐热合金、钛合金	0.8	1.4	2.3	3.7	4.6	6.0	7.7	9.2	11.5	13.7	14.3	13.7	13.2	12.9	12.1	9.5	7.7
高硬度钢	0.7	1.2	1.9	3.1	3.8	5.0	6.5	7.7	9.6	11.5	12.0	11.5	11.0	10.8	10.1	7.9	6.5
不锈钢 SUS	1.1	1.9	3.0	5.0	6.1	8.0	10.3	12.2	15.3	18.3	19.1	18.3	17.6	17.2	16.1	12.6	10.3
铸铁 FC、FCD	3.4	5.8	9.1	14.9	18.2	24.0	31.0	36.7	45.8	55.0	57.4	55.0	52.8	51.6	48.2	37.9	31.0
铝、铝合金 Al、AC、ADC	3.1	5.3	8.4	13.6	16.7	22.0	28.4	33.7	42.0	50.4	52.6	50.4	48.4	47.3	44.2	34.8	28.4
铜合金、黄铜 Cu	2.0	3.4	5.3	8.7	10.6	14.0	18.1	21.4	26.7	32.1	33.5	32.1	30.8	30.1	28.1	22.1	18.1

高速钢立铣刀

切削工具

表 3 立铣刀系数 (E)

立铣刀的类型		品 名	刃数					
			2 刃型	3 刃型	4 刃型	5 刃型	6 刃型	8 刃型
高速钢标准立铣刀	短刀长	NATAC (2 枚刀片) / (3 枚刀片)、G 标准 (2 枚刀片) / (3 枚刀片) SG-FAX (2 枚刀片)、AG (2 枚刀片)	1.5	1.8	—	—	—	—
	标准刀长	硬质合金型、G 标准型 (4 枚刀片)、G 中长型 SG-FAX 中长型、SG-FAX (4 枚刀片)、AG (2 枚刀片、4 枚刀片)	1.0	1.2	1.5	—	2.0	—
	长刀长	硬质合金长型、G 长型、SG-FAX 长型、AG 长型	0.5	—	0.8	—	1.0	—
重切削立铣刀	标准刀长	重切削、AG 重切削型、SG-FAX 重切削型	—	—	1.8	—	2.4	—
	长刀长	重切削长刀型、AG 重切削长型、SG-FAX 重切削长型	—	—	1.1	—	1.5	—
粗立铣刀	短刀长	SG-FAX 粗铣刀短型 SG、AG 粗铣常规短型	—	1.9	2.3	2.7	3.0	—
	标准刀长	粗铣中长型、GS 粗铣型 SG、AG 粗铣中长型、SG 粗铣大齿距型	—	1.3	1.6	1.8	2.0	—
	长刀长	粗铣长型、AG 粗铣长型、SG 粗铣长型	—	1.0	1.2	1.4	1.5	—
硬质合金系列	标准刀长	X's 铣刀、X's 铣刀高螺旋角型、X's 铣刀圆角型、X's 铣刀多刃型、 X's 铣刀硬质合金常规型、X's 铣刀不锈钢型、GS 铣刀 X's 铣刀 GEO 型、GEO 开槽型、GEO 圆角型、GEO 可伐合金型	0.8	1.0	1.2	—	1.6	1.8
	长刀长	X's 铣刀长型、X's 铣刀 GEO 长刀型、X's 铣刀 高硬长刀型	0.5	—	0.7	—	0.8	1.0

套装商品
其它

精密工具

技术资料
索引

立铣刀的故障排除

End Mill Trouble-Shooting

项目	故障	原因	对策
加工面不良	加工面粗糙	颤动、振动	刀长、突出长度控制在最小限度 提高加工物的安装刚性 使用夹持力高的夹头 检查夹头、主轴 检查工具安装精度 缩小切削深度 降低切削速度 降低进给
		构成刀头、粘结	再研磨 使用非水溶性切削油剂
		切屑的再切削	增加切削油剂的排出量 以气冷方式使切屑从切削部位排出 缩小切削深度
	加工面的波浪纹	工具形状	2 枚刀刃→4 枚刀刃→6 枚刀刃 缩小螺旋角
		切削深度、进给大	缩小切削深度和进给
		立铣刀的弯曲	增加工具直径 检查夹头、主轴
	加工面的倾斜	突出长度过长	将刀长、突出长度控制在最小限度
		立铣刀的弯曲	增加工具直径 检查夹头、主轴
	加工面的颤动	切削条件	降低转速 进行顺铣
		安装刚性不足	刀长、突出长度控制在最小限度 提高工具加工物的安装刚性 检查夹头、主轴
		工具形状	增加工具直径 改变齿数
立铣刀的损伤	切削刃异常磨损	切削条件	降低切削速度
		切削油剂	增加切削油剂的排出量 改用非水溶性切削油剂 以气冷方式使切屑从切削部位排出
		立铣刀材料	选定材料耐磨性高、有涂层的立铣刀
		再研磨时期延迟	在适当的时期再研磨
	立铣刀折断	切削阻力过大	切削阻力过大 缩小切削深度 降低进给 提升转速
		立铣刀的磨耗	通过再研磨，去除磨耗和崩口 选定材料耐磨性高、有涂层的立铣刀
		立铣刀的豁口	缩短工具的刀长和突出长度 选定采用高韧性材料的立铣刀
	外圆刃和底刀刃尖缺损	齿角小	在立铣刀上对刃尖进行倒角加工 使用带角 R 的立铣刀 缩小后角、前刀角
		刚性不足	缩短工具的刀长、突出长度 使用夹持力高的夹头 提升加工物的安装刚性
		振动、颤动	振动、颤动 缩小切削深度 降低进给 提升加工物的安装刚性

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

■ 切削速度和切削长度
Cutting speed and cutting length

右图是侧面加工中改变切削速度、进给和齿数后，达到一定磨耗量为止的切削长度的比较结果。

在侧面加工中相比 2 枚刀片，4 枚刀片更有优势。


每刀的进给量较大时或切削速度较低时，可见寿命有延长的倾向。因为寿命短而降低进给量是非常草率的。

还有可能导致反效果。但关于切削速度、进给量，要达到工具寿命的峰值需要一定条件，重要的就是要找到使寿命最长的切削条件。

The diagram at right shows a comparison of milling length until uniform wear starts for various milling speeds, feed rates, and numbers of cutting edges for a shoulder milling. Four flute are better than two flute for shoulder milling.

Increasing the feed rate for each flute and keeping milling speeds low tends to increase tool life. However, it would be ill advised to lower the feed rate just because they say it shortens tool life.

Sometimes doing so has the opposite effect. It is important to find the cutting condition that produce the longest tool life, and the condition that indicate peak tool life in regard to milling speed and feed rate.

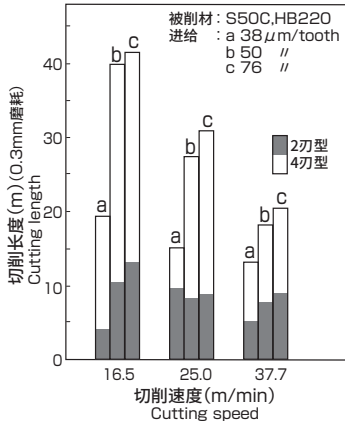

■ 切削速度和加工面精度
Cutting speed and machined surface roughness

右图是侧面加工中改变切削速度、进给和齿数后，加工面粗糙度的比较结果。


缩小每刀的进给量，可改善加工面精度。表现出与寿命相反的倾向。切削条件会根据以工具磨损和加工面精度中哪一项为重点而改变。

4 枚刀片的加工面精度也很出色。因为是按每刀的进给量比较的，因此 4 枚刀片的进给速度是 2 枚刀片的 2 倍，从加工效率、加工面精度、寿命来看，侧面加工中，4 枚刀片的更有优势。

The diagram at right shows a comparison of machined surface for various milling speeds, feed rates, and the number of flute for a shoulder milling.

Reducing the feed rate in relation to each flute improves machined surface. This also has an indirect correlation with tool life. The cutting condition also vary depending on whether tool wear or machined surface is given more weight.

Machined surface is also good with four cutting edges. Comparing the feed rate in relation to the number of flute, we see that the feed rate for 4 flute is double that of when 2 flute are used. For shoulder milling, four flute give us superior productivity, machined surface, and tool life.

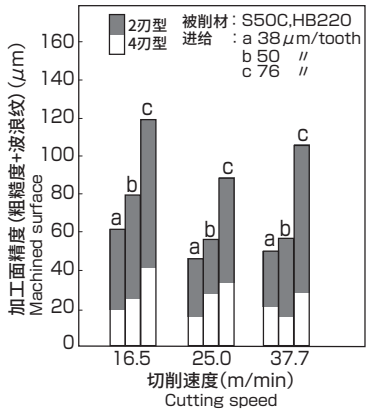

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

立铣刀的损耗

End Mill Wear



正常磨损

Normal wear

在正常的切削加工中，受高切削热和压力影响，前刀面和后面发生刮擦，后面会产生磨损，前刀面会产生月牙洼，而刀头会出现圆角。即使是正常磨损，随着加工数（切削长度）的增加，也会从初期的急速磨损转变成稳定磨损，而再次超过某一切削长度后，会再次看到急速磨损（终期磨损）增加。这种急速磨损开始的时间点，就是一个需要再研磨的时期。

For standard milling, high cutting temperatures and pressure cause abrasions on the cutting face and flank, wear on the flank, craters on the cutting face, and rounding of the cutting edge.

Even with normal wear, wear quickly increases in line with the number of jobs (milling length) until it levels off. Then, after a certain amount of usage, the amount of wear speeds up (end-time wear). The start of this period of rapid wear indicates it is time to re-grind the tool.

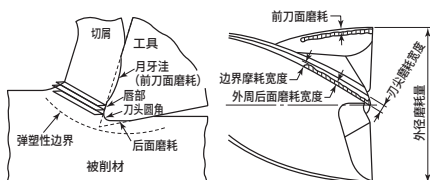

异常磨损

Abnormal wear

若在终期磨损开始后继续加工，磨损宽度将增加，刮擦热也会升高，发展成为更大的磨损，最终导致崩口或折断。

产生小崩口后继续加工时，也同样会导致异常磨损或缺损。


根据是正常磨损还是崩口，采取的对策也不同，因此，必须观察能否看到崩口的痕迹。

Continuing to work when this end-time wear starts increases the surface being worn, raises the abrasion heat, develops greater wear, causes chipping, and breakage.


Continuing to work after even tiny amounts of chipping occur causes abnormal wear and fractures.

The countermeasures for normal wear and chipping are different, so it is necessary to visually check for evidence of chipping.


原 因	对 策
①振动	· 强化夹具
②被削材的缺陷	· 实现内部组织的均一化
	· 适当的硬度以及消除硬度不均匀的情况
③进给量不当	· 降低进给量
④切削刃钝化	· 进行再研磨
⑤切削油剂劣化	· 更换切削油剂



a) 崩口
Chipping




b) 剥落
Flaking




c) 热裂纹
Thermal crack

原 因	对 策
①工装夹具不良	· 切实安装工件
②切削刃钝化 (磨损)	· 改善夹具
	· 进行再研磨
③立铣刀的使用法不良	· 遵守保管、使用注意事项
④切屑堵塞	· 使用切削油剂或利用气冷吹散切屑



a) 缺损
Fracture



b) 破损
Breakage



c) 折断
Breakage

寿命

Tool Life

一般，立铣刀的寿命是指“磨损寿命”“折断寿命”。


这是从工具角度所说的寿命。

在实际作业中，被削物的“尺寸精度”“表面性状”得到满足的期间被称为“完全寿命”。

People often say that the life of an end mill is "wear life" or "breakage life".

This is considered the life of the tool.

While actually working, the "complete life" of the tool is considered as the period that it can attain the "dimensional accuracy" and "surface condition" required for the work material.

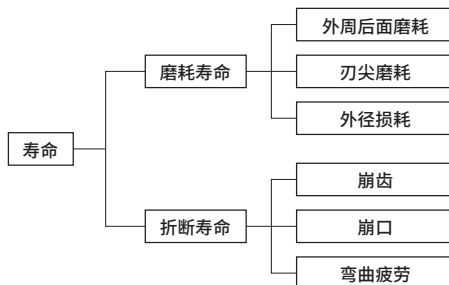

立铣刀的抗弯曲应力

End Mill Bending Stress

刀长和折断寿命

Cutting length and fatigue breakage life

比较不同刀长的折断情况。

刀长 1.6 倍时，折断寿命降低至 1/8，


刀长 3 倍时，降低至 1/150。

立铣刀	刃长 l	作用刃长 l'	力矩 $M=R \cdot l'$	疲劳破坏次数 $N=(M/a^\alpha)$	比率
短刃	1.4	1.0	53.3	3.1×10^5	150
标准刃	2	1.6	85.3	3.8×10^4	19
长刃	3.5	3.1	165.2	2.0×10^3	1

R：施加在立铣刀上的弯曲阻力 (Kgf)

参考 $a=905.1$ $\alpha=-1/0.224$

折断寿命

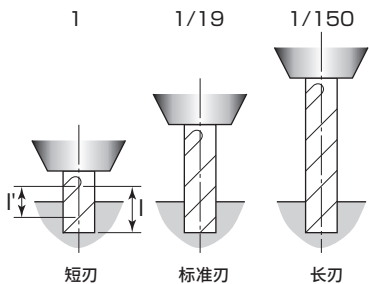

使用的立铣刀：8mm 2 枚刀片
被削材：S50C (200HB)
切削深度：(a) $aa=8\text{mm}$ $ar=8\text{mm}$
切削速度：30m/min
进给量：0.016mm/tooth

切削长度和弯曲应力

Cut length and bending stress


因为切削方法不同，即使切削体积相同，若作用刃长为 1.5 倍，则折断寿命将降低至 1/6。

从发现弯曲时来看，如果是相同的切削体积，刀长得到充分使用的更有优势。

立铣刀	作用刃长 l'	力矩 $M=R \cdot l'$	疲劳破坏次数 $N=(M/a^\alpha)$	比率
a	1.0	53.3	3.1×10^5	6
b	1.5	80.0	5.1×10^4	1

假设弯曲阻力施加在立铣刀轴方向的切削深度的中央

折断寿命



使用的立铣刀：8S2 (标准刃)
被削材：S50C (200HB)
切削深度：(a) $aa=20\text{mm}$ $ar=3\text{mm}$
(b) $aa=10\text{mm}$ $ar=6\text{mm}$
切削速度：30m/min
进给量：0.016mm/tooth

弯曲

Bend

立铣刀的刀长为 2 倍时，弯曲量将达到 8 倍，

外径为 1/2 倍时，弯曲量将达到 16 倍

将立铣刀换算成等效圆棒，比较不同突出长度 (刀长) 的弯曲强度。

R: 切削阻力

L: 突出长度


E: 立铣刀的杨氏模量

I: 断面二次力矩 $K (\pi \cdot Dc^4/64)$

D: 等效圆棒的直径

$$\delta = RL^3 / 3EI$$

杨氏模量方面，以高速钢 200GPa、硬质合金 600GPa 为例，高速钢系列的弯曲量是硬质合金系列的 3 倍



刀长 2 倍 → 弯曲量 8 倍
外径 1/2 倍 → 弯曲量 16 倍

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

直筒夹的磨损及切削方向

Wear of Collet/Hand of Cut

夹头的损伤

Wear of collet

立铣刀因切削承受反复弯曲阻力，从而导致夹头内部也受损。

尤其是直筒夹，立铣刀的反反复弯曲阻力造成了立铣刀打滑的现象，从而使夹头的入口附近被磨损。使用被磨损的夹头，会导致承受力矩的距离比实际突出长度更长。


从柄的角度来看，实际有效夹持长度短于表观的长度，会导致加工精度下降、寿命缩短。

The flexing resistance caused by the repeated cutting of an end mill damages the inside of the holder.

For straight collets particularly, the repeated flexing resistance of the end mill causes the end mill to slip and wears the mouth of the collet.

Using a worn collet subjects the end mill to movement because more of the end mill protrudes from the collet.

The length of the shank which needs to be held is shorter, which lowers accuracy and reduces tool life.



直筒夹的变形



直柄的应力腐蚀



柄部的折断（夹头内）

逆铣和顺铣


Up Cut and Down Cut

逆铣：加工面粗糙度良好


顺铣：工具磨损少

逆铣的问题点

- 不锈钢等加工硬化性高的材料
→ 寿命缩短
- SKD11、SUJ2 等切屑排出性差的材料
→ 切屑的再切削

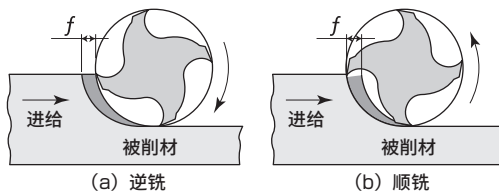

切削方向



附着在刀头上的切屑的再切削状态

新品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀


切削工具

套装商品
其它

精密工具

技术资料
索引

各部分的名称
Nomenclature

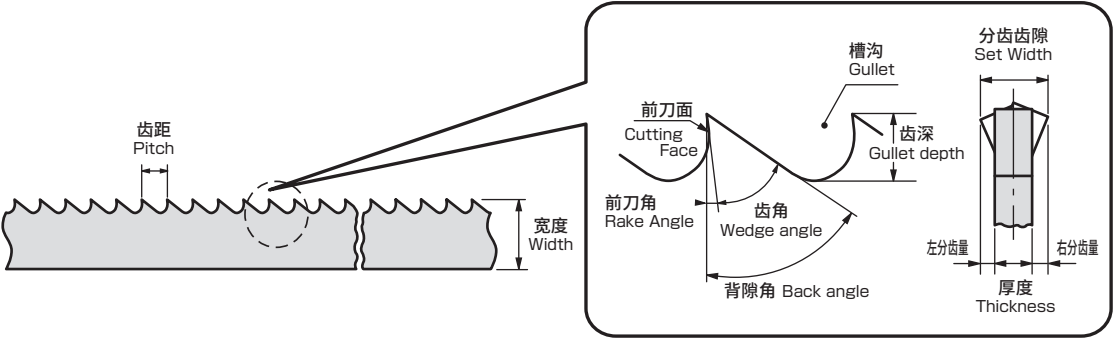


齿距
Tooth pitch

带锯条的齿距是指 1 英寸内的齿数 (TPI)
Tooth pitch is defined as the number of teeth per inch(TPI).


等齿距
Constant pitch

齿距一定的锯齿形状
Constant pitch has uniform tooth spacing.
例) 齿数 2 • 3 • 4



变齿距 (VL)
Variable pitch(VL)



齿距不同的锯齿形状反复出现。
这种锯齿在进行高速重切削或者用于切削长度变化较大的型钢时，
能减小振动产生的噪音，并能防止切削堵塞。
Variable pitch has different tooth spacing within one tooth interval. This pitch is marked by two
dimensions, example 4/6(TPI).
例) 齿数 2/3 • 3/4 • 4/6



刃部材质与双金属构造
Tooth material & Bi-Metal Construction

刃部采用高级粉末高速钢、高级高速钢，胴部采用强
韧的弹簧钢。刃部和胴部通过电子束强力焊接。

Tooth material is made from Powder HSS or Super HSS
and body material is made from spring steel. Tooth and
body are welded strongly by electronic beam welding.



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

工件的装夹方法

Clamp Method According to Work Shape

如不按照工件的形状及成束情况加以适当装夹，切削时容易产生移动，会导致崩齿及折断等问题。
It moves during cutting, and causes a trouble such as chipping and breakage if a proper clamp isn't done according to the work shape and the number of bundles.

形 状	根据成束数量的装夹方法				
	1 根	2 根	3 根	4 根	5 根
圆棒					
六角棒					
H 形钢					
管材					
方形管件					
槽型钢					
山型钢					
C 型钢					
轨道钢					

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

切割工具的故障排除

Metal Band Saw Blade Trouble-Shooting

项 目	故障	原 因	对 策
加工精度	断面歪斜	● 带锯条张力过小 ● 侧导轮磨损过大 ● 导臂距离过大 ● 切削进给过大 ● 带锯条异常磨损 ● 带锯条侧面不规则 ● 被削物装夹松动	● 将带锯条张力调整至正常（18 ~ 20kgf/mm²） ● 更换侧导轮 ● 检查侧导轮的偏磨耗 ● 尽量使可动侧导臂靠近被削物一侧 ● 调整进给刻度，设定为适当的进给 ● 将切削速度调整至适当，或更换为高级刃材的带锯条 ● 确认侧导轮、导向片，更换偏磨耗过大的零部件 ● 牢固固定被削物，防止其移动 ● 整束切削时需要小心
	断面粗糙	● 带锯条齿距过大 ● 切削进给过大 ● 带锯条异常磨损 ● 锯床振动过大	● 更换为适当齿距的带锯条，或缩小进给 ● 调整进给刻度，设定为适当的进给 ● 确认切削条件、被削材，更换为高级刃材的带锯条 ● 确认导臂、滑轮筒等各部分的松动，确认偏磨耗，进行调整修理
金属带锯条的损伤	折断	● 切削进给过大 ● 带锯条张力过大 ● 导向片松动 ● 被削物装夹松动 ● 从动轮磨损过大 ● 带锯条刃底发生龟裂 ● 带锯条背部发生龟裂 ● 带锯条分齿有磨损 ● 带锯条上存在过多压痕 ● 导向片磨损过大	● 调整进给刻度，设定为适当的进给 ● 冬季要注意液压进给的变化 ● 将带锯条张力调整至正常（18 ~ 20kgf/mm²） ● 检查两臂的导向片，调整松动、歪斜 ● 调整被削物的位置，牢固固定，防止其移动 ● 更换从动轮（0.3mm 以上） ● 尽量使可动侧导臂靠近被削物一侧 ● 从动轮磨损过大，将其更换 ● 导向片有松动倾向，将其牢固固定在正常位置上 ● 确认钢丝刷的磨耗、适当位置，清除滑轮筒内的切屑 ● 更换导向片 ● * 安装状态下检查带锯条的垂直度
	发生崩齿	● 切削进给过大 ● 钢丝刷的功能不良 ● 切削油剂少 ● 带锯条齿距过小 ● 切割方形材料时，锯齿卡于材料的角上 ● 切割方形、柱形材料即将结束时，切削长度急剧增加 ● 带锯条上下抖动过大	● 调整进给刻度，设定为适当的进给 ● 更换磨耗过大的零部件，调整位置不适当的零部件 ● 增加切削油剂，将喷嘴调整至适当的位置 ● 变更带锯条齿距，或缩小进给 ● * 尤其要注意大直径实心材料 ● 缩小带锯条齿距，倾斜方形材料后再装夹，或缩小进给 ● * 尤其要注意水平支柱式机器 ● 增加带锯条齿距，或缩小进给 ● * 尤其要注意铰链式机器 ● 确认滑轮筒的偏磨耗、导臂的松动和带锯条定心，并进行必要调整
其它	振动、骚音大	● 切削速度过大 ● 带锯条磨耗过大 ● 带锯条齿距过大	● 调整为适当的速度 ● 变更为高级刃材的带锯条 ● 变更小齿距或 VL 锯齿形状的带锯条

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀


切割工具

套装商品
其它


精密工具

技术资料
索引

外齿轮加工
 External Gear Machining

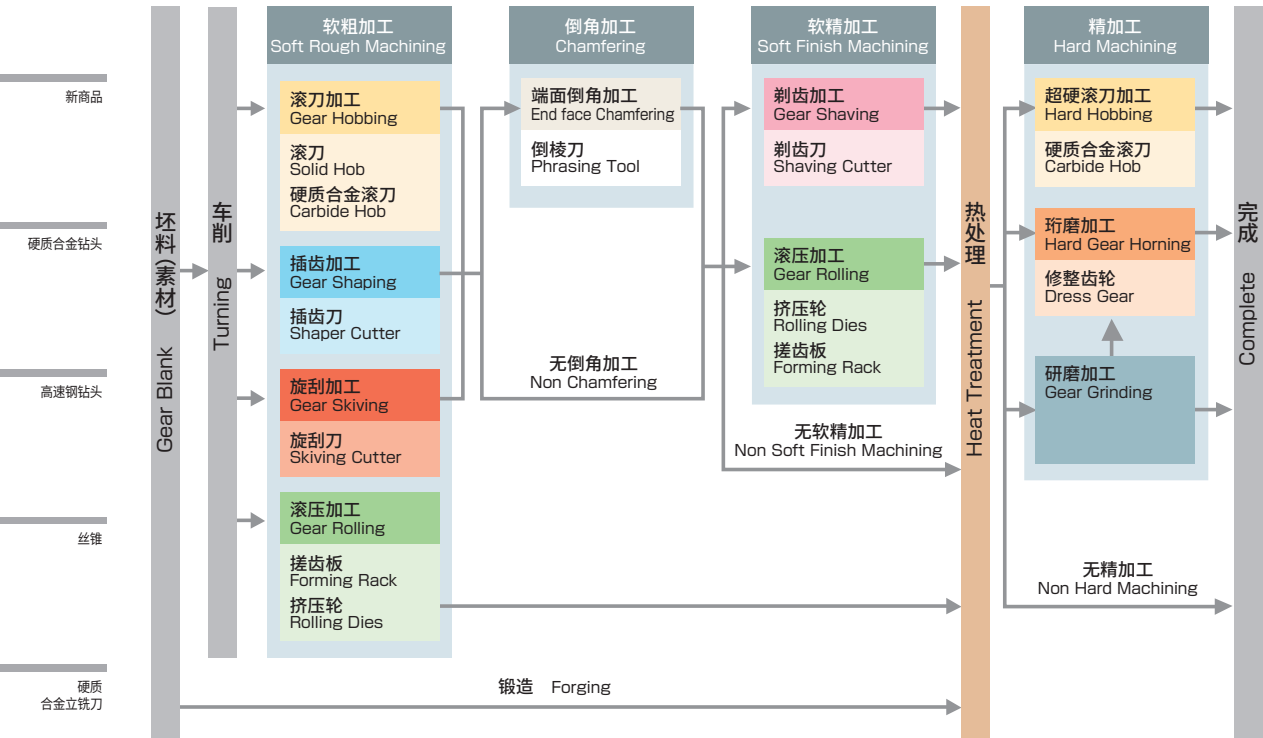


内齿轮加工
 Internal Gear Machining

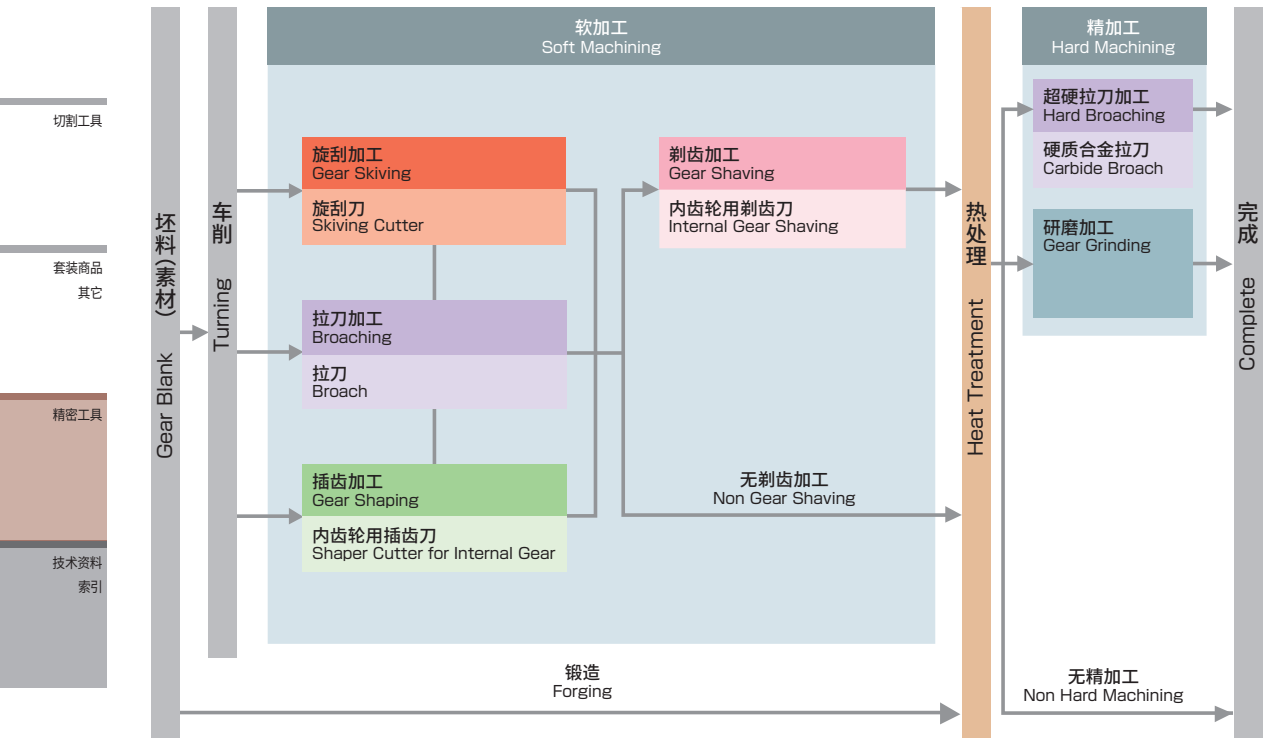


滚刀 Hob

滚刀是装配了螺纹状齿条刀的齿轮切削工具。
转动滚刀，可投射出由螺纹面上的切削刃形成的齿条（切削齿条）。
转动被削齿轮，使其与图（滚刀的切削机构）中的切削齿条咬合，并朝着齿线方向使推进滚刀，从而形成齿轮。
Hob is the cutting tool which has the rack cutting teeth on its body as the shape of a screw.
The basic rack (rack cutting teeth) projects the rotating hob which has teeth in a screw pattern to generate the gear.
Work piece is rotated so that it may gear with this basic rack, and feeding a hob in the lead direction generates the gear.


滚刀的齿轮切削机构 Hob Cutting Action

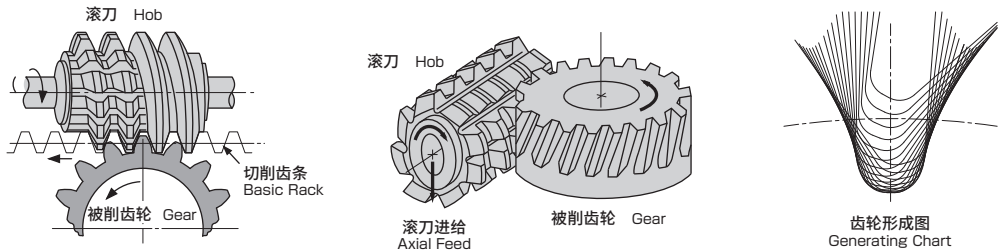

各部分的名称 Hob Nomenclature

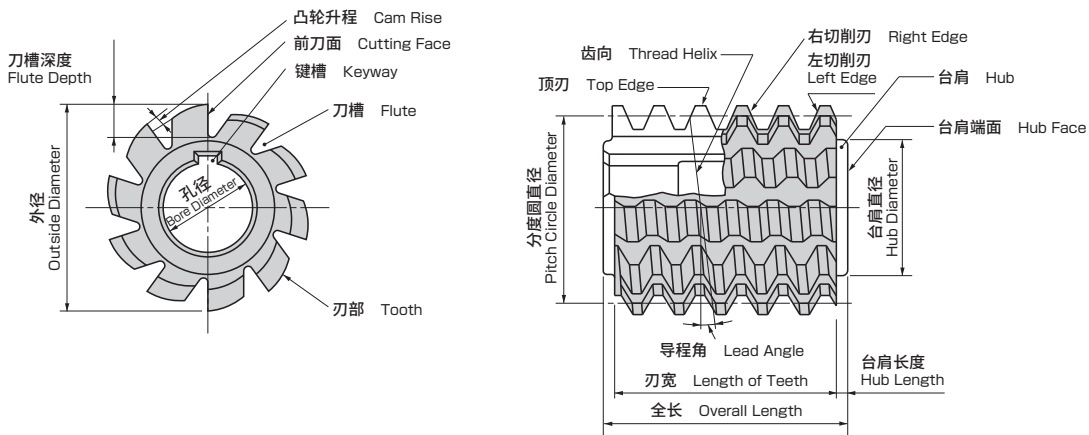

滚刀齿形 Normal Section of Hob Tooth Profile

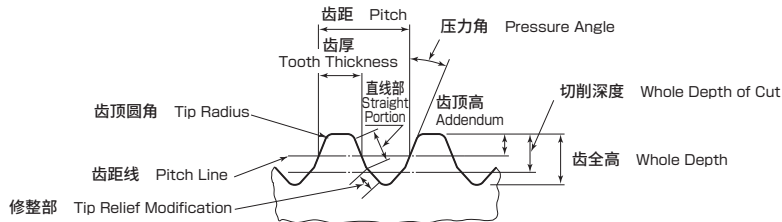

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

插齿刀

Gear Shaper Cutter

插齿刀是齿轮的齿面上带有切削刃的齿轮切削工具。

Gear shaper cutter is the gear cutting tool for generating the gear teeth.

刀具和被削物安装在齿轮形削机上，通过具有固定关联性的转动和齿线方向的往复运动，形成齿轮的齿形。

The both gear and cutter are mounted on the gear shaper machine. Then a symmetrical motion of rotation and reciprocating generates the gear teeth.


用途

1. 无法通过滚刀加工实现的内齿轮加工和阶梯齿轮的切削加工。

1. Generating internal gears and shoulder gears.

2. 无齿齿轮、结合齿齿轮、不同齿厚齿轮的切削加工。


2. Generating omitted teeth, combined one or variable tooth thickness.

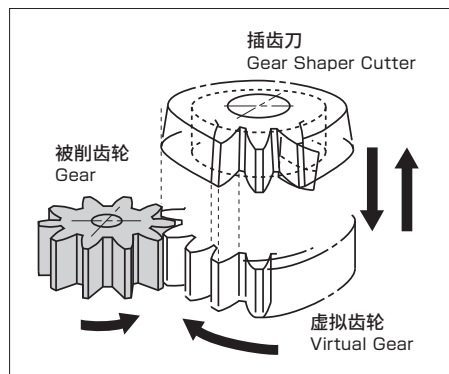

插齿刀
Gear Shaper Cutters

各部分的名称

Gear Shaper Cutters Nomenclature

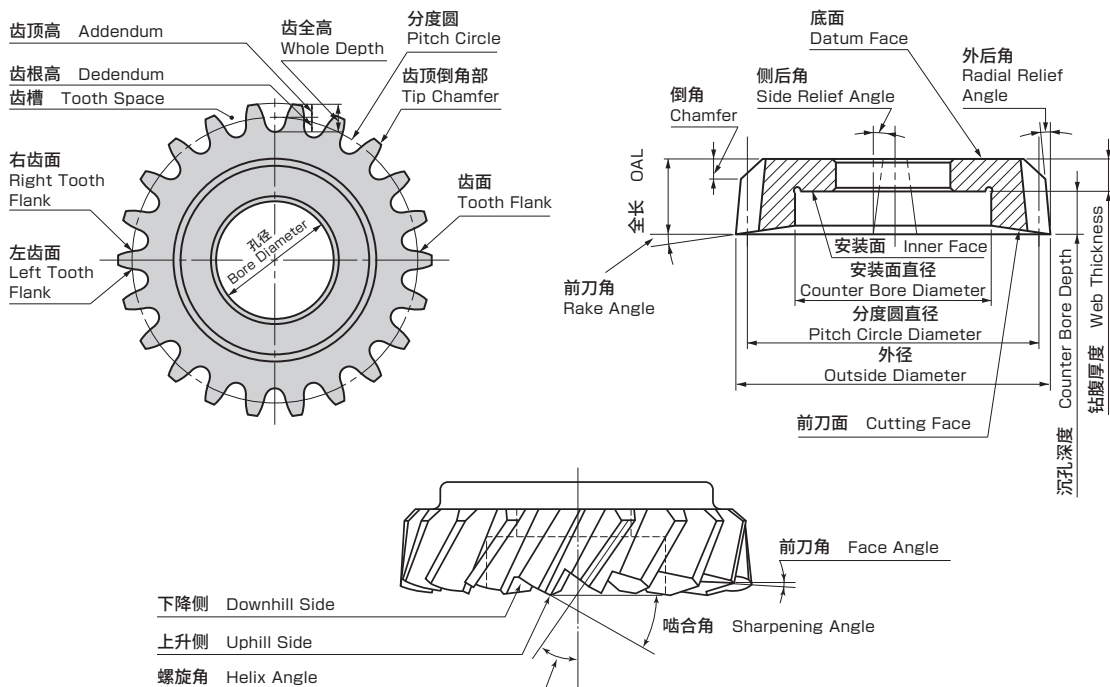


斜齿插齿刀
Helical Gear Shaper Cutter

剃齿刀

Shaving Cutters


各部分的名称

Shaving Cutter Nomenclature

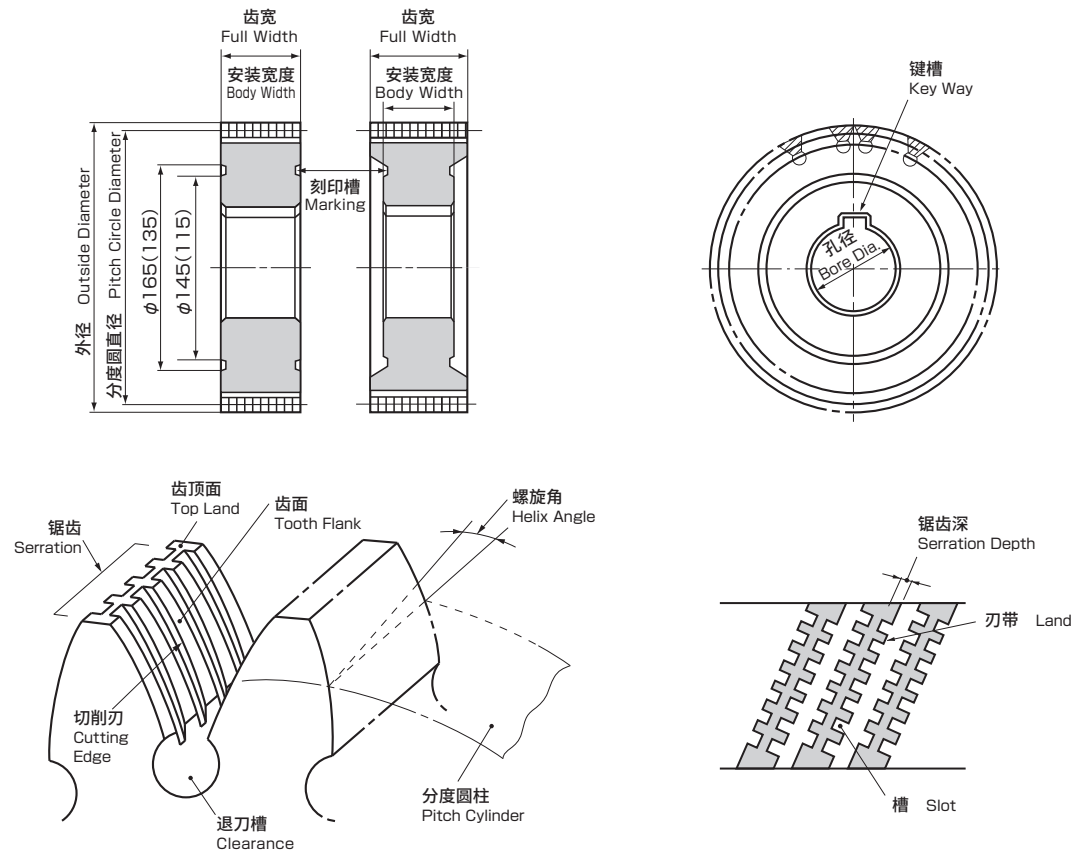

加工原理

Processing Principles

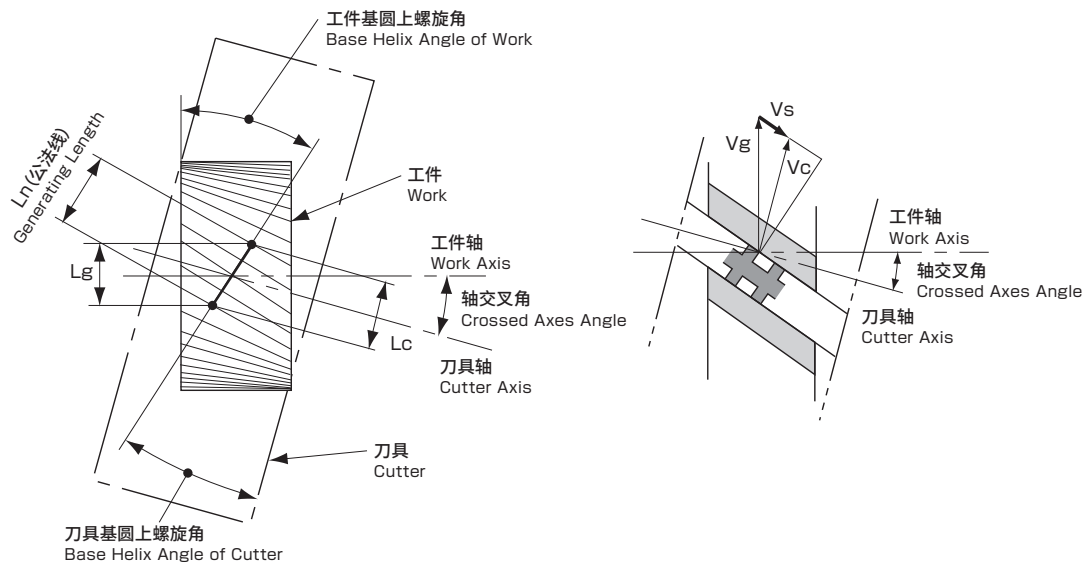

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引


搓齿板

Forming Rack


加工原理

Rolling Principles

立式滚压机床的结构 Vertical Rolling Machine

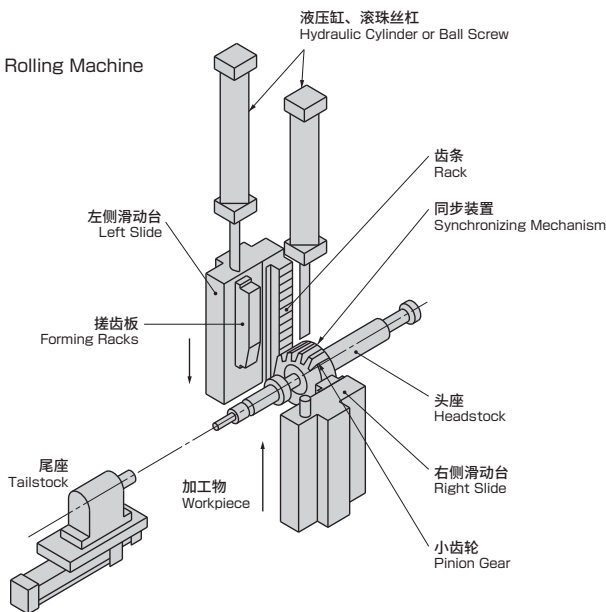


滚压加工的过程 Rolling Process

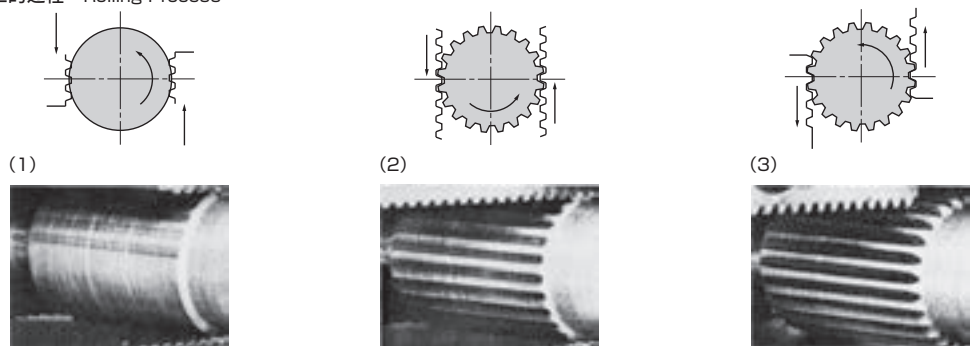

种类和主要尺寸

Type of Racks and Basic Dimensions

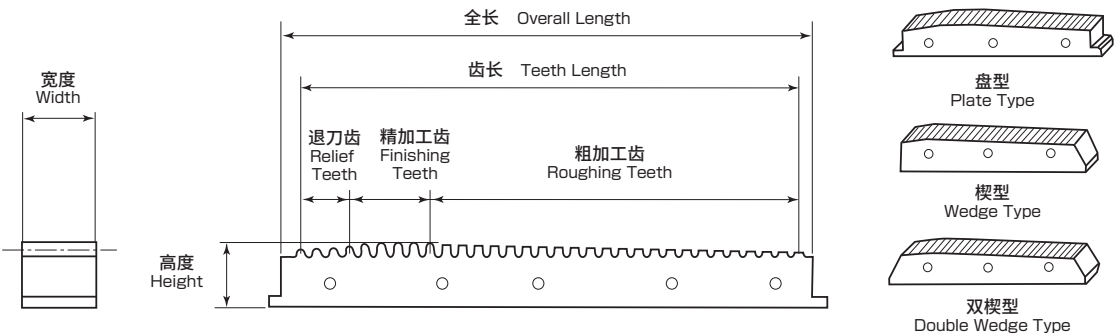


适用的滚压机床 Applicable Machine	盘型 Plate Type	楔型 Wedge Type	双楔型 Double Wedge Type	ATC 型 ATC Type
	立式或卧式滚压机床 Vertical or Horizontal Rolling Machine	立式滚压机床 Vertical Rolling Machine	卧式滚压机床 Horizontal Rolling Machine	带 ATC 的滚压机床 Vertical Rolling Machine with ATC

削平型柄形状和钻头冷却方式

Dimension of Flatted Cylindrical Shank / Type of Oil Hole Drills

削平型立铣刀柄 I

Flatted cylindrical shank I

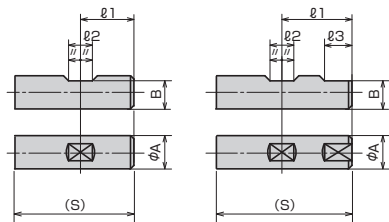


JIS B4005 摘自 铣刀用直柄部形状和尺寸

柄径 A	(柄长) (S)	平头			
		l 1	l 2	l 3	B
6	36	18.0	4.2	—	4.8
8	36	18.0	5.5		6.6
10	40	20.0	7.0		8.4
12	45	22.5	8.0		10.4
16	48	24.0	10.0		14.2
20	50	25.0	11.0	17	18.2
25	56	32.0	12.0		23.0
32	60	36.0	14.0		30.0
40	70	40.0	14.0		38.0
42	70	40.0	14.0		40.0
50	80	45.0	18.0	23	47.8
63	90	50.0	18.0	23	60.8

削平型立铣刀柄 II


Flatted cylindrical shank II



柄径 A	(柄长) (S)	平头		
		l 1	l 2	B
16	48	35	7	14.5
20	50	35	7	18.5
25	56	43	7	23.5
32	60	48	7	30.0
40	70	48	12	38.0

带扁尾直柄

Cylindrical shank with tong drive



类型 1

柄径 A		扁尾	
以上	不足	J	K
3	4.8	2.4	7
4.8	6.4	3.1	8
6.4	8.0	4.1	9
8.0	9.6	5.2	10
9.6	12.0	6.2	11
12.0	(以下) 14.2	7.7	13
14.2	16.6	9.5	14
16.6	19.0	11.3	16
19.0	22.0	13.1	17

类型 2


柄径 A	(柄长) (S)	扁尾	
		J	K
3	29	2.4	6
6	35	3.1	7
8	35	5.2	8
10	43	6.2	10
12	43	6.2	10
16	48	8.0	10
20	60	10.0	10

带油孔钻头的冷却方式

Type of oil hole drills

锥柄钻头 Morse taper shank drills

1 型 Type 1



2 型 Type 2



3 型 Type 3



直柄钻头 Parallel shank drills



新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀



高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

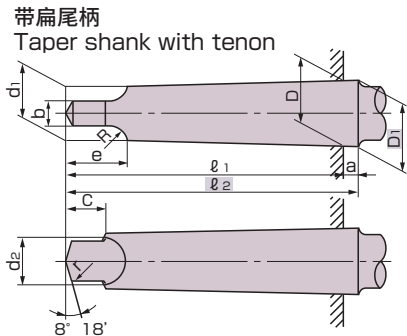

(本表引用了TAS0103-1980。
JIS中有B4003, 但未规定允许值。)

带扁尾柄
Taper shank with tenon

锥度编号 Morse taper	锥度 ⁽¹⁾ Taper	锥角 Angle on side	带扁尾柄 Taper shank with tenon														R	r
			D ⁽²⁾	a	D ₁ ⁽³⁾	d ₁ ⁽³⁾	d ₂		ℓ ₁		ℓ ₂		b		C ⁽⁴⁾	e		
							基准尺寸 Basic size	允差 Tolerance	基准尺寸 Basic size	允差 Tolerance	基准尺寸 Basic size	允差 Tolerance	基准尺寸 Basic size	允差 Tolerance		基准尺寸 Basic size	允差 Tolerance	最大 Max.
0	1/19.212	0.05205	1° 29'27"	9.045	3	9.201	6.104	6	$\begin{smallmatrix} 0 \\ -0.3 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.2 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.9 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.180 \end{smallmatrix}$	6.5	10.5	$\begin{smallmatrix} 0 \\ -1.1 \end{smallmatrix}$	4		
1	1/20.047	0.04988	1° 25'43"	12.065	3.5	12.240	8.972	8.7	$\begin{smallmatrix} 0 \\ -0.3 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.2 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.9 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.180 \end{smallmatrix}$	8.5	13.5	$\begin{smallmatrix} 0 \\ -1.1 \end{smallmatrix}$	5	1.2	
2	1/20.020	0.04995	1° 25'50"	17.780	5	18.030	14.034	13.5	$\begin{smallmatrix} 0 \\ -0.43 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.2 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.9 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.220 \end{smallmatrix}$	10	16	$\begin{smallmatrix} 0 \\ -1.1 \end{smallmatrix}$	6	1.6	
3	1/19.922	0.05020	1° 26'16"	23.825	5	24.076	19.107	18.5	$\begin{smallmatrix} 0 \\ -0.52 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.4 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -2.2 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.220 \end{smallmatrix}$	13	20	$\begin{smallmatrix} 0 \\ -1.3 \end{smallmatrix}$	7	2	
4	1/19.254	0.05194	1° 29'15"	31.267	6.5	31.605	25.164	24.5	$\begin{smallmatrix} 0 \\ -0.52 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.4 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -2.5 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.270 \end{smallmatrix}$	16	24	$\begin{smallmatrix} 0 \\ -1.3 \end{smallmatrix}$	8	2.5	
5	1/19.002	0.05263	1° 30'26"	44.399	6.5	44.741	36.531	35.7	$\begin{smallmatrix} 0 \\ -0.62 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.6 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -2.5 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.270 \end{smallmatrix}$	19	29	$\begin{smallmatrix} 0 \\ -1.3 \end{smallmatrix}$	10	3	
6	1/19.180	0.05214	1° 29'36"	63.348	8	63.765	52.399	51.0	$\begin{smallmatrix} 0 \\ -0.74 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -1.85 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -2.9 \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0.330 \end{smallmatrix}$	27	40	$\begin{smallmatrix} 0 \\ -1.6 \end{smallmatrix}$	13	4	

带螺纹柄
Taper shank with tapped hole

锥度编号 Morse taper	锥度 ⁽¹⁾ Taper		锥角 Angle on side	带螺纹柄 Taper shank with tapped hole														r ₁	d ₅	K
				D ⁽²⁾	a	D ₁ ⁽³⁾	d ⁽³⁾	d ₄		ℓ ₅		ℓ ₆		t		最小 Min.				
								基准尺寸 Basic size	允差 Tolerance	基准尺寸 Basic size	允差 Tolerance	基准尺寸 Basic size	允差 Tolerance	基准尺寸 Basic size	允差 Tolerance					
0	1/19.212	0.05205	1° 29'27"	9.045	3	9.201	6.442	6	0 - 0.3	50	0 - 1.0	53	0 - 1.9	4	0 - 0.75	0.2	—	—		
1	1/20.047	0.04988	1° 25'43"	12.065	3.5	12.240	9.396	9	0 - 0.36	53.5	0 - 1.2	57	0 - 1.9	5	0 - 0.75	0.2	M6	16		
2	1/20.020	0.04995	1° 25'50"	17.780	5	18.030	14.583	14	0 - 0.43	64	0 - 1.2	69	0 - 1.9	5	0 - 0.75	0.2	M10	24		
3	1/19.922	0.05020	1° 26'16"	23.825	5	24.076	19.759	19	0 - 0.52	81	0 - 1.4	86	0 - 2.2	7	0 - 0.90	0.6	M12	28		
4	1/19.254	0.05194	1° 29'15"	31.267	6.5	31.605	25.943	25	0 - 0.52	102.5	0 - 1.4	109	0 - 2.2	9	0 - 0.90	1	M16	32		
5	1/19.002	0.05263	1° 30'26"	44.399	6.5	44.741	37.584	35.7	0 - 0.62	129.5	0 - 1.6	136	0 - 2.5	9	0 - 0.90	2.5	M20	40		
6	1/19.180	0.05214	1° 29'36"	63.348	8	63.765	53.859	51	0 - 0.74	182	0 - 1.85	190	0 - 2.9	12	0 - 0.10	4	M24	50		

注 (1) 锥度以分数值为基准。
(2) D 是基本尺寸。
(3) D₁、d 以及 d₁ 是将根据 D、锥度、a、l₁、以及 l₅ 计算得到的数字, 将小数点后第 4 位四舍五入的数值。
(4) c 的最大不得超过 e。

备注 (1) 锥度使用 JIS B 3301 的环规检查, 接触度在 75% 以上。
(2) 螺纹依据 JIS B 0205, 精度依据 JIS B 0209 的 3 级。
(3) d₂、d 以及 d₁、l₁ 和 l₅、l₆ 和 t 以及 e、b 分别依据 JIS B 0401-2 的 h14、j15、j16 和 h13。

标准公差的数值（摘自 JIS B 0401-1:1998）


Numerical values of standard tolerance IT (JIS B 0401-1 : 1998 Extract)

单位 (Unit) : μm

等级 Grades		IT 1	IT 2	IT 3	IT 4	IT 5	IT 6	IT 7	IT 8	IT 9	IT 10	IT 11	IT 12	IT 13	IT 14
尺寸区分 Base size(mm)	超过 Above	1 级	2 级	3 级	4 级	5 级	6 级	7 级	8 级	9 级	10 级	11 级	12 级	13 级	14 级
	以下 Up to and including														
—	3	0.8	1.2	2	3	4	6	10	14	25	40	60	100	140	250
3	6	1	1.5	2.5	4	5	8	12	18	30	48	75	120	180	300
6	10	1	1.5	2.5	4	6	9	15	22	36	58	90	150	220	360
10	18	1.2	2	3	5	8	11	18	27	43	70	110	180	270	430
18	30	1.5	2.5	4	6	9	13	21	33	52	84	130	210	330	520
30	50	1.5	2.5	4	7	11	16	25	39	62	100	160	250	390	620
50	80	2	3	5	8	13	19	30	46	74	120	190	300	460	740
80	120	2.5	4	6	10	15	22	35	54	87	140	220	350	540	870
120	180	3.5	5	8	12	18	25	40	63	100	160	250	400	630	1000
180	250	4.5	7	10	14	20	29	46	72	115	185	290	460	720	1150
250	315	6	8	12	16	23	32	52	81	130	210	320	520	810	1300
315	400	7	9	13	18	25	36	57	89	140	230	360	570	890	1400
400	500	8	10	15	20	27	40	63	97	155	250	400	630	970	1550

适用的等级和记号（摘自 JIS B 0401-1:1998）

Tolerance grade (JIS B 0401-1 : 1998 Extract)

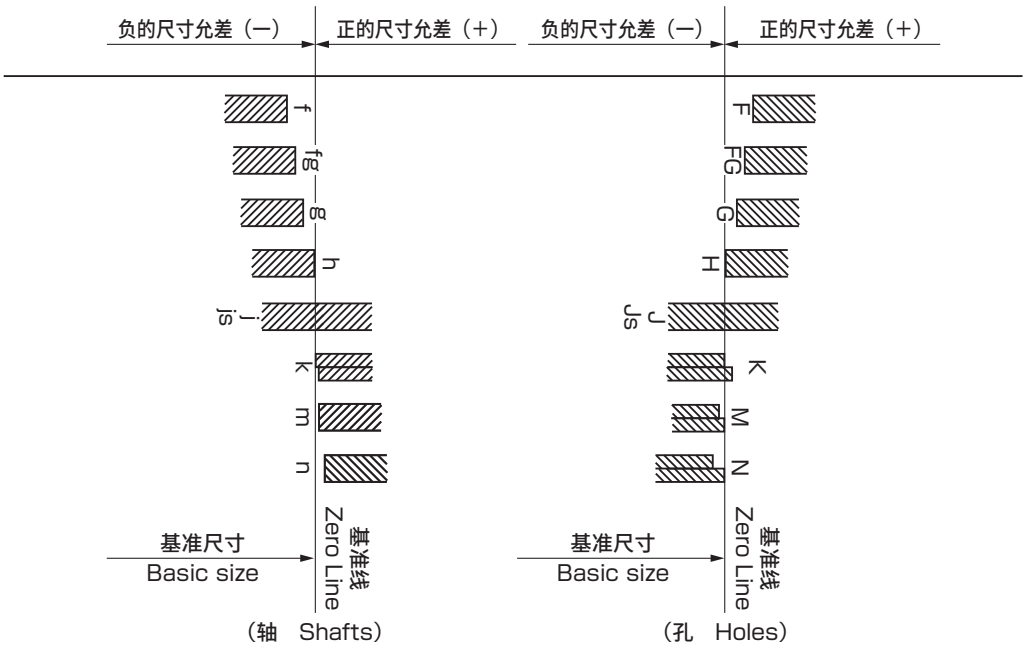

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

Roughness Range by Processing

加工方法 Processing		表面粗糙度的标识 Roughness												最大高度（根据 JIS B 0601:2001）Rz 的区分				单位：μ m	
		0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	18	25	35	50	70	100				
		▽▽▽▽				▽▽▽			▽▽			▽							
砂 型 铸 造 Sand casting									↔										
铸 造 、 锻 造 Forging									精 密 Fine finish			↔							
滚 压 Rolling					↔														
车 削 Turning				精 密 Fine finish			上 Finish		中 Semi-finish			粗 糙 Rough							
镗 孔 Boring						精 密 Fine finish		↔											
铣 削 Milling						精 密 Fine finish		↔											
平削、形削、插削 Planing								↔											
开 孔 Drilling								↔											
铰 孔 Reaming						精 密 Fine finish		↔											
拉 孔 Broaching						精 密 Fine finish		↔											
剃 齿 Shaving							↔												
研 磨 Grinding				精 密 Fine finish	上 Finish	中 Semi-finish		粗 糙 Rough			↔								
磨 光 Lapping		精 密 Fine finish		↔															
珩 磨 Honing				精 密 Fine finish		↔													
电 解 研 磨 Electrolytic grinding			精 密 Fine finish			↔													
滚 压 、 抛 光 Rolling, burnishing				↔															
化 学 研 磨 Chemical polishing					精 密 Fine finish			↔											
锉 削 Filing						精 密 Fine finish		↔											
擦 光 Buffing		精 密 Fine finish			↔														
砂 带 抛 光 Belt polishing			精 密 Fine finish			↔													

硬度换算表
Hardness Exchange Table

洛式硬度 C 级 HRC Rockwell Hardness C scale (150Kg)	维卡硬度 HV Vickers Hardness	布氏硬度 HB Brinell Hardness		洛式硬度 Rockwell Hardness		邵氏硬度 Shore Hardness	拉伸强度 (近似值) MPa N/mm ²
		标准球 Standard ball (10mm)	碳化钨球 Tungsten carbide ball (10mm)	A 级 A scale (60kg)	B 级 B scale (100kg)		
68	940	—	—	85.6	—	97	—
67	900	—	—	85.0	—	95	—
66	865	—	—	84.5	—	92	—
65	832	—	(739)	83.9	—	91	—
64	800	—	(722)	83.4	—	88	—
63	772	—	(705)	82.8	—	87	—
62	746	—	(688)	82.3	—	85	—
61	720	—	(670)	81.8	—	83	—
60	697	—	(654)	81.2	—	81	—
59	674	—	(634)	80.7	—	80	—
58	653	—	615	80.1	—	78	—
57	633	—	595	79.6	—	76	—
56	613	—	577	79.0	—	75	—
55	595	—	560	78.5	—	74	2075
54	577	—	543	78.0	—	72	2015
53	560	—	525	77.4	—	71	1950
52	544	(500)	512	76.8	—	69	1880
51	528	(487)	496	76.3	—	68	1820
50	513	(475)	481	75.9	—	67	1760
49	498	(464)	469	75.2	—	66	1695
48	484	451	455	74.7	—	64	1635
47	471	442	443	74.1	—	63	1580
46	458	432	432	73.6	—	62	1530
45	446	421	421	73.1	—	60	1480
44	434	409	409	72.5	—	58	1435
43	423	400	400	72.0	—	57	1385
42	412	390	390	71.5	—	56	1340
41	402	381	381	70.9	—	55	1295
40	392	371	371	70.4	—	54	1250
39	382	362	362	69.9	—	52	1215
38	372	353	353	69.4	—	51	1180
37	363	344	344	68.9	—	50	1160
36	354	336	336	68.4	(109.0)	49	1115
35	345	327	327	67.9	(108.5)	48	1080
34	336	319	319	67.4	(108.0)	47	1055
33	327	311	311	66.8	(107.5)	46	1025
32	318	301	301	66.3	(107.0)	44	1000
31	310	294	294	65.8	(106.0)	43	980
30	302	286	286	65.3	(105.5)	42	950
29	294	279	279	64.7	(104.5)	41	930
28	286	271	271	64.3	(104.0)	41	910
27	279	264	264	63.8	(103.0)	40	880
26	272	258	258	63.3	(102.5)	38	860
25	266	253	253	62.8	(101.5)	38	840
24	260	247	247	62.4	(101.0)	37	825
23	254	243	243	62.0	100.0	36	805
22	248	237	237	61.5	99.0	35	785
21	243	231	231	61.0	98.5	35	770
20	238	226	226	60.5	97.8	34	760
(18)	230	219	219	—	96.7	33	730
(16)	222	212	212	—	95.5	32	705
(14)	213	203	203	—	93.9	31	675
(12)	204	194	194	—	92.3	29	650
(10)	196	187	187	—	90.7	28	620
(8)	186	179	179	—	89.5	27	600
(6)	180	171	171	—	87.1	26	580
(4)	173	165	165	—	85.5	25	550
(2)	166	158	158	—	83.5	24	530
(0)	160	152	152	—	81.7	24	515

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

被削材的金属特性

Characteristics of Various Metals

金属材料的特性

Characteristics of metals

	分类	编码	名称	拉伸强度 N/mm²	硬度	调质	化学成分 概要	特长和用途
新商品	钢	SS400	一般结构用压延钢	～ 510			Fe	钢板、扁钢
	钢		高张力钢	～ 800			Fe,C:0.08%,Mn:1.5%,Ni:1.8%,Cr:0.28%, Mo:0.4%	车身、框架 还有 1400N/mm² 的超高张力
	钢	S25C	机械结构用碳钢		156HB		Fe,C:0.25%	低碳钢。螺栓、螺帽、销
	钢	S45C	机械结构用碳钢	700 ～	230HB		Fe,C:0.45%	高碳钢。传动轴、机械零部件
	钢	SK4	碳素工具钢	770 ～	61HRC ～	淬硬	Fe,C:1.0%	轴、销、锉刀、模具
硬质合金钻头	钢	SKH51	高速度工具钢		63HRC ～	淬硬	Fe,C:0.8%,Mo:5%,W:6.3%,V:2%, Cr:4%	钻头、丝锥等切削工具
	钢	SKD11	合金工具钢		58HRC ～	淬硬	Fe,C:1.5%,Cr:12%,Mo:1%	冷压模具、量规、搓齿板
	钢	SKD61	合金工具钢		50HRC ～	淬硬	Fe,C:0.7%,Si:1%,Cr:5%,Mo:1.2%, V:1%	热锻模具
	钢	SNC631	镍铬钢	830 ～	～ 300HB	淬硬	Fe,C:0.3%,Ni:3%,Cr:1%	曲轴
	钢	SNCM439	镍铬铝钢	980 ～	～ 350HB	淬硬	Fe,C:0.4%,Ni:2%,Cr:1%,Mo:0.3%	齿轮轴类
高速钢钻头	钢	SCr420	铬钢	830 ～	～ 320HB	淬硬	Fe,C:0.2%,Cr:1%	渗碳钢。齿轮类、花键轴
	钢	SCM420	铬铝钢	850 ～	～ 350HB	淬硬	Fe,C:0.2%,Cr:1%,Mo:0.3%	汽车零部件、六角螺栓
	钢	SMn420	锰钢	830 ～	～ 320HB	淬硬	Fe,C:0.2%,Mn:1.5%	耐磨性高
	钢	SUM21	硫类快削钢				Fe,C:0.13 以下 ,Mn:1%,S:0.3%	快削钢
	钢	SUH310	耐热钢	590 ～			Fe,C:0.25% 以下 ,Ni:20%,Cr:25%	喷嘴、燃烧室、锅炉零部件
丝锥	钢	SUJ2	高碳铬轴承钢		62HRC ～	淬硬	Fe,C:1%,Cr:1.5%	轴承、滚柱罩
	钢	FC250	灰口铸铁	250 ～	～ 240HB			耐磨耗性、耐热冲击性、耐腐蚀性、被削性、振动吸收 效率优于碳钢
	钢	FCD700	球墨铸铁	700 ～	～ 300HB			耐磨性、韧性好。机械零部件
	钢	SACM645	氮化钢		～ 30HRC	淬硬	Fe,C:0.45%,Cr:1.5%,Al:1%,Mo:0.2%	铝铬铝氮化后使用
	钢	SUS304	不锈钢	520 ～	～ 187HB		Fe,C:0.08% 以下 ,Cr:18%,Ni:8%	奥氏体不锈钢。耐腐蚀性、耐热性良好。非磁性
硬质合金立铣刀	钢	SUS310S	不锈钢	520 ～	～ 187HB		Fe,C:0.08% 以下 ,Cr:25%,Ni:20%	奥氏体不锈钢。高级耐热钢。锅炉材料、热处理零部件
	钢	SUS316	不锈钢	520 ～	～ 187HB		Fe,C:0.08% 以下 , Cr:18%,Ni:12%,Mo:3%	奥氏体不锈钢。在 304 基础上进一步提升了耐酸性、耐 热性
	钢	SUS420J2	不锈钢	740 ～	217HB ～	淬硬	Fe,C:0.4%,Cr:13%	马氏体不锈钢。制动盘、弹簧
	钢	SUS430	不锈钢	450 ～			Fe,C:0.12%,Cr:18%	铁氧体不锈钢。家庭用水设施
	钢	SUS440C	不锈钢		58HRC ～		Fe,C:1.2%,Cr:18%	马氏体不锈钢。小刀、菜刀
高速钢立铣刀	钢	SUS630	不锈钢	1300	40HRC ～	时效处理	Fe,C:0.07% 以下 , Cr:17%,Ni:4%,Cu:4%,Nb	沉淀硬化不锈钢。17-4PH, 兼具耐腐蚀性和强度
	钢		马氏体时效钢	2000		时效处理	Fe,C:0.03% 以下 , Cr:18%,Ni:9%,Mo:5%	航天火箭零部件
	铝	A1100	铝合金	90		O	Al,Cu:0.1%	耐腐蚀性良好 建材
	铝	A2014	铝合金	405		T8	Al,Cu:4.5%,Si:0.8%,Mo:0.8%	强度高, 适合结构用。航空机用材
	铝	A3004	铝合金	180		O	Al,Mn:1.2%,Mg:1%	成形性、耐腐蚀性良好 铝罐、屋顶板
切削工具	铝	A4032	铝合金	380		T6	Al,Si:12%,Cu:0.9%,Mg:1.0%,Ni:0.9%	耐腐蚀性、耐磨耗性出色, 热膨胀系数小
	铝	A5052	铝合金	250		H34	Al,Mg:2.5%,Cr:0.25%	耐腐蚀性、加工性良好, 强度高但疲劳强度大
	铝	A6063	铝合金	180		T5	Al,Mn:0.7%,Si:0.4%	挤压用合金。建筑窗格
	铝	A7075	铝合金	570		T6	Al,Zn:5.5%,Mg:2.5%,Cu:1.8%	超级杜拉铝。航空机用材
	铝	AC4C	铝合金铸件	230 ～		T6	Al,Si:7%	铸造性出色, 耐压性和耐腐蚀性良好。传动箱、液压零 部件
套装商品 其它	铝	ADC12	铝合金压铸件	225			Al,Si:11%,Cu:2.5%	铸造性良好。汽车汽缸缸体、曲轴箱
	镁	AZ91D	镁合金压铸件	230		F	Mg,Al:9%,Zn:1%	轻量且振动吸收性好。电磁屏蔽性。汽车车轮、笔记本 电脑外壳
	铜合金	C1020	无氧铜	～ 315	～ 112HB	1/2H	Cu	电、热传导性出色, 焊接性好
	铜合金	C1100	韧铜	～ 275	～ 87HB	1/4H	Cu	电、热传导性出色, 延展性和拉伸性好
	铜合金	C5191	磷青铜 2 种	～ 685	～ 230HB	H	Cu,Sn:7%	延展性、耐疲劳性、耐腐蚀性好。开关、轴承
精密工具	铜合金	C6241	铝青铜	685 ～	210HB ～	H	Cu,Al:10%,Fe:4%,Ni:2%,Mn:2%	强度高, 耐磨性、耐腐蚀性好。小齿轮、齿轮轴
	铜合金	C7541	镍黄铜 3 种	490 ～	100HB ～	H	Cu,Zn:23%,Ni:14%	光泽美观, 延展性和拉伸性好。医疗仪器、西式餐具
	铜合金	C1720	铍铜 25 合金	1480	420HB	H	Cu,Ber:0.5%,Co:0.3%	高强度, 介电常数 25%。焊接用零部件、开关、塑料模 具材料
	铜合金	C2700	黄铜 2 种	410 ～		H	Cu,Zn:35%	冷压锻造性、拉伸性好。弹簧、机械零部件
	铜合金	C6782	高强度黄铜	460 ～		F	Cu,Zn:35%,Al:2%,Mn:2%,Fe:1%	强度高, 耐腐蚀性好。船用螺旋桨
技术资料 索引	铜合金	CAC403	青铜铸件 3 种	245 ～			Cu,Sn:10%,Zn:2%	耐压性和耐磨性好。泵胴体、齿轮
	铜合金	CAC502	磷青铜铸件 2 种	195 ～			Cu,Sn:10%,P:0.2%	耐压性和耐磨性好。轴承、机械零部件
	铜合金	CAC304C	高强度黄铜铸件	755 ～	210HB ～		Cu,Zn:25%,Al:6%,Mn:3.5%,Fe:3%	强度高, 耐腐蚀性好。轴承、轴承
	钛合金		高强度钛	890 ～			Ti,Al:6%,V:4%	高拉力、高强度。航空机材 (叶盘、起落架)
	镍铜合金		蒙乃尔 K500 合金		240HB		Ni,Cu:30%	对海水、蒸汽的耐腐蚀性好。泵轴、造船、炼油装置
	镍基合金		钴镍铁合金 600	660			Ni,Cr:15%,Fe:8%	高温强度和耐腐蚀性出色。工业锅炉、航空机、核材料
	镍基合金		钴镍铁合金 718	1380			Ni,Cr:19%,Fe:19%,Mo:3%,Ti:0.9 %,Al:0.5%,Nb,Ta	耐 700℃ 的高温强度, 蠕变强度高, 加工性和焊接性良好。 燃气涡轮、航空机、火箭、低温用零部件
	镍基合金		沃斯帕洛				Ni,Cr:19%,Co:13%,Mo:4%,Ti:3%, Al:1.3%	耐硫化性和高温强度出色。燃气涡轮发动机的转子盘、 轴垫片

分类	编码	名称	拉伸强度 N/mm ²	硬度	调质	化学成分 概要	特长和用途
镍基合金		哈斯特洛依合金 276				Ni,Cr:16%,Mo:16%,Fe:5%,W:4%	对氧化性、还原性的耐腐蚀性出色，在 1000℃的氧化环境下也能保持出色的耐腐蚀性
钴基合金		司太立合金		~ 55HRC		Co,Cr:30%,W:12%	耐磨合金。
低热膨胀合金		因瓦合金	400	120HV		Fe,Ni:36%	热膨胀是铁等的 1/10。电气、光学机器零部件
		超因瓦合金	440	130HV		Fe,Ni:32%,Co:5%	热膨胀几乎为零。光学机器零部件、块规
		可伐合金	470	150HV		Fe,Ni:29%,Co:17%	硬质玻璃，陶瓷密封用。膨胀系数接近硬质玻璃
软磁性合金		坡莫合金 C		180HV		Fe,Ni:79%,Mo:5%,Cu,Cr	高导磁材料。电子机器的电磁屏蔽装置、磁头
钼基合金	TZM	钼合金		330HV		Mo,Ti:0.5%,Zr:0.08%	高温强度、蠕变强度高。镍基合金的锻造模具
其它		钨铜		330HV		W,Cu:10%	电极 被削性良好
		纯镍	350 ~			Ni	对碱性溶液的耐腐蚀性出色
		纯钨		450HV		W	超高温强度，导热性高。可屏蔽辐射。电极
		纯钼		250HV		Mo	高温强度、导热性高。工业锅炉零部件、电极
		纯钛	~ 620			Ti	成形性、耐腐蚀性出色。化工装置、汽车零部件
		纯铁		~ 100HV		Fe	软磁性材料。马达的轭、电磁屏蔽板
		锆	55			Zr	高耐腐蚀性。铀燃料棒的被覆，燃料电池的电极
		钽				Ta	高耐腐蚀性。可用于镍基合金也无法使用的腐蚀性环境中
金属基复合体		MMC		90HRB		AL,SiC:30%	在铝材中加入陶瓷颗粒的复合材料
纤维强化塑料	GFRP	玻璃纤维	3400				浴缸、休闲游艇、建筑强化材料
纤维强化塑料	CFRP	碳纤维	4900				导电性、耐热性、低热膨胀率、化学稳定性、超热传导性高。航空机的机翼、航天工程
塑料		Duracon	60				机械性质高。OA、AV 机器、齿轮、螺丝
		电木	65				耐热性高，也可用作绝缘体。汽车、电气零部件
		聚氯乙烯	~ 62				耐水性、耐酸性、耐碱性、耐溶剂性出色。电线被覆材、隔热隔音材
		木材	59				

注意：本表是在探讨各种金属材料的被削性时供参考的资料，其中总结了各种金属材料概要。
本表并未展示材料的组成和特性，根据材料的制造方法和调质内容，材料的机械性质会有明显变化，关于被削性，应在考虑这些因素后再确定。

被削材元素成分的特性

Characteristics of elements

元素成分		特长
C	碳	形成化合物，增加硬度和强度。
Mo	钼	增强耐回火性。形成碳化物，增强热锻强度、耐蠕变性。
V	钒	增强耐回火性。通过二次硬化增强粘度和强度。形成碳化物，增强耐蠕变性。增强耐磨性。
W	钨	形成强碳化物，增强耐回火性、强度和热锻硬度。增强耐磨性。
Co	钴	增强耐蠕变性。增强耐热性和耐磨性。强磁性体。
Ni	镍	增强耐腐蚀性和热锻强度。磁性体。导热率低，工具刀头容易升温发热。
Cr	铬	含量 12% 以上可显著增强耐腐蚀性。提升热锻强度。切屑亲和性高，降低切屑排出性
Al	铝	形成化合物，通过沉淀硬化增加强度。
Cu	铜	改善耐腐蚀性。会出现沉淀硬化现象，增加强度。
Ti	钛	形成碳化物、化合物，增强耐蠕变性。耐腐蚀性高，会出现沉淀硬化，增加强度。
Zr	锆	与钛类似的性质。形成化合物，增强热锻强度、耐腐蚀性。
Ta	钽	提高耐腐蚀性。
Nb	铌	增强耐蠕变性、热锻强度，使结晶颗粒微细化。改善韧性。
B	硼	增强热锻强度、耐蠕变性。使结晶颗粒微细化，提升热锻强度。
Si	硅	提高粘合强度、韧性。
Mn	锰	可增强被削性，因此常被添加在快削材中。增强强度、韧性、耐腐蚀性。
P	磷	增强被削性。
S	硫	形成化合物，增强被削性。
Se	硒	增强被削性。
Te	碲	与硒 (Se) 类似的元素。增强被削性。
Pb	铅	增强被削性。
O	氧	形成氧化物，会损害加工性。会损害强度和韧性。
N	氮	可增强高温强度，但会损害低温下的韧性。

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速钢立铣刀

切割工具

套装商品
其它

精密工具

技术资料
索引

模具用钢一览表

Die & Mold Material Comparison Table

冷压模具用钢											
Cold Work Die Steels											
分类	JIS	AISI	不二越	日立金属	神户制钢所	山阳特殊制钢	大同特殊钢	日本高周波钢业	Bohler	Uddeholm	使用硬度HRC
碳素工具钢	SK105	W1-10				QK3	YK3		K990		58 ~ 61
	SKS93			YCS3		QK3M	YK30	K3M			55 ~ 60
合金工具钢	SKS3			SGT		QKS3	GOA	K3M	K460	ARNE	55 ~ 62
	SKD1	D3		CRD		QC1	DC1	KD1	K100 K107	SVERKER3	55 ~ 62
	SKD11	D2	CDS11	SLD		QC11	DC11	KD11	K105 K110	SVERKER21 SVERKER SF	55 ~ 62
	SKD11 (改良)		MDS9	SLD8		QCM8 QCM7	DC53	KD11S KD21	K340	SLEIPNER	62 ~ 64
	中 CrSKD			ARK1							
	SKD12	A2					DC12	KD12	K305	RIGOR	55 ~ 62
	预硬钢 40HRC						GO40F	KAP65		IMPAX HH	40
	预硬钢 50HRC							RC55			50
	火焰淬火钢			HMD5 HMD1		QF3	GO5	FH5 KRCX		FERMO	55 ~ 62
	低温空冷钢			ACD37			GO4	KSM			58 ~ 62
	耐冲击钢			YSM		QF1	GS5	KTV5	K630		55 ~ 60
	其它		ICS22	SLD10 SLD-MAGIC					K190	CALMAX ELMAX VANADIS4 VANADIS6 VANADIS10	
高速度工具钢	SKH51	M2	SKH9	YXM1		QH51	MH51	H51	S600		55 ~ 65
	SKH55 类		HM35 HS53M	YXM4			MH55	HM35	S705		57 ~ 66
	SKH57 类		DURO-SP HS93R	XVC5			MH8	MV10	S700		55 ~ 68
	矩阵类		DURO-F1 DURO-F3 DURO-F7 DURO-V2 DURO-V5 MATRIX2	YXR33 YXR3 YXR7		QHZ	DRM1 DRM2 MH85 MH88 DRM3	KMX1 KMX2 KMX3	W360	CALDIE UNIMAX	55 ~ 64
粉末高速度工具钢	SKH40		FAX38	HAP40	KHA30		DEX40		S590	ASP30	
	矩阵类			HAP5R	KHA3VN		DEX-M1 DEX-M3				
	其它		FAX31 FAX55 FAXG2	HAP10 HAP50 HAP72	KHA32 KHA60 KHA33N KHA30N	SPM23 SPM30 SPM60 SPMR8	DEX20 DEX60		S290 S390 S690 S790	ASP23 ASP60	
热锻模具用钢											
Die Steels for Casting											
合金工具钢	SKD4						DH4	KD4	W105		40 ~ 50
	SKD5	H21					DH5	KD5	W100		45 ~ 50
	SKD6	H11			KTD1		DH6	KD6	W300	VIDAR	40 ~ 52
	SKD61	H13		DAC	KTD2	QD61	DHA DHA1	DKA	W302	ORVAR-2M	40 ~ 52
	SKD61 (改良)			DAC3 DAC10	KTD3	QDA61 QDN	DHA2 DH21	KDA1 KAA1S		ORVAR-S	40 ~ 52
				DAC55			DH31-S	KDAMAX	W303	DIEVAR	40 ~ 52
	SKD62	H12				QD62	DH62	KDB			40 ~ 52
	SKD7	H10					DH72	KDH1	W320		40 ~ 50
	SKD7 (改良)		DURO-N1	DAC40 YEM-K		QDH	DH71 DH73 DH32				40 ~ 50
	SKD8	H19					DH41	KDF			40 ~ 50
	SKD8 (改良)			MDS-K DAC45			DH42	KDS4			40 ~ 50
	SKT4			DM	KTH3	QT41	GFA	KTV	W500		38 ~ 45
	SKT4 (改良)			YHD28		QDT	GF78				38 ~ 45
	沉淀硬化钢			YHD3			DH76				
	其它			FDAC			DH2F	KAP90F			
						QF5					
高速度工具钢	矩阵类		DURO-F1	YXR33		QHZ	DRM1 DRM2	KMX1	W360 W321 W705	HOTVAR	53 ~ 58

塑料模具用钢

Plastic Mold Steels

分类	JIS	AISI	不二越	日立金属	神户制钢所	山阳特殊制钢	大同特殊钢	日本高周波钢业	Bohler	Uddeholm	使用硬度HRC
预硬钢	SC 类	1055			KTSM21 KTSM2A KTSM22		PXZ	KPM1 KPMAX			13
	SCM 类	4140			KTSM31		PDS3				28
	SCM (改良)	P20		HPM7	KTSM3M		PX5 PX7	KPM30	M200 M201 M238	PLAMAX IMPAX	33
	SUS 类	420		HPM38			S-STAR	420M	M303 M310	STAVAX	33
	SUS (快削)			HPM77			G-STAR		M315	RAMAX-S	33
	SUS 类	S17400		PSL		QSH6	NAK101	U630	N700	CORRAX	35
	SKD61 (改良)	H13		FDAC		QD6F	DH2F	KAP90F	W302	ORVAR-S	40
		P21		HPM1 CENA1		PCM40	NAK55 NAK80	KAP65 KAP88	M261 M461		40
淬火回火钢	SKD11 (改良)	D2		HPM31		QCM8	PD613	KD21	K105 K110 K340	SLEIPNER RIGOR CALMAX	60
	SUS 类 440C	440C	440C	SUS440C		QPD5 SPC5 (粉末)	SUS440C DEX-P1 (粉末)	KSP2	M340 M390	ELMAX	57
	SUS 类 420			HPM38 HPM38-S HPM77			S-STAR D-STAR G-STAR	KSP1		STAVAX	52
			PROVA-400						M310 M333	STAVAX POLMAX MIRRAX	40
时效处理钢	马氏体时效钢		EXEO-M21	YAG			MASIC	KMS18-20	V720	CORRAX	50 以上
	其它			ASL407							50 以上
	非磁性钢			HPM75				NMS1			40

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质合金立铣刀

高速度工具钢

High Speed Steels

分类	JIS	AISI	不二越	日立金属	神户制钢所	山阳特殊制钢	大同特殊钢	日本高周波钢业	Bohler	Uddeholm	使用硬度HRC
钨类	SKH2	T1	SKH2	YHX2			WH2	H2	S200		63 ~ 66
	SKH3	T4	SKH2				WH3	H3	S305		64 ~ 68
	SKH4	T5	SKH4				WH4	H4			65 ~ 69
	SKH10	T15					WH10	HV5			66 ~ 69
钼类	SKH51	M2	SKH9	YXM1	RHM1	QH51	MH51	H51	S600 S614 S401		58 ~ 66
	SKH52	M3-1					MH52	H52			60 ~ 66
	SKH53	M3-2					MH53	HV1	S607		63 ~ 66
	SKH54	M4	HM4				MH54	HV2			63 ~ 66
	SKH55		HM35	YXM4			MH55	HM35	S705		64 ~ 67
	SKH56	M36	HM36		RHM6		MH56	HM36			64 ~ 67
	SKH57		HS93R	XVC5			MH57 MH8	HV10	S700		65 ~ 69
	SKH58	M7	HM7				MH7	HM3	S400		63 ~ 66
	SKH59	M42	HM42	YXM42			MH59	HM42	S500		65 ~ 68
	其它		DURO-SP HS97R HM1 HMT12 HM33 SKH9D	YXM60			MH64 MH69	S70			
矩阵类	矩阵类		DURO-V2 DURO-V5 DURO-F1 DURO-F3 DURO-F7	YXR3 YXR33 YXR7		QHZ	DRM1 DRM2 DRM3	KMX1 KMX2 KMX3			
粉末类	SKH40		FAX38	HAP40		SPM30	DEX40		S590	ASP30	62 ~ 70
	其它		FAX31 FAX55 FAXG2	HAP10 HAP50 HAP72 HAP5R		SPM23 SPM60 SPMR8	DEX20 DEX60 DEX61 DEX-M1 DEX-M3		S690 S790 S390	ASP23 ASP60	

高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

	商品编码 Code	页 Pages	商品编码 Code	页 Pages	商品编码 Code	页 Pages	商品编码 Code	页 Pages
新商品	2AGE	E-10	AGELHV	E-44	AQDEXVF8D	A-134	COLSD	B-84
	2AGEL	E-21	AGES	B-28	AQDEXXOH5D	A-78	COLTD	B-133
	2AGEM	E-18	AGESS	B-24	AQDEXXOH10D	A-79	COSD	B-54
	2AGRE	E-46	AGESSL	B-30	AQDEXZ	A-64	COSDML	B-60
	2CE	D-18	AGHV	E-40	AQDEXZ3FR	A-76	COSET10	G-14
硬质合金钻头	2CEAL	D-61	AGLHV	E-42	AQDEXZ-HCD	A-81	COSET19	G-16
	2CER	D-54	AGPLSD	B-62	AQDEXZLS	A-73	COSP	G-8
	2DCE	D-71	AGPSD	B-45	AQDEXZOH3D	A-74	COTD	B-122
	2DLCHE	E-17	AGPSLSD	B-61	AQDEXZOH5D	A-75	COTDOH	B-151
	2DLCM	D-60	AGREL	E-38	AQDEXZOHPLT	A-48	CU2	D-73
高速钢钻头	2DLCM-R	D-67	AGREM	E-36	AQDEXZ-R	A-70	CU4	D-74
	2DLCR	D-70	AGRERS	E-34	AQDEXZR	A-71	CUB2	D-74
	2DLCSC	D-61	AGRERS-R	E-45	AQDEXZ-RCD	A-81	CURIB	D-82
	2DSE	D-70	AGRES	E-34	AQDEXZS	A-62	CURIBR	D-85
	2GE	E-12	AGREU-R	E-46	AQDEXZ-SCD	A-81	DCD	A-125
丝锥	2GEOLSR	D-55	AGREX/AGREU	E-39	AQDFC	A-85	DCDCF	A-124
	2GEOR	D-52	AGREX-R	E-45	AQDH	A-84	DCECFF	D-71
	2GS	D-15	AGSTD	B-41	AQMD	A-82	DCRE	D-72
	2GSR	D-51	AGSTDLS	B-42	AQRVDM5D	10	DDFD	A-127
	2MGE	E-18	AGSUSR	B-37	AQRVDM10D	12	DGE13X	G-18
硬质合金立铣刀	2MMR	D-55	AGUSS	B-31	AQRVDOH3D	24	DIYSET5	G-15
	2MNE	D-18	APET	D-93,D-94	AQRVDOH5D	25	DIYSET7	G-15
	2MNER	D-54	APMT	D-93,D-94	AQRVDOH8D	26	DIYSET13	G-15
	2MSGE	E-17	AQD3F	A-57	AQRVDR	20	DLCDL-4D	A-101
	2NAC	E-15	AQDED3F	A-61	AQRVDS	15	DLCDLM-4D	A-98
高速钢立铣刀	2PLXS	D-16	AQDEX3FH	A-56	AQRVDSL	22	DLCDOH3D	A-108
	2PLXSR	D-53	AQDEX3FR	A-53	BFHV	F-7	DLCDOH5D	A-109
	2RSE	E-20	AQDEXDLM-4D	A-27	BFQV	F-7	DLCDOH8D	A-110
	2SE	E-19	AQDEXE	A-18	BFV	F-7	DLCDOH10D	A-111
	2SGE	E-8	AQDEX-HCD	A-80	BFVW	F-7	DLCDOH15D	A-112
切削工具	3GE	E-23	AQDEXOH3D	A-32	BGHV	F-7	DLCDOH20D	A-113
	3NAC	E-24	AQDEXOH3F3D	A-49	BGQV	F-7	DLCDOH25D	A-114
	4AGE	E-25	AQDEXOH3F5D	A-51	BGV	F-7	DLCDOH30D	A-114
	4AGEL	E-31	AQDEXOH3F10D	A-52	BGWV	F-7	DLCDOH35D	A-115
	4CE	D-27	AQDEXOH5D	A-35	BH	F-12	DLCDOH40D	A-115
套装商品 其它	4GE	E-26	AQDEXOH8D	A-38	BHP25024	G-17	DLCDOH45D	A-116
	4GEOLS	D-37	AQDEXOH10D	A-40	BM	F-10	DLCDOH50D	A-116
	4GEOLS-R	D-48	AQDEXOH15D	A-41	BNBP	D-58	DLCDOHPLT	A-117
	4GEOM	D-33	AQDEXOH20D	A-42	BP	F-6	DLCDR	A-97
	4GS	D-26	AQDEXOH25D	A-43	PCPN	F-8	DLCDZ3F	A-123
精密工具	4MNE	D-36	AQDEXOH30D	A-44	BPH	F-8	DLCDZLS	A-121
	4NAC	E-27	AQDEXOH35D	A-45	BPHV	F-6	DLCDZOH5D	A-122
	4PLXS	D-29	AQDEXOH40D	A-45	BPK	F-9	DLCDZR	A-118
	4RSE	E-30	AQDEXOH45D	A-46	BPQ	F-6	DLCCFFDOH4D	A-104
	4SE	E-29	AQDEXOH50D	A-46	BPQV	F-6	DLCCFFDOH8D	A-106
技术资料 索引	4SGE	E-24	AQDEXOHPLT	A-47	BPV	F-6	DLCCFFDR	A-102
	4XS GEO	D-28	AQDEXR	A-14	BPW	F-6	DLCHD	B-99
	4XS GEO-R	D-44	AQDEX-RCD	A-80	BPWT	F-9	DLCHDSL	B-101
	5MSPA	G-7	AQDEXRN	A-31	BPWV	F-6	DLCMD	A-96
	5SDXJP	G-5	AQDEXS	A-12	BXCN	F-8	DLCPLSD	B-107
	6LSDP	G-12	AQDEX-SCD	A-80	BXG	F-7	DLCSLTLS	D-62
	6SD3P	G-11	AQDEXSL	A-16	BXH	F-8	DLCVL4-2.5D	D-64
	6SDP	G-11	AQDEXSN	A-30	BXHV	F-7	DLCVL4-4D	D-65
	6SDPS	G-10	AQDEXST	A-77	BXMD	F-9	DLCVL4-5D	D-65
	6SDSP	G-13	AQDEXVF1.5D	A-128	BXQV	F-7	DLCVL4-R-2.5D	D-68
	6SUSSDP	G-12	AQDEXVF3D	A-130	BXV	F-7	DLCVL4-R-4D	D-68
	AC	F-10	AQDEXVF5D	A-132	BXWV	F-7	DLCVL6-2.5D	D-66

商品编码 Code	页 Pages	商品编码 Code	页 Pages	商品编码 Code	页 Pages	商品编码 Code	页 Pages
DLCVL6-R-2.5D	D-69	GSXVL4-R-4D	D-46	NWEX2000E/EL	D-88	SGSP-1.5P	C-8
DLCVLLS4-1.5D	D-66	GSXVL4T-2.5D	D-30	NWEX2000F	D-89	SGSPL	C-9
DLCVLLS4-R-1.5D	D-69	GSXVL4T-4D	D-34	NWEX3000E/ES/EL/E-C/ES-C	D-90	SGSP-T	C-11
DLCVLSLT3-2.5D	D-63	GSXVL4T-R-2.5D	D-45	NWEX3000F/R NWEXF3000R	D-91	SGSS	B-43
DLCVLSLT3-R-2.5D	D-67	GSXVL4T-R-4D	D-46	OVM	D-56	SGTDK	B-116
DLCVLSLTLS3-1.5D	D-64	GSXVL4XT-2D	D-27	PB	F-11	SHP25018	G-17
EHT	C-39	GSXVL4XT-4D	D-35	PF2D	A-20	SHP25024	G-17
ELHV	E-44	GSXVL4XT-R-2D	D-44	PF4D	A-24	SHP25032	G-17
ESP	C-38	GSXVL4XT-R-4D	D-47	PLOH3D	A-90	SL2DLCSC	D-62
GCOSD	B-49	GSXVL6-2.5D	D-38	PLOH5D	A-92	SL2GE	E-22
GCOSDML	B-59	GSXVL6-R-2.5D	D-49	PLOH7D	A-94	SL2SE	E-22
GEOSLT	D-23	GSXVL6T-2.5D	D-38	PMKS	F-9	SL2SGE	E-21
GHKEY/GKKEY/GLKEY	E-14	GSXVL6T-R-2.5D	D-49	RCD	B-115	SL4GE	E-31
GLD	B-74	GSXVLH6-2.5D	D-39	RE	E-47	SL4GEO	D-35
GLSD	B-65	GSXVLLS4-1.5D	D-36	RGALSD	B-106	SL4SE	E-32
GLTD	B-130	GSXVLLS4-R-1.5D	D-47	RGASD	B-103	SL4SGE	E-30
GLTDOH	B-152	GSXVLLS4T-1.5D	D-37	RSL2SE	E-23	SLDR	B-51
GNLSD	B-69	GSXVLLS4T-R-1.5D	D-48	RSL4SE	E-32	SLHV	E-43
GNLTD	B-148	GSXVLR4-2.5D	D-41	RVM2G-1.5D	30	SLXSMH	D-40
GOH	B-96	GSXVLSLT3-2.5D	D-24	RVM2G-2.5D	31	SNOS	B-114
GOHL	B-98	GSXVLSLT3-R-2.5D	D-43	RVM2S-2.5D	32	SRE	E-35
GS4-R	D-43	GTD	B-119	RVM4G-1.5D	30	STPO	C-37
GSBH	D-57	GTD0H	B-150	RVM4G-2.5D	31	STSP	C-36
GSBNH2	D-78	GTS	B-117	RVM4G-4D	33	TD	B-125
GSD	B-48	GTTD	B-129	RVM4S-2.5D	32	TFL	C-42
GSDP	G-9	HCD	B-115	RVMSUS4G-2.5D	33	TFLL	C-43
GSDSET10	G-14	HH	F-12	SCD	B-115	TFS	C-41
GSH	D-39	HHP25024	G-17	SD	B-55	TFST	C-44
GSH-R	D-50	HT	C-35	SDP	G-6	TFSTL	C-45
GSHV	D-40	HV	E-41	SDXJP	G-4	TH	F-12
GSN2	D-75	KLA	B-110	SET10	G-14	THX25024	G-17
GSN4	D-77	KLE	B-89	SET19	G-16	TTD	B-129
GSRE	D-42	KSA	B-105	SET25	G-16	TVF	A-136
GSRE-R	D-50	LASD	B-109	SET50	G-16	TVFDLC	A-138
GSS	B-46	LRE	E-38	SGELHV	E-43	TVFZ	A-137
GSSLT	D-23	LSD	B-76	SGES	B-21	TVFZDLC	A-139
GSX2C-1.5D	D-14	LSDP	G-7	SGESR	B-14	XSRE	D-42
GSX2C-2.5D	D-19	LT	B-134	SGESS	B-8	XSWBMF	D-96
GSX2C-2D	D-14	MCD	B-52	SGEZ	B-23	XSWBMR	D-95
GSX2C-3D	D-20	MQLPLD	A-86	SGFRE	E-33	XSWMM2000E/EL	D-93
GSX2C-4D	D-21	MRE	E-37	SGFREL	E-37	XSWMM3000E/EL	D-94
GSX2P-2.5D	D-20	NAXET	D-89,D-91	SGFREM	E-35	YKL	B-87
GSX3C-1.5D	D-21	NAXMT	D-89,D-91	SGFRERS	E-33	YKS	B-58
GSX3C-2D	D-22	NBNES1/NBNESL1	D-59	SGFREX/SGFREU	E-39	ZNMT	D-95
GSX4C-1.5D	D-25	NBNES2/NBNESL2	D-59	SGFRR	E-47	ZPGU	D-96
GSX4C-1D	D-25	NLSD	B-86	SGHV	E-40	ZPO	C-24
GSX4C-2.5D	D-31	NLTD	B-149	SGLHV	E-42	ZPOL	C-26
GSX4C-2D	D-26	NOS	B-112	SGLREM	E-36	ZPO-SUS	C-28
GSX4C-3D	D-32	NOSP	G-10	SGOH	B-94	ZSP	C-16
GSX4C-4D	D-34	NPO	C-32	SGOH3D	B-90	ZSPL	C-18
GSX4P-2.5D	D-32	NPOL	C-34	SGOH5D	B-91	ZSP-LS	C-20
GSXB	D-51	NSP	C-29	SGOH7D	B-92	ZSP-SUS	C-21
GSXRE-2.5D	D-41	NSPL	C-31	SGOH9D	B-93	ZSP-T	C-22
GSXSLT-1.5D	D-22	NWDX2D	A-140	SGPO	C-12	ZSP-T-HL	C-23
GSXVL4-2.5D	D-30	NWDX3D	A-141	SGPOL	C-14	ZTF	C-40
GSXVL4-4D	D-33	NWDX4D	A-142	SGSD	B-44		
GSXVL4-R-2.5D	D-45	NWDXT	A-143	SGSP	C-6		

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

	品名 Product Name	页 Pages	品名 Product Name	页 Pages
新商品	AG-ES Drills	B-28	AQUA Drills EX Oil-Hole 3 Flutes 10D	A-52
	AG-ES Drills Semi-long	B-30	AQUA Drills EX Oil-Hole 5D	A-35
	AG-ESS Drills	B-24	AQUA Drills EX Oil-Hole 8D	A-38
	AG-mill Ball	E-46	AQUA Drills EX Oil-Hole 10D	A-40
	AG-mill Four Flutes	E-25	AQUA Drills EX Oil-Hole 15D	A-41
硬质合金钻头	AG-mill Four Flutes Long	E-31	AQUA Drills EX Oil-Hole 20D	A-42
	AG-mill HEAVY	E-40	AQUA Drills EX Oil-Hole 25D	A-43
	AG-mill HEAVY Extra Long	E-44	AQUA Drills EX Oil-Hole 30D	A-44
	AG-mill HEAVY Long	E-42	AQUA Drills EX Oil-Hole 35D	A-45
	AG-mill Roughing Long	E-38	AQUA Drills EX Oil-Hole 40D	A-45
高速钢钻头	AG-mill Roughing Long Shank Radius SLX Type	E-46	AQUA Drills EX Oil-Hole 45D	A-46
	AG-mill Roughing Long Shank Radius SX Type	E-45	AQUA Drills EX Oil-Hole 50D	A-46
	AG-mill Roughing Long Shank SX Type/SLX Type	E-39	AQUA Drills EX Oil-Hole Cross for cast metal 5D	A-78
	AG-mill Roughing Medium	E-36	AQUA Drills EX Oil-Hole Cross for cast metal 10D	A-79
	AG-mill Roughing Radius	E-45	AQUA Drills EX Oil-Hole Pilot	A-47
丝锥	AG-mill Roughing Regular Length Short	E-34	AQUA Drills EX Power Feed 2D	A-20
	AG-mill Roughing Short	E-34	AQUA Drills EX Power Feed 4D	A-24
	AG-mill Two Flutes	E-10	AQUA Drills EX Regular	A-14
	AG-mill Two Flutes Long	E-21	AQUA Drills EX Semi-long	A-16
	AG-mill Two Flutes Medium	E-18	AQUA Drills EX Starting	A-77
硬质合金立铣刀	AG Power Drills	B-45	AQUA Drills EX Stub	A-12
	AG Power Long Drills	B-62	AQUA Drills EX Stub for Titanium Alloy and Nickel Alloy	A-30
	AG Power Semi-long Drills	B-61	AQUA Drills EX VF 1.5D	A-128
	AG Starting Drills	B-41	AQUA Drills EX VF 3D	A-130
	AG Starting Drills Long Shank	B-42	AQUA Drills EX VF 5D	A-132
高速钢立铣刀	AG-SUS Drills Regular	B-37	AQUA Drills EX VF 8D	A-134
	AG-SUS Drills Short	B-31	AQUA Drills FC	A-85
	ANCHOR V Ball	D-54	AQUA Drills Hard	A-84
	ANCHOR V for Aluminum	D-61	AQUA Drills NWDX 2D	A-140
	ANCHOR V Four Flutes	D-27	AQUA Drills NWDX 3D	A-141
切削工具	ANCHOR V Two Flutes	D-18	AQUA Drills NWDX 4D	A-142
	AQUA Drills 3 Flutes	A-57	AQUA Micro Drills	A-82
	AQUA Drills 3 Flutes with end cutting teeth	A-61	AquaREVO Drills Micro 5D	10
	AQUA Drills EX 3 Flutes Hard	A-56	AquaREVO Drills Micro 10D	12
	AQUA Drills EX 3 Flutes Regular	A-53	AquaREVO Drills Oil-Hole 3D	24
套装商品 其它	AQUA Drills EX Counter bore for hexagon socket head bolts	A-80	AquaREVO Drills Oil-Hole 5D	25
	AQUA Drills EX Extension	A-18	AquaREVO Drills Oil-Hole 8D	26
	AQUA Drills EX FLAT	A-64	AquaREVO Drills Regular	20
	AQUA Drills EX FLAT 3 Flutes Regular	A-76	AquaREVO Drills Semi-long	22
	AQUA Drills EX FLAT Counter bore for hexagon socket head bolts	A-81	AquaREVO Drills Stub	15
精密工具	AQUA Drills EX FLAT Long Shank	A-73	AquaREVO Mills for Stainless Steel Four Flutes 2.5D G type	33
	AQUA Drills EX FLAT Machine screw counter bore	A-81	AquaREVO Mills Four Flutes 1.5D G type	30
	AQUA Drills EX FLAT Machine screw counter sink	A-81	AquaREVO Mills Four Flutes 2.5D G type	31
	AQUA Drills EX FLAT Oil-Hole 3D	A-74	AquaREVO Mills Four Flutes 2.5D S type	32
	AQUA Drills EX FLAT Oil-Hole 5D	A-75	AquaREVO Mills Four Flutes 4D G type	33
技术资料 索引	AQUA Drills EX FLAT Oil-Hole Pilot	A-48	AquaREVO Mills Two Flutes 1.5D G type	30
	AQUA Drills EX FLAT Radius	A-70	AquaREVO Mills Two Flutes 2.5D G type	31
	AQUA Drills EX FLAT Regular	A-71	AquaREVO Mills Two Flutes 2.5D S type	32
	AQUA Drills EX FLAT Short	A-62	Ball End Mills for Copper	D-74
	AQUA Drills EX for Titanium Alloy and Nickel Alloy	A-31	Ball End Mills Two Flutes	E-47
	AQUA Drills EX Machine screw counter bore	A-80	Bi-Metal	F-11
	AQUA Drills EX Machine screw counter sink	A-80	BI-METAL Hand Hack Saw Blades PM	F-12
	AQUA Drills EX Micro Twist Angle Decrescendo Type	A-27	BI-METAL Hand Saw Blades for Steel and Stainless Steel (24TPI) 2per package	G-17
	AQUA Drills EX Oil-Hole 3D	A-32	Bi-Metal MV	F-10
	AQUA Drills EX Oil-Hole 3 Flutes 3D	A-49	Bi-Metal PM	F-10
	AQUA Drills EX Oil-Hole 3 Flutes 5D	A-51		

品名 Product Name	页 Pages
Carbide Mini-Ball End Mills Two Flutes	D-54
Carbide Mini-Square End Mills Four Flutes	D-36
Carbide Mini-Square End Mills Two Flutes	D-18
CBN Helical Finish Master 1 Flute/1 Flute Long	D-59
CBN Helical Finish Master 2 Flutes/2 Flutes Long	D-59
CBN Mold Finish Master	D-58
Coated Straight Shank Drills for Aluminum	B-103
Coated Straight Shank Long Drills for Aluminum	B-106
Cobalt Noss Drills for Stainless Steel	B-114
Counter bore Drills for hexagon socket head bolts	B-115
Crystal Diamond Coat Drills	A-124
Crystal Diamond Coat Fiber Mill	D-71
Diamond Coating Ball End Mills	D-72
Diamond Coating Drills	A-125
Diamond Coating End Mills Two Flutes	D-71
Diamond Coating FF Drills	A-127
Diamond Coating Stub End Mills	D-70
DLC Burnishing Drills Oil-Hole 4D	A-104
DLC Burnishing Drills Oil-Hole 8D	A-106
DLC Burnishing Drills Regular	A-102
DLC Drills FLAT 3 Flutes	A-123
DLC Drills FLAT Long Shank	A-121
DLC Drills FLAT Oil-Hole 5D	A-122
DLC Drills FLAT Regular	A-118
DLC Drills Micro Twist Angle Decrescendo Type	A-98
DLC Drills Oil-Hole 3D	A-108
DLC Drills Oil-Hole 5D	A-109
DLC Drills Oil-Hole 8D	A-110
DLC Drills Oil-Hole 10D	A-111
DLC Drills Oil-Hole 15D	A-112
DLC Drills Oil-Hole 20D	A-113
DLC Drills Oil-Hole 25D	A-114
DLC Drills Oil-Hole 30D	A-114
DLC Drills Oil-Hole 35D	A-115
DLC Drills Oil-Hole 40D	A-115
DLC Drills Oil-Hole 45D	A-116
DLC Drills Oil-Hole 50D	A-116
DLC Drills Oil-Hole Pilot	A-117
DLC Drills Regular	A-97
DLC Drills Twist Angle Decrescendo Type	A-101
DLC-HSS Drills	B-99
DLC-HSS Drills Semi-long	B-101
DLC-HSS mill	E-17
DLC Micro Drills	A-96
DLC-mill Ball	D-70
DLC-mill for Aluminum	D-60
DLC-mill Long Sharp Corner	D-62
DLC-mill Radius	D-67
DLC-mill Sharp Corner	D-61
DLC-mill SLOT Long Shank	D-62
DLC MILL VL 2.5D	D-64
DLC MILL VL 4D	D-65
DLC MILL VL 5D	D-65
DLC MILL VL Long Shank 1.5D	D-66
DLC MILL VL Long Shank Radius 1.5D	D-69
DLC MILL VL Multi-Flutes 2.5D	D-66

品名 Product Name	页 Pages
DLC MILL VL Multi-Flutes Radius 2.5D	D-69
DLC MILL VL Radius 2.5D	D-68
DLC MILL VL Radius 4D	D-68
DLC MILL VL SLOT 2.5D	D-63
DLC MILL VL SLOT Long Shank 1.5D	D-64
DLC MILL VL SLOT Radius 2.5D	D-67
DLC Power Long Drills	B-107
Drill Grinder Plain type KANTA KUN	G-18
Drills for Power Drill (5 Sizes Pack)	G-15
Drills for Power Drill (7 Sizes Pack)	G-15
Drills for Power Drill (13 Sizes Pack)	G-15
Drills for Stainless Steel	G-8
Drills for Stainless Steel (10 Sizes Pack)	G-14
Drills for Stainless Steel (19 Sizes Pack)	G-16
Drills for Steel	G-6
Drills for Steel 5 per package	G-7
Drills for Steel (10 Sizes Pack)	G-14
Drills for Steel (19 Sizes Pack)	G-16
Drills for Steel (25 Sizes Pack)	G-16
Drills for Steel (50 Sizes Pack)	G-16
Drills for Steel (thinning)	G-4
Drills for Steel (thinning) 5 per package	G-5
EXCEL Hand Tap	C-39
EXCEL Spiral Tap	C-38
For AQUA Drills EX VF DLC Insert	A-138
For AQUA Drills EX VF DLC Insert FLAT Type	A-139
For AQUA Drills EX VF Insert	A-136
For AQUA Drills EX VF Insert FLAT Type	A-137
For AQUA Drills NWDX Insert	A-143
Forming Racks	H-18
Four Flutes End Mills for Copper	D-74
G Coated Drills	G-9
G Coated Drills (10 Sizes Pack)	G-14
Gear Shaper Cutters	H-15
G End Mills for Keyway Two Flutes	E-14
G End Mills Long Four Flutes	E-31
G End Mills Long Two Flutes	E-22
G End Mills Medium Two Flutes	E-18
G End Mills Standard Four Flutes	E-26
G End Mills Standard Three Flutes	E-23
G End Mills Standard Two Flutes	E-12
G Micro-Long Drills	B-59
G Non-Step Straight Shank Long Drills	B-65
G Non-Step Straight Shank Long Drills with Longer Flute	B-69
G Non-Step Taper Shank Long Drills	B-148
G Oil-Hole Drills	B-96
G Oil-Hole Long Drills	B-98
G Short Drills	B-46
GS MILL Ball	D-51
GS MILL Four Flutes	D-26
GS MILL Hard	D-39
GS MILL Hard Ball	D-57
GS MILL Hard Radius	D-50
GS MILL HEAVY	D-40
GS MILL Long Neck Four Flutes	D-77
GS MILL Long Neck Hard Ball	D-78

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

	品名 Product Name	页 Pages	品名 Product Name	页 Pages
新商品	GS MILL Long Neck Two Flutes	D-75	G Taper Shank Standard Drills	B-119
	GS MILL Radius	D-43	Hand Hack Saw Blades	F-12
	GS MILL Roughing	D-42	Hand Saw Blades for Nonferrous Metals (18TPI) 2 per package	G-17
	GS MILL Roughing Radius	D-50	Hand Saw Blades for Steel (24TPI) 2 per package	G-17
	GS MILL SLOT	D-23	Hand Saw Blades for Thin Steel Plates and Tubing (32TPI) 2 per package	G-17
硬质合金钻头	GS MILL Two Flutes	D-15	Hand Saw Blades with grip for Steel (24TPI) 2per package	G-17
	G Standard Drills	B-48	Hand Tap	C-35
	G Straight Shank Cobalt Drills	B-49	Hard Gear Honing	H-19
	G Straight Shank Long Drills	B-74	HEAVY End Mills	E-41
	GSX MILL Ball	D-51	HEAVY End Mills Extra Long	E-44
高速钢钻头	GSX MILL Four Flutes 1.5D	D-25	HEAVY End Mills Long	E-43
	GSX MILL Four Flutes 1D	D-25	Hexagonal Shank Drills for Stainless Steel	G-12
	GSX MILL Four Flutes 2.5D	D-31	Hexagonal Shank Drills for Steel	G-11
	GSX MILL Four Flutes 2.5D P Type	D-32	Hexagonal Shank Drills for Steel 3 per package	G-11
	GSX MILL Four Flutes 2D	D-26	Hexagonal Shank Short Drills for Steel	G-10
丝锥	GSX MILL Four Flutes 3D	D-32	Hobs	H-13
	GSX MILL Four Flutes 4D	D-34	HSS Hand Hack Saw Blades	F-12
	GSX MILL Roughing 2.5D	D-41	HSS Hand Saw Blades for Steel and Stainless Steel (24TPI) 2per package	G-17
	GSX MILL SLOT 1.5D	D-22	Hyper Z Low Spiral Tap	C-20
	GSX MILL Three Flutes 1.5D	D-21	Hyper Z Point Tap	C-24
硬质合金立铣刀	GSX MILL Three Flutes 2D	D-22	Hyper Z Point Tap for Stainless Steel	C-28
	GSX MILL Two Flutes 1.5D	D-14	Hyper Z Point Tap Long Shank	C-26
	GSX MILL Two Flutes 2.5D	D-19	Hyper Z Spiral Tap	C-16
	GSX MILL Two Flutes 2.5D P Type	D-20	Hyper Z Spiral Tap for Stainless Steel	C-21
	GSX MILL Two Flutes 2D	D-14	Hyper Z Spiral Tap for Titanium Alloy	C-22
高速钢立铣刀	GSX MILL Two Flutes 3D	D-20	Hyper Z Spiral Tap for Titanium Alloy for helisert	C-23
	GSX MILL Two Flutes 4D	D-21	Hyper Z Spiral Tap Long Shank	C-18
	GSX MILL VL 2.5D	D-30	Internal Broaches	H-20
	GSX MILL VL 2.5D for Ti • SUS	D-30	Long Drills for Steel	G-7
	GSX MILL VL 2D for X-Treme chuck for Ti • SUS	D-27	Long Neck Ball for Copper	D-85
切削工具	GSX MILL VL 4D	D-33	Long Neck Two Flutes for Copper	D-82
	GSX MILL VL 4D for Ti • SUS	D-34	Long Reach Hexagonal Shank Drills for Steel	G-12
	GSX MILL VL 4D for X-Treme chuck for Ti • SUS	D-35	Machine screw counter bore Drills	B-115
	GSX MILL VL Hard 2.5D	D-39	Machine screw counter sink Drills	B-115
	GSX MILL VL Long Shank 1.5D	D-36	MC Drills	B-52
套装商品 其它	GSX MILL VL Long Shank 1.5D for Ti • SUS	D-37	Micro-Long Drills	B-60
	GSX MILL VL Long Shank Radius 1.5D	D-47	Mold Meister Ball	D-55
	GSX MILL VL Long Shank Radius 1.5D for Ti • SUS	D-48	MQL Power Long Drills	A-86
	GSX MILL VL Multi-Flutes 2.5D	D-38	NATAC End Mills Four Flutes	E-27
	GSX MILL VL Multi-Flutes 2.5D for Ti • SUS	D-38	NATAC End Mills Three Flutes	E-24
精密工具	GSX MILL VL Multi-Flutes Radius 2.5D	D-49	NATAC End Mills Two Flutes	E-15
	GSX MILL VL Multi-Flutes Radius 2.5D for Ti • SUS	D-49	Non-Step Straight Shank Long Drills	B-86
	GSX MILL VL Radius 2.5D	D-45	Non-Step Taper Shank Long Drills	B-149
	GSX MILL VL Radius 2.5D for Ti • SUS	D-45	Noss Drills	B-112
	GSX MILL VL Radius 2D for X-Treme chuck for Ti • SUS	D-44	Noss Drills	G-10
技术资料 索引	GSX MILL VL Radius 4D	D-46	N Point Tap	C-32
	GSX MILL VL Radius 4D for Ti • SUS	D-46	N Point Tap Long Shank	C-34
	GSX MILL VL Radius 4D for X-Treme chuck for Ti • SUS	D-47	N Spiral Tap	C-29
	GSX MILL VL Roughing 2.5D	D-41	N Spiral Tap Long Shank	C-31
	GSX MILL VL SLOT 2.5D	D-24	Other Types of Gear Cutting Tools	H-19
	GSX MILL VL SLOT Radius 2.5D	D-43	Oval mills	D-56
	G Taper Shank Drills for Iron Frame	B-129	Parabolic Flute Drills Extra Long	B-89
	G Taper Shank Drills with Oil-Hole	B-150	Parabolic Flute Drills for Aluminum Long	B-110
	G Taper Shank Long Drills	B-130	Parabolic Flute Drills for Aluminum Regular	B-105
	G Taper Shank Long Drills with Oil-Hole	B-152		
	G Taper Shank Short Drills	B-117		

品名 Product Name	页 Pages
Parabolic Flute Drills Long	B-87
Parabolic Flute Drills Regular	B-58
PLATINA Oil-Hole Drills (3D)	A-90
PLATINA Oil-Hole Drills (5D)	A-92
PLATINA Oil-Hole Drills (7D)	A-94
Roughing End Mills Long	E-38
Roughing End Mills Medium	E-37
Roughing End Mills Short	E-35
SG-ES Drills	B-21
SG-ESR Drills	B-14
SG-ESS Drills	B-8
SG-FAX End Mills Four Flutes	E-24
SG-FAX End Mills Long Four Flutes	E-30
SG-FAX End Mills Long Two Flutes	E-21
SG-FAX End Mills Medium Two Flutes	E-17
SG-FAX End Mills Two Flutes	E-8
SG-FAX HEAVY End Mills	E-40
SG-FAX HEAVY End Mills Extra Long	E-43
SG-FAX HEAVY End Mills Long	E-42
SG-FAX Oil-Hole Drills	B-94
SG-FAX Roughing Ball End Mills Fine Pitch	E-47
SG-FAX Roughing End Mills Large Pitch Medium	E-36
SG-FAX Roughing End Mills Long	E-37
SG-FAX Roughing End Mills Long Shank SX Type/SLX Type	E-39
SG-FAX Roughing End Mills Medium With Neck	E-35
SG-FAX Roughing End Mills Regular Length Short	E-33
SG-FAX Roughing End Mills Short With Neck	E-33
SG-FAX Taper Shank Drills	B-116
SG FLAT Drills	B-23
SG Oil-Hole Straight Shank Drills (3D)	B-90
SG Oil-Hole Straight Shank Drills (5D)	B-91
SG Oil-Hole Straight Shank Drills (7D)	B-92
SG Oil-Hole Straight Shank Drills (9D)	B-93
SG Point Tap	C-12
SG Point Tap Long Shank	C-14
SG Short Drills	B-43
SG Spiral Tap	C-6
SG Spiral Tap for Difficult-to-Cut Material and Titanium Alloy	C-11
SG Spiral Tap Long Shank	C-9
SG Spiral Tap Short Chamfer	C-8
SG Straight Shank Drills	B-44
Shaving Cutters	H-15
Side Lock Straight Shank Drills Larger Shank	B-51
Spurt Drill, with Hexagonal Shank, is for thin sheets	G-13
ST Point Tap	C-37
Straight Shank Cobalt Drills	B-54
Straight Shank Cobalt Long Drills	B-84
Straight Shank Drills	B-55
Straight Shank Long Drills	B-76
Straight Shank Long Drills for Aluminum	B-109
ST Spiral Tap	C-36
SUPER HARD End Mills Four Flutes	E-29
SUPER HARD End Mills Long Four Flutes	E-32
SUPER HARD End Mills Long Two Flutes	E-22
SUPER HARD End Mills Regular Shank Four Flutes	E-30
SUPER HARD End Mills Regular Shank Long Four Flutes	E-32

品名 Product Name	页 Pages
SUPER HARD End Mills Regular Shank Long Two Flutes	E-23
SUPER HARD End Mills Regular Shank Two Flutes	E-20
SUPER HARD End Mills Two Flutes	E-19
Surface Broaches	H-24
TAFLET for Steel	C-44
TAFLET-L	C-42
TAFLET-L Long Shank	C-43
TAFLET Long Shank for Steel	C-45
TAFLET-S	C-41
Taper Shank Cobalt Drills	B-122
Taper Shank Cobalt Drills with Oil-Hole	B-151
Taper Shank Cobalt Long Drills	B-133
Taper Shank Drills	B-125
Taper Shank Drills for Iron Frame	B-129
Taper Shank Long Drills	B-134
TORNADO FAX	F-7
TORNADO G-FAX	F-7
TORNADO G SWORD	F-7
TORNADO PM	F-6
TORNADO PM CNC	F-8
TORNADO PM-H	F-8
TORNADO PM-K	F-9
TORNADO PM-KS	F-9
TORNADO PM-KS-WT	F-9
TORNADO PM-K-WT	F-9
TORNADO PM-WT	F-9
TORNADO SWORD	F-7
TORNADO SWORD CNC	F-8
TORNADO SWORD-H	F-8
TORNADO SWORD-MD	F-9
Two Flutes End Mills for Copper	D-73
WAVY MILL NWEX2000E/EL	D-88
WAVY MILL NWEX2000F	D-89
WAVY MILL NWEX3000E/ES/EL/E-C/ES-C	D-90
WAVY MILL NWEX3000F/R WAVY MILL NWEXF3000R	D-91
X's-mill Ball	D-53
X's-mill Four Flutes	D-29
X's-mill Geo	D-28
X's-mill Geo Ball	D-52
X's-mill Geo Ball Long Shank	D-55
X's-mill Geo Long	D-35
X's-mill Geo Long Shank	D-37
X's-mill Geo Medium	D-33
X's-mill Geo Radius	D-44
X's-mill Geo Radius Long Shank	D-48
X's-mill Geo SLOT	D-23
X's-mill Hard Long	D-40
X's-mill Roughing	D-42
X's-mill Two Flutes	D-16
X's-mill WAVY Ball	D-95
X's-mill WAVY Ball (WBMF)	D-96
X's-mill WAVY Multi 2000E/EL	D-93
X's-mill WAVY Multi 3000E/EL	D-94
ZT Forming Tap	C-40

新商品

硬质合金钻头

高速钢钻头

丝锥

硬质
合金立铣刀高速
钢立铣刀

切削工具

套装商品
其它

精密工具

技术资料
索引

	LIST No.	页 Pages	LIST No.	页 Pages	LIST No.	页 Pages	LIST No.	页 Pages	LIST No.	页 Pages
新商品	500	B-55	6532	B-109	7590P	B-91	9338	D-23	9608	A-38
	520P	B-48	6536	B-45	7592P	B-92	9340	D-52	9610	A-64
	544	B-99	6538	B-61	7594P	B-93	9342	D-55	9612	A-40
	550	B-76	6540P	B-62	7946	C-6	9346	D-37	9614	A-41
	574	B-112	6544	B-23	7948	C-9	9348	D-48	9616	A-42
硬质合金钻头	576	B-112	6546	B-28	7950	C-12	9350	D-33	9618	A-43
	578	B-112	6548	B-24	7952	C-14	9356	D-93,D-94	9620	A-44
	595	B-115	6550	B-86	7954	C-8	9358	D-56	9622	A-47
	597	B-115	6550P	B-65	7958	C-11	9360	D-70	9624	A-77
	598	B-115	6556P	B-98	7962	C-20	9378	D-61	9628	A-62
高速钢钻头	602	B-125	6558P	B-96	8800	C-40	9380	D-62	9702	32
	620P	B-119	6568P	B-46	9104	D-48	9382	D-15	9704	32
	644	B-129	6586	B-114	9106	D-47	9384	D-26	9706	31
	644P	B-129	6588	B-114	9108	D-49	9386	D-51	9708	31
	650	B-134	6594P	B-37	9110	D-49	9388	D-35	9714	30
丝锥	908	C-35	6596P	B-31	9112	D-37	9390	D-62	9716	30
	6202	E-30	6602	B-122	9114	D-36	9398	D-39	9720	33
	6204	E-20	6618P	B-117	9116	D-38	9400	D-96	9724	33
	6206	E-32	6620	B-51	9118	D-38	9408	D-55	9812	A-74
	6208	E-23	6650	B-149	9150	D-14	9410	D-82	9814	A-75
硬质合金立铣刀	6210	E-29	6850	C-16	9152	D-20	9412	D-85	9816	A-73
	6212	E-32	6852	C-24	9154	D-21	9414	D-75	9818	A-71
	6212P	E-31	6854	C-18	9156	D-21	9416	D-77	9820	A-51
	6230	E-19	6856	C-26	9158	D-22	9420	D-42	9822	A-130
	6230P	E-18	6858	C-21	9160	D-25	9422	D-57	9824	A-136
高速钢立铣刀	6232	E-22	6860	C-28	9162	D-32	9424	D-43	9826	A-49
	6232P	E-22	6866	C-36	9164	D-34	9426	D-58	9828	A-132
	6244P	E-14	6868	C-37	9166	D-22	9428	D-78	9830	A-70
	6270	E-24	6900	C-29	9168	D-14	9430	D-40	9834	A-52
	6270P	E-23	6902	C-31	9170	D-19	9432	D-23	9836	A-53
切削工具	6272	E-15	6906	C-32	9172	D-26	9434	D-50	9838	A-56
	6272P	E-12	6908	C-34	9174	D-31	9436	D-50	9840	A-137
	6274	E-27	6950	C-42	9176	D-41	9438	D-88,D-89	9844	A-134
	6274P	E-26	6952	C-41	9178	D-20		D-90,D-91	9846	A-128
	6290	E-47	6954	C-44	9180	D-25	9448	D-41	9850	A-20
套装商品 其它	6302	E-35	6970	C-43	9182	D-32	9450	D-18	9852	A-24
	6304	E-37	6974	C-45	9186	D-51	9452	D-27	9860	15
	6306	E-38	7300P	E-33	9188	D-30	9458	D-54	9862	20
	6366	E-41	7302P	E-35	9190	D-30	9470	D-16	9864	24
	6368	E-43	7304P	E-37	9192	D-45	9472	D-29	9866	25
精密工具	6402	E-40	7306P	E-39	9198	D-24	9514	A-140,A-141	9868	26
	6404	E-42	7308P	E-39	9236	C-39		A-142,A-143	9870	22
	6406	E-34	7310P	E-33	9238	C-38	9520	A-97	9878	10
	6420	E-46	7314P	E-36	9278	D-53	9524	A-96	9880	12
	6422	E-45	7320P	E-47	9288	D-40	9538	A-86		
技术资料 索引	6450	E-17	7366P	E-40	9292	D-54	9540	A-85		
	6484	E-34	7368P	E-42	9294	D-18	9542	A-61		
	6486	E-36	7464P	E-21	9296	D-36	9544	A-82		
	6488	E-38	7466P	E-30	9302	D-67	9546	A-57		
	6490	E-10	7468P	E-17	9318	D-39	9548	A-84		
	6492	E-18	7472P	E-8	9320	D-61	9580	A-90		
	6494	E-21	7474P	E-24	9322	D-28	9582	A-92		
	6496	E-25	7570P	B-21	9324	D-44	9584	A-94		
	6498	E-31	7572P	B-8	9326	D-93,D-94	9600	A-12		
	6502	B-41	7574	B-14	9328	D-95	9602	A-14		
	6504	B-42	7580P	B-94	9330	D-60	9604	A-32		
	6520	B-54	7588P	B-90	9336	D-93,D-94	9606	A-35		

废止品

废止品和相当品

种类 Model	废止品 Discontinued			相当品 Equivalent	
	商品编码 Code	LIST List	商品名 Product Name	商品编码 Code	页码 Page
硬质合金钻头	AQDS	9550	AQUA 钻头 短刃型	AQRVDS	15
	AQDR	9552	AQUA 钻头 标准型	AQRVDR	20
丝锥	GSP	7904P	G 螺旋槽丝锥	SGSP	C-6
	GSPL	7916P	G 长柄螺旋槽丝锥	SGSPL	C-9
	GSPS	7934P	G 不锈钢用螺旋槽丝锥	ZSP-SUS	C-21
	GGN	7912P	G 枪式丝锥	SGPO	C-12
	GGNL	7928P	G 长柄枪式丝锥	SGPOL	C-14
	GHT	7908P	G 用手丝锥	HT	C-35
	GHTL	7922P	G 长柄用手丝锥	—	—
	GOH	7900P	G 油孔丝锥	—	—
	TSP	6904	T 螺旋槽丝锥	STSP	C-36
	TSPS	6934	T 不锈钢螺旋槽丝锥	ZSP-SUS	C-21
	TGN	6912	T 枪式丝锥	STPO	C-37
	TGNS	6932	T 不锈钢枪式丝锥	ZPO-SUS	C-28

废止的刀片・零部件

AQWDS-3 /AQUA 钻头 WAVY 型 3D 用

AQWDS-5 /AQUA 钻头 WAVY 型 5D 用

●刀片 Inserts

LIST 9512

订货方式 刀片型号 材料

Fig. 1





Fig. 2



单位 (Unit) : mm

刀片型号 Code	材质 Material		适用钻杆直径 Applicable Holder	尺寸 Dimension(mm)			形状 Figure	库存 Stock
	钢用	铸铁用		φ	厚度 Thickness	圆弧半径 Corner Radius		
LPMX06T206S04N	AQ350	AQ310	14.0 ~ 15.0	6	2.8	0.6	Fig.1	●
LPMX07T208S04N	AQ350	AQ310	15.5 ~ 17.0	6.75		0.8		
LPMX080308S04N	AQ350	AQ310	17.5 ~ 20.0	7.6				
LPMX090308S04N	AQ350	AQ310	20.5 ~ 23.5	8.8				
XPMX11T308S04N	AQ350	AQ310	24.0 ~ 27.0	11.1	3.97	1.2	Fig.2	
XPMX13T308S04N	AQ350	AQ310	28.0 ~ 32.0	13				
XPMX150408S04N	AQ350	AQ310	33.0 ~ 37.0	15	4.76			
XPMX170412S04N	AQ350	AQ310	38.0 ~ 43.0	17				
XPMX200412S04N	AQ350	AQ310	44.0 ~ 50.0	19.5				

刀片 1 盒 10 片装。

●零部件 Parts

订货方式 商品编码

商品编码 Code	螺丝 Screw	螺丝扳手 Wrench	螺丝扳手 Wrench	适用钻杆直径 Diameter of applicable holder	库存 Stock
	BFTY02205	TRD07	—	14.0 ~ 15.0	●
	BFTY02206	TRD07	—	15.5 ~ 17.0	●
	BFTX02506N	TRD08	—	17.5 ~ 20.0	●
	BFTX02508	TRD08	—	20.5 ~ 27.0	●
	BFTX0309N	—	TRX10	28.0 ~ 32.0	●
	BFTX03584	—	TRX15	33.0 ~ 37.0	●
	BFTX0409N	—	TRX15	38.0 ~ 43.0	●
	BFTX0511N	—	TRX20	44.0 ~ 50.0	●


安全事项

为了您能安全使用工具，请务必阅读以下“安全事项”。

警告：请不要进行下述一类不合适的使用，否则有可能引起工具破损。




另外，请使用护罩、防护眼镜等，以便在万一出现破损时不至于受伤。



1

请不要在不合适的切削条件下使用。


请将产品目录中所记载的基准切削条件表内的参数作为新的加工工作开始时的大致标准。因切削而出现异常的振动或声响时，请调整切削条件。



4

要装在夹头上使用时，请妥善加以固定，以免出现松动或晃动。


如有松动或振动，使用中可能出现工具松脱飞出、破损的情况。请确认夹头上的安装状态后再使用。



2

请不要使用磨损严重、有缺口的工具。


连续地使用磨损严重、有缺口的工具，会引起破损。在装上工具之前请先确认工具的损伤状况。请在合适的时期更换工具或重新研磨。



5

请妥善固定住被削材，以免在加工中出现松动。

加工中如被削材出现松动，则有可能使工具破损。请在确认被削材已经完全固定之后再使用。




警告：请注意工具和切屑会致人受伤的危险性。



3

请不要进行反方向使用。


工具通常是在向右旋转的状态下进行使用。如为向左旋转，则会在包装上加以提示，故请予以确认。



1

请不要用裸手碰触切削刃口。


切削刃口十分锋利，裸手碰触有可能被割伤。要拿工具时，请戴上皮手套或手持刃口以外的部分。



2

请不要用裸手碰触切屑。

加工刚结束时的切屑非常热，有可能被烫伤。且锋利的切屑可能导致被割伤。切屑请务必在停止机械后，用皮手套或棒等处理。



3

请注意不要让飞散的切屑和缠绕的切屑接触到身体。

加工中，切屑会飞散开来或缠绕在工具上。请使用护罩、防护眼镜等。



4

旋转中请不要戴上手套操作。


若戴上手套操作，可能被卷入旋转的工具中，因此，旋转中请勿戴上手套。



5

请注意不要使身体或衣服碰触到旋转中的工具。


碰触到旋转中的工具可能导致受伤。另外，有可能发生衣服被卷入导致受伤的情况，因此，请勿穿着松垮的衣服。



6

移动较重的工具时，请使用链式葫芦等起吊器具。


一个人抬起重物有可能损伤腰肌。对重量超过 20kg 的工具，包装上会有“本品较重，请注意操作”的字样。



7

工具掉落时有可能砸伤脚，所以请穿上防护鞋进行操作。

在使用工具时，工具掉落下来会砸伤或挫伤脚部，所以请务必穿上防护鞋进行操作。




警告：请注意以下情况下时，设备和被削材可能受损。



1

干式切削时，请遮蔽加工机械，排除可燃物。


切削过程中产生的火花、破损导致的发热、高温的切屑，可能燃烧、引发火灾，因此必须实施防火对策。



2

为避免发生火灾，请在油温、流量合适的状态下使用切削油剂。


使用非水溶性切削油剂时，有可能因过热、火花等导致火灾发生。请在切削过程中确认油温、流量以及喷嘴切削油剂的出油状况。



Attentions on Safety

To use Small Tools for the safety, read this “Attentions on Safety” .


Warning : Don't do the following inappropriate use because tools are damaged. Use safety cover, protection glasses so that it does not hurt you when it is damaged.



1

Don't use tools in the inappropriate cutting condition.


Utilize the recommended cutting condition shown in the catalogs just as the general guide, when starting operation. It is necessary to adjust cutting condition when an unusual vibration, different sound occur by cutting.



4

Attach tools firmly to the holders to prevent shaking.


Insufficient retention of tools causes breakage. Confirm that tools are attached firmly to the holder.



2

Don't use tools with considerable wear or cracks.


Wear or cracks in the tools cause breakage. Be sure that there is no wear, no cracks before using tools.



5

Fix work materials firmly to the machine.

Insufficient retention of the work materials cause breakage of tools. Confirm that work material is fixed firmly.



Warning : Be careful because touching tools or chips cause injury.



3

Don't use tools by the reverse rotation.


Tools is usually used by the right rotation. Confirm attached indication of package in the case of the left rotation.



1

Don't touch cutting edges with your bare hand.


Touching sharp cutting edge with bare hands cause injury. Handle tools by wearing protective grooves or hold a part except the cutting edge.



2

Don't touch chips with your bare hand.


Chips are very hot immediately after processing and very sharp. Never touch them with your bare hands.



7

Wear safety shoes to avoid foot injury in case of tools falls.

Be sure of laceration or bruise by dropping tools, and wear safety shoes.



3

Prevent a body and clothes from touching scattered tips and coiled tips.

Chips sometimes scatter, or coil around tools. Use a cover and protection glasses.



Warning : Take proper fire-prevention measures because machines and work materials are lost by fire.



4

Don't wear the gloves during the rotation.


Don't wear gloves during rotation because it is involved in the tool.



1

Cover a machine, and exclude a combustible in the case of dry-cutting.


By sparks during cutting or heat by breakage, or hot chips, there is danger of fire. Take fire prevention measures.



5

Prevent a body and clothes from touching tools during the rotation.


Insured if you touch the rotating tools. Ensure that you wear tight clothes.



2

Use the cutting fluid at an appropriate temperature and flow rate to prevent a fire.


In the case of non-water soluble cutting fluid, there is a risk of fire due to overheating, sparks, etc. Check the cutting fluid temperature and flow rate at the time of cutting, and how the cutting fluid is discharged from the nozzle.



6

Handle heavy tools by using transport equipment or chain block.

It is likely to become lumbago when heavy tools are lifted alone. There is a attached warning sheet on the package of the heavy tools beyond 20kg.



再研磨和再涂层服务的介绍

业务介绍

- 钻头、立铣刀的再研磨、再涂层加工
- 钻头、立铣刀的额外加工和形状修正
- 剃齿刀的齿形再研磨加工
- 拉刀的前刀面再研磨加工
- 滚刀的前刀面再研磨加工
- 多种涂层加工
- 其他多种切削工具的再研磨加工

关于再研磨、再涂层的委托，请委托、咨询最近的 NACHI 代理店或各营业网点

再研磨和再涂层服务的流程

1. 验收产品 → 2. 再研磨 → 3. 清洗 → 4. 再涂层 → 5. 检查 → 6. 出库/包装/捆包发货



生产商规格的再涂层

在从材料到热处理、涂层等一体开发中总结的涂层技术。



- 以媲美新品的涂层再现产品性能。
- 可根据加工环境，提供涂层方案。

■ 涂层根据用途，对复合多层膜进行流程管理。

倒圆角工具用涂层一览表

涂层名称	成分	特性	用途	适用产品
REVO-D涂层	AlCrN系+AlTiN系	耐热冲击、耐磨损、耐溶着膜	高速切削用	AquaREVO钻头
REVO-M涂层	AlCrXN系	耐热冲击、耐磨损、耐溶着膜	高速切削用	AquaREVO铣刀
AQUA EX涂层	AlCrTiN系	耐热、润滑膜	超高速切削用	硬质合金钻头
AQUA涂层	铝系	耐热、润滑膜	高速切削用	硬质合金钻头
GSX涂层	AlCrN系	耐热、耐磨膜	高速、高硬度钢切削用	硬质合金立铣刀
GS涂层	铝系	耐热、耐磨膜	一般切削用	硬质合金立铣刀
AG涂层	AlCrN系	耐热、耐磨膜	一般切削用	高速钢钻头 高速钢立铣刀
SG涂层	TiCN系	耐磨膜	一般切削用	高速钢钻头
G涂层	TiN	耐磨膜	一般切削用	高速钢钻头 高速钢立铣刀
DLC涂层	DLC	耐热、润滑膜	Al合金切削用	高速钢/硬质合金钻头 高速钢/硬质合金立铣刀
金刚石	金刚石	耐溶着性、耐磨膜	石墨、铜铝、CFRP	硬质合金钻头 硬质合金立铣刀

以无滴方式管理涂层表面。

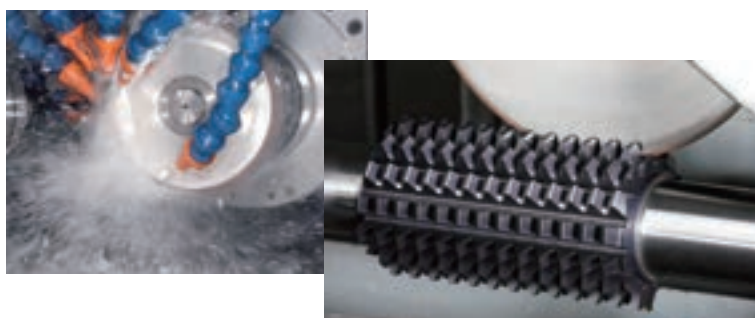


针对每一件工具的安心支持体制

1


对每一件再研磨品进行追踪

在每一件委托品上刻上管理编号。对工具的再研磨和再涂层履历进行彻底的管理。

涂层的多层叠加会显著降低涂层的粘性，弱化工具性能。通过保留、管理再涂层履历，实施品质稳定的涂层加工。



激光刻印



2

工具的诊断

根据各管理编号的再研磨诊断记录，诊断磨损和损伤，告知产品的异常和再研磨寿命。



再研磨诊断记录



剃齿刀的测定

3

技术服务的提供

与TES (Tool Engineering Service) 的员工合作，为顾客提供难削材的工具选定和切削条件的讨论、工具布局的提案、生产线诊断、试切割等服务。欢迎通过电话服务进行技术咨询。



生产线诊断



试切割

海外的工程管理、再研磨服务

再研磨、工程管理海外网点

中国

NJI(钻头、拉刀、滚刀、搓齿板)

SNS(带锯条焊接)

美国

NTA(拉刀、滚刀、剃齿刀、搓齿板、钻头、立铣刀)

墨西哥

NMEC(拉刀、滚刀)

马来西亚

NMS(拉刀)

巴西

NBR(滚刀)

印度

NPPL(搓齿板、带锯条焊接)

新加坡

NIP(钻头、立铣刀)

泰国

NTTC(带锯条焊接)

中国的再研磨服务

如要咨询海外网点的相关信息，请直接联系当地的海外网点或本公司的海外营业人员。



公司名称	那智不二越 (江苏) 精密机械有限公司 (NJI)
地址	江苏省张家港市经济技术开发区 (南区) 南园路39号
邮编	215618
电话	0512-3500-7616
传真	0512-3500-7615

NJI的工具事业的介绍

生产品种 : 搓齿板、钻头

再研磨服务 : 拉刀・滚刀 (再研磨)、搓齿板 (新品・再研磨)
钻头 (新品・再研磨)

Plants and Offices

Sales Companies

ASIA

不二越（中国）有限公司

NACHI-FUJIKOSHI(CHINA)CO.,LTD.

5F, Tower A, NECC, 1988 Zhuguang Rd. Qingpu District, Shanghai, CHINA (201702)

Tel: +86-(0)21-6915-2200

Fax: +86-(0)21-6915-5427

URL: <https://www.nachi.com.cn/>

北京分公司 BEIJING BRANCH

Room 1111, Kuntai International Mansion, Building O, Yi No.12 Chao Wai Street, Chao yang District, Beijing 100020, CHINA

Tel: +86-(0)10-5879-0181

Fax: +86-(0)10-5879-0182

重庆分公司 CHONGQING BRANCH

Room 405, Building D, CINDA INTERNATIONAL, No.67 middle Huangshan Avenue, Yubei District, 401120, Chongqing, CHINA

Tel: +86-(0)23-8816-1967

Fax: +86-(0)23-8816-1968

沈阳分公司 SHENYANG BRANCH

Room 304, Fanyuan Building, No.1 Yuebin Street, Shenhe District, Shenyang 110000, CHINA

Tel: +86-(0)24-3120-2252

Fax: +86-(0)24-2250-5316

广州分公司 GUANGZHOU BRANCH

2F Building A, Yixiang Science and Technology Park, No.72 Nanxiang Two Road, Science City, Hightech Industrial development Park, Guangzhou City, 510670, CHINA

Tel: +86-(0)20-8200-6163

武汉分公司 WUHAN BRANCH

Room 402, D Building, Donghe Center, Dongfeng 3rd. Road, Wuhan Economic and Technological Development Zone, Wuhan City 430056, Hubei Province, CHINA

Tel: +86-(0)27-8473-1747

宁波分公司 NINGBO BRANCH

Building G No.128, Qixin Road, Yinzhou District, Ningbo City, 315040, Zhejiang, CHINA

Tel: +86-(0)574-8813-5499

长春事务所 CHANGCHUN OFFICE

Room 1113, Block B, Productivity Building, No.5666, Silicon valley street, High-tech zone, Changchun City, Jilin Province, 130012, CHINA

Tel: +86-(0)431-8939-5595

Fax: +86-(0)431-8939-5595

NACHI TAIWAN CO., LTD.

2F, No.23, Lane 15, Sec. 6, Minquan E. Rd., Neihu Dist., Taipei City, CHINA

Tel: +886-(0)2-2792-1895

NACHI TECHNOLOGY (THAILAND) CO., LTD.

BANGKOK SALES OFFICE

Unit 23/109(A), Fl.24 Sorachai Bldg., Sukhumvit 63 Road(Ekamai), Klongtonnua, Wattana, Bangkok 10110, THAILAND

Tel: +66-2-714-0008

Fax: +66-2-714-0740

NACHI SINGAPORE PTE. LTD.

No.2 Joo Koon Way, Jurong Town, Singapore 628943, SINGAPORE

Tel: +65-65587393

Fax: +65-65587371

NACHI VIETNAM CO., LTD.

1502B, 15FL., IPH building, 241 Xuan Thuy st., Cau Giay dist, Ha Noi, VIETNAM

Tel: +84-24-3767-8605

Fax: +84-24-3767-8604

HO CHI MINH BRANCH

4Fl., Yoco Bld., 41 Nguyen Thi Minh Khai St., Dist.1, Ho Chi Minh, VIETNAM

Tel: +84-28-3822-3919

Fax: +84-28-3822-3918

FUJIKOSHI-NACHI (MALAYSIA) SDN. BHD.

No.17, Jalan USJ 21/3, 47630 UEP Subang Jaya, Selangor Darul Ehsan, MALAYSIA

Tel: +60-(0)3-80247900

Fax: +60-(0)3-80235884

PT.NACHI INDONESIA

Tempo Scan Tower, 31st Floor JI.H.R Rasuna Said Kav. 3-4, Kuningan, Jakarta 12950 INDONESIA

Tel: +62-021-527-2841

Fax: +62-021-527-3029

NACHI-FUJIKOSHI CORP.

KOREA REPRESENTATIVE OFFICE

8th Floor Chan & Chan Tower 77-9, Samseong-dong, Gangnam-gu, Seoul, 06087, KOREA

Tel: +82-(0)2-6929-2292

Fax: +82-(0)2-6929-2293

NACHI TECHNOLOGY INDIA PVT. LTD.

GURGAON HEAD OFFICE

Unit No.108, 1st Floor, Sewa Corporate Park, M.G Road, Gurgaon-122002, Haryana, INDIA

Tel: +91-124-450-2100

Fax: +91-124-450-2910

BANGALORE OFFICE

F-11 Asha Chamber, No.2, Venkata Swamy Raju Road, Kumara Park West, Bangalore-560020, INDIA

Tel: +91-(0)80-3920-8701

Fax: +91-(0)80-3920-8700



NACHI-FUJIKOSHI (CHINA) CO.,LTD



NACHI(JIANGSU)INDUSTRIES CO., LTD.



NACHI SINGAPORE PTE. LTD.
NACHI INDUSTRIES PTE. LTD.



NACHI AMERICA INC.
NACHI TOOL AMERICA INC.



NACHI BRASIL LTDA.



NACHI EUROPE GmbH

AMERICA and EUROPE

NACHI AMERICA INC. HEADQUARTERS

715 Pushville Road, Greenwood, Indiana, 46143, U.S.A.
Tel: +1-317-530-1001 Fax: +1-317-530-1011
URL: <http://www.nachiamerica.com/>

WEST COAST BRANCH

12652 E. Alondra Blvd. Cerritos, California, 90703, U.S.A.
Tel: +1-562-802-0055 Fax: +1-562-802-2455

MIAMI BRANCH-LATIN AMERICA DIV.

2315 N.W. 107th Ave. Suite B8, Doral, Florida, 33172, U.S.A.
Tel: +1-305-591-0054

NACHI ROBOTIC SYSTEMS INC.

46200 WEST 12 Mile Road Novi, Michigan 48377, U.S.A.
Tel: +1-248-305-6545 Fax: +1-248-305-6542
URL: <http://www.nachirobotics.com/>

NACHI CANADA INC.

89 Courtland Ave., Unit No.2, Concord, Ontario, L4K 3T4, CANADA
Tel: +1-905-660-0088 Fax: +1-905-660-1146
URL: <http://www.nachicanada.com/>

NACHI MEXICANA, S.A. DE C.V.

Aerotech Industrial Park, Tequisquiapan No.2, Localidad Galeras,
Municipio de Colon, Queretaro, C.P.76295, MEXICO
Tel: +52-442-153-2424 Fax: +52-442-153-2435

NACHI BRASIL LTDA.

SAO PAULO BRANCH

Av. Paulista, 453, Primeiro Andar, Conj. 11, 12, 13 e 14, Cerqueira
Cesar, Sao Paulo-SP, CEP : 01311-000, BRASIL
Tel: +55-11-3284-9844 Fax: +55-11-3284-1751
URL: <http://www.nachi.com.br/>

NACHI EUROPE GmbH

Bischofstrasse 99, 47809 Krefeld, GERMANY
Tel: +49-(0)2151-65046-0 Fax: +49-(0)2151-65046-90
URL: <http://www.nachi.de/>

SOUTH GERMANY OFFICE

Pleidelsheimer Str.47 74321 Bietigheim-Bissingen, GERMANY
Tel: +49-(0)7142-77418-0 Fax: +49-(0)7142-77418-20

CZECH BRANCH

Obchodni 132, 251 01 Cestlice, CZECH REPUBLIC
Tel: +420-(0)255-734-000 Fax: +420-(0)255-734-001

U.K. BRANCH

Unit 3, 92 Kettles Wood Drive Woodgate Business Park
Birmingham B32 3DB, U.K.
Tel: +44-(0)121-423-5000 Fax: +44-(0)121-421-7520

TURKEY BRANCH

Ataturk Mah. Mustafa Kemal Cad. No:10/1A,
34758 Atasehir/Istanbul, TURKEY
Tel: +90-(0)216-688-4457 Fax: +90-(0)216-688-4458

Manufacturing Companies

建越工业股份有限公司 NACHI C.Y. CORP.

No.109, Kao Young North Rd. Lung-Tan Dist, Tao-Yuan City, CHINA
Tel: +886-(0)3-471-7651 Fax: +886-(0)3-471-8402

那智不二越（江苏）精密机械有限公司 NACHI (JIANGSU) INDUSTRIES CO., LTD.

39 Nanyuan Road, Economic and Technological Development Zone
(South), Zhangjiagang, Jiangsu 215618, CHINA
Tel: +86-(0)512-3500-7616 Fax: +86-(0)512-3500-7615

NACHI TECHNOLOGY (THAILAND) CO., LTD.

5/5 M, 2, Rojana Industrial PARK Nongbua, Ban Khai, Rayong,
21120, THAILAND
Tel: +66-38-961-682 Fax: +66-38-961-683

NACHI INDUSTRIES PTE. LTD.

No.2 Joo Koon Way, Jurong Town, Singapore 628943, SINGAPORE
Tel: +65-68613944 Fax: +65-68610262
URL: <http://www.nachi.com.sg/>

NACHI PILIPINAS INDUSTRIES, INC.

1st Avenue, Manalac Compound, Sta. Maria Industrial Estate,
Bagumbayan, Taguig, Metro Manila, PHILIPPINES
Tel: +63-(0)2-8838-3620 Fax: +63-(0)2-8838-3623

NACHI PRECISION TOOL INDIA PVT. LTD.

179, Sector4, IMT Manesar, District, Gurgaon-122 050, Haryana,
INDIA
Tel: +91-124-4936-000 Fax: +91-124-4936-022

NACHI TOOL AMERICA INC.

717 Pushville Road, Greenwood, Indiana, 46143, U.S.A.
Tel: +1-317-535-0320 Fax: +1-317-535-0983

NACHI-FUJIKOSHI CORP.

URL : <http://www.nachi-fujikoshi.co.jp/>

Head Office

Shiodome Sumitomo Bldg.17F 1-9-2 Higashi-Shinbashi, Minato-ku,
Tokyo 105-0021
Tel: +81-(0)3-5568-5111 Fax: +81-(0)3-5568-5206

Toyama Plant

1-1-1 Fujikoshi-Honmachi, Toyama 930-8511
Tel: +81-(0)76-423-5111 Fax: +81-(0)76-493-5211

不二越(中国)有限公司

URL: <http://www.nachi.com.cn>

上海市青浦区诸光路 1988 号国家会展中心 A 座 5 层 邮编: 201702

Tel: 021-6915-2200 Fax: 021-6915-5427

• 北京分公司

北京市朝阳区朝外大街乙 12 号昆泰国际大厦 O-1111 室 邮编: 100020

Tel: 010-5879-0181 Fax: 010-5879-0182

• 重庆分公司

重庆市渝北区黄山大道中段 67 号信达国际 D 座 405 室 邮编: 401120

Tel: 023-8816-1967 Fax: 023-8816-1968

• 沈阳分公司

辽宁省沈阳市沈河区悦宾街 1 号方圆大厦第 3 层 304 室 邮编: 110000

Tel: 024-3120-2252 Fax: 024-2250-5316

• 广州分公司

广州市高新技术产业开发区科学城南翔二路 72 号易翔科技园 A 栋 2 楼 邮编: 510670

Tel: 020-8200-6163

• 武汉分公司

湖北省武汉市武汉经济技术开发区东风三路东合中心 D 栋 402 室 邮编: 430056

Tel: 027-8473-1747

• 宁波分公司

浙江省宁波市鄞州区启新路 128 号八骏湾 G 座 邮编: 315040

Tel: 0574-8813-5499

• 长春事务所

吉林省长春市高新区硅谷大街 5666 号生产力大厦 B 座 1113 室 邮编: 130012

Tel: 0431-8939-5595

关于因部分法令修订使得钴被指定为特定化学物质相关事项

1. 关于法令修订内容

根据劳动安全卫生法施工令等部分法令的修订，“钴及其无机化合物”被新追加指定为特定化学物质的第2类物质，该内容于2012年9月20日公布并从2013年1月1日开始实施。
伴随法令的修订，作为特定化学物质引发的健康损害防止措施，必须实施以下对策。

- 产品（粉末、合金、工具）上的标识※
- 扩散抑制措施（钴浓度 $0.02\text{mg}/\text{m}^3$ 以下）
- 防泄漏措施
- 作业主管的选任
- 作业环境的测定（每隔6个月）
- 健康诊断（每隔6个月），记录保管30年
- 配备防护用具，作业记录保管30年，设置休息室，设置清洗设备，标示使用注意

※关于“产品上的标识”，详细内容现在正在讨论中。

2. 伴随法令修订的应对

(1) 使用工具的顾客

本行业制造销售的工具等中存在含钴的产品，但通常使用时，不会发生因工具等的磨损而导致会引发作业者健康受损的钴粉尘等扩散的情况。因此，关于通常使用工具时，预计将发布不以上述1为必要内容的通知。所以，请和过去一样使用这些产品。

(2) 购买含钴工具，并通过研磨等对工具进行额外加工的顾客

在含钴工具的额外加工和再研磨工序等中，必须实施上述1项的对策。另外，因为还涉及到缓冲期间等的设定，详细内容请向主管的劳动基准监督署或对法令等进行确认。

(3) 购买含钴材料，并通过研磨等对材料进行加工的顾客

在含钴材料（钢材、超合金和硬质合金）的加工和研磨工序等中，必须实施上述1项的对策。另外，因为还涉及到缓冲期间等的设定，详细内容请向主管的劳动基准监督署或对法令等进行确认。

About the designation of cobalt as a specified chemical substance by the revision of the law

1. The amendments of the law

"Cobalt and its inorganic compounds" are newly added as second type of specific chemical substances by the partial revision of Ordinance for Enforcement of the Act on Occupational Safety and Health, issued on September 20, 2012, scheduled to be implemented on January 1, 2013.

According to the amendments to the Act, we must take following actions to prevent health problems caused by specific chemical substances.

- Marking on the tools (Powder, Alloys, Tools)※
- Divergence control measures (Less than $0.02\text{mg}/\text{m}^3$ as cobalt concentration)
- Measures for leakage
- Appointment of Operations Chief
- Measurement and working environment (every 6 months)
- Keeping health diagnosis records for 30 years (every 6 months)
- Wearing protective equipment, keep work records for 30 years, Set up a break room, Installation of cleaning equipment, handling notices

※ Details of "Marking on tools" is currently under consideration.

2. The correspondence with the revision of the law

(1) Customers who use the tool

There are products containing cobalt which we manufacture and sell, however, in your regular use, divergence of cobalt dust which may cause worker's health problems doesn't occur. We have been notified that for a normal use the tool, they will not require the action as above 1. Therefore, please use them same as before.

(2) Customers who purchase the tool contain cobalt, and make any alterations to it such as by grinding

It is required for the processes as re-grinding and alteration to the tool contains cobalt to take measures above Section 1. Since there is a setting of the grace period, please check the laws of regulations of the competent or Labor Standards Inspection Office for more information.

(3) Customers who purchase the material contain cobalt, and make any alterations to it such as by grinding

It is required for the processes as re-grinding and alteration to the material contains cobalt (Steel Material, Super Alloy and Cemented Carbide) to take measures above Section 1. Since there is a setting of the grace period, please check the laws of regulations of the competent or Labor Standards Inspection Office for more information.